Features

- Compliant with AEC-Q200 Rev-C- Stress Test Qualification for Passive Components in Automotive Applications
- Operating temperature range up to 125 °C
- Low thermal derating factor
- Higher hold currents at elevated temperature
- Choice of operating currents
- RoHS compliant* and Pb free
- Resettable fault protection of general electronic equipment

MF-RHT Series - PTC Resettable Fuses

Electrical Characteristics

Model	V max. Volts	I max. Amps	I_{hold}	I_{trip}	Resistance		Max. Time To Trip		Tripped Power Dissipation
			Amperes at 23 °C		Ohms at 23 °C		Amperes at 23 °C	Seconds at 23 °C	Watts at 23 °C
			Hold	Trip	$R_{Min.}$	R_1 Max. (Post Trip)		Max.	Typ.
MF-RHT070	16	40	0.7	1.4	0.3	0.8	3.5	4.0	1.4
MF-RHT200	16	100	2.0	3.8	0.045	0.110	12.5	3.0	1.4
MF-RHT450	16	100	4.5	7.8	0.022	0.054	22.5	3.0	3.6
MF-RHT650	16	100	6.5	12.0	0.011	0.026	32.5	5.5	4.3
MF-RHT750	16	100	7.5	13.1	0.0094	0.022	37.5	7.0	4.5
MF-RHT1300	16	100	13.0	24.0	0.0041	0.010	60.0	13.0	6.9

Environmental Characteristics

Operating Temperature	-40 °C to +125 °C	
Storage Temperature	-40 °C to +85 °C	
Passive Aging	+85 °C, 1000 hours	±15 % typical resistance change
Humidity Aging	+85 °C, 85 % R.H. 1000 hours	±15 % typical resistance change
Thermal Shock	MIL-STD-202, Method 107, +125 °C to -40 °C,10 cycles	±10 % typical resistance change
Vibration	MIL-STD-883C, Method 2007.1, Condition A	No change

Test Procedures And Requirements For Model MF-RHT Series

Test	Test Conditions	Accept/Reject Criteria
Visual/Mech.	Verify dimensions and materials	Per MF physical description
Resistance	In still air @ 23 °C	Rmin ≤ R ≤ R1max
Time to Trip	At specified current, Vmax, 23 °C	T ≤ max. time to trip (seconds)
Hold Current	30 min. at Ihold	No trip
Trip Cycle Life	Vmax, Imax, 100 cycles	No arcing or burning
Trip Endurance	Vmax, 48 hours	No arcing or burning
Solderability	MIL-STD-202, Method 208	95 % min. coverage

Thermal Derating Chart - I_{hold} (Amps)

Model	Ambient Operating Temperature									
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C	125 °C
MF-RHT070	0.95	0.87	0.79	0.7	0.62	0.56	0.51	0.47	0.39	0.17
MF-RHT200	2.71	2.49	2.26	2.00	1.77	1.60	1.46	1.34	1.11	0.49
MF-RHT450	6.1	5.6	5.1	4.5	4.0	3.6	3.3	3.0	2.5	1.1
MF-RHT650	8.8	8.1	7.4	6.5	5.7	5.3	4.8	4.3	3.6	1.6
MF-RHT750	10.2	9.4	8.6	7.5	6.6	6.1	5.6	5.0	4.1	1.9
MF-RHT1300	17.7	16.3	14.8	13.0	11.4	10.5	9.6	8.6	7.2	3.3

How to Order

MF - RHT 750 - __

Multifuse® Product Designator

Series
RHT = High Temperature Radial Leaded Component

Hold Current, Ihold
070 - 1300 (0.70 - 13.00 Amps)

Packaging Options
- = Bulk Packaging
- 2 = Tape and Reel*
- AP = Ammo-Pak*

*Packaged per EIA 486-B

*RoHS Directive 2002/95/EC Jan 27 2003 including Annex.
Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

Applications

- Protection of automotive circuitry including engine control modules
- Overcurrent surge protection of electronic equipment required to operate at high operating temperature ranges
- Resettable fault protection of general electronic equipment

MF-RHT Series - PTC Resettable Fuses

BOURNS®

Product Dimensions

Model	A	B	C		D	E	F	Physical Characteristics	
	Max.	Max.	Nom.	Tol. ±	Min.	Max.	Nom.	Style	Material
MF-RHT070	6.86 (0.27)	10.8 (0.425)	5.1 (0.201)	0.7 (0.028)	7.6 (0.30)	3.0 (0.12)	0.51 (0.020)	1	Sn/CuFe
MF-RHT200	9.4 (0.37)	14.0 (0.55)	5.1 (0.201)	0.7 (0.028)	7.6 (0.30)	3.0 (0.12)	0.51 (0.020)	3	Sn/Cu
MF-RHT450	10.4 (0.41)	15.6 (0.61)	5.1 (0.201)	0.7 (0.028)	7.6 (0.30)	3.0 (0.12)	0.81 (0.032)	2	Sn/Cu
MF-RHT650	12.7 (0.50)	22.2 (0.88)	5.1 (0.201)	0.7 (0.028)	7.6 (0.30)	3.0 (0.12)	0.81 (0.032)	2	Sn/Cu
MF-RHT750	14.0 (0.55)	23.5 (0.93)	5.1 (0.201)	0.7 (0.028)	7.6 (0.30)	3.0 (0.12)	0.81 (0.032)	2	Sn/Cu
MF-RHT1300	23.5 (0.925)	28.7 (1.17)	10.2 (0.402)	0.7 (0.028)	7.6 (0.30)	3.6 (0.14)	1.0 (0.040)	2	Sn/Cu

Packaging:
BULK: 500 pcs. per bag
TAPE & REEL: MF-RHT070 ~ MF-RHT200 = 3000 pcs. per reel; MF-RHT450 ~ MF-RHT650 = 1500 pcs. per reel; MF-RHT750 ~ MF-RHT1300 = 1000 pcs. per reel
AMMO-PACK: MF-RHT070 ~ MF-RHT200 = 2000 pcs. per pack; MF-RHT450 ~ MF-RHT750 = 1000 pcs. per pack; MF-RHT1300 = 500 pcs. per pack

0.51 (24AWG)
0.81 (20AWG)
1.0 (18AWG)

DIMENSIONS: MM (INCHES)

Style 1

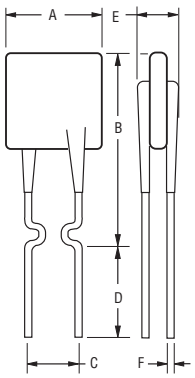

Style 2

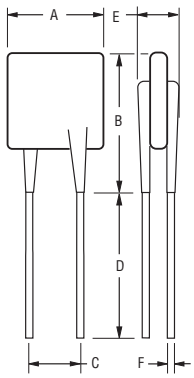

Style 3

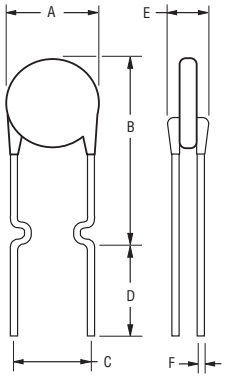

Typical Part Marking

Represents total content. Layout may vary.

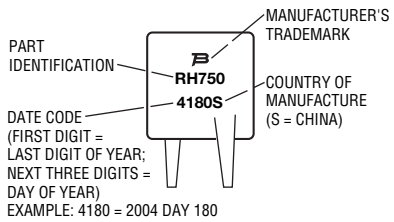

Typical Time to Trip at 23 °C

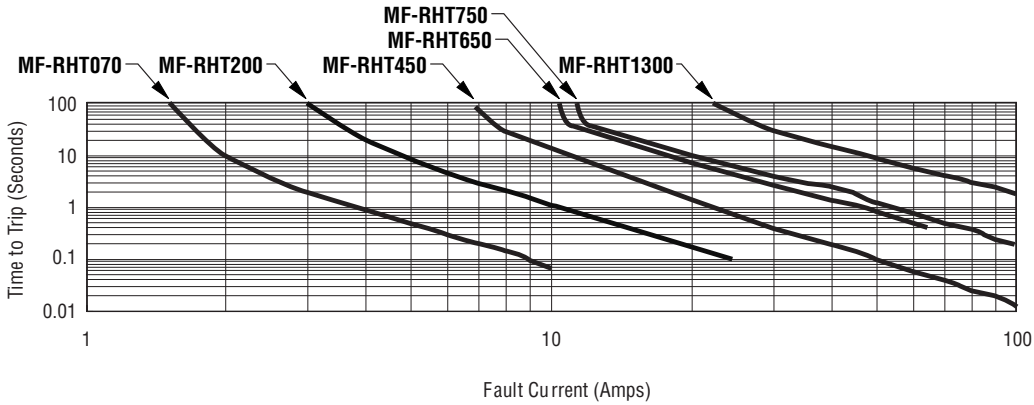

The Time to Trip curves represent typical performance of a device in a simulated application environment. Actual performance in specific customer applications may differ from these values due to the influence of other variables.

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications.

MF-RHT Series Tape and Reel Specifications

BOURNS®

Devices taped using EIA468–B/IEC60286-2 standards. See table below and Figures 1 and 2 for details.

Dimension Description	IEC Mark	EIA Mark	Dimensions	
			Dimensions	Tolerance
Carrier tape width	W	W	18 (.709)	-0.5/+1.0 (-0.02/+.039)
Hold down tape width	W_0	W_4	11 (.433)	min.
Hold down tape			No protrusion	
Top distance between tape edges	W_2	W_6	3 (.118)	max.
Sprocket hole position	W_1	W_5	9 (.354)	-0.5/+0.75 (-0.02/+0.03)
Sprocket hole diameter	D_0	D_0	4 (.157)	±0.2 (±.0078)
Abscissa to plane (straight lead)	H	H	18.5 (.728)	±3.0 (±.118)
Abscissa to plane (kinked lead)	H_0	H_0	16 (.63)	±0.5 (±.02)
Abscissa to top: MF-RHT070 ~ MF-RHT450	H_1	H_1	32.2 (1.268)	max.
Abscissa to top: MF-RHT650 ~ MF-RHT1300	H_1	H_1	45.0 (1.837)	max.
Overall width w/lead protrusion: MF-RHT070 ~ MF-RHT450		C_1	42.5 (1.673)	max.
Overall width w/lead protrusion: MF-RHT650 ~ MF-RHT1300		C_1	55.0 (2.165)	max.
Overall width w/o lead protrusion: MF-RHT070 ~ MF-RHT450		C_2	42.5 (1.673)	max.
Overall width w/o lead protrusion: MF-RHT650 ~ MF-RHT1300		C_2	54.0 (2.126)	max.
Lead protrusion	l_1	L_1	1.0 (.039)	max.
Protrusion of cutout	L	L	11 (.433)	max.
Protrusion beyond hold-down tape	l_2	l_2	Not specified	
Sprocket hole pitch	P_0	P_0	12.7 (0.5)	±0.3 (±.012)
Pitch tolerance			20 consecutive	±1 (±.039)
Device pitch: MF-RHT070 ~ MF-RHT450			12.7 (0.5)	±0.3 (±.012)
Device pitch: MF-RHT650 ~ MF-RHT1300			25.4 (1.0)	±0.6 (±.024)
Tape thickness	t	t	0.9 (.035)	max.
Tape thickness with splice: MF-RHT070		t_1	1.5 (.059)	max.
Tape thickness with splice: MF-RHT450 ~ MF-RHT1300		t_1	2.3 (.091)	max.
Splice sprocket hole alignment			4.0 (.157)	±0.2 (±.008)
Body lateral deviation	Δh	Δh	0	±1 (±.039)
Body tape plane deviation	Δp	Δp	0	±0.3 (±.012)
Ordinate to adjacent component lead	P_1	P_1	3.81 (.015)	±0.07 (±.028)

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications

DIMENSIONS: MM (INCHES)

MF-RHT Series Tape and Reel Specifications

BOURNS®

Dimension Description	IEC Mark	EIA Mark	Dimensions			Tolerance
Lead spacing: MF-RHT070 ~ MF-RHT750	*F*	*F*	5.08 (0.2)			-0.2/+0.8 (-0.006/+0.031)
Lead spacing: MF-RHT1300	*F*	*F*	10.2 (0.402)			-0.2/+0.8 (-0.006/+0.031)
Reel width: MF-RHT070 ~ MF-RHT450	*w*	W_2	56 (2.20)			max.
Reel width: MF-RHT650 ~ MF-RHT1300	*w*	W_2	63.5 (2.50)			max.
Reel diameter	*d*	*a*	370.0 (14.57)			max.
Space between flanges less device	W_1	*h*	4.75 (.187)			±3.25 (±.128)
Arbor hole diameter	*f*	*c*	26.0 (1.02)			±12.0 (±.472)
Core diameter	*h*	*n*	80.0 (3.15)			max.
Box			64 (2.52)	372 (14.6)	372 (14.6)	
Consecutive missing places			3			max.
Empty places per reel			Not specified			

Taped Component Dimensions - Figure 1

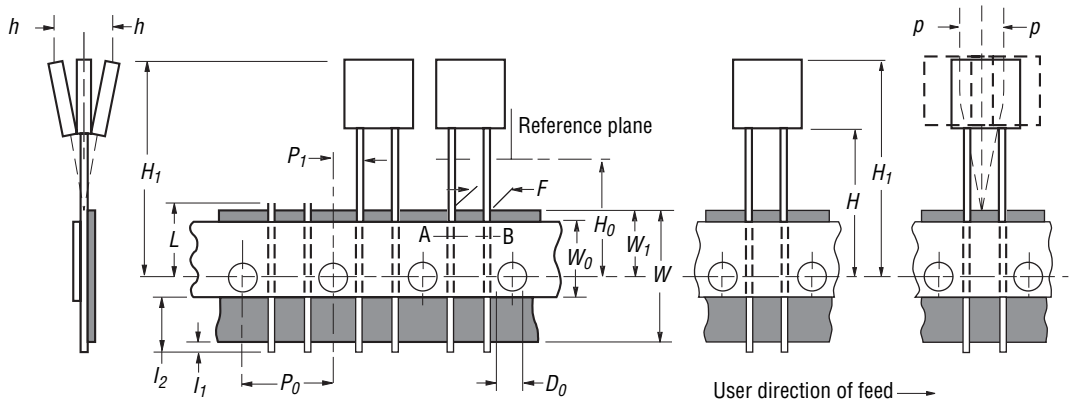

Cross section A - B



DIMENSIONS: MM (INCHES)

Reel Dimensions - Figure 2

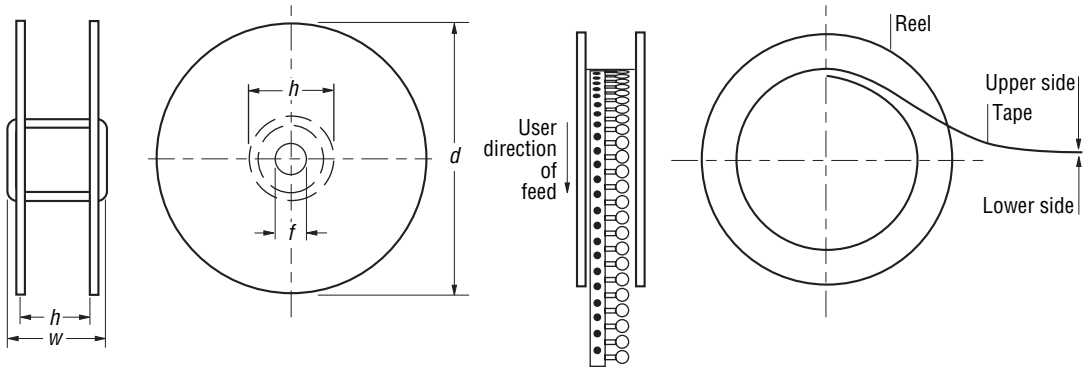

Specifications are subject to change without notice.
Customers should verify actual device performance in their specific applications

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9