



## Features

- Compliant with AEC-Q200 Rev-C- Stress Test Qualification for Passive Components in Automotive Applications
- Operating temperature range up to 125 °C
- Low thermal derating factor
- Higher hold currents at elevated temperature
- Choice of operating currents
- RoHS compliant\* and Pb free
- Resettable fault protection of general electronic equipment

## MF-RHT Series - PTC Resettable Fuses

### Electrical Characteristics

| Model      | V max.<br>Volts | I max.<br>Amps | I <sub>hold</sub> | I <sub>trip</sub> | Resistance        |                                 | Max. Time To Trip |                  | Tripped Power Dissipation |
|------------|-----------------|----------------|-------------------|-------------------|-------------------|---------------------------------|-------------------|------------------|---------------------------|
|            |                 |                | Amperes at 23 °C  |                   | Ohms at 23 °C     |                                 | Amperes at 23 °C  | Seconds at 23 °C | Watts at 23 °C            |
|            |                 |                | Hold              | Trip              | R <sub>Min.</sub> | R <sub>1</sub> Max. (Post Trip) |                   | Max.             | Typ.                      |
| MF-RHT070  | 16              | 40             | 0.7               | 1.4               | 0.3               | 0.8                             | 3.5               | 4.0              | 1.4                       |
| MF-RHT200  | 16              | 100            | 2.0               | 3.8               | 0.045             | 0.110                           | 12.5              | 3.0              | 1.4                       |
| MF-RHT450  | 16              | 100            | 4.5               | 7.8               | 0.022             | 0.054                           | 22.5              | 3.0              | 3.6                       |
| MF-RHT650  | 16              | 100            | 6.5               | 12.0              | 0.011             | 0.026                           | 32.5              | 5.5              | 4.3                       |
| MF-RHT750  | 16              | 100            | 7.5               | 13.1              | 0.0094            | 0.022                           | 37.5              | 7.0              | 4.5                       |
| MF-RHT1300 | 16              | 100            | 13.0              | 24.0              | 0.0041            | 0.010                           | 60.0              | 13.0             | 6.9                       |

### Environmental Characteristics

|                            |                                                                   |
|----------------------------|-------------------------------------------------------------------|
| Operating Temperature..... | -40 °C to +125 °C                                                 |
| Storage Temperature.....   | -40 °C to +85 °C                                                  |
| Passive Aging.....         | +85 °C, 1000 hours..... ±15 % typical resistance change           |
| Humidity Aging.....        | +85 °C, 85 % R.H. 1000 hours..... ±15 % typical resistance change |
| Thermal Shock.....         | MIL-STD-202, Method 107..... ±10 % typical resistance change      |
|                            | +125 °C to -40 °C, 10 cycles                                      |
| Vibration.....             | MIL-STD-883C, Method 2007.1, Condition A..... No change           |

### Test Procedures And Requirements For Model MF-RHT Series

| Test                 | Test Conditions                                       | Accept/Reject Criteria                    |
|----------------------|-------------------------------------------------------|-------------------------------------------|
| Visual/Mech.....     | Verify dimensions and materials.....                  | Per MF physical description               |
| Resistance.....      | In still air @ 23 °C.....                             | R <sub>min</sub> ≤ R ≤ R <sub>1</sub> max |
| Time to Trip.....    | At specified current, V <sub>max</sub> , 23 °C.....   | T ≤ max. time to trip (seconds)           |
| Hold Current.....    | 30 min. at I <sub>hold</sub> .....                    | No trip                                   |
| Trip Cycle Life..... | V <sub>max</sub> , I <sub>max</sub> , 100 cycles..... | No arcing or burning                      |
| Trip Endurance.....  | V <sub>max</sub> , 48 hours.....                      | No arcing or burning                      |
| Solderability.....   | MIL-STD-202, Method 208.....                          | 95 % min. coverage                        |

### Thermal Derating Chart - I<sub>hold</sub> (Amps)

| Model      | Ambient Operating Temperature |        |      |       |       |       |       |       |       |        |
|------------|-------------------------------|--------|------|-------|-------|-------|-------|-------|-------|--------|
|            | -40 °C                        | -20 °C | 0 °C | 23 °C | 40 °C | 50 °C | 60 °C | 70 °C | 85 °C | 125 °C |
| MF-RHT070  | 0.95                          | 0.87   | 0.79 | 0.7   | 0.62  | 0.56  | 0.51  | 0.47  | 0.39  | 0.17   |
| MF-RHT200  | 2.71                          | 2.49   | 2.26 | 2.00  | 1.77  | 1.60  | 1.46  | 1.34  | 1.11  | 0.49   |
| MF-RHT450  | 6.1                           | 5.6    | 5.1  | 4.5   | 4.0   | 3.6   | 3.3   | 3.0   | 2.5   | 1.1    |
| MF-RHT650  | 8.8                           | 8.1    | 7.4  | 6.5   | 5.7   | 5.3   | 4.8   | 4.3   | 3.6   | 1.6    |
| MF-RHT750  | 10.2                          | 9.4    | 8.6  | 7.5   | 6.6   | 6.1   | 5.6   | 5.0   | 4.1   | 1.9    |
| MF-RHT1300 | 17.7                          | 16.3   | 14.8 | 13.0  | 11.4  | 10.5  | 9.6   | 8.6   | 7.2   | 3.3    |

### How to Order

|                                 |                                                                |
|---------------------------------|----------------------------------------------------------------|
| Multifuse® Product Designator   | MF - RHT 750 -                                                 |
| Series                          | RHT = High Temperature Radial Leaded Component                 |
| Hold Current, I <sub>hold</sub> | 070 - 1300 (0.70 - 13.00 Amps)                                 |
| Packaging Options               | - = Bulk Packaging<br>- 2 = Tape and Reel*<br>- AP = Ammo-Pak* |

\*Packaged per EIA 486-B

\*RoHS Directive 2002/95/EC Jan 27 2003 including Annex. Specifications are subject to change without notice. Customers should verify actual device performance in their specific applications.

## Applications

- Protection of automotive circuitry including engine control modules
- Overcurrent surge protection of electronic equipment required to operate at high operating temperature ranges
- Resettable fault protection of general electronic equipment

## MF-RHT Series - PTC Resettable Fuses

**BOURNS®**

### Product Dimensions

| Model      | A                      | B                      | C                      |                       | D                    | E                    | F                      | Physical Characteristics |          |
|------------|------------------------|------------------------|------------------------|-----------------------|----------------------|----------------------|------------------------|--------------------------|----------|
|            | Max.                   | Max.                   | Nom.                   | Tol. ±                | Min.                 | Max.                 | Nom.                   | Style                    | Material |
| MF-RHT070  | $\frac{6.86}{(0.27)}$  | $\frac{10.8}{(0.425)}$ | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.30)}$ | $\frac{3.0}{(0.12)}$ | $\frac{0.51}{(0.020)}$ | 1                        | Sn/CuFe  |
| MF-RHT200  | $\frac{9.4}{(0.37)}$   | $\frac{14.0}{(0.55)}$  | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.30)}$ | $\frac{3.0}{(0.12)}$ | $\frac{0.51}{(0.020)}$ | 3                        | Sn/Cu    |
| MF-RHT450  | $\frac{10.4}{(0.41)}$  | $\frac{15.6}{(0.61)}$  | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.30)}$ | $\frac{3.0}{(0.12)}$ | $\frac{0.81}{(0.032)}$ | 2                        | Sn/Cu    |
| MF-RHT650  | $\frac{12.7}{(0.50)}$  | $\frac{22.2}{(0.88)}$  | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.30)}$ | $\frac{3.0}{(0.12)}$ | $\frac{0.81}{(0.032)}$ | 2                        | Sn/Cu    |
| MF-RHT750  | $\frac{14.0}{(0.55)}$  | $\frac{23.5}{(0.93)}$  | $\frac{5.1}{(0.201)}$  | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.30)}$ | $\frac{3.0}{(0.12)}$ | $\frac{0.81}{(0.032)}$ | 2                        | Sn/Cu    |
| MF-RHT1300 | $\frac{23.5}{(0.925)}$ | $\frac{28.7}{(1.17)}$  | $\frac{10.2}{(0.402)}$ | $\frac{0.7}{(0.028)}$ | $\frac{7.6}{(0.30)}$ | $\frac{3.6}{(0.14)}$ | $\frac{1.0}{(0.040)}$  | 2                        | Sn/Cu    |

Packaging:

BULK: 500 pcs. per bag

TAPE & REEL: MF-RHT070 ~ MF-RHT200 = 3000 pcs. per reel; MF-RHT450 ~ MF-RHT650 = 1500 pcs. per reel;  
MF-RHT750 ~ MF-RHT1300 = 1000 pcs. per reel

AMMO-PACK: MF-RHT070 ~ MF-RHT200 = 2000 pcs. per pack; MF-RHT450 ~ MF-RHT750 = 1000 pcs. per pack;  
MF-RHT1300 = 500 pcs. per pack


0.51 (24AWG)

0.81 (20AWG)


1.0 (18AWG)

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$


Style 1

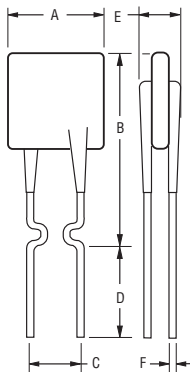

Style 2

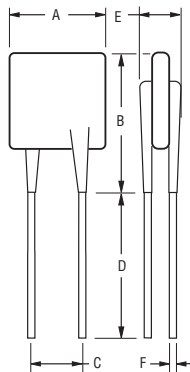


Style 3

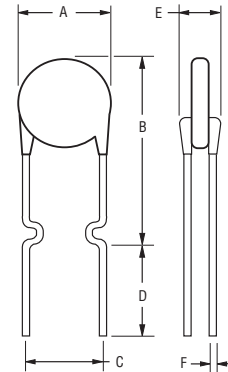


### Typical Part Marking

Represents total content. Layout may vary.

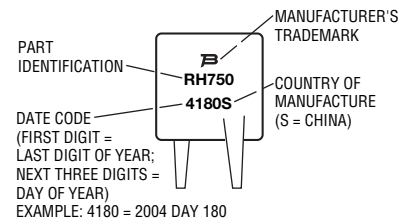

### Typical Time to Trip at 23 °C

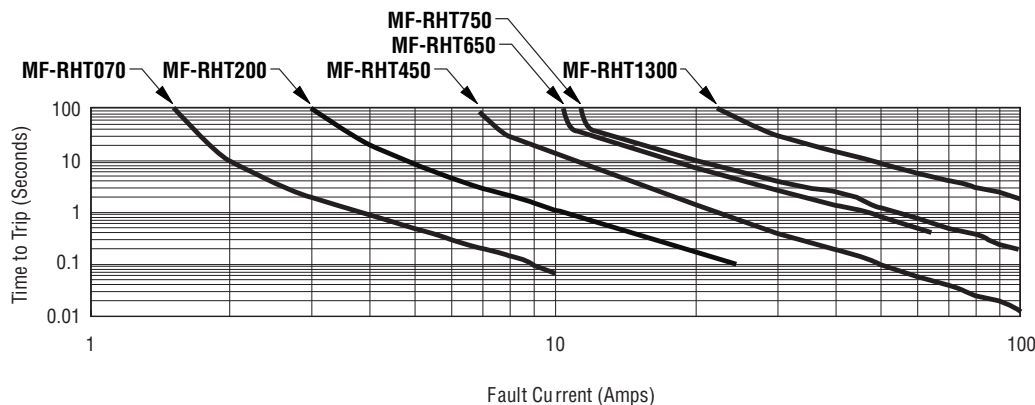

The Time to Trip curves represent typical performance of a device in a simulated application environment. Actual performance in specific customer applications may differ from these values due to the influence of other variables.

MF-RHT SERIES, REV. E, 01/10

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

# MF-RHT Series Tape and Reel Specifications

**BOURNS®**

Devices taped using EIA468-B/IEC60286-2 standards. See table below and Figures 1 and 2 for details.

| Dimension Description                                     | IEC Mark   | EIA Mark   | Dimensions             |                                    |
|-----------------------------------------------------------|------------|------------|------------------------|------------------------------------|
|                                                           |            |            | Dimensions             | Tolerance                          |
| Carrier tape width                                        | $W$        | $W$        | $\frac{18}{(.709)}$    | $\frac{-0.5/+1.0}{(-0.02/+0.039)}$ |
| Hold down tape width                                      | $W_0$      | $W_4$      | $\frac{11}{(.433)}$    | min.                               |
| Hold down tape                                            |            |            | No protrusion          |                                    |
| Top distance between tape edges                           | $W_2$      | $W_6$      | $\frac{3}{(.118)}$     | max.                               |
| Sprocket hole position                                    | $W_1$      | $W_5$      | $\frac{9}{(.354)}$     | $\frac{-0.5/+0.75}{(-0.02/+0.03)}$ |
| Sprocket hole diameter                                    | $D_0$      | $D_0$      | $\frac{4}{(.157)}$     | $\frac{\pm 0.2}{(\pm .0078)}$      |
| Abscissa to plane (straight lead)                         | $H$        | $H$        | $\frac{18.5}{(.728)}$  | $\frac{\pm 3.0}{(\pm .118)}$       |
| Abscissa to plane (kinked lead)                           | $H_0$      | $H_0$      | $\frac{16}{(.63)}$     | $\frac{\pm 0.5}{(\pm .02)}$        |
| Abscissa to top: MF-RHT070 ~ MF-RHT450                    | $H_1$      | $H_1$      | $\frac{32.2}{(1.268)}$ | max.                               |
| Abscissa to top: MF-RHT650 ~ MF-RHT1300                   | $H_1$      | $H_1$      | $\frac{45.0}{(1.837)}$ | max.                               |
| Overall width w/lead protrusion: MF-RHT070 ~ MF-RHT450    |            | $C_1$      | $\frac{42.5}{(1.673)}$ | max.                               |
| Overall width w/lead protrusion: MF-RHT650 ~ MF-RHT1300   |            | $C_1$      | $\frac{55.0}{(2.165)}$ | max.                               |
| Overall width w/o lead protrusion: MF-RHT070 ~ MF-RHT450  |            | $C_2$      | $\frac{42.5}{(1.673)}$ | max.                               |
| Overall width w/o lead protrusion: MF-RHT650 ~ MF-RHT1300 |            | $C_2$      | $\frac{54.0}{(2.126)}$ | max.                               |
| Lead protrusion                                           | $I_1$      | $L_1$      | $\frac{1.0}{(.039)}$   | max.                               |
| Protrusion of cutout                                      | $L$        | $L$        | $\frac{11}{(.433)}$    | max.                               |
| Protrusion beyond hold-down tape                          | $I_2$      | $I_2$      | Not specified          |                                    |
| Sprocket hole pitch                                       | $P_0$      | $P_0$      | $\frac{12.7}{(0.5)}$   | $\frac{\pm 0.3}{(\pm .012)}$       |
| Pitch tolerance                                           |            |            | 20 consecutive         | $\frac{\pm 1}{(\pm .039)}$         |
| Device pitch: MF-RHT070 ~ MF-RHT450                       |            |            | $\frac{12.7}{(0.5)}$   | $\frac{\pm 0.3}{(\pm .012)}$       |
| Device pitch: MF-RHT650 ~ MF-RHT1300                      |            |            | $\frac{25.4}{(1.0)}$   | $\frac{\pm 0.6}{(\pm .024)}$       |
| Tape thickness                                            | $t$        | $t$        | $\frac{0.9}{(.035)}$   | max.                               |
| Tape thickness with splice: MF-RHT070                     |            | $t_1$      | $\frac{1.5}{(.059)}$   | max.                               |
| Tape thickness with splice: MF-RHT450 ~ MF-RHT1300        |            | $t_1$      | $\frac{2.3}{(.091)}$   | max.                               |
| Splice sprocket hole alignment                            |            |            | $\frac{4.0}{(.157)}$   | $\frac{\pm 0.2}{(\pm .008)}$       |
| Body lateral deviation                                    | $\Delta_h$ | $\Delta_h$ | 0                      | $\frac{\pm 1}{(\pm .039)}$         |
| Body tape plane deviation                                 | $\Delta_p$ | $\Delta_p$ | 0                      | $\frac{\pm 0.3}{(\pm .012)}$       |
| Ordinate to adjacent component lead                       | $P_1$      | $P_1$      | $\frac{3.81}{(.015)}$  | $\frac{\pm 0.07}{(\pm .028)}$      |

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications


DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

# MF-RHT Series Tape and Reel Specifications


**BOURNS®**

| Dimension Description               | IEC Mark       | EIA Mark       | Dimensions                                                    |                                     |
|-------------------------------------|----------------|----------------|---------------------------------------------------------------|-------------------------------------|
|                                     |                |                | Dimensions                                                    | Tolerance                           |
| Lead spacing: MF-RHT070 ~ MF-RHT750 | F              | F              | $\frac{5.08}{(0.2)}$                                          | $\frac{-0.2/+0.8}{(-0.006/+0.031)}$ |
| Lead spacing: MF-RHT1300            | F              | F              | $\frac{10.2}{(0.402)}$                                        | $\frac{-0.2/+0.8}{(-0.006/+0.031)}$ |
| Reel width: MF-RHT070 ~ MF-RHT450   | w              | W <sub>2</sub> | $\frac{56}{(2.20)}$                                           | max.                                |
| Reel width: MF-RHT650 ~ MF-RHT1300  | w              | W <sub>2</sub> | $\frac{63.5}{(2.50)}$                                         | max.                                |
| Reel diameter                       | d              | a              | $\frac{370.0}{(14.57)}$                                       | max.                                |
| Space between flanges less device   | W <sub>1</sub> | h              | $\frac{4.75}{(.187)}$                                         | $\frac{\pm 3.25}{(\pm .128)}$       |
| Arbor hole diameter                 | f              | c              | $\frac{26.0}{(1.02)}$                                         | $\frac{\pm 12.0}{(\pm .472)}$       |
| Core diameter                       | h              | n              | $\frac{80.0}{(3.15)}$                                         | max.                                |
| Box                                 |                |                | $\frac{64}{(2.52)}$ $\frac{372}{(14.6)}$ $\frac{372}{(14.6)}$ |                                     |
| Consecutive missing places          |                |                | 3                                                             | max.                                |
| Empty places per reel               |                |                | Not specified                                                 |                                     |

**Taped Component Dimensions - Figure 1**

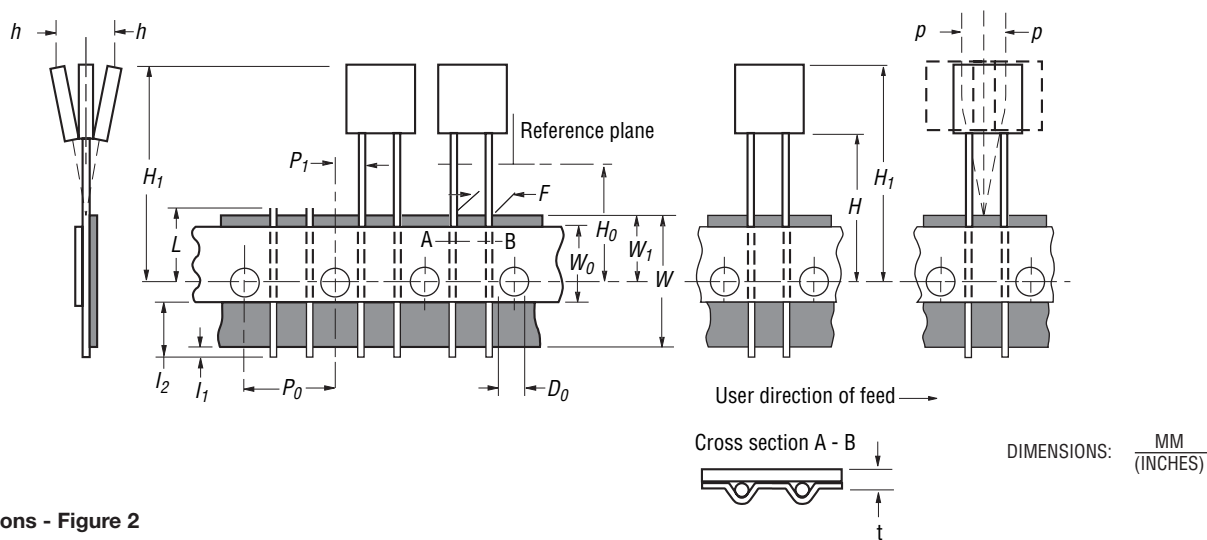

**Reel Dimensions - Figure 2**

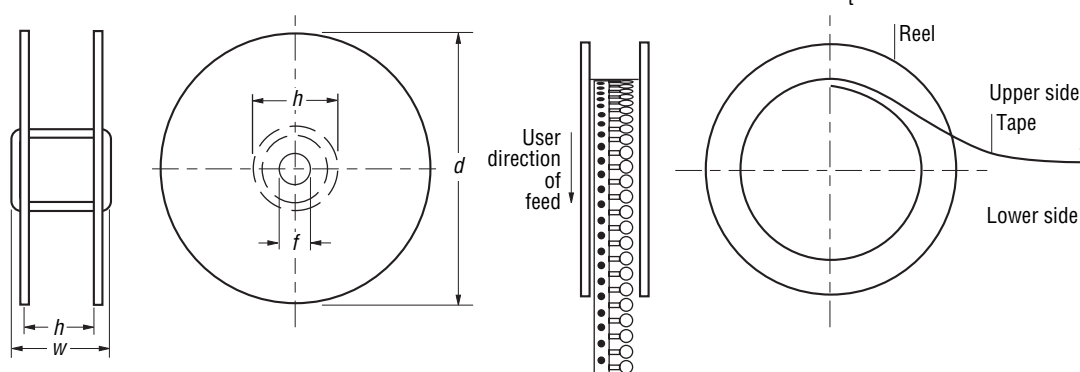

Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9