# Cree® XLamp® XT-E LEDs



XT-E White

XT-E Royal Blue

## PRODUCT DESCRIPTION

Optimized for directional, high-lumen applications, from indoor and outdoor to portable and lamp retrofits, the XLamp® XT-E LED delivers high performance and high reliability in the industry-standard XP/XT footprint. The XT-E LED offers the benefits of the XT/XP platform — compact and proven 3.45 mm x 3.45 mm package and established ecosystem — enabling lighting manufacturers to simplify the design process and shorten time to market.

The XT-E LED is available in royal blue and white. The XT-E White LED offers a high-efficacy option. In this document, the term White denotes the white XT-E LED without regard to its efficacy. The terms Standard and High Efficacy are used when necessary to differentiate the performace of the High Efficacy XT-E LED from the XT-E LED without the high-efficacy option.
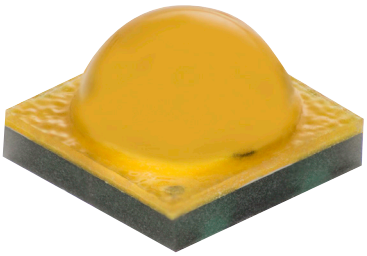
## FEATURES

- Maximum Vf for High Efficacy XT-E White: 2.85 V
- Available in 70-, 80- and 90-CRI minimum white
- Binned at 85 °C
- Available in 2200 K CCT
- Thermal resistance: White 5 °C/W, Royal Blue 3.5 °C/W
- Wide viewing angle: White 115°, Royal Blue 130°
- Maximum drive current: White 1.5 A, Royal Blue 1.5 A
- Electrically neutral thermal path
- Vf binning supported for XT-E White and Royal Blue
- XT-E Royal Blue sorted into 2.5-nm-wavelength bins
- Unlimited floor life at ≤ 30 °C/85% RH
- Reflow solderable - JEDEC J-STD-020C compatible
- RoHS and REACh compliant
- UL® recognized component (E349212)

**NOTE: For remote phosphor applications, a separate license to certain Cree patents is required.**



Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

Cree, Inc.
4600 Silicon Drive
Durham, NC 27703
USA Tel: +1.919.313.5300

## TABLE OF CONTENTS

Characteristics ..... 3
Flux Characteristics - White, Standard ..... 4
Flux Characteristics - White, High Efficacy ..... 15
Flux Characteristics - Royal Blue ..... 23
Relative Spectral Power Distribution - White ..... 24
Relative Spectral Power Distribution - Royal Blue ..... 24
Relative Luminous Flux vs. Junction Temperature - White ..... 25
Relative Radiant Flux vs. Junction Temperature - Royal Blue ..... 25
Electrical Characteristics - White, Standard ..... 26
Electrical Characteristics - White, High Efficacy ..... 26
Electrical Characteristics - Royal Blue ..... 27
Relative Luminous Flux vs. Current - White ..... 27
Relative Radiant Flux vs. Current - Royal Blue ..... 28
Relative Chromaticity vs. Current - Warm White ..... 28
Relative Chromaticity vs. Temperature - Warm White ..... 29
Typical Spatial Distribution - White ..... 29
Typical Spatial Distribution - Royal Blue ..... 30
Thermal Design - White ..... 30
Thermal Design - Royal Blue ..... 31
Performance Groups - Luminous Flux ..... 31
Performance Groups - Radiant Flux ..... 32
Performance Groups - Dominant Wavelength ..... 32
Performance Groups - Forward Voltage ..... 32
Performance Groups - Chromaticity ..... 33
Cree's White Chromaticity Regions Plotted on the CIE 1931 Curve ..... 37
Cree's Cool White Kits Plotted on ANSI Standard Chromaticity Regions ..... 38
Cree's White Kits Plotted on ANSI Standard Chromaticity Regions ..... 39
Cree's Warm and Neutral White Kits Plotted on ANSI Standard Chromaticity Regions ..... 40
Cree's 2200 K CCT White Kit Plotted on ANSI Standard Chromaticity Regions ..... 41
Cree EasyWhite® Bins Plotted on the 1931 CIE Color Space ..... 41
Cree's Standard Chromaticity Kits ..... 42
Bin and Order Code Formats ..... 43
Reflow Soldering Characteristics ..... 44
Notes ..... 45
Mechanical Dimensions ..... 47
Tape and Reel ..... 49
Packaging ..... 50

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## CHARACTERISTICS

| Characteristics | Unit | Minimum | Typical | Maximum |
|---|---|---|---|---|
| Thermal resistance, junction to solder point - white | °C/W | | 5 | |
| Thermal resistance, junction to solder point - royal blue | °C/W | | 3.5 | |
| Viewing angle (FWHM) - white | degrees | | 115 | |
| Viewing angle (FWHM) - royal blue | degrees | | 130 | |
| Temperature coefficient of voltage - white | mV/°C | | -2.5 | |
| Temperature coefficient of voltage - royal blue | mV/°C | | -1.3 | |
| ESD withstand voltage (HBM per Mil-Std-883D) | V | | | 8000 |
| DC forward current - white | mA | | | 1500 |
| DC forward current - royal blue | mA | | | 1500 |
| Reverse voltage | V | | | 5 |
| Forward voltage - white - Standard (@ 350 mA, 85 °C) | V | | 2.85 | 3.1 |
| Forward voltage - white - High Efficacy (@ 350 mA, 85 °C) | V | | 2.77 | 2.85 |
| Forward voltage - royal blue (@ 350 mA, 85 °C) | V | | 2.8 | 3.1 |
| LED junction temperature | °C | | | 150 |

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C)

The following tables provide order codes for Standard XLamp XT-E White LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 42). For definitions of the chromaticity kits, please see the Cree's Standard Chromaticity Kits section (page 41).

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| 51 | 6200 K | S3 | 156 | 171 | XTEAWT-00-0000-000000K51 | XTEAWT-00-0000-00000BK51 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000J51 | XTEAWT-00-0000-00000BJ51 | | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000H51 | XTEAWT-00-0000-00000BH51 | | XTEAWT-00-0000-00000HH51 | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000G51 | XTEAWT-00-0000-00000BG51 | | XTEAWT-00-0000-00000HG51 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000F51 | XTEAWT-00-0000-00000BF51 | | XTEAWT-00-0000-00000HF51 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000E51 | XTEAWT-00-0000-00000BE51 | | XTEAWT-00-0000-00000HE51 | | |
| | | Q5 | 107 | 118 | | | | XTEAWT-00-0000-00000HD51 | | |
| 53 | 6000 K | S3 | 156 | 171 | XTEAWT-00-0000-000000K53 | XTEAWT-00-0000-00000BK53 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000J53 | XTEAWT-00-0000-00000BJ53 | | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000H53 | XTEAWT-00-0000-00000BH53 | | XTEAWT-00-0000-00000HH53 | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000G53 | XTEAWT-00-0000-00000BG53 | | XTEAWT-00-0000-00000HG53 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000F53 | XTEAWT-00-0000-00000BF53 | | XTEAWT-00-0000-00000HF53 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000E53 | XTEAWT-00-0000-00000BE53 | | XTEAWT-00-0000-00000HE53 | | |
| | | Q5 | 107 | 118 | | | | XTEAWT-00-0000-00000HD53 | | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| 50 | 6200 K | S3 | 156 | 171 | XTEAWT-00-0000-000000K50 | XTEAWT-00-0000-00000BK50 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000J50 | XTEAWT-00-0000-00000BJ50 | | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000H50 | XTEAWT-00-0000-00000BH50 | | XTEAWT-00-0000-00000HH50 | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000G50 | XTEAWT-00-0000-00000BG50 | | XTEAWT-00-0000-00000HG50 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000F50 | XTEAWT-00-0000-00000BF50 | | XTEAWT-00-0000-00000HF50 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000E50 | XTEAWT-00-0000-00000BE50 | | XTEAWT-00-0000-00000HE50 | | |
| | | Q5 | 107 | 118 | | | | XTEAWT-00-0000-00000HD50 | | |
| E1 | 6500 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KE1 | XTEAWT-00-0000-00000BKE1 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JE1 | XTEAWT-00-0000-00000BJE1 | | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HE1 | XTEAWT-00-0000-00000BHE1 | | XTEAWT-00-0000-00000HHE1 | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GE1 | XTEAWT-00-0000-00000BGE1 | | XTEAWT-00-0000-00000HGE1 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FE1 | XTEAWT-00-0000-00000BFE1 | | XTEAWT-00-0000-00000HFE1 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EE1 | XTEAWT-00-0000-00000BEE1 | | XTEAWT-00-0000-00000HEE1 | | |
| | | Q5 | 107 | 118 | | | | XTEAWT-00-0000-00000HDE1 | | |
| E2 | 5700 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KE2 | XTEAWT-00-0000-00000BKE2 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JE2 | XTEAWT-00-0000-00000BJE2 | | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HE2 | XTEAWT-00-0000-00000BHE2 | | XTEAWT-00-0000-00000HHE2 | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GE2 | XTEAWT-00-0000-00000BGE2 | | XTEAWT-00-0000-00000HGE2 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FE2 | XTEAWT-00-0000-00000BFE2 | | XTEAWT-00-0000-00000HFE2 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EE2 | XTEAWT-00-0000-00000BEE2 | | XTEAWT-00-0000-00000HEE2 | | |
| | | Q5 | 107 | 118 | | | | XTEAWT-00-0000-00000HDE2 | | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| E3 | 5000 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KE3 | XTEAWT-00-0000-00000BKE3 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JE3 | XTEAWT-00-0000-00000BJE3 | XTEAWT-00-0000-00000LJE3 | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HE3 | XTEAWT-00-0000-00000BHE3 | XTEAWT-00-0000-00000LHE3 | XTEAWT-00-0000-00000HHE3 | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GE3 | XTEAWT-00-0000-00000BGE3 | XTEAWT-00-0000-00000LGE3 | XTEAWT-00-0000-00000HGE3 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FE3 | XTEAWT-00-0000-00000BFE3 | XTEAWT-00-0000-00000LFE3 | XTEAWT-00-0000-00000HFE3 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EE3 | XTEAWT-00-0000-00000BEE3 | XTEAWT-00-0000-00000LEE3 | XTEAWT-00-0000-00000HEE3 | | |
| | | Q5 | 107 | 118 | | | | XTEAWT-00-0000-00000HDE3 | XTEAWT-00-0000-00000PDE3 | XTEAWT-00-0000-00000UDE3 |
| | | Q4 | 100 | 110 | | | | | XTEAWT-00-0000-00000PCE3 | XTEAWT-00-0000-00000UCE3 |
| | | Q3 | 93.9 | 103 | | | | | XTEAWT-00-0000-00000PBE3 | XTEAWT-00-0000-00000UBE3 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAE3 | XTEAWT-00-0000-00000UAE3 |
| C1 | 5000 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KC1 | XTEAWT-00-0000-00000BKC1 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JC1 | XTEAWT-00-0000-00000BJC1 | XTEAWT-00-0000-00000LJC1 | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HC1 | XTEAWT-00-0000-00000BHC1 | XTEAWT-00-0000-00000LHC1 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GC1 | XTEAWT-00-0000-00000BGC1 | XTEAWT-00-0000-00000LGC1 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FC1 | XTEAWT-00-0000-00000BFC1 | XTEAWT-00-0000-00000LFC1 | | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EC1 | XTEAWT-00-0000-00000BEC1 | XTEAWT-00-0000-00000LEC1 | | | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| F4 | 4750 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KF4 | XTEAWT-00-0000-00000BKF4 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JF4 | XTEAWT-00-0000-00000BJF4 | XTEAWT-00-0000-00000LJF4 | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HF4 | XTEAWT-00-0000-00000BHF4 | XTEAWT-00-0000-00000LHF4 | XTEAWT-00-0000-00000HHF4 | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GF4 | XTEAWT-00-0000-00000BGF4 | XTEAWT-00-0000-00000LGF4 | XTEAWT-00-0000-00000HGF4 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FF4 | XTEAWT-00-0000-00000BFF4 | XTEAWT-00-0000-00000LFF4 | XTEAWT-00-0000-00000HFF4 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EF4 | XTEAWT-00-0000-00000BEF4 | XTEAWT-00-0000-00000LEF4 | XTEAWT-00-0000-00000HEF4 | | |
| | | Q5 | 107 | 118 | | | XTEAWT-00-0000-00000LDF4 | XTEAWT-00-0000-00000HDF4 | XTEAWT-00-0000-00000PDF4 | XTEAWT-00-0000-00000UDF4 |
| | | Q4 | 100 | 110 | | | | | XTEAWT-00-0000-00000PCF4 | XTEAWT-00-0000-00000UCF4 |
| | | Q3 | 93.9 | 103 | | | | | XTEAWT-00-0000-00000PBF4 | XTEAWT-00-0000-00000UBF4 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAF4 | XTEAWT-00-0000-00000UAF4 |
| D1 | 4750 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KD1 | XTEAWT-00-0000-00000BKD1 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JD1 | XTEAWT-00-0000-00000BJD1 | XTEAWT-00-0000-00000LJD1 | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HD1 | XTEAWT-00-0000-00000BHD1 | XTEAWT-00-0000-00000LHD1 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GD1 | XTEAWT-00-0000-00000BGD1 | XTEAWT-00-0000-00000LGD1 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FD1 | XTEAWT-00-0000-00000BFD1 | XTEAWT-00-0000-00000LFD1 | | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000ED1 | XTEAWT-00-0000-00000BED1 | XTEAWT-00-0000-00000LED1 | | | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| E4 | 4500 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KE4 | XTEAWT-00-0000-00000BKE4 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JE4 | XTEAWT-00-0000-00000BJE4 | XTEAWT-00-0000-00000LJE4 | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HE4 | XTEAWT-00-0000-00000BHE4 | XTEAWT-00-0000-00000LHE4 | XTEAWT-00-0000-00000HHE4 | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GE4 | XTEAWT-00-0000-00000BGE4 | XTEAWT-00-0000-00000LGE4 | XTEAWT-00-0000-00000HGE4 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FE4 | XTEAWT-00-0000-00000BFE4 | XTEAWT-00-0000-00000LFE4 | XTEAWT-00-0000-00000HFE4 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EE4 | XTEAWT-00-0000-00000BEE4 | XTEAWT-00-0000-00000LEE4 | XTEAWT-00-0000-00000HEE4 | | |
| | | Q5 | 107 | 118 | | | XTEAWT-00-0000-00000LDE4 | XTEAWT-00-0000-00000HDE4 | XTEAWT-00-0000-00000PDE4 | XTEAWT-00-0000-00000UDE4 |
| | | Q4 | 100 | 110 | | | | | XTEAWT-00-0000-00000PCE4 | XTEAWT-00-0000-00000UCE4 |
| | | Q3 | 93.9 | 103 | | | | | XTEAWT-00-0000-00000PBE4 | XTEAWT-00-0000-00000UBE4 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAE4 | XTEAWT-00-0000-00000UAE4 |
| D2 | 4500 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KD2 | XTEAWT-00-0000-00000BKD2 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JD2 | XTEAWT-00-0000-00000BJD2 | | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HD2 | XTEAWT-00-0000-00000BHD2 | XTEAWT-00-0000-00000LHD2 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GD2 | XTEAWT-00-0000-00000BGD2 | XTEAWT-00-0000-00000LGD2 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FD2 | XTEAWT-00-0000-00000BFD2 | XTEAWT-00-0000-00000LFD2 | | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000ED2 | XTEAWT-00-0000-00000BED2 | XTEAWT-00-0000-00000LED2 | | | |
| | | Q5 | 107 | 118 | | | XTEAWT-00-0000-00000LDD2 | | | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| C2 | 4500 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KC2 | XTEAWT-00-0000-00000BKC2 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JC2 | XTEAWT-00-0000-00000BJC2 | XTEAWT-00-0000-00000LJC2 | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HC2 | XTEAWT-00-0000-00000BHC2 | XTEAWT-00-0000-00000LHC2 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GC2 | XTEAWT-00-0000-00000BGC2 | XTEAWT-00-0000-00000LGC2 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FC2 | XTEAWT-00-0000-00000BFC2 | XTEAWT-00-0000-00000LFC2 | | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EC2 | XTEAWT-00-0000-00000BEC2 | XTEAWT-00-0000-00000LEC2 | | | |
| C3 | 4300 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KC3 | XTEAWT-00-0000-00000BKC3 | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JC3 | XTEAWT-00-0000-00000BJC3 | XTEAWT-00-0000-00000LJC3 | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HC3 | XTEAWT-00-0000-00000BHC3 | XTEAWT-00-0000-00000LHC3 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GC3 | XTEAWT-00-0000-00000BGC3 | XTEAWT-00-0000-00000LGC3 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FC3 | XTEAWT-00-0000-00000BFC3 | XTEAWT-00-0000-00000LFC3 | | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EC3 | XTEAWT-00-0000-00000BEC3 | XTEAWT-00-0000-00000LEC3 | | | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| F5 | 4250 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KF5 | | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JF5 | XTEAWT-00-0000-00000BJF5 | | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HF5 | XTEAWT-00-0000-00000BHF5 | XTEAWT-00-0000-00000LHF5 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GF5 | XTEAWT-00-0000-00000BGF5 | XTEAWT-00-0000-00000LGF5 | XTEAWT-00-0000-00000HGF5 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FF5 | XTEAWT-00-0000-00000BFF5 | XTEAWT-00-0000-00000LFF5 | XTEAWT-00-0000-00000HFF5 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EF5 | XTEAWT-00-0000-00000BEF5 | XTEAWT-00-0000-00000LEF5 | XTEAWT-00-0000-00000HEF5 | | |
| | | Q5 | 107 | 118 | XTEAWT-00-0000-000000DF5 | XTEAWT-00-0000-00000BDF5 | XTEAWT-00-0000-00000LDF5 | XTEAWT-00-0000-00000HDF5 | | |
| | | Q4 | 100 | 110 | | | XTEAWT-00-0000-00000LCF5 | XTEAWT-00-0000-00000HCF5 | XTEAWT-00-0000-00000PCF5 | XTEAWT-00-0000-00000UCF5 |
| | | Q3 | 93.9 | 103 | | | | | XTEAWT-00-0000-00000PBF5 | XTEAWT-00-0000-00000UBF5 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAF5 | XTEAWT-00-0000-00000UAF5 |
| | | P4 | 80.6 | 88.6 | | | | | XTEAWT-00-0000-00000P9F5 | XTEAWT-00-0000-00000U9F5 |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 75 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| E5 | 4000 K | S3 | 156 | 171 | XTEAWT-00-0000-000000KE5 | | | | | |
| | | S2 | 148 | 163 | XTEAWT-00-0000-000000JE5 | XTEAWT-00-0000-00000BJE5 | | | | |
| | | R5 | 139 | 153 | XTEAWT-00-0000-000000HE5 | XTEAWT-00-0000-00000BHE5 | XTEAWT-00-0000-00000LHE5 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GE5 | XTEAWT-00-0000-00000BGE5 | XTEAWT-00-0000-00000LGE5 | XTEAWT-00-0000-00000HGE5 | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FE5 | XTEAWT-00-0000-00000BFE5 | XTEAWT-00-0000-00000LFE5 | XTEAWT-00-0000-00000HFE5 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EE5 | XTEAWT-00-0000-00000BEE5 | XTEAWT-00-0000-00000LEE5 | XTEAWT-00-0000-00000HEE5 | | |
| | | Q5 | 107 | 118 | XTEAWT-00-0000-000000DE5 | XTEAWT-00-0000-00000BDE5 | XTEAWT-00-0000-00000LDE5 | XTEAWT-00-0000-00000HDE5 | | |
| | | Q4 | 100 | 110 | | | XTEAWT-00-0000-00000LCE5 | XTEAWT-00-0000-00000HCE5 | XTEAWT-00-0000-00000PCE5 | XTEAWT-00-0000-00000UCE5 |
| | | Q3 | 93.9 | 103 | | | | | XTEAWT-00-0000-00000PBE5 | XTEAWT-00-0000-00000UBE5 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAE5 | XTEAWT-00-0000-00000UAE5 |
| | | P4 | 80.6 | 88.6 | | | | | XTEAWT-00-0000-00000P9E5 | XTEAWT-00-0000-00000U9E5 |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| F6 | 3750 K | R5 | 139 | 153 | XTEAWT-00-0000-000000HF6 | XTEAWT-00-0000-00000BHF6 | XTEAWT-00-0000-00000LHF6 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GF6 | XTEAWT-00-0000-00000BGF6 | XTEAWT-00-0000-00000LGF6 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FF6 | XTEAWT-00-0000-00000BFF6 | XTEAWT-00-0000-00000LFF6 | XTEAWT-00-0000-00000HFF6 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EF6 | XTEAWT-00-0000-00000BEF6 | XTEAWT-00-0000-00000LEF6 | XTEAWT-00-0000-00000HEF6 | | |
| | | Q5 | 107 | 118 | XTEAWT-00-0000-000000DF6 | XTEAWT-00-0000-00000BDF6 | XTEAWT-00-0000-00000LDF6 | XTEAWT-00-0000-00000HDF6 | | |
| | | Q4 | 100 | 110 | | | XTEAWT-00-0000-00000LCF6 | XTEAWT-00-0000-00000HCF6 | XTEAWT-00-0000-00000PCF6 | XTEAWT-00-0000-00000UCF6 |
| | | Q3 | 93.9 | 103 | | | | | XTEAWT-00-0000-00000PBF6 | XTEAWT-00-0000-00000UBF6 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAF6 | XTEAWT-00-0000-00000UAF6 |
| | | P4 | 80.6 | 88.6 | | | | | XTEAWT-00-0000-00000P9F6 | XTEAWT-00-0000-00000U9F6 |
| E6 | 3500 K | R5 | 139 | 153 | XTEAWT-00-0000-000000HE6 | XTEAWT-00-0000-00000BHE6 | XTEAWT-00-0000-00000LHE6 | | | |
| | | R4 | 130 | 143 | XTEAWT-00-0000-000000GE6 | XTEAWT-00-0000-00000BGE6 | XTEAWT-00-0000-00000LGE6 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FE6 | XTEAWT-00-0000-00000BFE6 | XTEAWT-00-0000-00000LFE6 | XTEAWT-00-0000-00000HFE6 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EE6 | XTEAWT-00-0000-00000BEE6 | XTEAWT-00-0000-00000LEE6 | XTEAWT-00-0000-00000HEE6 | | |
| | | Q5 | 107 | 118 | XTEAWT-00-0000-000000DE6 | XTEAWT-00-0000-00000BDE6 | XTEAWT-00-0000-00000LDE6 | XTEAWT-00-0000-00000HDE6 | | |
| | | Q4 | 100 | 110 | | | XTEAWT-00-0000-00000LCE6 | XTEAWT-00-0000-00000HCE6 | XTEAWT-00-0000-00000PCE6 | XTEAWT-00-0000-00000UCE6 |
| | | Q3 | 93.9 | 103 | | | | | XTEAWT-00-0000-00000PBE6 | XTEAWT-00-0000-00000UBE6 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAE6 | XTEAWT-00-0000-00000UAE6 |
| | | P4 | 80.6 | 88.6 | | | | | XTEAWT-00-0000-00000P9E6 | XTEAWT-00-0000-00000U9E6 |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| F7 | 3250 K | R4 | 130 | 143 | XTEAWT-00-0000-000000GF7 | XTEAWT-00-0000-00000BGF7 | XTEAWT-00-0000-00000LGF7 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FF7 | XTEAWT-00-0000-00000BFF7 | XTEAWT-00-0000-00000LFF7 | XTEAWT-00-0000-00000HFF7 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EF7 | XTEAWT-00-0000-00000BEF7 | XTEAWT-00-0000-00000LEF7 | XTEAWT-00-0000-00000HEF7 | | |
| | | Q5 | 107 | 118 | XTEAWT-00-0000-000000DF7 | XTEAWT-00-0000-00000BDF7 | XTEAWT-00-0000-00000LDF7 | XTEAWT-00-0000-00000HDF7 | | |
| | | Q4 | 100 | 110 | XTEAWT-00-0000-000000CF7 | XTEAWT-00-0000-00000BCF7 | XTEAWT-00-0000-00000LCF7 | XTEAWT-00-0000-00000HCF7 | | |
| | | Q3 | 93.9 | 103 | | | XTEAWT-00-0000-00000LBF7 | XTEAWT-00-0000-00000HBF7 | XTEAWT-00-0000-00000PBF7 | XTEAWT-00-0000-00000UBF7 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAF7 | XTEAWT-00-0000-00000UAF7 |
| | | P4 | 80.6 | 88.6 | | | | | XTEAWT-00-0000-00000P9F7 | XTEAWT-00-0000-00000U9F7 |
| | | P3 | 73.9 | 81.2 | | | | | XTEAWT-00-0000-00000P8F7 | XTEAWT-00-0000-00000U8F7 |
| E7 | 3000 K | R4 | 130 | 143 | XTEAWT-00-0000-000000GE7 | XTEAWT-00-0000-00000BGE7 | XTEAWT-00-0000-00000LGE7 | | | |
| | | R3 | 122 | 134 | XTEAWT-00-0000-000000FE7 | XTEAWT-00-0000-00000BFE7 | XTEAWT-00-0000-00000LFE7 | XTEAWT-00-0000-00000HFE7 | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EE7 | XTEAWT-00-0000-00000BEE7 | XTEAWT-00-0000-00000LEE7 | XTEAWT-00-0000-00000HEE7 | | |
| | | Q5 | 107 | 118 | XTEAWT-00-0000-000000DE7 | XTEAWT-00-0000-00000BDE7 | XTEAWT-00-0000-00000LDE7 | XTEAWT-00-0000-00000HDE7 | | |
| | | Q4 | 100 | 110 | XTEAWT-00-0000-000000CE7 | XTEAWT-00-0000-00000BCE7 | XTEAWT-00-0000-00000LCE7 | XTEAWT-00-0000-00000HCE7 | | |
| | | Q3 | 93.9 | 103 | | | XTEAWT-00-0000-00000LBE7 | XTEAWT-00-0000-00000HBE7 | XTEAWT-00-0000-00000PBE7 | XTEAWT-00-0000-00000UBE7 |
| | | Q2 | 87.4 | 96.1 | | | | | XTEAWT-00-0000-00000PAE7 | XTEAWT-00-0000-00000UAE7 |
| | | P4 | 80.6 | 88.6 | | | | | XTEAWT-00-0000-00000P9E7 | XTEAWT-00-0000-00000U9E7 |
| | | P3 | 73.9 | 81.2 | | | | | XTEAWT-00-0000-00000P8E7 | XTEAWT-00-0000-00000U8E7 |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, STANDARD ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Typical | 80 CRI Minimum | 85 CRI Minimum | 90 CRI Minimum |
| F8 | 2850 K | R3 | 122 | 134 | XTEAWT-00-0000-000000FF8 | XTEAWT-00-0000-00000BFF8 | XTEAWT-00-0000-00000LFF8 | | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EF8 | XTEAWT-00-0000-00000BEF8 | XTEAWT-00-0000-00000LEF8 | XTEAWT-00-0000-00000HEF8 | | |
| | | Q5 | 107 | 118 | XTEAWT-00-0000-000000DF8 | XTEAWT-00-0000-00000BDF8 | XTEAWT-00-0000-00000LDF8 | XTEAWT-00-0000-00000HDF8 | | |
| | | Q4 | 100 | 110 | XTEAWT-00-0000-000000CF8 | XTEAWT-00-0000-00000BCF8 | XTEAWT-00-0000-00000LCF8 | XTEAWT-00-0000-00000HCF8 | | |
| | | Q3 | 93.9 | 103 | XTEAWT-00-0000-000000BF8 | XTEAWT-00-0000-00000BBF8 | XTEAWT-00-0000-00000LBF8 | XTEAWT-00-0000-00000HBF8 | XTEAWT-00-0000-00000PBF8 | |
| | | Q2 | 87.4 | 96.1 | | | XTEAWT-00-0000-00000LAF8 | XTEAWT-00-0000-00000HAF8 | XTEAWT-00-0000-00000PAF8 | XTEAWT-00-0000-00000UAF8 |
| | | P4 | 80.6 | 88.6 | | | | | XTEAWT-00-0000-00000P9F8 | XTEAWT-00-0000-00000U9F8 |
| | | P3 | 73.9 | 81.2 | | | | | XTEAWT-00-0000-00000P8F8 | XTEAWT-00-0000-00000U8F8 |
| E8 | 2700 K | R3 | 122 | 134 | XTEAWT-00-0000-000000FE8 | XTEAWT-00-0000-00000BFE8 | XTEAWT-00-0000-00000LFE8 | | | |
| | | R2 | 114 | 125 | XTEAWT-00-0000-000000EE8 | XTEAWT-00-0000-00000BEE8 | XTEAWT-00-0000-00000LEE8 | XTEAWT-00-0000-00000HEE8 | | |
| | | Q5 | 107 | 118 | XTEAWT-00-0000-000000DE8 | XTEAWT-00-0000-00000BDE8 | XTEAWT-00-0000-00000LDE8 | XTEAWT-00-0000-00000HDE8 | | |
| | | Q4 | 100 | 110 | XTEAWT-00-0000-000000CE8 | XTEAWT-00-0000-00000BCE8 | XTEAWT-00-0000-00000LCE8 | XTEAWT-00-0000-00000HCE8 | | |
| | | Q3 | 93.9 | 103 | XTEAWT-00-0000-000000BE8 | XTEAWT-00-0000-00000BBE8 | XTEAWT-00-0000-00000LBE8 | XTEAWT-00-0000-00000HBE8 | XTEAWT-00-0000-00000PBE8 | |
| | | Q2 | 87.4 | 96.1 | | | XTEAWT-00-0000-00000LAE8 | XTEAWT-00-0000-00000HAE8 | XTEAWT-00-0000-00000PAE8 | XTEAWT-00-0000-00000UAE8 |
| | | P4 | 80.6 | 88.6 | | | | | XTEAWT-00-0000-00000P9E8 | XTEAWT-00-0000-00000U9E8 |
| | | P3 | 73.9 | 81.2 | | | | | XTEAWT-00-0000-00000P8E8 | XTEAWT-00-0000-00000U8E8 |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C)

The following tables provide order codes for XLamp High-Efficacy XT-E White LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 42). For definitions of the chromaticity kits, please see the Cree's Standard Chromaticity Kits section (page 41).

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | |
|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Minimum | 90 CRI Minimum |
| 51 | 6200 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L51 | XTEAWT-E0-0000-00000BL51 | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K51 | XTEAWT-E0-0000-00000BK51 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J51 | XTEAWT-E0-0000-00000BJ51 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H51 | XTEAWT-E0-0000-00000BH51 | XTEAWT-E0-0000-00000HH51 | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000G51 | XTEAWT-E0-0000-00000BG51 | XTEAWT-E0-0000-00000HG51 | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF51 | |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HE51 | |
| 53 | 6000 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L53 | XTEAWT-E0-0000-00000BL53 | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K53 | XTEAWT-E0-0000-00000BK53 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J53 | XTEAWT-E0-0000-00000BJ53 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H53 | XTEAWT-E0-0000-00000BH53 | XTEAWT-E0-0000-00000HH53 | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000G53 | XTEAWT-E0-0000-00000BG53 | XTEAWT-E0-0000-00000HG53 | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF53 | |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HE53 | |
| 50 | 6200 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L50 | XTEAWT-E0-0000-00000BL50 | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K50 | XTEAWT-E0-0000-00000BK50 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J50 | XTEAWT-E0-0000-00000BJ50 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H50 | XTEAWT-E0-0000-00000BH50 | XTEAWT-E0-0000-00000HH50 | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000G50 | XTEAWT-E0-0000-00000BG50 | XTEAWT-E0-0000-00000HG50 | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF50 | |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HE50 | |
| E1 | 6500 K | S3 | 156 | 171 | XTEAWT-E0-0000-000000KE1 | XTEAWT-E0-0000-00000BKE1 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000JE1 | XTEAWT-E0-0000-00000BJE1 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000HE1 | XTEAWT-E0-0000-00000BHE1 | XTEAWT-E0-0000-00000HHE1 | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000GE1 | XTEAWT-E0-0000-00000BGE1 | XTEAWT-E0-0000-00000HGE1 | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HFE1 | |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HEE1 | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | |
|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Minimum | 90 CRI Minimum |
| 1E | 6500 K | S3 | 156 | 171 | XTEAWT-E0-0000-000000K1E | XTEAWT-E0-0000-00000BK1E | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J1E | XTEAWT-E0-0000-00000BJ1E | XTEAWT-E0-0000-00000HJ1E | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H1E | XTEAWT-E0-0000-00000BH1E | XTEAWT-E0-0000-00000HH1E | |
| | | R4 | 130 | 143 | | | XTEAWT-E0-0000-00000HG1E | |
| 1G | 6500 K | S3 | 156 | 171 | XTEAWT-E0-0000-000000K1G | XTEAWT-E0-0000-00000BK1G | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J1G | XTEAWT-E0-0000-00000BJ1G | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H1G | XTEAWT-E0-0000-00000BH1G | | |
| E2 | 5700 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000LE2 | XTEAWT-E0-0000-00000BLE2 | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000KE2 | XTEAWT-E0-0000-00000BKE2 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000JE2 | XTEAWT-E0-0000-00000BJE2 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000HE2 | XTEAWT-E0-0000-00000BHE2 | XTEAWT-E0-0000-00000HHE2 | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000GE2 | XTEAWT-E0-0000-00000BGE2 | XTEAWT-E0-0000-00000HGE2 | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HFE2 | |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HEE2 | |
| 2E | 5700 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L2E | XTEAWT-E0-0000-00000BL2E | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K2E | XTEAWT-E0-0000-00000BK2E | XTEAWT-E0-0000-00000HK2E | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J2E | XTEAWT-E0-0000-00000BJ2E | XTEAWT-E0-0000-00000HJ2E | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H2E | XTEAWT-E0-0000-00000BH2E | XTEAWT-E0-0000-00000HH2E | |
| 2G | 5700 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L2G | XTEAWT-E0-0000-00000BL2G | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K2G | XTEAWT-E0-0000-00000BK2G | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J2G | XTEAWT-E0-0000-00000BJ2G | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H2G | XTEAWT-E0-0000-00000BH2G | | |
| E3 | 5000 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000LE3 | XTEAWT-E0-0000-00000BLE3 | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000KE3 | XTEAWT-E0-0000-00000BKE3 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000JE3 | XTEAWT-E0-0000-00000BJE3 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000HE3 | XTEAWT-E0-0000-00000BHE3 | XTEAWT-E0-0000-00000HHE3 | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000GE3 | XTEAWT-E0-0000-00000BGE3 | XTEAWT-E0-0000-00000HGE3 | XTEAWT-E0-0000-00000UGE3 |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HFE3 | XTEAWT-E0-0000-00000UFE3 |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HEE3 | XTEAWT-E0-0000-00000UEE3 |
| | | Q5 | 107 | 118 | | | | XTEAWT-E0-0000-00000UDE3 |
| | | Q4 | 100 | 110 | | | | XTEAWT-E0-0000-00000UCE3 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBE3 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAE3 |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | |
|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Minimum | 90 CRI Minimum |
| 3E | 5000 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L3E | XTEAWT-E0-0000-00000BL3E | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K3E | XTEAWT-E0-0000-00000BK3E | XTEAWT-E0-0000-00000HK3E | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J3E | XTEAWT-E0-0000-00000BJ3E | XTEAWT-E0-0000-00000HJ3E | |
| | | R5 | 139 | 153 | | | XTEAWT-E0-0000-00000HH3E | |
| 3G | 5000 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L3G | XTEAWT-E0-0000-00000BL3G | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K3G | XTEAWT-E0-0000-00000BK3G | XTEAWT-E0-0000-00000HK3G | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J3G | XTEAWT-E0-0000-00000BJ3G | XTEAWT-E0-0000-00000HJ3G | |
| | | R5 | 139 | 153 | | | XTEAWT-E0-0000-00000HH3G | |
| F4 | 4750 K | R5 | 139 | 153 | | | XTEAWT-E0-0000-00000HHF4 | |
| | | R4 | 130 | 143 | | | XTEAWT-E0-0000-00000HGF4 | XTEAWT-E0-0000-00000UGF4 |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HFF4 | XTEAWT-E0-0000-00000UFF4 |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HEF4 | XTEAWT-E0-0000-00000UEF4 |
| | | Q5 | 107 | 118 | | | | XTEAWT-E0-0000-00000UDF4 |
| | | Q4 | 100 | 110 | | | | XTEAWT-E0-0000-00000UCF4 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBF4 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAF4 |
| E4 | 4500 K | S3 | 156 | 171 | XTEAWT-E0-0000-000000KE4 | XTEAWT-E0-0000-00000BKE4 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000JE4 | XTEAWT-E0-0000-00000BJE4 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000HE4 | XTEAWT-E0-0000-00000BHE4 | XTEAWT-E0-0000-00000HHE4 | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000GE4 | XTEAWT-E0-0000-00000BGE4 | XTEAWT-E0-0000-00000HGE4 | XTEAWT-E0-0000-00000UGE4 |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HFE4 | XTEAWT-E0-0000-00000UFE4 |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HEE4 | XTEAWT-E0-0000-00000UEE4 |
| | | Q5 | 107 | 118 | | | | XTEAWT-E0-0000-00000UDE4 |
| | | Q4 | 100 | 110 | | | | XTEAWT-E0-0000-00000UCE4 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBE4 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAE4 |
| 4E | 4500 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L4E | XTEAWT-E0-0000-00000BL4E | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K4E | XTEAWT-E0-0000-00000BK4E | XTEAWT-E0-0000-00000HK4E | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J4E | XTEAWT-E0-0000-00000BJ4E | XTEAWT-E0-0000-00000HJ4E | |
| | | R5 | 139 | 153 | | | XTEAWT-E0-0000-00000HH4E | |
| | | R4 | 130 | 143 | | | XTEAWT-E0-0000-00000HG4E | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | |
|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Minimum | 90 CRI Minimum |
| 4G | 4500 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L4G | XTEAWT-E0-0000-00000BL4G | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K4G | XTEAWT-E0-0000-00000BK4G | XTEAWT-E0-0000-00000HK4G | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J4G | XTEAWT-E0-0000-00000BJ4G | XTEAWT-E0-0000-00000HJ4G | |
| | | R5 | 139 | 153 | | | XTEAWT-E0-0000-00000HH4G | |
| | | R4 | 130 | 143 | | | XTEAWT-E0-0000-00000HG4G | |
| F5 | 4250 K | S3 | 156 | 171 | XTEAWT-E0-0000-000000KF5 | XTEAWT-E0-0000-00000BKF5 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000JF5 | XTEAWT-E0-0000-00000BJF5 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000HF5 | XTEAWT-E0-0000-00000BHF5 | | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000GF5 | XTEAWT-E0-0000-00000BGF5 | XTEAWT-E0-0000-00000HGF5 | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HFF5 | XTEAWT-E0-0000-00000UFF5 |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HEF5 | XTEAWT-E0-0000-00000UEF5 |
| | | Q5 | 107 | 118 | | | XTEAWT-E0-0000-00000HDF5 | XTEAWT-E0-0000-00000UDF5 |
| | | Q4 | 100 | 110 | | | | XTEAWT-E0-0000-00000UCF5 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBF5 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAF5 |
| | | P4 | 80.6 | 88.6 | | | | XTEAWT-E0-0000-00000U9F5 |
| E5 | 4000 K | S3 | 156 | 171 | XTEAWT-E0-0000-000000KE5 | XTEAWT-E0-0000-00000BKE5 | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000JE5 | XTEAWT-E0-0000-00000BJE5 | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000HE5 | XTEAWT-E0-0000-00000BHE5 | | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000GE5 | XTEAWT-E0-0000-00000BGE5 | XTEAWT-E0-0000-00000HGE5 | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HFE5 | XTEAWT-E0-0000-00000UFE5 |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HEE5 | XTEAWT-E0-0000-00000UEE5 |
| | | Q5 | 107 | 118 | | | XTEAWT-E0-0000-00000HDE5 | XTEAWT-E0-0000-00000UDE5 |
| | | Q4 | 100 | 110 | | | | XTEAWT-E0-0000-00000UCE5 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBE5 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAE5 |
| | | P4 | 80.6 | 88.6 | | | | XTEAWT-E0-0000-00000U9E5 |
| 5E | 4000 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L5E | XTEAWT-E0-0000-00000BL5E | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K5E | XTEAWT-E0-0000-00000BK5E | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J5E | XTEAWT-E0-0000-00000BJ5E | XTEAWT-E0-0000-00000HJ5E | |
| | | R5 | 139 | 153 | | | XTEAWT-E0-0000-00000HH5E | |
| | | R4 | 130 | 143 | | | XTEAWT-E0-0000-00000HG5E | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | |
|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Minimum | 90 CRI Minimum |
| 5G | 4000 K | S4 | 164 | 180 | XTEAWT-E0-0000-000000L5G | XTEAWT-E0-0000-00000BL5G | | |
| | | S3 | 156 | 171 | XTEAWT-E0-0000-000000K5G | XTEAWT-E0-0000-00000BK5G | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J5G | XTEAWT-E0-0000-00000BJ5G | XTEAWT-E0-0000-00000HJ5G | |
| | | R5 | 139 | 153 | | | XTEAWT-E0-0000-00000HH5G | |
| | | R4 | 130 | 143 | | | XTEAWT-E0-0000-00000HG5G | |
| F6 | 3750 K | R5 | 139 | 153 | XTEAWT-E0-0000-000000HF6 | XTEAWT-E0-0000-00000BHF6 | | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000GF6 | XTEAWT-E0-0000-00000BGF6 | | |
| | | R3 | 122 | 134 | XTEAWT-E0-0000-000000FF6 | XTEAWT-E0-0000-00000BFF6 | XTEAWT-E0-0000-00000HFF6 | |
| | | R2 | 114 | 125 | XTEAWT-E0-0000-000000EF6 | XTEAWT-E0-0000-00000BEF6 | XTEAWT-E0-0000-00000HEF6 | XTEAWT-E0-0000-00000UEF6 |
| | | Q5 | 107 | 118 | | | XTEAWT-E0-0000-00000HDF6 | XTEAWT-E0-0000-00000UDF6 |
| | | Q4 | 100 | 110 | | | XTEAWT-E0-0000-00000HCF6 | XTEAWT-E0-0000-00000UCF6 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBF6 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAF6 |
| | | P4 | 80.6 | 88.6 | | | | XTEAWT-E0-0000-00000U9F6 |
| E6 | 3500 K | R5 | 139 | 153 | XTEAWT-E0-0000-000000HE6 | XTEAWT-E0-0000-00000BHE6 | | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000GE6 | XTEAWT-E0-0000-00000BGE6 | | |
| | | R3 | 122 | 134 | XTEAWT-E0-0000-000000FE6 | XTEAWT-E0-0000-00000BFE6 | XTEAWT-E0-0000-00000HFE6 | |
| | | R2 | 114 | 125 | XTEAWT-E0-0000-000000EE6 | XTEAWT-E0-0000-00000BEE6 | XTEAWT-E0-0000-00000HEE6 | XTEAWT-E0-0000-00000UEE6 |
| | | Q5 | 107 | 118 | | | XTEAWT-E0-0000-00000HDE6 | XTEAWT-E0-0000-00000UDE6 |
| | | Q4 | 100 | 110 | | | XTEAWT-E0-0000-00000HCE6 | XTEAWT-E0-0000-00000UCE6 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBE6 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAE6 |
| | | P4 | 80.6 | 88.6 | | | | XTEAWT-E0-0000-00000U9E6 |
| 6E | 3500 K | S3 | 156 | 171 | XTEAWT-E0-0000-000000K6E | XTEAWT-E0-0000-00000BK6E | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J6E | XTEAWT-E0-0000-00000BJ6E | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H6E | XTEAWT-E0-0000-00000BH6E | XTEAWT-E0-0000-00000HH6E | |
| | | R4 | 130 | 143 | | | XTEAWT-E0-0000-00000HG6E | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF6E | |
| 6G | 3500 K | S3 | 156 | 171 | XTEAWT-E0-0000-000000K6G | XTEAWT-E0-0000-00000BK6G | | |
| | | S2 | 148 | 163 | XTEAWT-E0-0000-000000J6G | XTEAWT-E0-0000-00000BJ6G | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H6G | XTEAWT-E0-0000-00000BH6G | XTEAWT-E0-0000-00000HH6G | |
| | | R4 | 130 | 143 | | | XTEAWT-E0-0000-00000HG6G | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF6G | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | |
|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Minimum | 90 CRI Minimum |
| F7 | 3250 K | R4 | 130 | 143 | XTEAWT-E0-0000-000000GF7 | XTEAWT-E0-0000-00000BGF7 | | |
| | | R3 | 122 | 134 | XTEAWT-E0-0000-000000FF7 | XTEAWT-E0-0000-00000BFF7 | XTEAWT-E0-0000-00000HFF7 | |
| | | R2 | 114 | 125 | XTEAWT-E0-0000-000000EF7 | XTEAWT-E0-0000-00000BEF7 | XTEAWT-E0-0000-00000HEF7 | XTEAWT-E0-0000-00000UEF7 |
| | | Q5 | 107 | 118 | XTEAWT-E0-0000-000000DF7 | XTEAWT-E0-0000-00000BDF7 | XTEAWT-E0-0000-00000HDF7 | XTEAWT-E0-0000-00000UDF7 |
| | | Q4 | 100 | 110 | | | XTEAWT-E0-0000-00000HCF7 | XTEAWT-E0-0000-00000UCF7 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBF7 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAF7 |
| | | P4 | 80.6 | 88.6 | | | | XTEAWT-E0-0000-00000U9F7 |
| | | P3 | 73.9 | 81.2 | | | | XTEAWT-E0-0000-00000U8F7 |
| E7 | 3000 K | R4 | 130 | 143 | XTEAWT-E0-0000-000000GE7 | XTEAWT-E0-0000-00000BGE7 | | |
| | | R3 | 122 | 134 | XTEAWT-E0-0000-000000FE7 | XTEAWT-E0-0000-00000BFE7 | XTEAWT-E0-0000-00000HFE7 | |
| | | R2 | 114 | 125 | XTEAWT-E0-0000-000000EE7 | XTEAWT-E0-0000-00000BEE7 | XTEAWT-E0-0000-00000HEE7 | XTEAWT-E0-0000-00000UEE7 |
| | | Q5 | 107 | 118 | XTEAWT-E0-0000-000000DE7 | XTEAWT-E0-0000-00000BDE7 | XTEAWT-E0-0000-00000HDE7 | XTEAWT-E0-0000-00000UDE7 |
| | | Q4 | 100 | 110 | | | XTEAWT-E0-0000-00000HCE7 | XTEAWT-E0-0000-00000UCE7 |
| | | Q3 | 93.9 | 103 | | | | XTEAWT-E0-0000-00000UBE7 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAE7 |
| | | P4 | 80.6 | 88.6 | | | | XTEAWT-E0-0000-00000U9E7 |
| | | P3 | 73.9 | 81.2 | | | | XTEAWT-E0-0000-00000U8E7 |
| 7E | 3000 K | S2 | 148 | 163 | XTEAWT-E0-0000-000000J7E | XTEAWT-E0-0000-00000BJ7E | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H7E | XTEAWT-E0-0000-00000BH7E | XTEAWT-E0-0000-00000HH7E | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000G7E | XTEAWT-E0-0000-00000BG7E | XTEAWT-E0-0000-00000HG7E | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF7E | |
| 7G | 3000 K | S2 | 148 | 163 | XTEAWT-E0-0000-000000J7G | XTEAWT-E0-0000-00000BJ7G | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H7G | XTEAWT-E0-0000-00000BH7G | XTEAWT-E0-0000-00000HH7G | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000G7G | XTEAWT-E0-0000-00000BG7G | XTEAWT-E0-0000-00000HG7G | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF7G | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | |
|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Minimum | 90 CRI Minimum |
| F8 | 2850 K | R3 | 122 | 134 | XTEAWT-E0-0000-000000FF8 | XTEAWT-E0-0000-00000BFF8 | | |
| | | R2 | 114 | 125 | XTEAWT-E0-0000-000000EF8 | XTEAWT-E0-0000-00000BEF8 | XTEAWT-E0-0000-00000HEF8 | |
| | | Q5 | 107 | 118 | XTEAWT-E0-0000-000000DF8 | XTEAWT-E0-0000-00000BDF8 | XTEAWT-E0-0000-00000HDF8 | XTEAWT-E0-0000-00000UDF8 |
| | | Q4 | 100 | 110 | XTEAWT-E0-0000-000000CF8 | XTEAWT-E0-0000-00000BCF8 | XTEAWT-E0-0000-00000HCF8 | XTEAWT-E0-0000-00000UCF8 |
| | | Q3 | 93.9 | 103 | | | XTEAWT-E0-0000-00000HBF8 | XTEAWT-E0-0000-00000UBF8 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAF8 |
| | | P4 | 80.6 | 88.6 | | | | XTEAWT-E0-0000-00000U9F8 |
| | | P3 | 73.9 | 81.2 | | | | XTEAWT-E0-0000-00000U8F8 |
| E8 | 2700 K | R3 | 122 | 134 | XTEAWT-E0-0000-000000FE8 | XTEAWT-E0-0000-00000BFE8 | | |
| | | R2 | 114 | 125 | XTEAWT-E0-0000-000000EE8 | XTEAWT-E0-0000-00000BEE8 | XTEAWT-E0-0000-00000HEE8 | |
| | | Q5 | 107 | 118 | XTEAWT-E0-0000-000000DE8 | XTEAWT-E0-0000-00000BDE8 | XTEAWT-E0-0000-00000HDE8 | XTEAWT-E0-0000-00000UDE8 |
| | | Q4 | 100 | 110 | XTEAWT-E0-0000-000000CE8 | XTEAWT-E0-0000-00000BCE8 | XTEAWT-E0-0000-00000HCE8 | XTEAWT-E0-0000-00000UCE8 |
| | | Q3 | 93.9 | 103 | | | XTEAWT-E0-0000-00000HBE8 | XTEAWT-E0-0000-00000UBE8 |
| | | Q2 | 87.4 | 96.1 | | | | XTEAWT-E0-0000-00000UAE8 |
| | | P4 | 80.6 | 88.6 | | | | XTEAWT-E0-0000-00000U9E8 |
| | | P3 | 73.9 | 81.2 | | | | XTEAWT-E0-0000-00000U8E8 |
| 8E | 2700 K | S2 | 148 | 163 | XTEAWT-E0-0000-000000J8E | XTEAWT-E0-0000-00000BJ8E | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H8E | XTEAWT-E0-0000-00000BH8E | | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000G8E | XTEAWT-E0-0000-00000BG8E | XTEAWT-E0-0000-00000HG8E | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF8E | |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HE8E | |
| 8G | 2700 K | S2 | 148 | 163 | XTEAWT-E0-0000-000000J8G | XTEAWT-E0-0000-00000BJ8G | | |
| | | R5 | 139 | 153 | XTEAWT-E0-0000-000000H8G | XTEAWT-E0-0000-00000BH8G | | |
| | | R4 | 130 | 143 | XTEAWT-E0-0000-000000G8G | XTEAWT-E0-0000-00000BG8G | XTEAWT-E0-0000-00000HG8G | |
| | | R3 | 122 | 134 | | | XTEAWT-E0-0000-00000HF8G | |
| | | R2 | 114 | 125 | | | XTEAWT-E0-0000-00000HE8G | |
| EA | 2200 K | Q4 | 100 | 110 | | XTEAWT-E0-0000-00000BCEA | | |
| | | Q3 | 93.9 | 103 | | XTEAWT-E0-0000-00000BBEA | XTEAWT-E0-0000-00000HBEA | |
| | | Q2 | 87.4 | 96.1 | | XTEAWT-E0-0000-00000BAEA | XTEAWT-E0-0000-00000HAEA | |
| | | P4 | 80.6 | 88.6 | | XTEAWT-E0-0000-00000B9EA | XTEAWT-E0-0000-00000H9EA | |
| | | P3 | 73.9 | 81.2 | | | XTEAWT-E0-0000-00000H8EA | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C) - CONTINUED

| Chromaticity | | Minimum Luminous Flux (lm) @ 350 mA | | | Order Codes | | | |
|---|---|---|---|---|---|---|---|---|
| Kit | CCT | Code | Flux (lm) @ 85 °C | Flux (lm) @ 25 °C* | No Minimum CRI | 70 CRI Minimum | 80 CRI Minimum | 90 CRI Minimum |
| AE | 2200 K | R3 | 122 | 134 | | XTEAWT-E0-0000-00000BFAE | | |
| | | R2 | 114 | 125 | | XTEAWT-E0-0000-00000BEAE | | |
| | | Q5 | 107 | 118 | | XTEAWT-E0-0000-00000BDAE | XTEAWT-E0-0000-00000HDAE | |
| | | Q4 | 100 | 110 | | | XTEAWT-E0-0000-00000HCAE | |
| | | Q3 | 93.9 | 103 | | | XTEAWT-E0-0000-00000HBAE | |
| AG | 2200 K | R3 | 122 | 134 | | XTEAWT-E0-0000-00000BFAG | | |
| | | R2 | 114 | 125 | | XTEAWT-E0-0000-00000BEAG | | |
| | | Q5 | 107 | 118 | | XTEAWT-E0-0000-00000BDAG | XTEAWT-E0-0000-00000HDAG | |
| | | Q4 | 100 | 110 | | | XTEAWT-E0-0000-00000HCAG | |
| | | Q3 | 93.9 | 103 | | | XTEAWT-E0-0000-00000HBAG | |

Notes:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements and ±2 on CRI measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.

* Flux values @ 25 °C are calculated and for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## FLUX CHARACTERISTICS - ROYAL BLUE ($T_J$ = 85 °C)

The following tables provide order codes for XLamp XT-E Royal Blue LEDs. For a complete description of the order code nomenclature, please see the Bin and Order Code Formats section (page 42).

| DWL Kit Codes | Dominant Wavelength Range | | | | Order Codes, Minimum Radiant Flux @ 350 mA, $T_j$=85 °C | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|
| | Minimum | | Maximum | | | | | | | |
| | Group | DWL (nm) | Group | DWL (nm) | 550 mW - Radiant Flux Group Code 34(N) | 575 mW - Radiant Flux Group Code 35 (P) | 600 mW - Radiant Flux Group Code 36 (Q) | 625 mW - Radiant Flux Group Code 37 (R) | 650 mW - Radiant Flux Group Code 38 (S) | 675 mW - Radiant Flux Group Code 39 (T) |
| | | | | | Calculated PPF (µmol/s) = 2.08 | Calculated PPF (µmol/s) = 2.18 | Calculated PPF (µmol/s) = 2.27 | Calculated PPF (µmol/s) = 2.37 | Calculated PPF (µmol/s) = 2.46 | Calculated PPF (µmol/s) = 2.56 |
| 01 | D36 | 450 | D57 | 465 | XTEARY-00-0000-000000N01 | XTEARY-00-0000-000000P01 | XTEARY-00-0000-000000Q01 | XTEARY-00-0000-000000R01 | XTEARY-00-0000-000000S01 | XTEARY-00-0000-000000T01 |
| 02 | D36 | 450 | D47 | 460 | | XTEARY-00-0000-000000P02 | XTEARY-00-0000-000000Q02 | XTEARY-00-0000-000000R02 | XTEARY-00-0000-000000S02 | XTEARY-00-0000-000000T02 |
| 03 | D46 | 455 | D57 | 465 | XTEARY-00-0000-000000N03 | XTEARY-00-0000-000000P03 | XTEARY-00-0000-000000Q03 | XTEARY-00-0000-000000R03 | XTEARY-00-0000-000000S03 | |
| 04 | D36 | 450 | D37 | 455 | | | XTEARY-00-0000-000000Q04 | XTEARY-00-0000-000000R04 | XTEARY-00-0000-000000S04 | XTEARY-00-0000-000000T04 |
| 05 | D46 | 455 | D47 | 460 | | XTEARY-00-0000-000000P05 | XTEARY-00-0000-000000Q05 | XTEARY-00-0000-000000R05 | XTEARY-00-0000-000000S05 | |
| 06 | D56 | 460 | D57 | 465 | XTEARY-00-0000-000000N06 | XTEARY-00-0000-000000P06 | XTEARY-00-0000-000000Q06 | XTEARY-00-0000-000000R06 | | |
| 07 | D37 | 452.5 | D46 | 457.5 | | XTEARY-00-0000-000000P07 | XTEARY-00-0000-000000Q07 | XTEARY-00-0000-000000R07 | XTEARY-00-0000-000000S07 | XTEARY-00-0000-000000T07 |
| 08 | D47 | 457.5 | D56 | 462.5 | XTEARY-00-0000-000000N08 | XTEARY-00-0000-000000P08 | XTEARY-00-0000-000000Q08 | XTEARY-00-0000-000000R08 | XTEARY-00-0000-000000S08 | |
| 09 | D37 | 452.5 | D56 | 462.5 | XTEARY-00-0000-000000N09 | XTEARY-00-0000-000000P09 | XTEARY-00-0000-000000Q09 | XTEARY-00-0000-000000R09 | XTEARY-00-0000-000000S09 | XTEARY-00-0000-000000T09 |

Note:

- Cree maintains a tolerance of ±7% on flux and power measurements, ±0.005 on chromaticity (CCx, CCy) measurements, ±2 on CRI measurements and ±1 nm on dominant wavelength measurements.See the Measurements section (page 45).
- Cree XLamp XT-E LED order codes specify only a minimum flux bin and not a maximum. Cree may ship reels in flux bins higher than the minimum specified by the order code without advance notice. Shipments will always adhere to the chromaticity or DWL bin restrictions specified by the order code.
- Calculated Photosynthetic Photon Flux (PPF) values are for reference only.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## RELATIVE SPECTRAL POWER DISTRIBUTION - WHITE




## RELATIVE SPECTRAL POWER DISTRIBUTION - ROYAL BLUE




Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## RELATIVE LUMINOUS FLUX VS. JUNCTION TEMPERATURE - WHITE ($I_F$ = 350 mA)

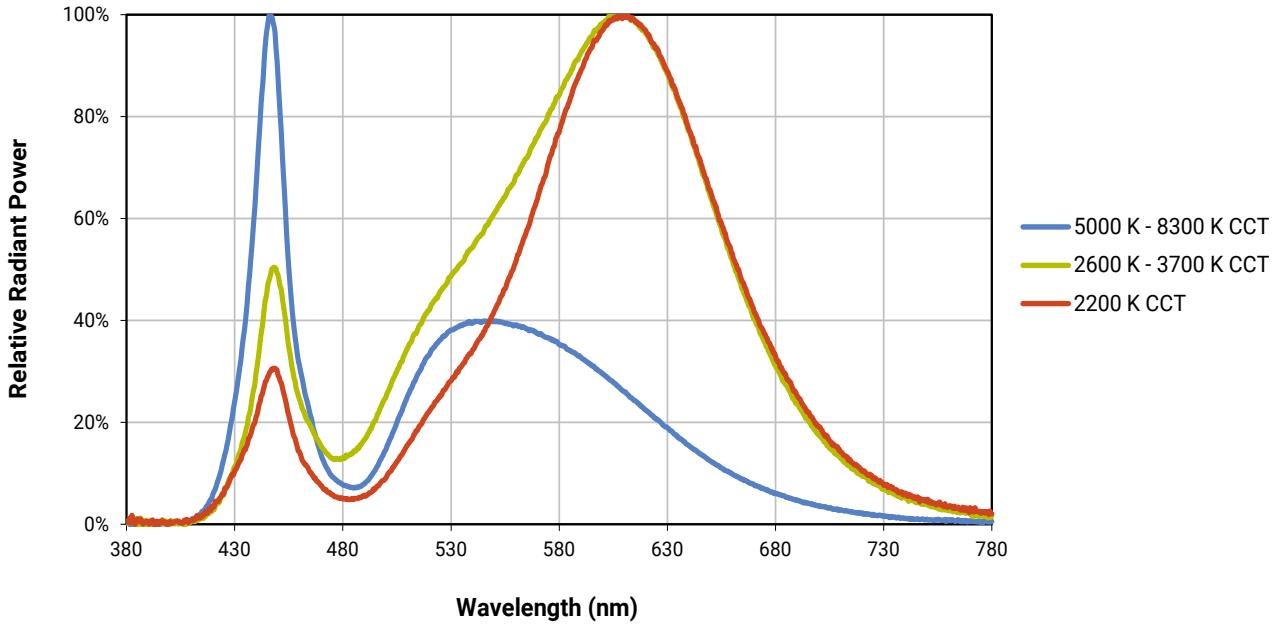


## RELATIVE RADIANT FLUX VS. JUNCTION TEMPERATURE - ROYAL BLUE ($I_F$ = 350 mA)

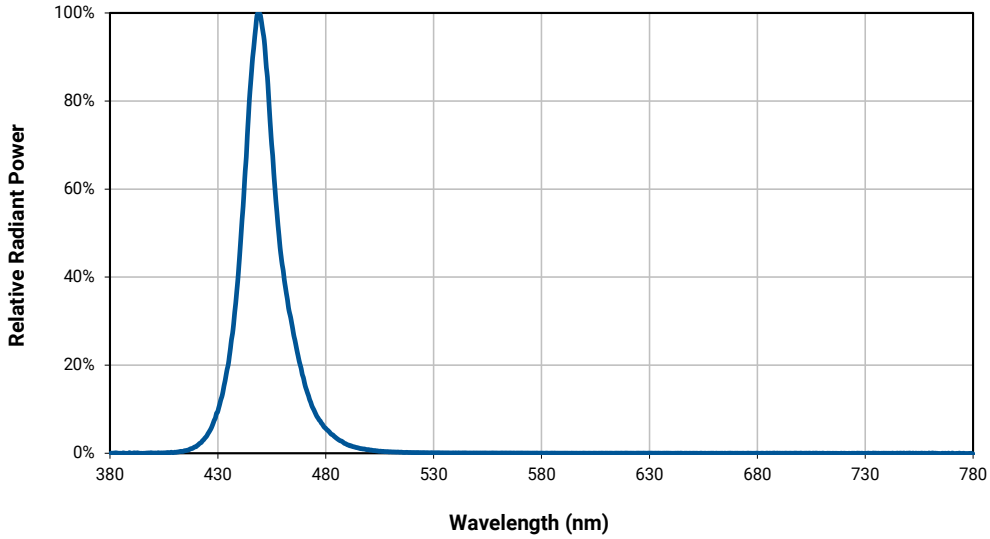


Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## ELECTRICAL CHARACTERISTICS - WHITE, STANDARD $T_J$ = 85 °C)

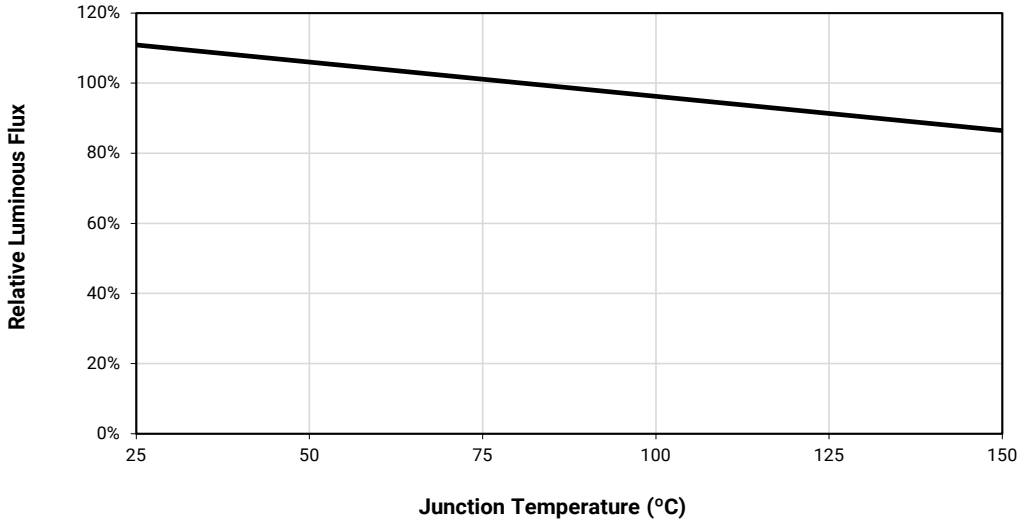


## ELECTRICAL CHARACTERISTICS - WHITE, HIGH EFFICACY ($T_J$ = 85 °C)

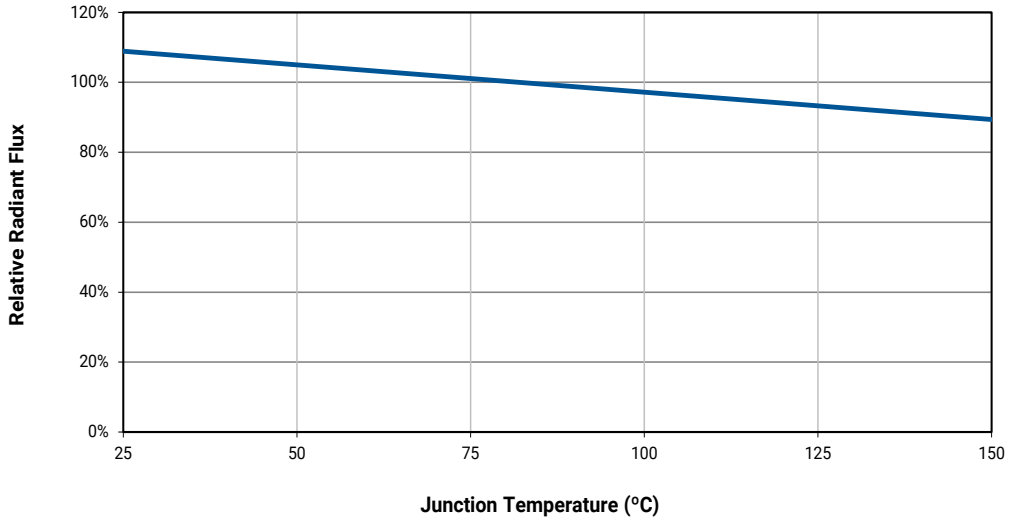


Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## ELECTRICAL CHARACTERISTICS - ROYAL BLUE ($T_J$ = 85 °C)

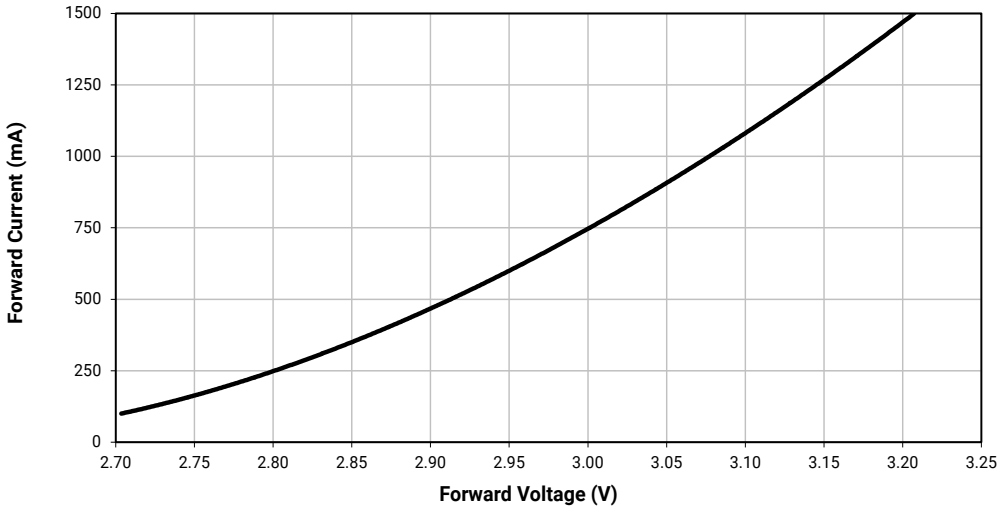


## RELATIVE LUMINOUS FLUX VS. CURRENT - WHITE ($T_J$ = 85 °C)

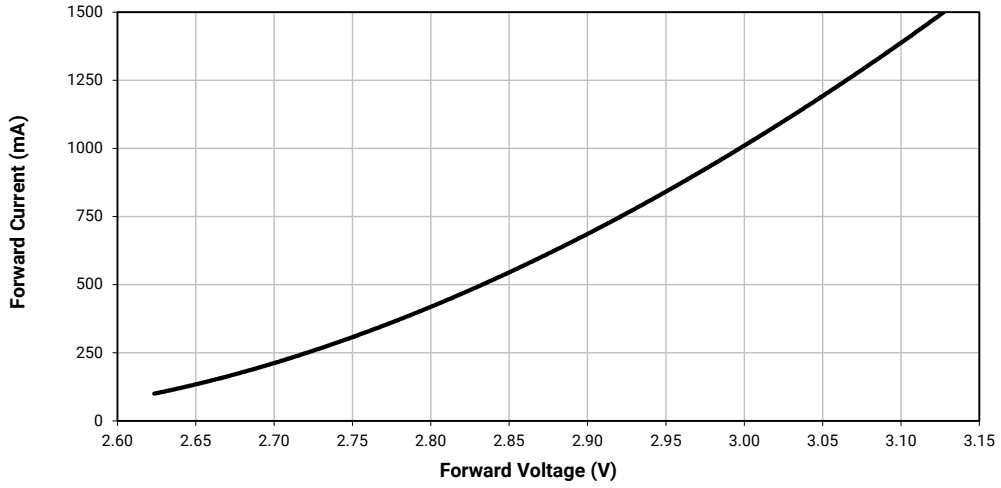


Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## RELATIVE RADIANT FLUX VS. CURRENT - ROYAL BLUE ($T_J$ = 85 °C)

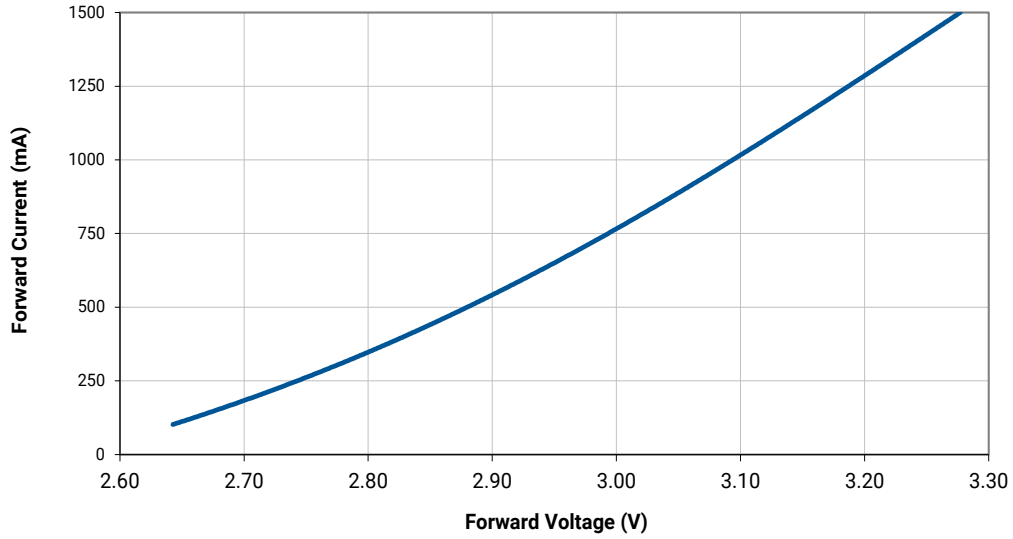


## RELATIVE CHROMATICITY VS. CURRENT - WARM WHITE

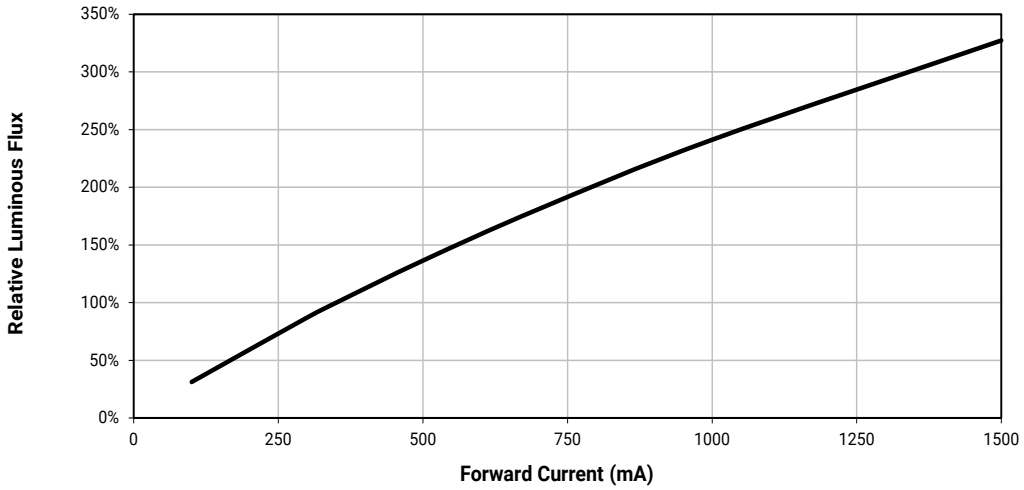


Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## RELATIVE CHROMATICITY VS. TEMPERATURE - WARM WHITE

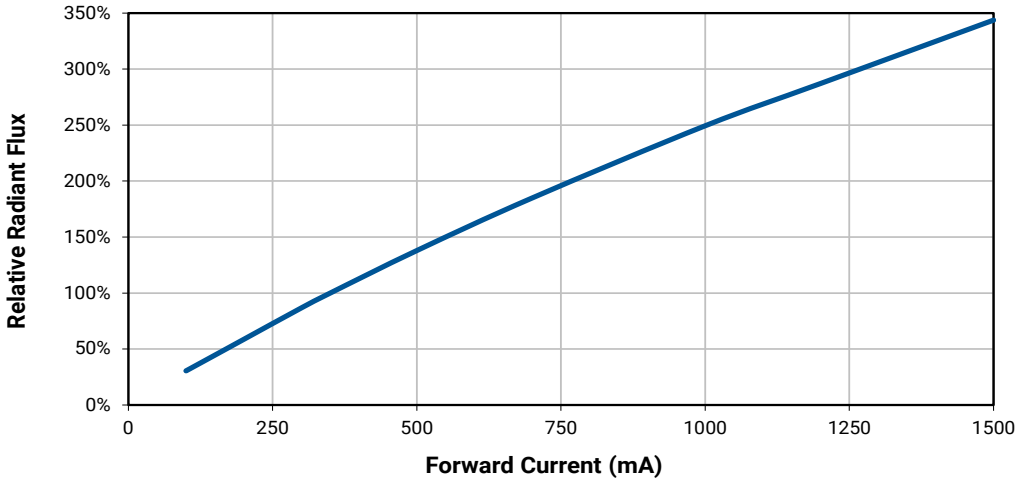


## TYPICAL SPATIAL DISTRIBUTION - WHITE

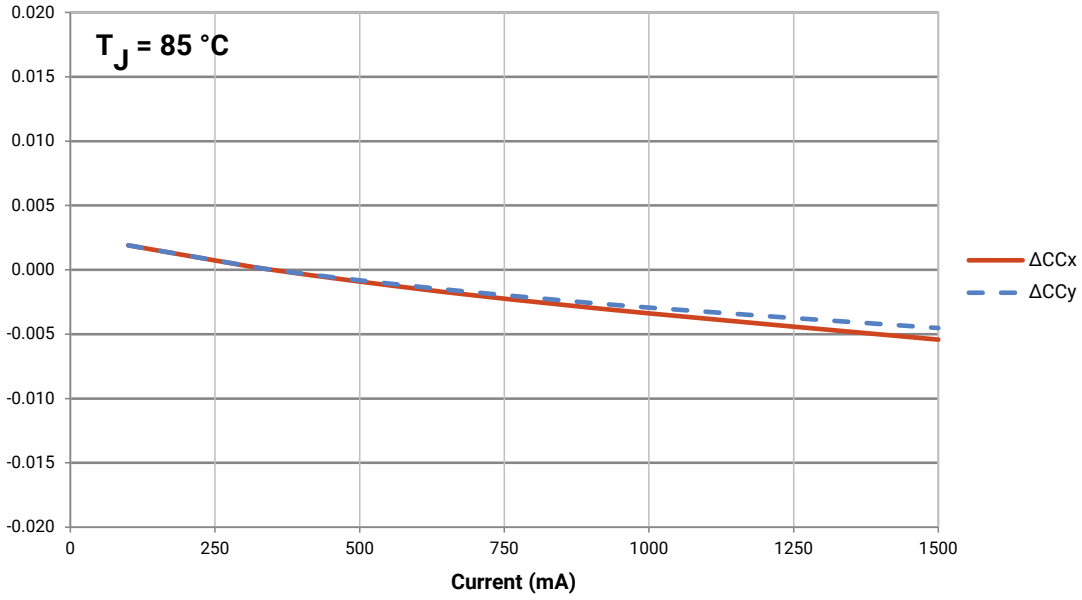


Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## TYPICAL SPATIAL DISTRIBUTION - ROYAL BLUE

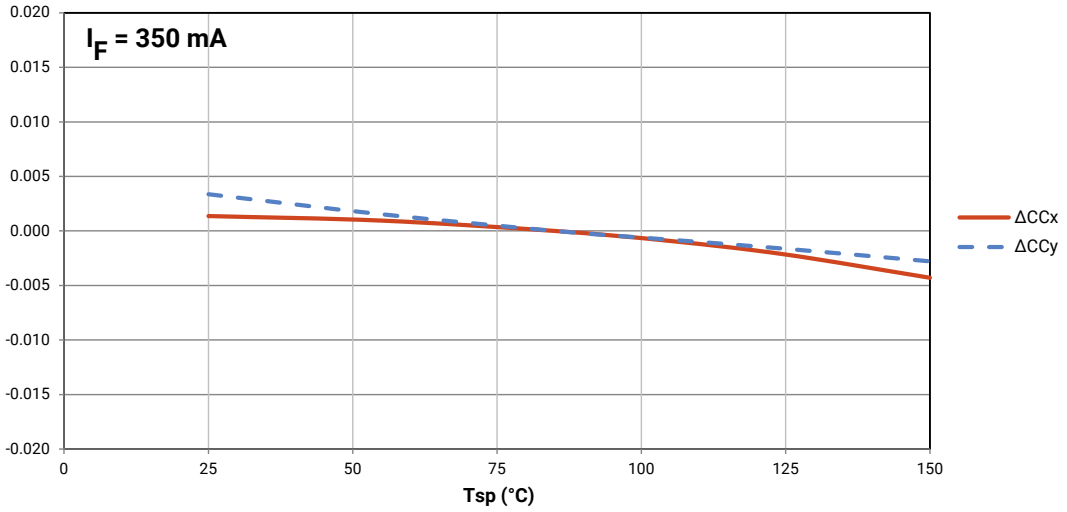


## THERMAL DESIGN - WHITE

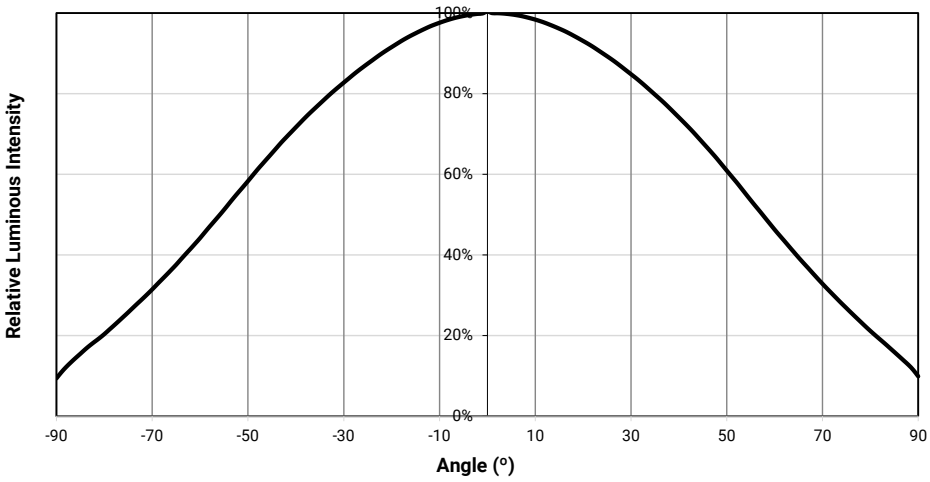The maximum forward current is determined by the thermal resistance between the LED junction and ambient. It is crucial for the end product to be designed in a manner that minimizes the thermal resistance from the solder point to ambient in order to optimize lamp life and optical characteristics.




Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.
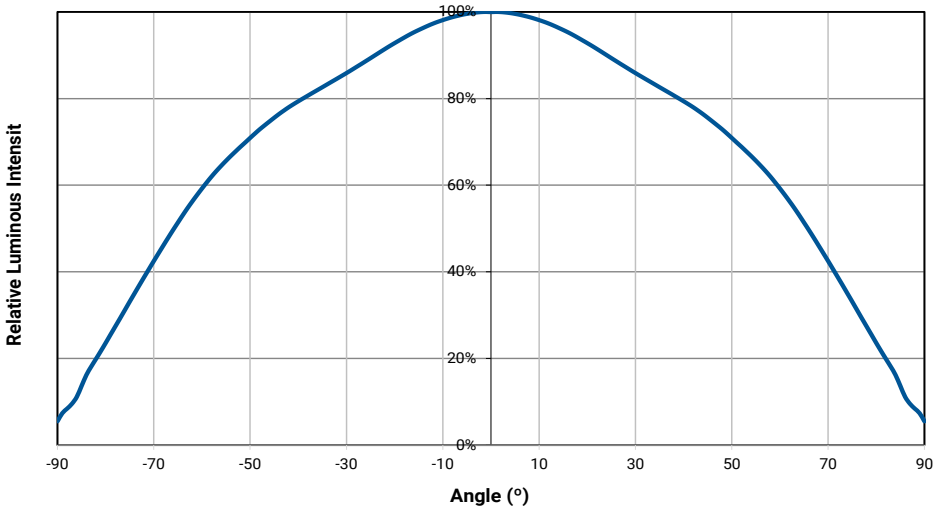
## THERMAL DESIGN - ROYAL BLUE

The maximum forward current is determined by the thermal resistance between the LED junction and ambient. It is crucial for the end product to be designed in a manner that minimizes the thermal resistance from the solder point to ambient in order to optimize lamp life and optical characteristics.

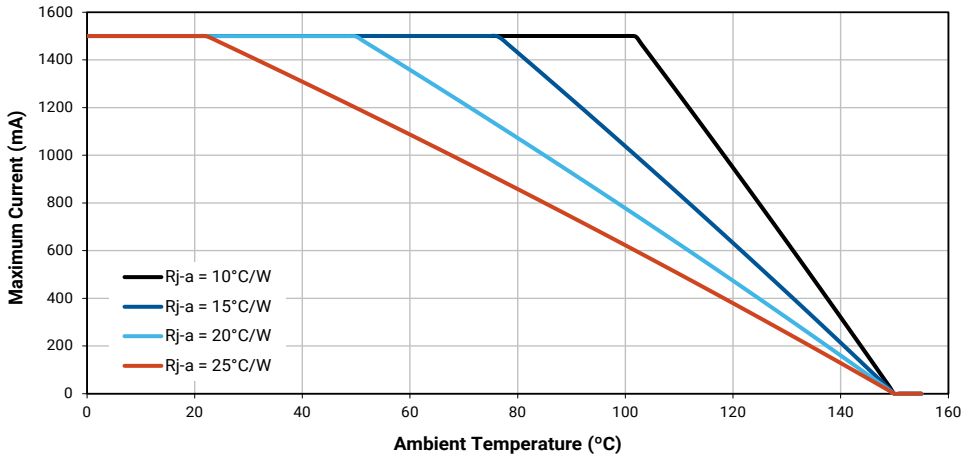


## PERFORMANCE GROUPS - LUMINOUS FLUX ($T_J$ = 85 °C)

XLamp XT-E White LEDs are tested for luminous flux and placed into one of the following luminous-flux groups.

| Group Code | Minimum Luminous Flux (lm) @ 350 mA | Maximum Luminous Flux (lm) @ 350 mA |
|---|---|---|
| P3 | 73.9 | 80.6 |
| P4 | 80.6 | 87.4 |
| Q2 | 87.4 | 93.9 |
| Q3 | 93.9 | 100 |
| Q4 | 100 | 107 |
| Q5 | 107 | 114 |
| R2 | 114 | 122 |
| R3 | 122 | 130 |
| R4 | 130 | 139 |
| R5 | 139 | 148 |
| S2 | 148 | 156 |
| S3 | 156 | 164 |
| S4 | 164 | 172 |
| S5 | 172 | 188 |

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.
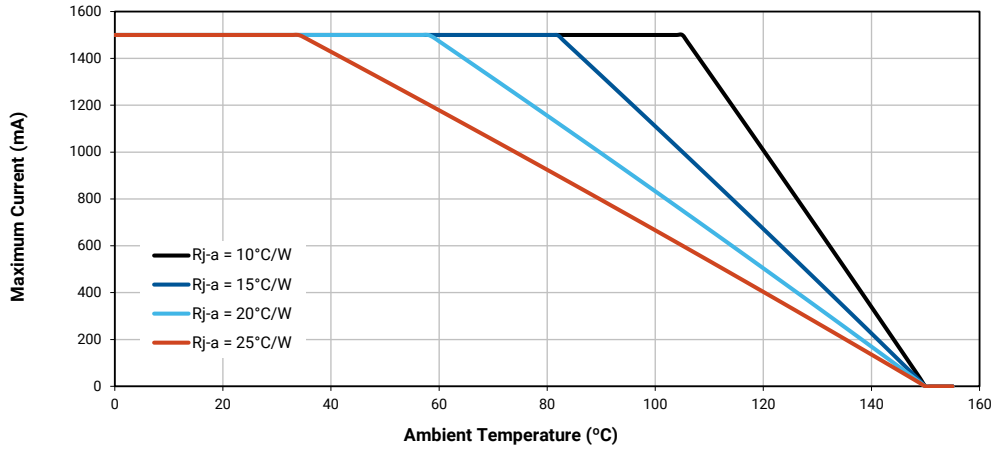
## PERFORMANCE GROUPS - RADIANT FLUX ($T_J$ = 85 °C)

XLamp XT-E Royal Blue LEDs are tested for radiant flux and placed into one the following bins.

| Group Code | Minimum Radiant Flux (mW) | Maximum Radiant Flux (mW) | Calculated PPF (µmol/s) | |
|---|---|---|---|---|
| | | | Minimum | Maximum |
| 34 (N) | 550 | 575 | 2.08 | 2.18 |
| 35 (P) | 575 | 600 | 2.18 | 2.27 |
| 36 (Q) | 600 | 625 | 2.27 | 2.37 |
| 37 (R) | 625 | 650 | 2.37 | 2.46 |
| 38 (S) | 650 | 675 | 2.46 | 2.56 |
| 39 (T) | 675 | 700 | 2.56 | 2.65 |

Note

- Calculated PPF values are for reference only.

## PERFORMANCE GROUPS - DOMINANT WAVELENGTH ($T_J$ = 85 °C)

XLamp XT-E Royal Blue LEDs are tested for dominant wavelength (DWL) and placed into one of the regions defined by the following bounding coordinates.

| Group Code | Minimum Dominant Wavelength (nm) | Maximum Dominant Wavelength (nm) | Typical Peak Wavelength (nm) |
|---|---|---|---|
| D36 | 450.0 | 452.5 | 446.0 |
| D37 | 452.5 | 455.0 | 448.5 |
| D46 | 455.0 | 457.5 | 451.0 |
| D47 | 457.5 | 460.0 | 453.5 |
| D56 | 460.0 | 462.5 | 456.0 |
| D57 | 462.5 | 465.0 | 458.5 |

Note

- Typical peak wavelength values are calculated and for reference only.

## PERFORMANCE GROUPS - FORWARD VOLTAGE ($T_J$ = 85 °C)

XLamp XT-E LEDs are tested for forward voltage and placed into one of the following voltage bins.

| Group Code | Minimum Forward Voltage (V) | Maximum Forward Voltage (V) |
|---|---|---|
| 1 | 2.50 | 2.85 |
| E | 2.50 | 2.75 |
| F | 2.75 | 3.00 |
| G | 3.00 | 3.25 |
| H | 3.25 | 3.50 |

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## PERFORMANCE GROUPS - CHROMATICITY

| Region | x | y | Region | x | y | Region | x | y | Region | x | y |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 0A | 0.2950 | 0.2970 | 0B | 0.2920 | 0.3060 | 0C | 0.2984 | 0.3133 | 0D | 0.2984 | 0.3133 |
| | 0.2920 | 0.3060 | | 0.2895 | 0.3135 | | 0.2962 | 0.3220 | | 0.3048 | 0.3207 |
| | 0.2984 | 0.3133 | | 0.2962 | 0.3220 | | 0.3028 | 0.3304 | | 0.3068 | 0.3113 |
| | 0.3009 | 0.3042 | | 0.2984 | 0.3133 | | 0.3048 | 0.3207 | | 0.3009 | 0.3042 |
| 0R | 0.2980 | 0.2880 | 0S | 0.2895 | 0.3135 | 0T | 0.2962 | 0.3220 | 0U | 0.3037 | 0.2937 |
| | 0.2950 | 0.2970 | | 0.2870 | 0.3210 | | 0.2937 | 0.3312 | | 0.3009 | 0.3042 |
| | 0.3009 | 0.3042 | | 0.2937 | 0.3312 | | 0.3005 | 0.3415 | | 0.3068 | 0.3113 |
| | 0.3037 | 0.2937 | | 0.2962 | 0.3220 | | 0.3028 | 0.3304 | | 0.3093 | 0.2993 |
| 1A | 0.3048 | 0.3207 | 1B | 0.3028 | 0.3304 | 1C | 0.3115 | 0.3391 | 1D | 0.3130 | 0.3290 |
| | 0.3130 | 0.3290 | | 0.3115 | 0.3391 | | 0.3205 | 0.3481 | | 0.3213 | 0.3373 |
| | 0.3144 | 0.3186 | | 0.3130 | 0.3290 | | 0.3213 | 0.3373 | | 0.3221 | 0.3261 |
| | 0.3068 | 0.3113 | | 0.3048 | 0.3207 | | 0.3130 | 0.3290 | | 0.3144 | 0.3186 |
| 1R | 0.3068 | 0.3113 | 1S | 0.3005 | 0.3415 | 1T | 0.3099 | 0.3509 | 1U | 0.3144 | 0.3186 |
| | 0.3144 | 0.3186 | | 0.3099 | 0.3509 | | 0.3196 | 0.3602 | | 0.3221 | 0.3261 |
| | 0.3161 | 0.3059 | | 0.3115 | 0.3391 | | 0.3205 | 0.3481 | | 0.3231 | 0.3120 |
| | 0.3093 | 0.2993 | | 0.3028 | 0.3304 | | 0.3115 | 0.3391 | | 0.3161 | 0.3059 |
| 2A | 0.3215 | 0.3350 | 2B | 0.3207 | 0.3462 | 2C | 0.3290 | 0.3538 | 2D | 0.3290 | 0.3417 |
| | 0.3290 | 0.3417 | | 0.3290 | 0.3538 | | 0.3376 | 0.3616 | | 0.3371 | 0.3490 |
| | 0.3290 | 0.3300 | | 0.3290 | 0.3417 | | 0.3371 | 0.3490 | | 0.3366 | 0.3369 |
| | 0.3222 | 0.3243 | | 0.3215 | 0.3350 | | 0.3290 | 0.3417 | | 0.3290 | 0.3300 |
| 2R | 0.3222 | 0.3243 | 2S | 0.3196 | 0.3602 | 2T | 0.3290 | 0.3690 | 2U | 0.3290 | 0.3300 |
| | 0.3290 | 0.3300 | | 0.3290 | 0.3690 | | 0.3381 | 0.3762 | | 0.3366 | 0.3369 |
| | 0.3290 | 0.3180 | | 0.3290 | 0.3538 | | 0.3376 | 0.3616 | | 0.3361 | 0.3245 |
| | 0.3231 | 0.3120 | | 0.3207 | 0.3462 | | 0.3290 | 0.3538 | | 0.3290 | 0.3180 |
| 3A | 0.3371 | 0.3490 | 3B | 0.3376 | 0.3616 | 3C | 0.3463 | 0.3687 | 3D | 0.3451 | 0.3554 |
| | 0.3451 | 0.3554 | | 0.3463 | 0.3687 | | 0.3551 | 0.3760 | | 0.3533 | 0.3620 |
| | 0.3440 | 0.3427 | | 0.3451 | 0.3554 | | 0.3533 | 0.3620 | | 0.3515 | 0.3487 |
| | 0.3366 | 0.3369 | | 0.3371 | 0.3490 | | 0.3451 | 0.3554 | | 0.3440 | 0.3427 |
| 3R | 0.3366 | 0.3369 | 3S | 0.3381 | 0.3762 | | | | | | |
| | 0.3440 | 0.3428 | | 0.3480 | 0.3840 | | | | | | |
| | 0.3429 | 0.3307 | | 0.3463 | 0.3687 | | | | | | |
| | 0.3361 | 0.3245 | | 0.3376 | 0.3616 | | | | | | |
| 4A | 0.3530 | 0.3597 | 4B | 0.3548 | 0.3736 | 4C | 0.3641 | 0.3804 | 4D | 0.3615 | 0.3659 |
| | 0.3615 | 0.3659 | | 0.3641 | 0.3804 | | 0.3736 | 0.3874 | | 0.3702 | 0.3722 |
| | 0.3590 | 0.3521 | | 0.3615 | 0.3659 | | 0.3702 | 0.3722 | | 0.3670 | 0.3578 |
| | 0.3512 | 0.3465 | | 0.3530 | 0.3597 | | 0.3615 | 0.3659 | | 0.3590 | 0.3521 |
| 4R | 0.3512 | 0.3465 | 4S | 0.3571 | 0.3907 | 4T | 0.3668 | 0.3957 | 4U | 0.3590 | 0.3521 |
| | 0.3590 | 0.3521 | | 0.3668 | 0.3957 | | 0.3771 | 0.4034 | | 0.3670 | 0.3578 |
| | 0.3567 | 0.3389 | | 0.3641 | 0.3804 | | 0.3736 | 0.3874 | | 0.3640 | 0.3440 |
| | 0.3495 | 0.3339 | | 0.3548 | 0.3736 | | 0.3641 | 0.3804 | | 0.3567 | 0.3389 |

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## PERFORMANCE GROUPS - CHROMATICITY (CONTINUED)

| Region | x | y | Region | x | y | Region | x | y | Region | x | y |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 5A1 | 0.3670 | 0.3578 | 5A2 | 0.3686 | 0.3649 | 5A3 | 0.3744 | 0.3685 | 5A4 | 0.3726 | 0.3612 |
| | 0.3686 | 0.3649 | | 0.3702 | 0.3722 | | 0.3763 | 0.3760 | | 0.3744 | 0.3685 |
| | 0.3744 | 0.3685 | | 0.3763 | 0.3760 | | 0.3825 | 0.3798 | | 0.3804 | 0.3721 |
| | 0.3726 | 0.3612 | | 0.3744 | 0.3685 | | 0.3804 | 0.3721 | | 0.3783 | 0.3646 |
| 5B1 | 0.3702 | 0.3722 | 5B2 | 0.3719 | 0.3797 | 5B3 | 0.3782 | 0.3837 | 5B4 | 0.3763 | 0.3760 |
| | 0.3719 | 0.3797 | | 0.3736 | 0.3874 | | 0.3802 | 0.3916 | | 0.3782 | 0.3837 |
| | 0.3782 | 0.3837 | | 0.3802 | 0.3916 | | 0.3869 | 0.3958 | | 0.3847 | 0.3877 |
| | 0.3763 | 0.3760 | | 0.3782 | 0.3837 | | 0.3847 | 0.3877 | | 0.3825 | 0.3798 |
| 5C1 | 0.3825 | 0.3798 | 5C2 | 0.3847 | 0.3877 | 5C3 | 0.3912 | 0.3917 | 5C4 | 0.3887 | 0.3836 |
| | 0.3847 | 0.3877 | | 0.3869 | 0.3958 | | 0.3937 | 0.4001 | | 0.3912 | 0.3917 |
| | 0.3912 | 0.3917 | | 0.3937 | 0.4001 | | 0.4006 | 0.4044 | | 0.3978 | 0.3958 |
| | 0.3887 | 0.3836 | | 0.3912 | 0.3917 | | 0.3978 | 0.3958 | | 0.3950 | 0.3875 |
| 5D1 | 0.3783 | 0.3646 | 5D2 | 0.3804 | 0.3721 | 5D3 | 0.3863 | 0.3758 | 5D4 | 0.3840 | 0.3681 |
| | 0.3804 | 0.3721 | | 0.3825 | 0.3798 | | 0.3887 | 0.3836 | | 0.3863 | 0.3758 |
| | 0.3863 | 0.3758 | | 0.3887 | 0.3836 | | 0.3950 | 0.3875 | | 0.3924 | 0.3794 |
| | 0.3840 | 0.3681 | | 0.3863 | 0.3758 | | 0.3924 | 0.3794 | | 0.3898 | 0.3716 |
| 5R | 0.3670 | 0.3578 | 5S | 0.3771 | 0.4034 | | | | | | |
| | 0.3783 | 0.3646 | | 0.3916 | 0.4127 | | | | | | |
| | 0.3743 | 0.3502 | | 0.3869 | 0.3958 | | | | | | |
| | 0.3640 | 0.3440 | | 0.3736 | 0.3874 | | | | | | |
| 6A1 | 0.3889 | 0.3690 | 6A2 | 0.3915 | 0.3768 | 6A3 | 0.3981 | 0.3800 | 6A4 | 0.4080 | 0.3916 |
| | 0.3915 | 0.3768 | | 0.3941 | 0.3848 | | 0.4010 | 0.3882 | | 0.3981 | 0.3800 |
| | 0.3981 | 0.3800 | | 0.4010 | 0.3882 | | 0.4080 | 0.3916 | | 0.4048 | 0.3832 |
| | 0.3953 | 0.3720 | | 0.3981 | 0.3800 | | 0.4048 | 0.3832 | | 0.4017 | 0.3751 |
| 6B1 | 0.3941 | 0.3848 | 6B2 | 0.3968 | 0.3930 | 6B3 | 0.4040 | 0.3966 | 6B4 | 0.4010 | 0.3882 |
| | 0.3968 | 0.3930 | | 0.3996 | 0.4015 | | 0.4071 | 0.4052 | | 0.4040 | 0.3966 |
| | 0.4040 | 0.3966 | | 0.4071 | 0.4052 | | 0.4146 | 0.4089 | | 0.4113 | 0.4001 |
| | 0.4010 | 0.3882 | | 0.4040 | 0.3966 | | 0.4113 | 0.4001 | | 0.4080 | 0.3916 |
| 6C1 | 0.4080 | 0.3916 | 6C2 | 0.4113 | 0.4001 | 6C3 | 0.4186 | 0.4037 | 6C4 | 0.4150 | 0.3950 |
| | 0.4113 | 0.4001 | | 0.4146 | 0.4089 | | 0.4222 | 0.4127 | | 0.4186 | 0.4037 |
| | 0.4186 | 0.4037 | | 0.4222 | 0.4127 | | 0.4299 | 0.4165 | | 0.4259 | 0.4073 |
| | 0.4150 | 0.3950 | | 0.4186 | 0.4037 | | 0.4259 | 0.4073 | | 0.4221 | 0.3984 |
| 6D1 | 0.4017 | 0.3751 | 6D2 | 0.4048 | 0.3832 | 6D3 | 0.4116 | 0.3865 | 6D4 | 0.4082 | 0.3782 |
| | 0.4048 | 0.3832 | | 0.4080 | 0.3916 | | 0.4150 | 0.3950 | | 0.4116 | 0.3865 |
| | 0.4116 | 0.3865 | | 0.4150 | 0.3950 | | 0.4221 | 0.3984 | | 0.4183 | 0.3898 |
| | 0.4082 | 0.3782 | | 0.4116 | 0.3865 | | 0.4183 | 0.3898 | | 0.4147 | 0.3814 |
| 7A1 | 0.4147 | 0.3814 | 7A2 | 0.4183 | 0.3898 | 7A3 | 0.4242 | 0.3919 | 7A4 | 0.4203 | 0.3833 |
| | 0.4183 | 0.3898 | | 0.4221 | 0.3984 | | 0.4281 | 0.4006 | | 0.4242 | 0.3919 |
| | 0.4242 | 0.3919 | | 0.4281 | 0.4006 | | 0.4342 | 0.4028 | | 0.4300 | 0.3939 |
| | 0.4203 | 0.3833 | | 0.4242 | 0.3919 | | 0.4300 | 0.3939 | | 0.4259 | 0.3853 |

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## PERFORMANCE GROUPS - CHROMATICITY (CONTINUED)

| Region | x | y | Region | x | y | Region | x | y | Region | x | y |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 7B1 | 0.4221 | 0.3984 | 7B2 | 0.4259 | 0.4073 | 7B3 | 0.4322 | 0.4096 | 7B4 | 0.4281 | 0.4006 |
| | 0.4259 | 0.4073 | | 0.4299 | 0.4165 | | 0.4364 | 0.4188 | | 0.4322 | 0.4096 |
| | 0.4322 | 0.4096 | | 0.4364 | 0.4188 | | 0.4430 | 0.4212 | | 0.4385 | 0.4119 |
| | 0.4281 | 0.4006 | | 0.4322 | 0.4096 | | 0.4385 | 0.4119 | | 0.4342 | 0.4028 |
| 7C1 | 0.4342 | 0.4028 | 7C2 | 0.4385 | 0.4119 | 7C3 | 0.4449 | 0.4141 | 7C4 | 0.4403 | 0.4049 |
| | 0.4385 | 0.4119 | | 0.4430 | 0.4212 | | 0.4496 | 0.4236 | | 0.4449 | 0.4141 |
| | 0.4449 | 0.4141 | | 0.4496 | 0.4236 | | 0.4562 | 0.4260 | | 0.4513 | 0.4164 |
| | 0.4403 | 0.4049 | | 0.4449 | 0.4141 | | 0.4513 | 0.4164 | | 0.4465 | 0.4071 |
| 7D1 | 0.4259 | 0.3853 | 7D2 | 0.4300 | 0.3939 | 7D3 | 0.4359 | 0.3960 | 7D4 | 0.4316 | 0.3873 |
| | 0.4300 | 0.3939 | | 0.4342 | 0.4028 | | 0.4403 | 0.4049 | | 0.4359 | 0.3960 |
| | 0.4359 | 0.3960 | | 0.4403 | 0.4049 | | 0.4465 | 0.4071 | | 0.4418 | 0.3981 |
| | 0.4316 | 0.3873 | | 0.4359 | 0.3960 | | 0.4418 | 0.3981 | | 0.4373 | 0.3893 |
| 8A1 | 0.4373 | 0.3893 | 8A2 | 0.4418 | 0.3981 | 8A3 | 0.4475 | 0.3994 | 8A4 | 0.4428 | 0.3906 |
| | 0.4418 | 0.3981 | | 0.4465 | 0.4071 | | 0.4523 | 0.4085 | | 0.4475 | 0.3994 |
| | 0.4475 | 0.3994 | | 0.4523 | 0.4085 | | 0.4582 | 0.4099 | | 0.4532 | 0.4008 |
| | 0.4428 | 0.3906 | | 0.4475 | 0.3994 | | 0.4532 | 0.4008 | | 0.4483 | 0.3919 |
| 8B1 | 0.4465 | 0.4071 | 8B2 | 0.4513 | 0.4164 | 8B3 | 0.4573 | 0.4178 | 8B4 | 0.4523 | 0.4085 |
| | 0.4513 | 0.4164 | | 0.4562 | 0.4260 | | 0.4624 | 0.4274 | | 0.4573 | 0.4178 |
| | 0.4573 | 0.4178 | | 0.4624 | 0.4274 | | 0.4687 | 0.4289 | | 0.4634 | 0.4193 |
| | 0.4523 | 0.4085 | | 0.4573 | 0.4178 | | 0.4634 | 0.4193 | | 0.4582 | 0.4099 |
| 8C1 | 0.4582 | 0.4158 | 8C2 | 0.4634 | 0.4193 | 8C3 | 0.4695 | 0.4207 | 8C4 | 0.4641 | 0.4112 |
| | 0.4634 | 0.4252 | | 0.4687 | 0.4289 | | 0.4750 | 0.4304 | | 0.4695 | 0.4207 |
| | 0.4695 | 0.4250 | | 0.4750 | 0.4304 | | 0.4813 | 0.4319 | | 0.4756 | 0.4221 |
| | 0.4641 | 0.4156 | | 0.4695 | 0.4207 | | 0.4756 | 0.4221 | | 0.4700 | 0.4126 |
| 8D1 | 0.4483 | 0.3919 | 8D2 | 0.4532 | 0.4008 | 8D3 | 0.4589 | 0.4021 | 8D4 | 0.4538 | 0.3931 |
| | 0.4532 | 0.4008 | | 0.4582 | 0.4099 | | 0.4641 | 0.4112 | | 0.4589 | 0.4021 |
| | 0.4589 | 0.4021 | | 0.4641 | 0.4112 | | 0.4700 | 0.4126 | | 0.4646 | 0.4034 |
| | 0.4538 | 0.3931 | | 0.4589 | 0.4021 | | 0.4646 | 0.4034 | | 0.4593 | 0.3944 |
| AA1 | 0.4822 | 0.3973 | AA2 | 0.4884 | 0.4067 | AA3 | 0.4942 | 0.4066 | AA4 | 0.4879 | 0.3972 |
| | 0.4884 | 0.4067 | | 0.4946 | 0.4162 | | 0.5006 | 0.4160 | | 0.4942 | 0.4066 |
| | 0.4942 | 0.4066 | | 0.5006 | 0.4160 | | 0.5066 | 0.4158 | | 0.5001 | 0.4064 |
| | 0.4879 | 0.3972 | | 0.4942 | 0.4066 | | 0.5001 | 0.4064 | | 0.4936 | 0.3970 |
| AB1 | 0.4946 | 0.4162 | AB2 | 0.5008 | 0.4256 | AB3 | 0.5069 | 0.4254 | AB4 | 0.5006 | 0.4160 |
| | 0.5008 | 0.4256 | | 0.5070 | 0.4350 | | 0.5133 | 0.4348 | | 0.5069 | 0.4254 |
| | 0.5069 | 0.4254 | | 0.5133 | 0.4348 | | 0.5196 | 0.4346 | | 0.5131 | 0.4252 |
| | 0.5006 | 0.4160 | | 0.5069 | 0.4254 | | 0.5131 | 0.4252 | | 0.5066 | 0.4158 |
| AC1 | 0.5066 | 0.4158 | AC2 | 0.5131 | 0.4252 | AC3 | 0.5192 | 0.4250 | AC4 | 0.5126 | 0.4156 |
| | 0.5131 | 0.4252 | | 0.5196 | 0.4346 | | 0.5258 | 0.4343 | | 0.5192 | 0.4250 |
| | 0.5192 | 0.4250 | | 0.5258 | 0.4343 | | 0.5321 | 0.4341 | | 0.5253 | 0.4248 |
| | 0.5126 | 0.4156 | | 0.5192 | 0.4250 | | 0.5253 | 0.4248 | | 0.5186 | 0.4154 |

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## PERFORMANCE GROUPS - CHROMATICITY (CONTINUED)

| Region | x | y | Region | x | y | Region | x | y | Region | x | y |
|---|---|---|---|---|---|---|---|---|---|---|---|
| AD1 | 0.4936 | 0.3970 | AD2 | 0.5001 | 0.4064 | AD3 | 0.5059 | 0.4062 | AD4 | 0.4993 | 0.3969 |
| | 0.5001 | 0.4064 | | 0.5066 | 0.4158 | | 0.5126 | 0.4156 | | 0.5059 | 0.4062 |
| | 0.5059 | 0.4062 | | 0.5126 | 0.4156 | | 0.5186 | 0.4154 | | 0.5118 | 0.4061 |
| | 0.4993 | 0.3969 | | 0.5059 | 0.4062 | | 0.5118 | 0.4061 | | 0.5050 | 0.3967 |

XLamp High-Efficacy XT-E 3-step and 5-step LEDs are tested for chromaticity and placed into one of the regions defined by the following bounding coordinates.

| EasyWhite Color Temperatures – 3-Step Ellipse | | | | | | |
|---|---|---|---|---|---|---|
| Bin Code | CCT | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
| | | x | y | a | b | |
| 1G | 6500 K | 0.3123 | 0.3282 | 0.00666 | 0.00330 | 61.0 |
| 2G | 5700 K | 0.3287 | 0.3417 | 0.00738 | 0.00360 | 72.0 |
| 3G | 5000 K | 0.3447 | 0.3553 | 0.00840 | 0.00312 | 65.0 |
| 4G | 4500 K | 0.3611 | 0.3658 | 0.00852 | 0.00330 | 61.5 |
| 5G | 4000 K | 0.3818 | 0.3797 | 0.00939 | 0.00402 | 53.7 |
| 6G | 3500 K | 0.4073 | 0.3917 | 0.00927 | 0.00414 | 54.0 |
| 7G | 3000 K | 0.4338 | 0.4030 | 0.00834 | 0.00408 | 53.2 |
| 8G | 2700 K | 0.4577 | 0.4099 | 0.00834 | 0.00420 | 48.5 |
| AG | 2200 K | 0.5066 | 0.4158 | 0.00980 | 0.00480 | 45.5 |

| EasyWhite Color Temperatures – 5-Step Ellipse | | | | | | |
|---|---|---|---|---|---|---|
| Bin Code | CCT | Center Point | | Major Axis | Minor Axis | Rotation Angle (°) |
| | | x | y | a | b | |
| 1E | 6500 K | 0.3123 | 0.3282 | 0.01110 | 0.00550 | 61.0 |
| 2E | 5700 K | 0.3287 | 0.3417 | 0.01230 | 0.00600 | 72.0 |
| 3E | 5000 K | 0.3447 | 0.3553 | 0.01400 | 0.00520 | 65.0 |
| 4E | 4500 K | 0.3611 | 0.3658 | 0.01420 | 0.00550 | 61.5 |
| 5E | 4000 K | 0.3818 | 0.3797 | 0.01565 | 0.00670 | 53.7 |
| 6E | 3500 K | 0.4073 | 0.3917 | 0.01545 | 0.00690 | 54.0 |
| 7E | 3000 K | 0.4338 | 0.4030 | 0.01390 | 0.00680 | 53.2 |
| 8E | 2700 K | 0.4577 | 0.4099 | 0.01390 | 0.00700 | 48.5 |
| AE | 2200 K | 0.5066 | 0.4158 | 0.01630 | 0.00800 | 45.5 |

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## CREE'S WHITE CHROMATICITY REGIONS PLOTTED ON THE CIE 1931 CURVE

ANSI Cool White




ANSI Neutral White and ANSI Warm White




Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## CREE'S COOL WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

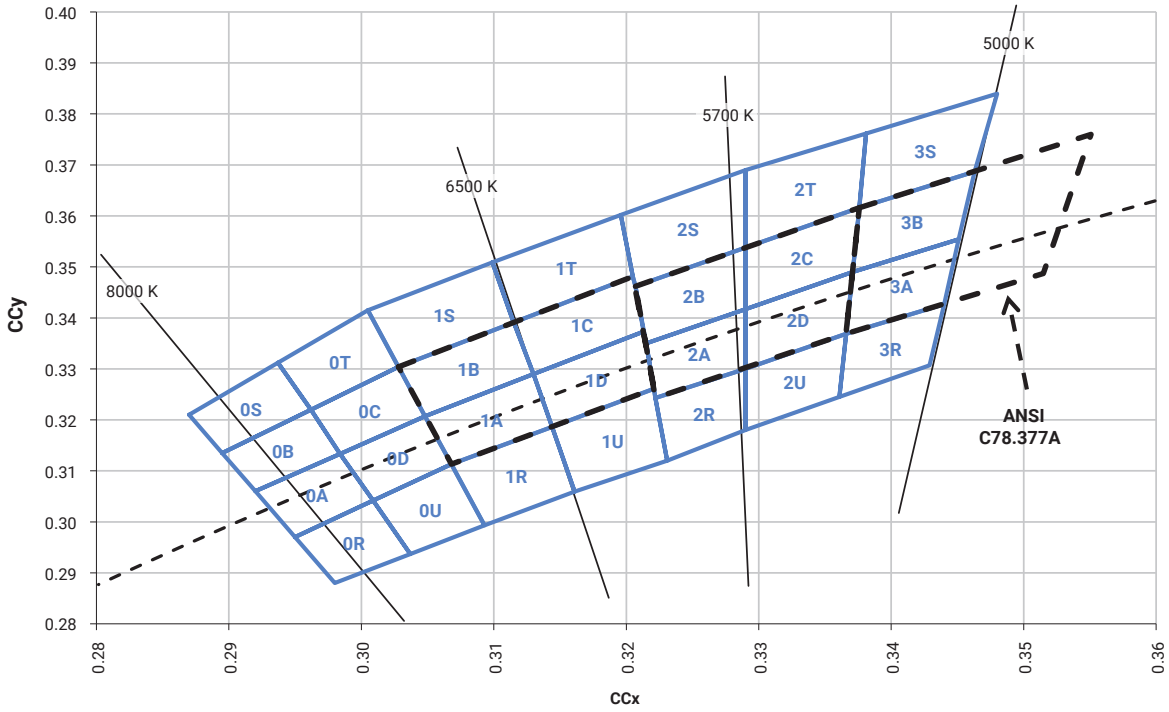





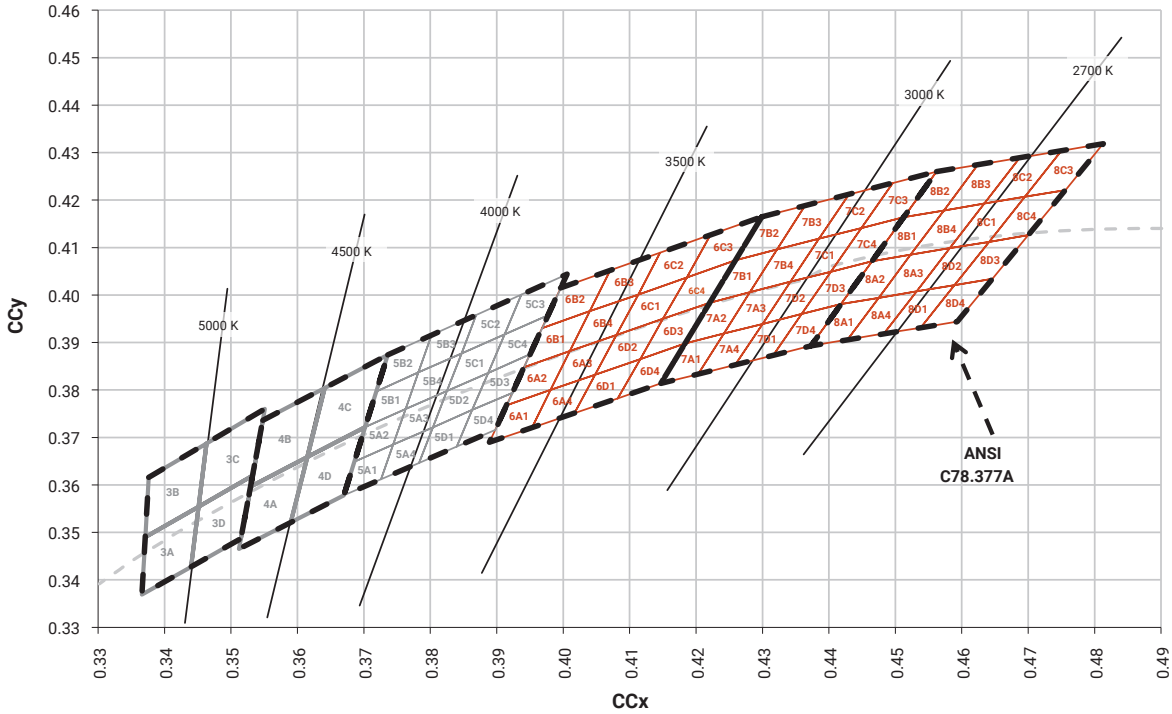





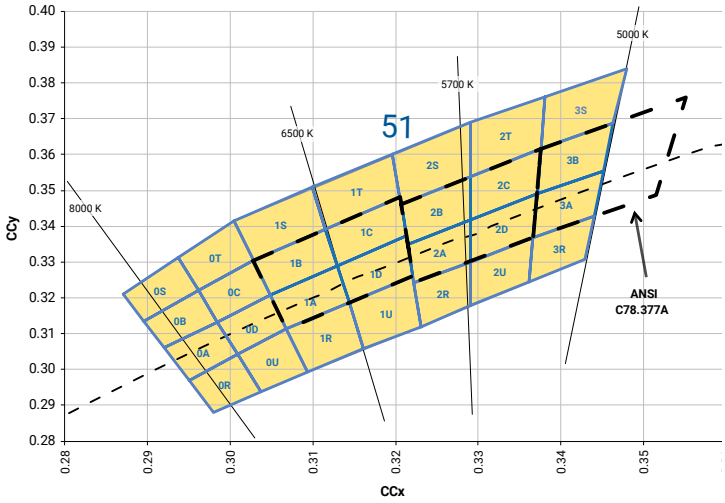


Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.
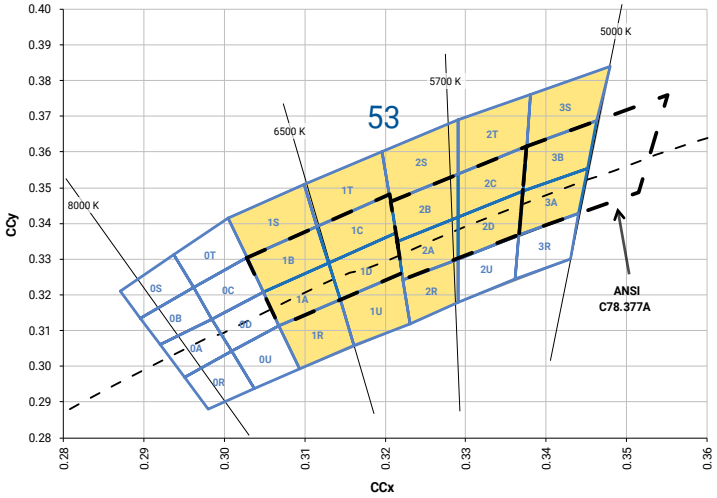
## CREE'S WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

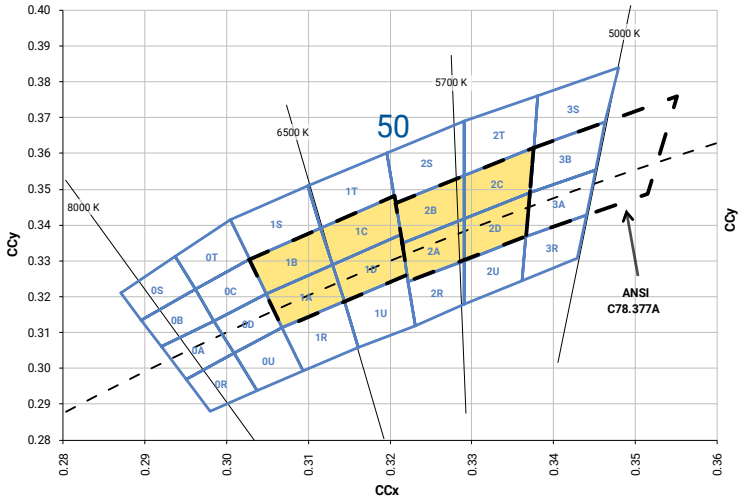


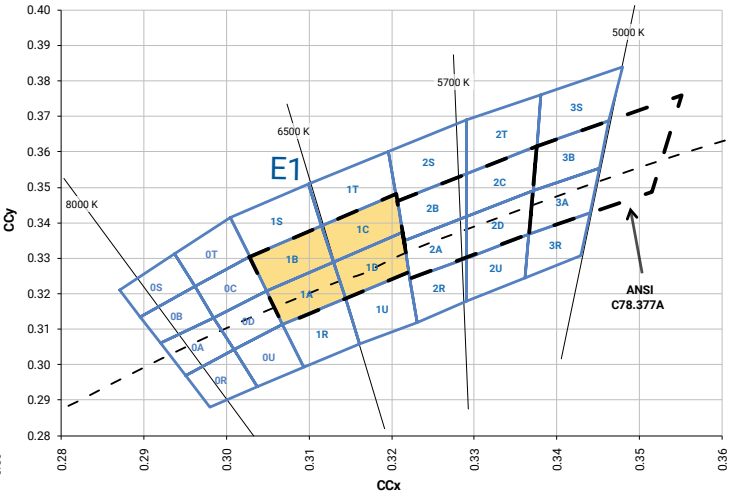


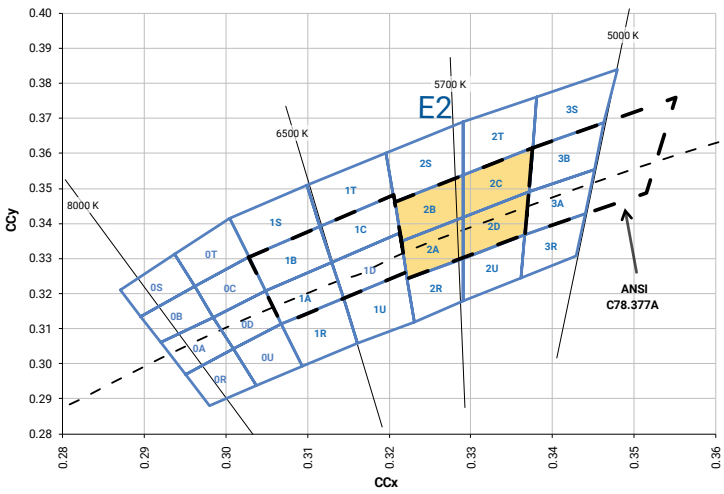





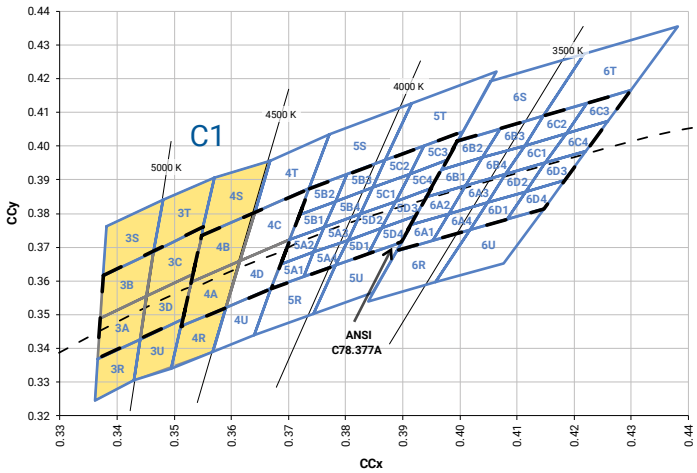


Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.
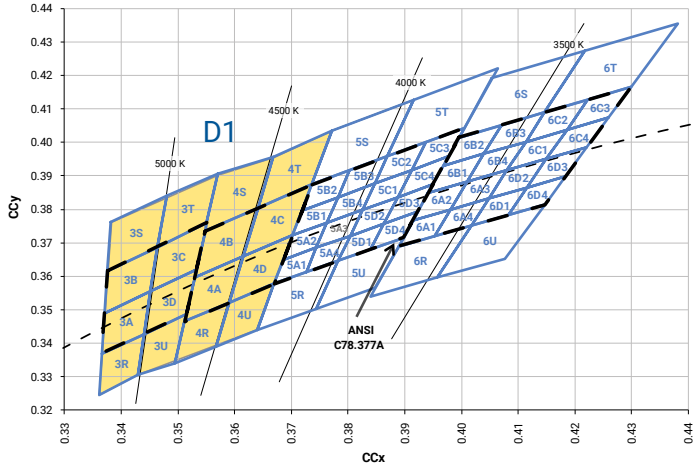
## CREE'S WARM AND NEUTRAL WHITE KITS PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

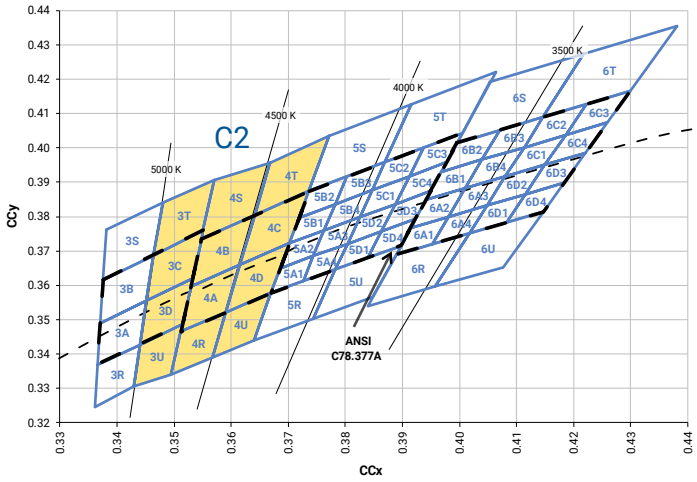


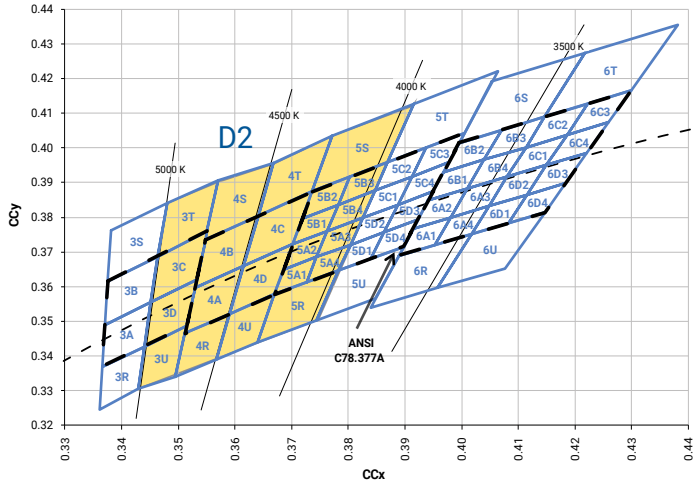


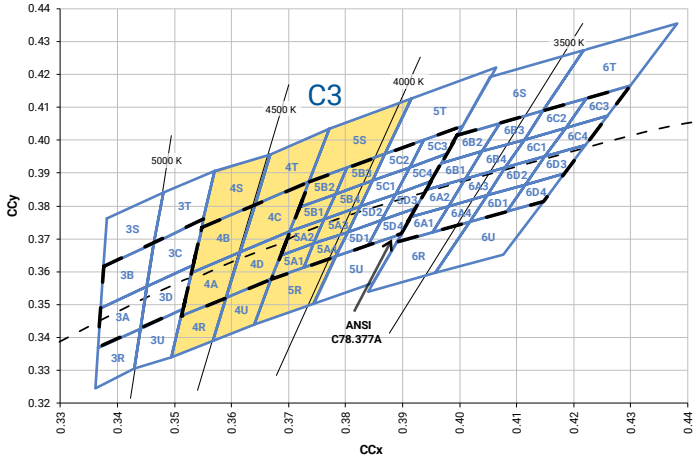Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## CREE'S 2200 K CCT WHITE KIT PLOTTED ON ANSI STANDARD CHROMATICITY REGIONS

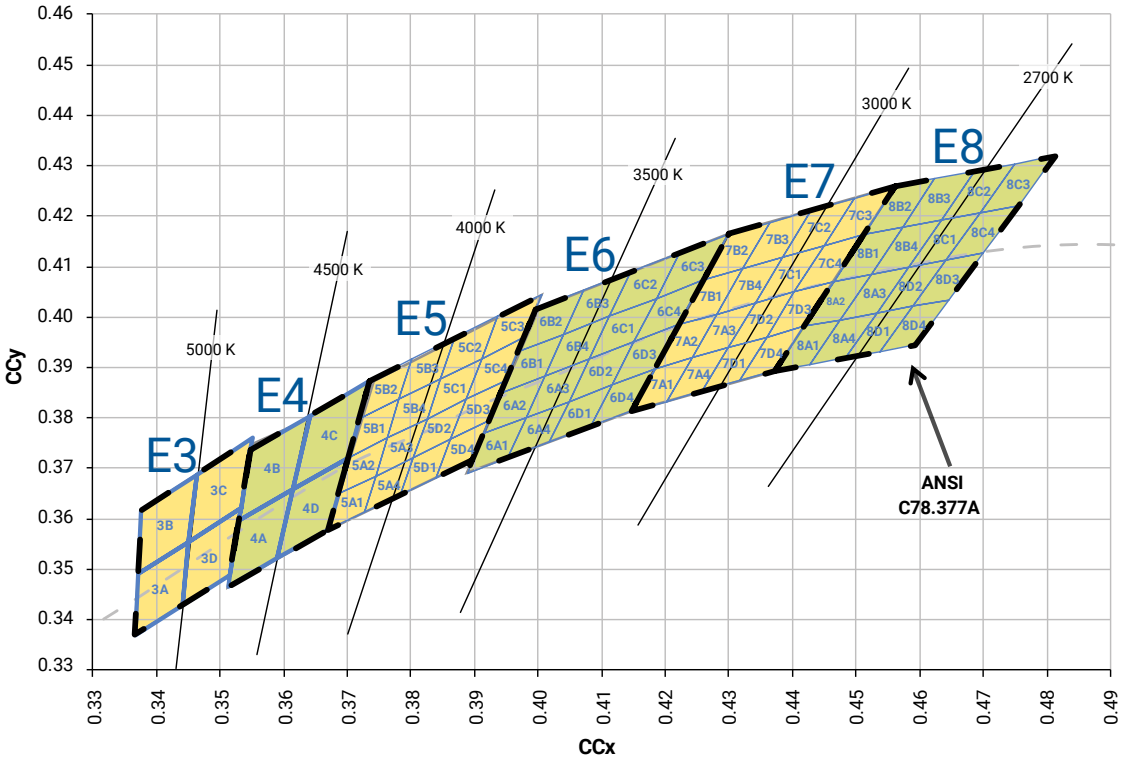


## CREE EASYWHITE® BINS PLOTTED ON THE 1931 CIE COLOR SPACE ($T_J$ = 85 °C)

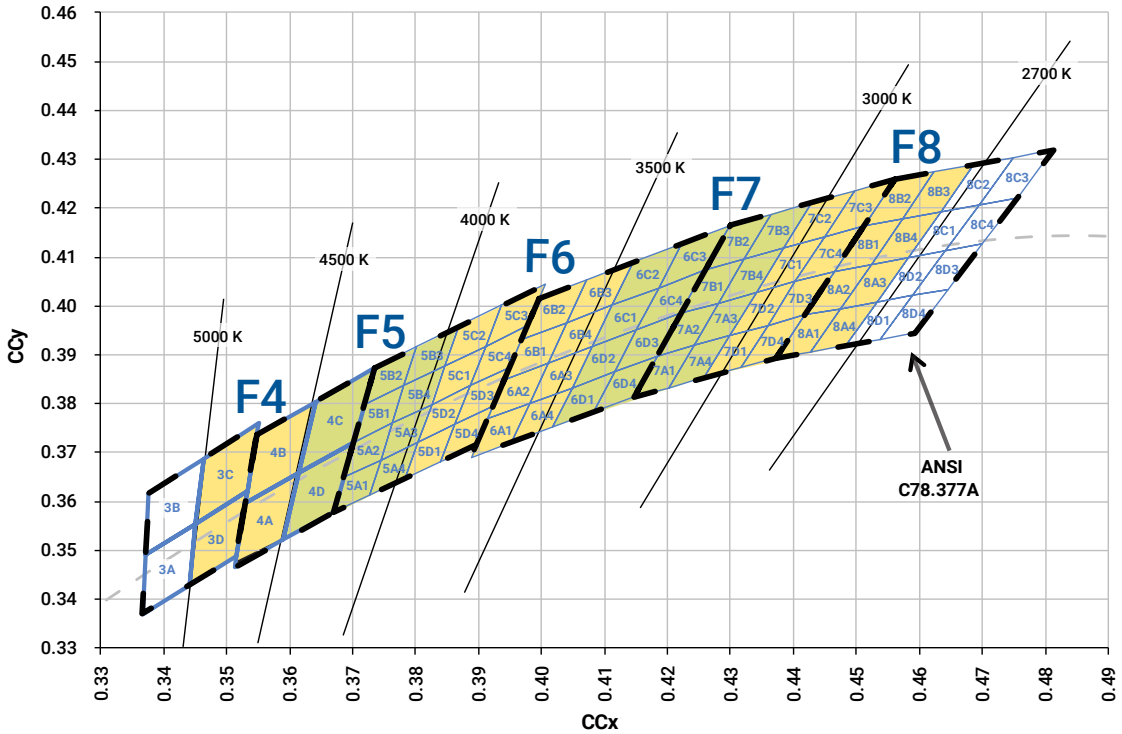


Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## CREE'S STANDARD CHROMATICITY KITS

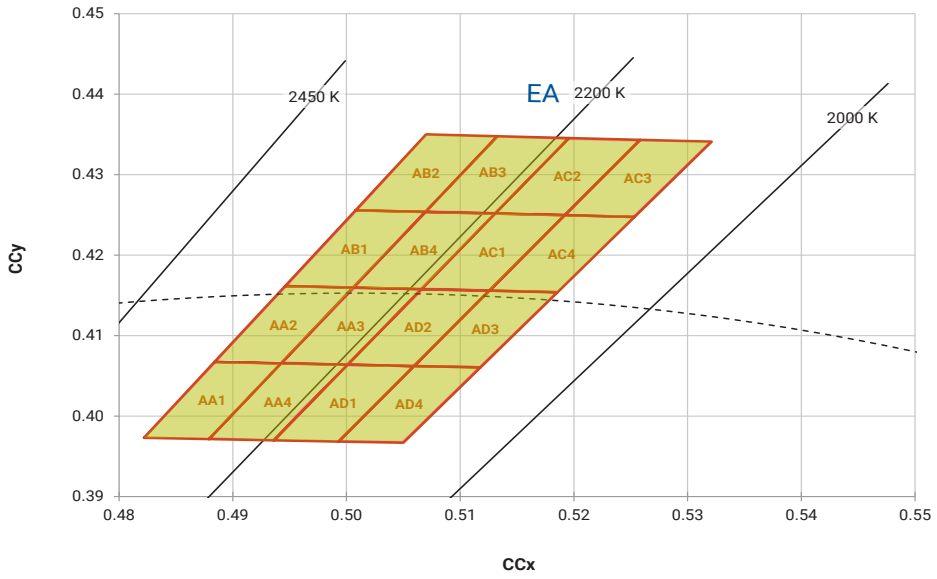The following table provides the chromaticity bins associated with chromaticity kits for XT-E White LEDs.

| Color | CCT | Kit | Chromaticity Bins |
|---|---|---|---|
| Cool White | 6200 K | 51 | 0A, 0B, 0C, 0D, 0R, 0S, 0T, 0U, 1A, 1B, 1C, 1D, 1R, 1S, 1T, 1U, 2A, 2B, 2C, 2D, 2R, 2S, 2T, 2U, 3A, 3B, 3R, 3S |
| | 6000 K | 53 | 1A, 1B, 1C, 1D, 1R, 1S, 1T, 1U, 2A, 2B, 2C, 2D, 2R, 2S, 2T, 3A, 3B, 3S |
| | 6200 K | 50 | 1A, 1B, 1C, 1D, 2A, 2B, 2C, 2D |
| | 6500 K | E1 | 1A, 1B, 1C, 1D |
| | 5700 K | E2 | 2A, 2B, 2C, 2D |
| Neutral White | 5000 K | E3 | 3A, 3B, 3C, 3D |
| | 5000 K | C1 | 3A, 3B, 3C, 3D, 3R, 3S, 3T, 3U, 4A, 4B, 4R, 4S |
| | 4750 K | F4 | 3C, 3D, 4A, 4B |
| | 4750 K | D1 | 3A, 3B, 3C, 3D, 3R, 3S, 3T, 3U, 4A, 4B, 4C, 4D, 4R, 4S, 4T, 4U |
| | 4500 K | E4 | 4A, 4B, 4C, 4D |
| | 4500 K | D2 | 3C, 3D, 3T, 3U, 4A, 4B, 4C, 4D, 4R, 4S, 4T, 4U, 5A1, 5A2, 5A3, 5A4, 5B1, 5B2, 5B3, 5B4, 5R, 5S |
| | 4500 K | C2 | 3C, 3D, 3T, 3U, 4A, 4B, 4C, 4D, 4R, 4S, 4T, 4U |
| | 4300 K | C3 | 4A, 4B, 4C, 4D, 4R, 4S, 4T, 4U, 5A1, 5A2, 5A3, 5A4, 5B1, 5B2, 5B3, 5B4, 5R, 5S |
| | 4250 K | F5 | 4C, 4D, 5A1, 5A2, 5A3, 5A4, 5B1, 5B2, 5B3, 5B4 |
| | 4000 K | E5 | 5A1, 5A2, 5A3, 5A4, 5B1, 5B2, 5B3, 5B4, 5C1, 5C2, 5C3, 5C4, 5D1, 5D2, 5D3, 5D4 |
| Warm White | 3750 K | F6 | 5C1, 5C2, 5C3, 5C4, 5D1, 5D2, 5D3, 5D4, 6A1, 6A2, 6A3, 6A4, 6B1, 6B2, 6B3, 6B4 |
| | 3500 K | E6 | 6A1, 6A2, 6A3, 6A4, 6B1, 6B2, 6B3, 6B4, 6C1, 6C2, 6C3, 6C4, 6D1, 6D2, 6D3, 6D4 |
| | 3250 K | F7 | 6C1, 6C2, 6C3, 6C4, 6D1, 6D2, 6D3, 6D4, 7A1, 7A2, 7A3, 7A4, 7B1, 7B2, 7B3, 7B4 |
| | 3000 K | E7 | 7A1, 7A2, 7A3, 7A4, 7B1, 7B2, 7B3, 7B4, 7C1, 7C2, 7C3, 7C4, 7D1, 7D2, 7D3, 7D4 |
| | 2850 K | F8 | 7C1, 7C2, 7C3, 7C4, 7D1, 7D2, 7D3, 7D4, 8A1, 8A2, 8A3, 8A4, 8B1, 8B2, 8B3, 8B4 |
| | 2700 K | E8 | 8A1, 8A2, 8A3, 8A4, 8B1, 8B2, 8B3, 8B4, 8C1, 8C2, 8C3, 8C4, 8D1, 8D2, 8D3, 8D4 |
| | 2200 K | EA | AA1, AA2, AA3, AA4, AB1, AB2, AB3, AB4, AC1, AC2, AC3, AC4, AD1, AD2, AD3, AD4 |

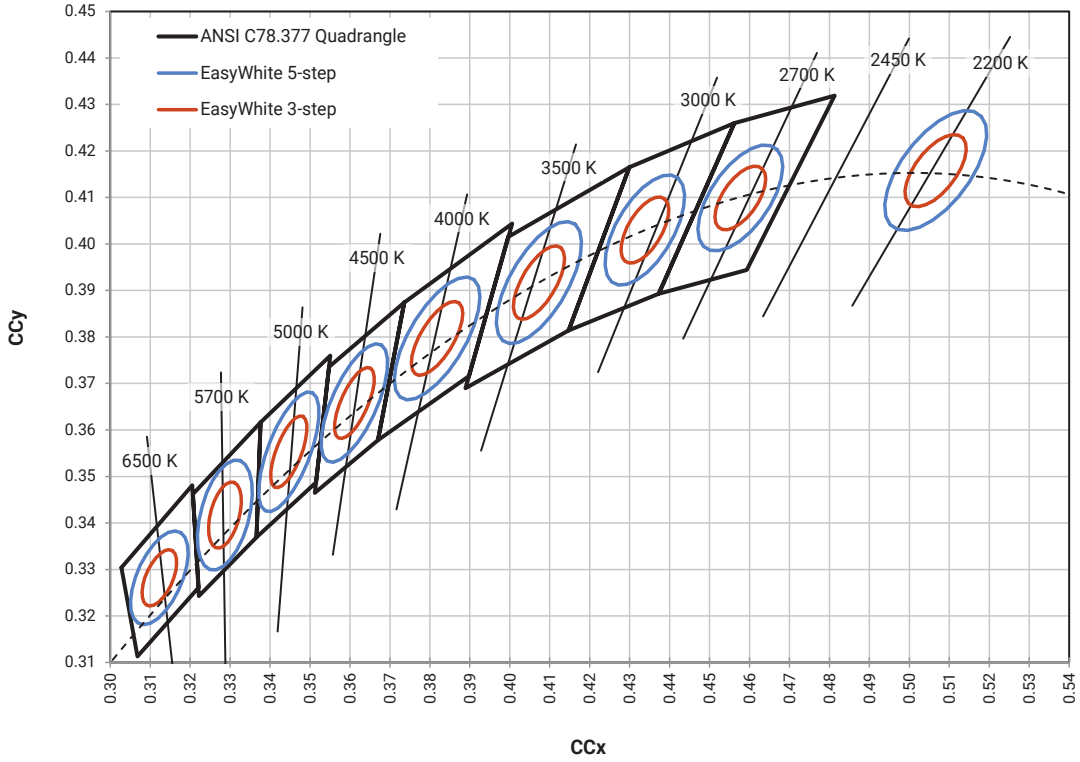Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## BIN AND ORDER CODE FORMATS

Bin codes and order codes for XT-E LEDs are configured in the following manner:

**Order Code**




**Bin Code**




Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## REFLOW SOLDERING CHARACTERISTICS

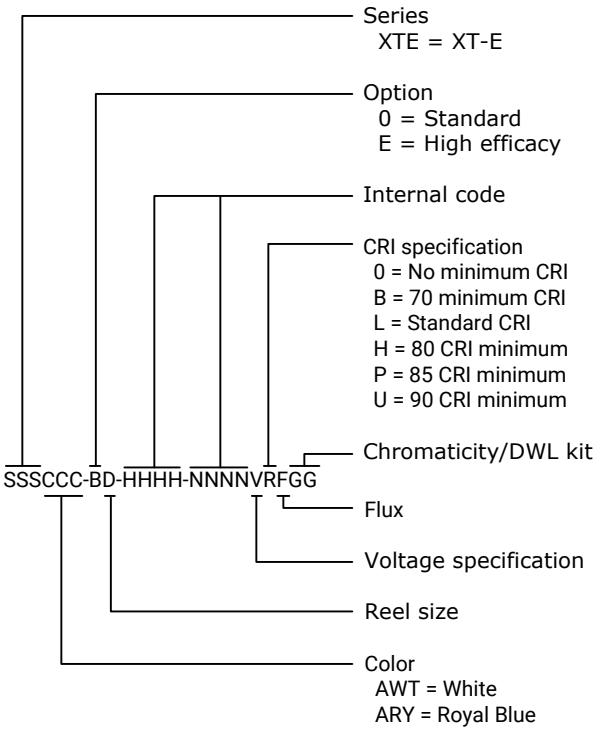In testing, Cree has found XLamp XT-E LEDs to be compatible with JEDEC J-STD-020C, using the parameters listed below. As a general guideline, Cree recommends that users follow the recommended soldering profile provided by the manufacturer of the solder paste used, and therefore it is the lamp or luminaire manufacturer's responsibility to determine applicable soldering requirements.

Note that this general guideline may not apply to all PCB designs and configurations of reflow soldering equipment.

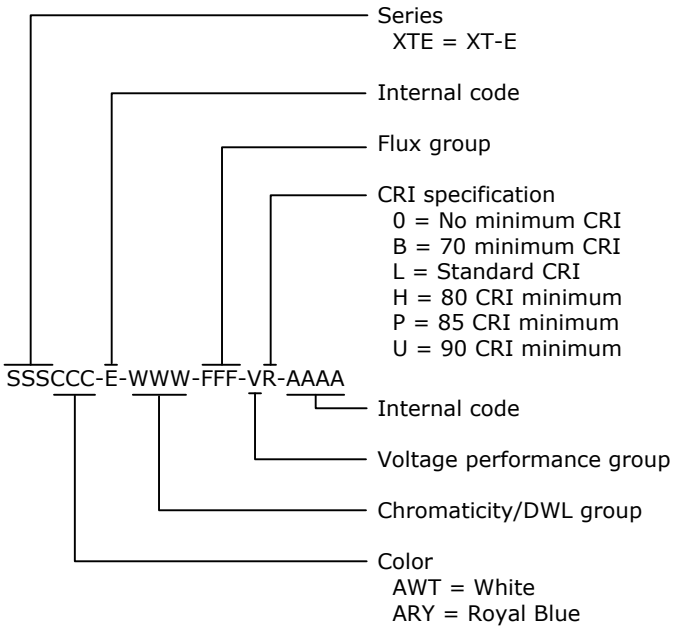


IPC/JEDEC J-STD-020C

| Profile Feature | Lead-Free Solder |
|---|---|
| Average Ramp-Up Rate ($Ts_{max}$ to $T_p$) | 1.2 °C/second |
| Preheat: Temperature Min ($Ts_{min}$) | 120 °C |
| Preheat: Temperature Max ($Ts_{max}$) | 170 °C |
| Preheat: Time ($Ts_{min}$ to $Ts_{max}$) | 65-150 seconds |
| Time Maintained Above: Temperature ($T_L$) | 217 °C |
| Time Maintained Above: Time ($t_L$) | 45-90 seconds |
| Peak/Classification Temperature (Tp) | 235 - 245 °C |
| Time Within 5 °C of Actual Peak Temperature (tp) | 20-40 seconds |
| Ramp-Down Rate | 1 - 6 °C/second |
| Time 25 °C to Peak Temperature | 4 minutes max. |

Note: All temperatures refer to the topside of the package, measured on the package body surface.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.
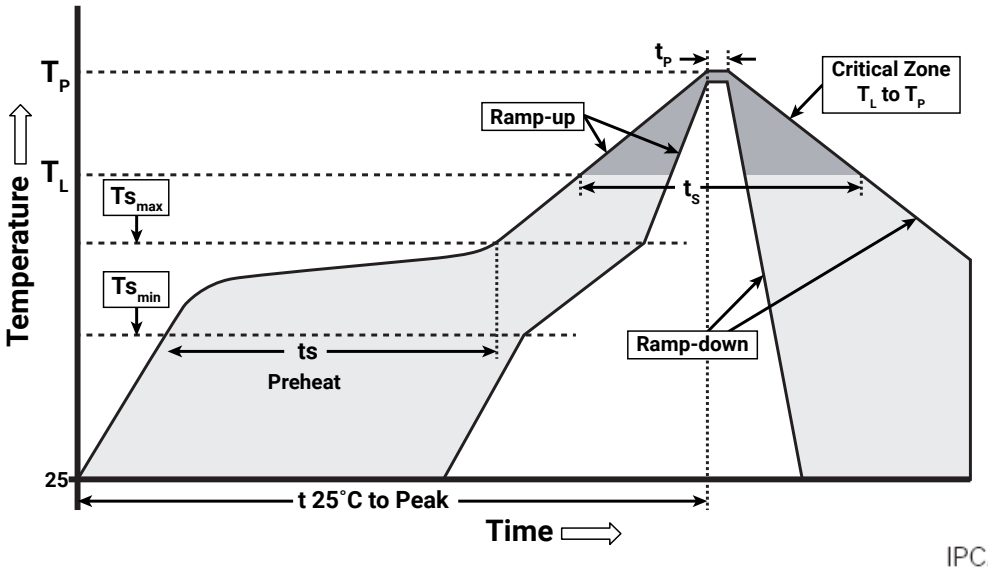
## NOTES

### Measurements

The luminous flux, radiant power, chromaticity, forward voltage and CRI measurements in this document are binning specifications only and solely represent product measurements as of the date of shipment. These measurements will change over time based on a number of factors that are not within Cree's control and are not intended or provided as operational specifications for the products. Calculated values are provided for informational purposes only and are not intended or provided as specifications.

### Pre-Release Qualification Testing

Please read the LED Reliability Overview for details of the qualification process Cree applies to ensure long-term reliability for XLamp LEDs and details of Cree's pre-release qualification testing for XLamp LEDs.

### Lumen Maintenance

Cree now uses standardized IES LM-80-08 and TM-21-11 methods for collecting long-term data and extrapolating LED lumen maintenance. For information on the specific LM-80 data sets available for this LED, refer to the public LM-80 results document.

Please read the Long-Term Lumen Maintenance application note for more details on Cree's lumen maintenance testing and forecasting. Please read the Thermal Management application note for details on how thermal design, ambient temperature, and drive current affect the LED junction temperature.

### Moisture Sensitivity

Cree recommends keeping XLamp LEDs in the provided, resealable moisture-barrier packaging (MBP) until immediately prior to soldering. Unopened MBPs that contain XLamp LEDs do not need special storage for moisture sensitivity.

Once the MBP is opened, XLamp XT-E LEDs may be stored as MSL 1 per JEDEC J-STD-033, meaning they have unlimited floor life in conditions of ≤ 30 ºC/85% relative humidity (RH). Regardless of the storage condition, Cree recommends sealing any unsoldered LEDs in the original MBP.

### RoHS Compliance

The levels of RoHS restricted materials in this product are below the maximum concentration values (also referred to as the threshold limits) permitted for such substances, or are used in an exempted application, in accordance with EU Directive 2011/65/EC (RoHS2), as implemented January 2, 2013. RoHS Declarations for this product can be obtained from your Cree representative or from the Product Ecology section of the Cree website.

### REACh Compliance

REACh substances of very high concern (SVHCs) information is available for this product. Since the European Chemical Agency (ECHA) has published notice of their intent to frequently revise the SVHC listing for the foreseeable future, please contact a Cree representative to insure you get the most up-to-date REACh SVHC Declaration. REACh banned substance information (REACh Article 67) is also available upon request.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## NOTES - CONTINUED

### UL® Recognized Component

This product meets the requirements to be considered a UL Recognized Component with Level 4 enclosure consideration. The LED package or a portion thereof has been investigated as a fire and electrical enclosure per ANSI/UL 8750.

### Vision Advisory

WARNING: Do not look at an exposed lamp in operation. Eye injury can result. For more information about LEDs and eye safety, please refer to the LED Eye Safety application note.

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## MECHANICAL DIMENSIONS

Thermal vias, if present, are not shown on these drawings.

All measurements are ±0.13 mm unless otherwise indicated.

### XT-E White




Top View




Side View

### XT-E Royal Blue

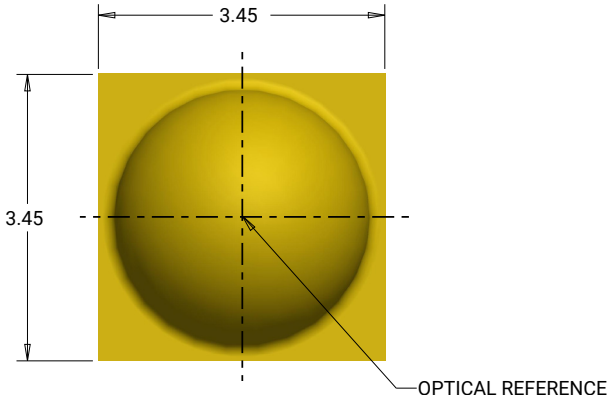


Top View

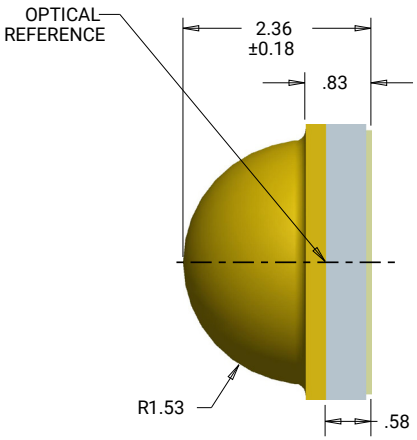


Side View

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.
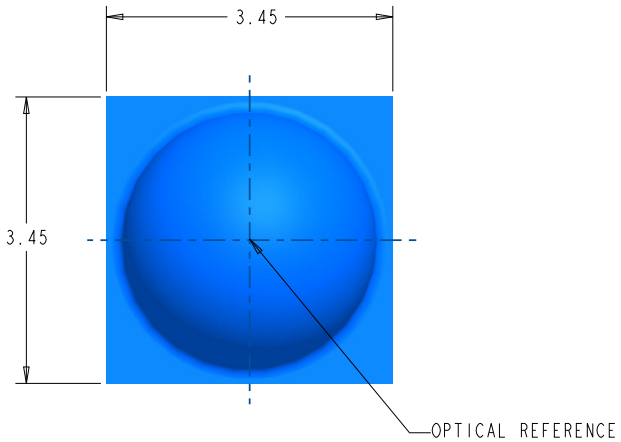
## MECHANICAL DIMENSIONS - CONTINUED

### XT-E White & XT-E Royal Blue

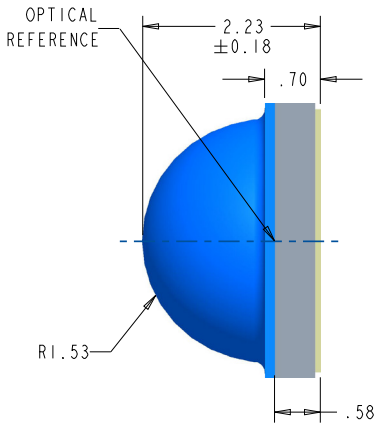


**Bottom View**




**Alternate Bottom View**

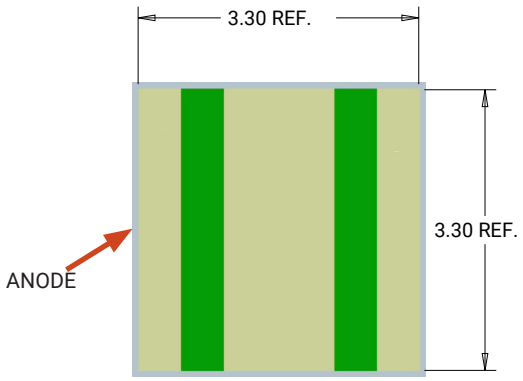


**Recommended PCB Solder Pad**

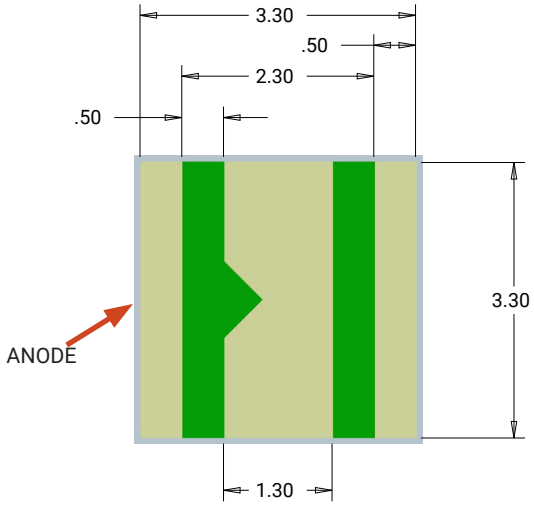


**Recommended Stencil Pattern (Shaded Area Is Open)**

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.
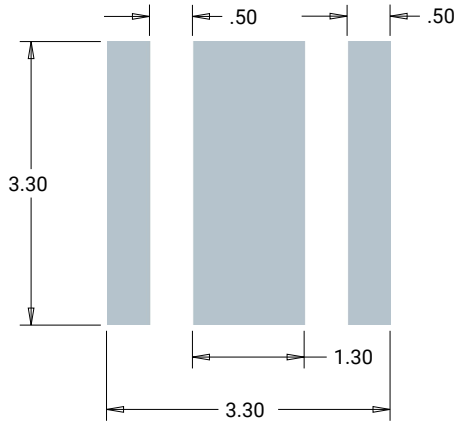
## TAPE AND REEL

All Cree carrier tapes conform to EIA-481D, Automated Component Handling Systems Standard.

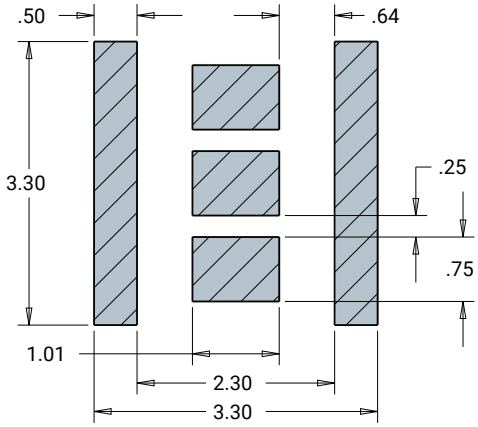All dimensions in mm.




| | | |
|---|---|---|
| Ao | 3.70 | +/- 0.1 |
| Bo | 3.70 | +/- 0.1 |
| Ko | 2.40 | +0.0/-0.1 |
| F | 5.50 | +/- 0.05 |
| $P_1$ | 8.00 | +/- 0.1 |
| W | 12.00 | +0.3/-0.1 |

(I) Measured from centerline of sprocket hole to centerline of pocket.

(II) Cumulative tolerance of 10 sprocket holes is ± 0.20.

(III) Measured from centerline of sprocket hole to centerline of pocket.

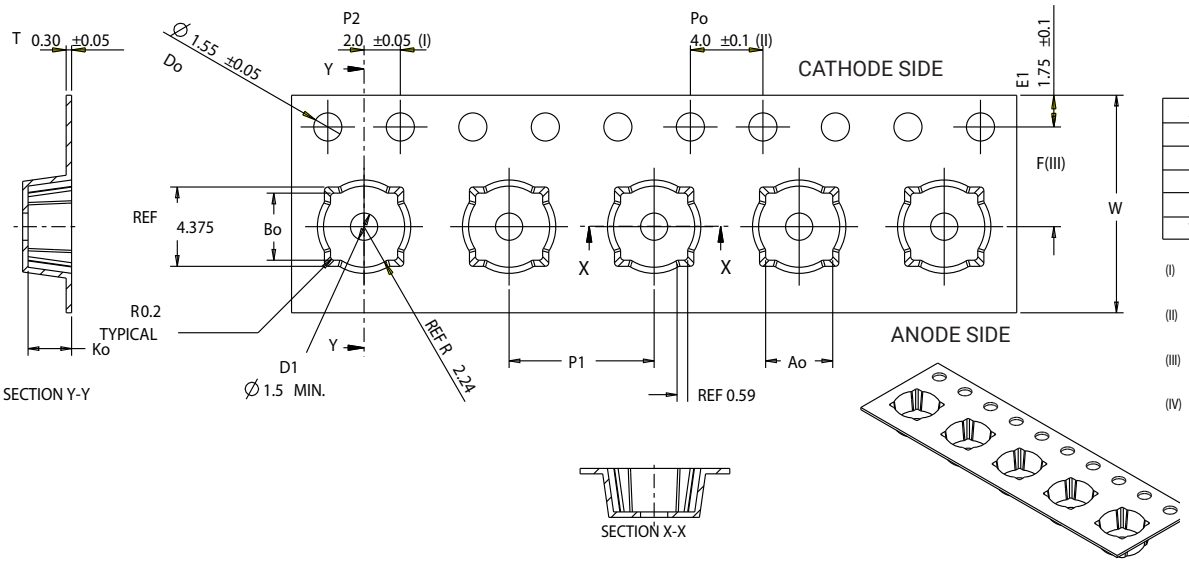(IV) Other material available.







Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

## PACKAGING

**Unpackaged Reel**

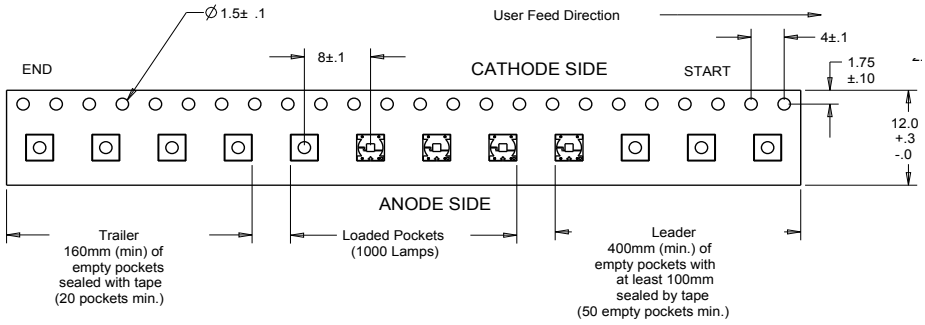

Label with Cree Bin Code, Quantity, Reel ID

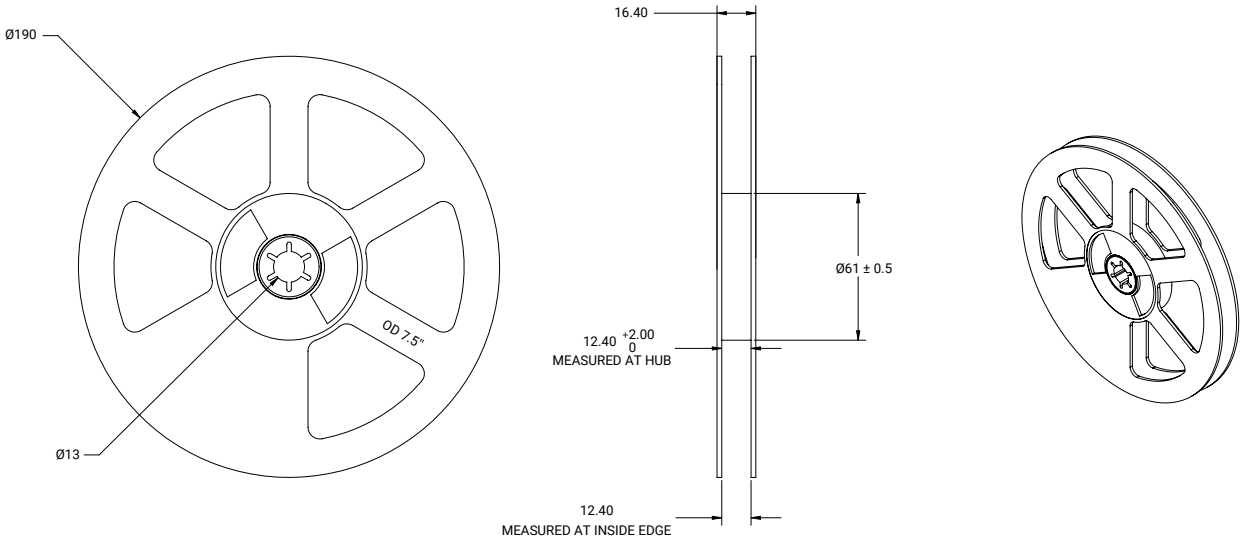**Packaged Reel**



Label with Cree Order Code, Quantity, Reel ID, PO #

Label with Cree Bin Code, Quantity, Reel ID

**Boxed Reel**

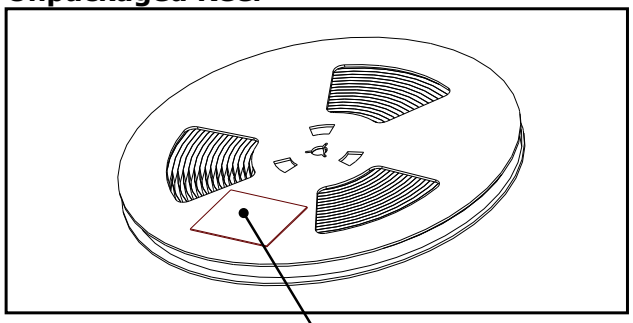


Label with Cree Order Code, Quantity, Reel ID, PO #

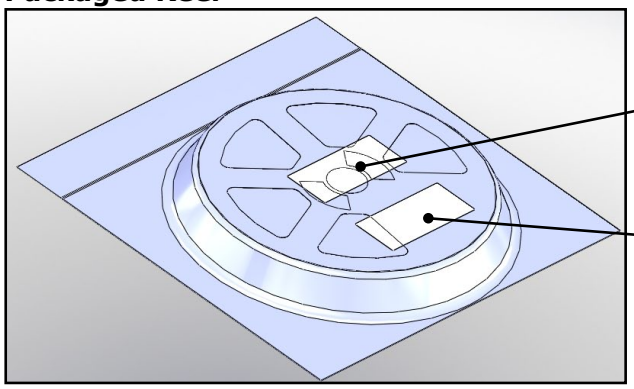Label with Cree Bin Code, Quantity, Reel ID

Patent Label

Copyright © 2011-2020 Cree, Inc. All rights reserved. The information in this document is subject to change without notice. Cree®, the Cree logo, EasyWhite® and XLamp® are registered trademarks of Cree, Inc. UL® and the UR logo are registered trademarks of UL LLC.

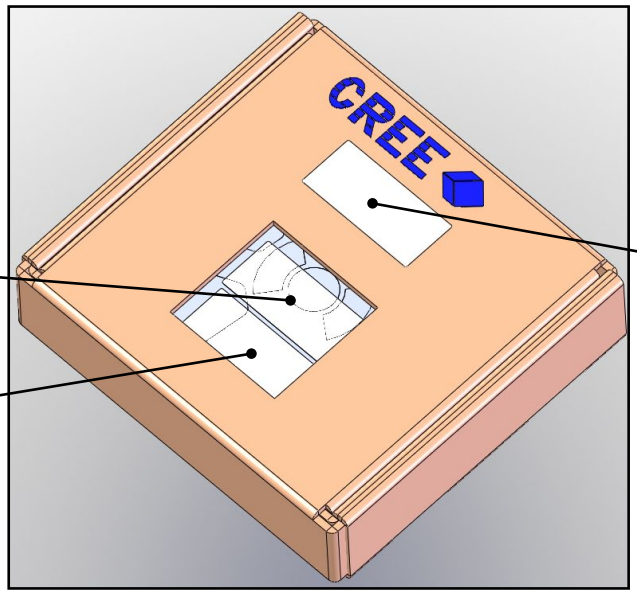Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

**Данный компонент на территории Российской Федерации**

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9