

FSK DEMODULATOR / TONE DECODER

■ GENERAL DESCRIPTION

The **NJM2211** is a monolithic phase-locked loop (PLL) system especially designed for data communications. It is particularly well suited for FSK modem applications, and operates over a wide frequency range of 0.01Hz to 300kHz. It can accommodate analog signals between 2mV and 3V, and can interface with conventional DTL, TTL and ECL logic families. The circuit consists of a basic PLL for tracking an input signal frequency within the passband, a quadrature phase detector which provides carrier detection, and an FSK voltage comparator which provides FSK demodulation. External components are used to independently set carrier frequency, bandwidth, and output delay.


■ FEATURES

- Wide Operating Voltage (4.5V to 20V)
- Wide frequency range (0.01Hz to 300kHz)
- DTL / TTL / ECL logic compatibility
- FSK demodulation with carrier-detector
- Wide dynamic range (2mV to 3V_{rms})
- Adjustable tracking range ($\pm 1\%$ to $\pm 80\%$)
- Excellent temperature stability (20ppm / °C typical)
- Package Outline DIP14, DMP14
- Bipolar Technology


■ APPLICATIONS

- FSK demodulation
- Data synchronization
- Tone decoding
- FM detection
- Carrier detection

■ PIN CONFIGURATION

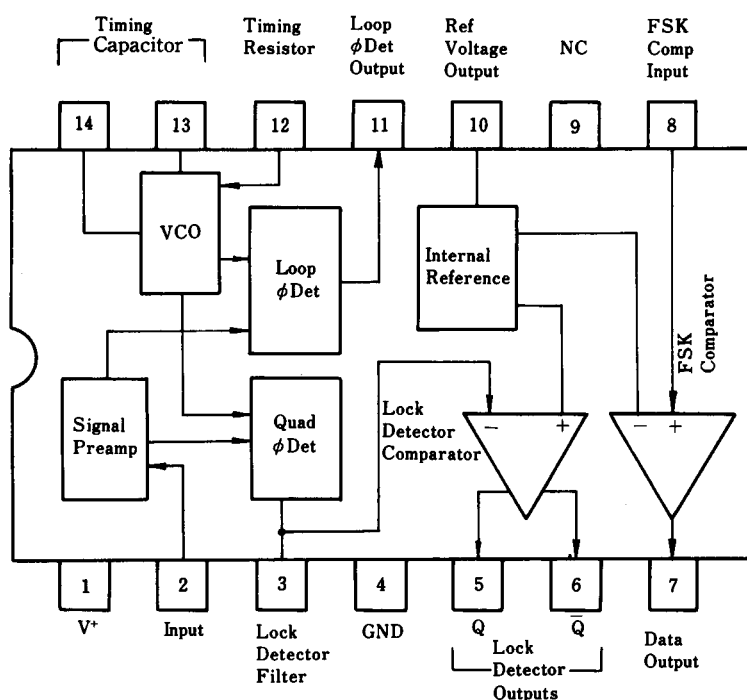

NJM2211D
NJM2211M

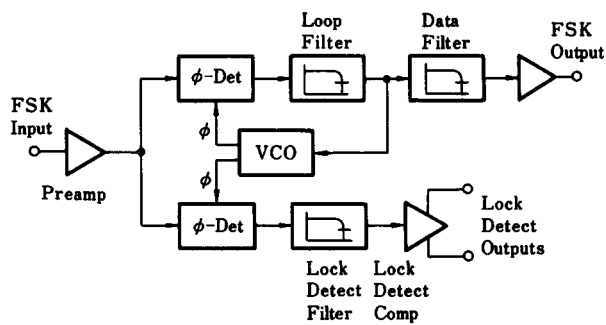

■ ABSOLUTE MAXIMUM RATINGS

 $(T_a = 25^\circ\text{C})$


PARAMETER	SYMBOL	RATINGS	UNIT
Supply Voltage	V^+	20	V
Input Signal Level	V_{IN}	3	Vrms
Power Dissipation	P_D	(DIP14) 700 (DMP14) 300	mW mW
Operating Temperature Range	T_{opr}	-40 to +85	°C
Storage Temperature Range	T_{stg}	-40 to +125	°C

■ ELECTRICAL CHARACTERISTICS

($V^+ = +12V$, $T_a = 25^\circ C$)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Operating Voltage	V ⁺		4.5	-	20	V
Operating Current	I _{CC}	R ₀ ≥ 10kΩ	-	5	11	mA
Oscillator						
Frequency Accuracy	Δf ₀		-	±1.0	-	%
Frequency Stability Temp. Coefficient	Δf ₀ / ΔT	R ₁ =∞	-	±20	-	ppm / °C
Power Supply Rejection	PSRR	V ⁺ =12±1V V ⁺ =5±0.5V	-	±0.05 ±0.2	±1.5	% / V % / V
Upper Frequency Limit	f ₀ MAX	R ₀ =8.2kΩ, C ₀ =400pF	-	300	-	kHz
Lowest Operating Frequency	f ₀ MIN	R ₀ =2MΩ, C ₀ =50μF	-	0.01	-	Hz
Timing Resistor						
Timing Resistor	R ₀	Operating Range	5	-	2000	kΩ
		Recommended Range	15	-	100	kΩ
Loop Phase Detector						
Peak Output Current	I ₀	Meas. at pin 11	±100	±200	±300	μA
Output Offset Current	I _{OS}		-	±2.0	-	μA
Output Impedance	Z ₀		-	1.0	-	MΩ
Maximum Voltage Swing	V _{OM}	Ref. to pin 10	±4.0	±5.0	-	V
Quadrature Phase Detector						
Peak Output Current	I _O	Meas. at Pin 3	-	150	-	μA
Output Impedance			-	1.0	-	MΩ
Maximum Voltage Swing			-	11	-	V _{P-P}
Input Preamp						
Input Impedance	R _{IN}	Meas. at Pin 2	-	20	-	kΩ
Input Signal Voltage Required to Cause Limiting	V _{IN}		-	2	-	mVrms
Voltage Comparator						
Input Impedance	R _{IN}	Measure at Pin 3 & 8	-	2	-	MΩ
Input Bias Current	I _B		-	100	-	nA
Voltage Gain	G _V	R _L =5.1kΩ	-	70	-	dB
Output Voltage Low	V _{SAT}	5, 6, 7 _{PIN} I _C =3mA	-	0.3	1.0	V
Output Leakage Current	I _{LEAK}	V ₀ =12V	-	0.01	11	μA
Internal Reference						
Output Voltage	V _{REF}	Measure at Pin 10	4.75	5.30	5.85	V
Output Impedance	Z ₀		-	100	-	Ω

■ EQUIVALENT CIRCUIT

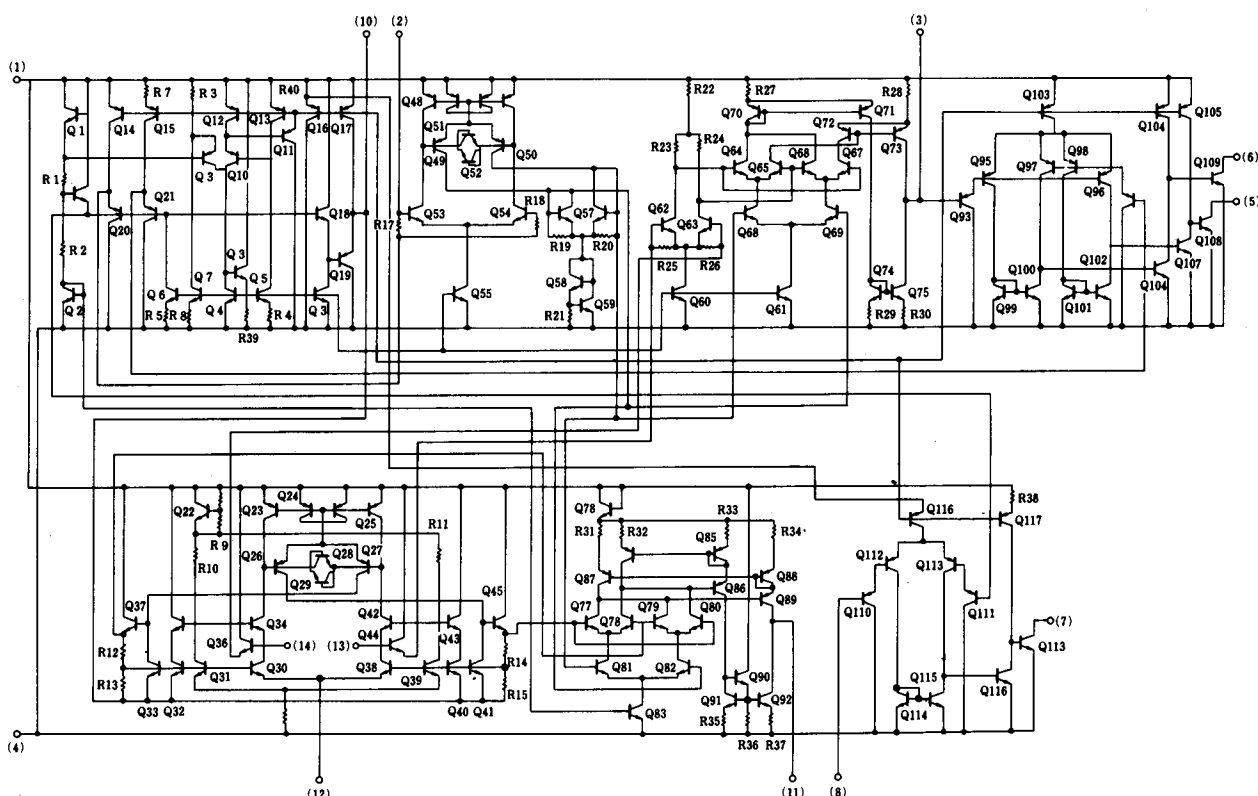

■ CIRCUIT FUNCTION

● Signal Input (Pin 2)

The input signal is AC coupled to this terminal. The internal impedance at pin 2 is 20k Ω , Recommended input signal levels in the range of 10mVrms to 3Vrms.

● Quadrature Phase Detector Output (Pin 3)

This is the high-impedance output of the quadrature phase detector, and is internally connected to the input of lock-detect voltage comparator. In tone detection applications, pin 3 is connected to ground through a parallel combination of R_D and C_D (see Figure 1) to eliminate chatter at the lock-detect outputs. If this tone-detect section is not used, pin 3 can be left open circuited.

● Lock-Detect Output, Q (Pin 5)

The output at pin 5 is at a "high" state when the PLL is out of lock and goes to a "low" or conducting state when the PLL is locked. It is an open collector type output and required a pull-up resistor, R_L , to V^+ for proper operation. In the "low" state it can sink up to 5mA of load current.

● Lock-Detect Complement, Q (Pin 6)

The output at pin 6 is the logic complement of the lock-detect output at pin 5. This output is also an open collector type stage which can sink 5mA of load current in the low or "on" state.

● FSK Data Output (Pin 7)

This output is an open collector logic stage which requires a pull-up resistor, R_L , to V^+ for proper operation. It can sink 5mA of load current. When decoding FSK signals the FSK data output will switch to a "high" or off state for low input frequency, and will switch to a "low" or on state for high input frequency. If no input signal is present, the logic state at pin 7 is indeterminate.

● FSK Comparator Input (Pin 8)

This is the high-impedance input to the FSK voltage comparator. Normally, an FSK post-detection or data filter is connected between this terminal and the PLL phase-detector output (pin 11). This data filter is formed by R_F and C_F of Figure 1. The threshold voltage of the comparator is set by the internal reference voltage, V_R , available at pin 10.

• Reference Voltage V_R (Pin 10)

This pin is internally biased at the reference voltage level, V_R ; $V_R = V_+ / 2 - 650\text{mV}$. The DC voltage level at this pin forms an internal reference for the voltage levels at pin 3, 8, 11, and 12. Pin 10 must be bypassed to ground with a $0.1\mu\text{F}$ capacitor.

• Loop Phase Detector Output (Pin 11)

This terminal provides a high impedance output for the loop phase-detector. The PLL loop filter is formed by R_1 and C_1 connected to pin 11 (see Figure 1). With no input signal, or with no phase error within the PLL, the DC level at pin 11 is very nearly equal to V_{REF} . The peak voltage swing available at the phase detector output is equal to $\pm V_{REF}$.

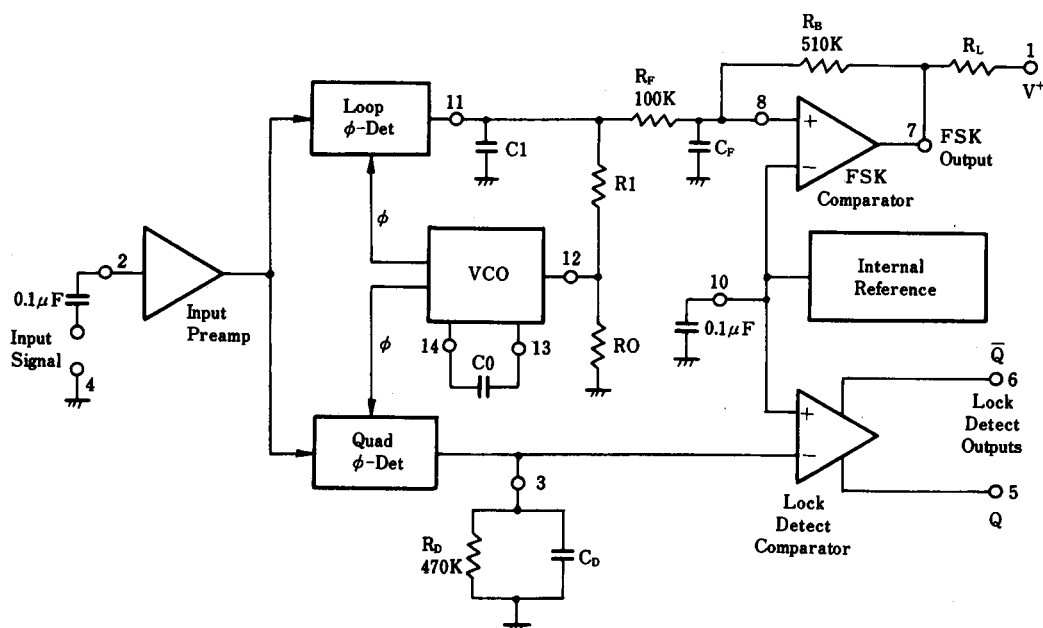


Figure 1. FSK & Tone Detection

• VCO Control Input (Pin 12)

VCO free-running frequency is determined by external timing resistor, R_0 , connected from this terminal to ground. The VCO free-running frequency, f_0 , is given by :

$$f_0(\text{Hz}) = \frac{1}{R_0 C_0}$$

where C_0 is the timing capacitor across pins 13 and 14. For optimum temperature stability R_0 must be in the range of $10\text{k}\Omega$ to $100\text{k}\Omega$ (see Typical Electrical Characteristics).

This terminal is a low impedance point, and is internally biased at a DC level equal to V_R . The maximum timing current drawn from pin 12 must be limited to $\leq 3\text{mA}$ for proper operation of the circuit.

• VCO Timing Capacitor (Pins 13 and 14)

VCO frequency is inversely proportional to the external timing capacitor, C_0 , connected across these terminals. C_0 must be non-polarized, and in the range of 200pF to $10\mu\text{F}$.

• VCO Frequency Adjustment

VCO can be fine tuned by connecting a potentiometer, R_x , in series with R_0 at pin 12 (see Figure 2)

• VCO Free-Running Frequency, F_0

The NJM2211 does not have a separate VCO output terminal. Instead, the VCO outputs are internally connected to the phase-detector sections of the circuit. However, for setup or adjustment purposes, the VCO free-running frequency can be measured at pin 3 (with C_0 disconnected) with no input and also pin 2 shorted to pin 10.

■ DESIGN EQUATIONS

See Figure 1 for Definitions of Components.

1. VCO Center Frequency, f_0 :

$$f_0 (\text{Hz}) = \frac{1}{R_0 C_0}$$

2. Internal Reference Voltage, V_R (measured at pin 10) :

$$V_R = \left(\frac{+V_S}{2} \right) - 650\text{mV}$$

3. Loop Lowpass Filter Time Constant, τ :

$$\tau = R_1 C_1$$

4. Loop Damping, ξ :


$$\xi = \left(\sqrt{\frac{C_0}{C_1}} \right) \left(\frac{1}{4} \right)$$

5. Loop Tracking Bandwidth, $\pm \Delta f / f_0$:

$$\Delta f / f_0 = R_0 / R_1$$

6. FSK Date Filter Time Constant, τ_F :

$$\tau_F = R_F C_F$$

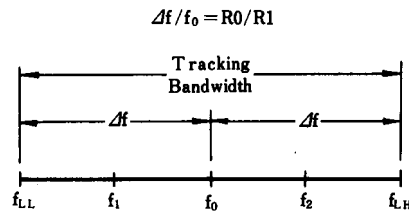

7. Loop Phase Detector Conversion Gain, K_ϕ :

(K_ϕ is the differential DC voltage across pins 10 and 11, per unit of phase error at phase-detector input) :

$$K_\phi (\text{in volts per radian}) = \frac{(-2)(V_{REF})}{\pi}$$

8. VCO conversion Gain, K_0 , is the amount of change in VCO frequency per unit of DC voltage change at pin 11 :

$$K_0 (\text{in Hertz per volt}) = \frac{-1}{C_0 R_1 V_{REF}}$$

9. Total Loop Gain K_T :

$$K_T (\text{in radians per second per volt}) = 2\pi K_\phi K_0 \\ = 4 / C_0 R_1$$

10. Peak Phase-Detector Current, I_A :

$$I_A (\text{mA}) = \frac{V_{REF}}{25}$$

■ APPLICATIONS

FSK Decoding

Figure 2 shows the basic circuit connection for FSK decoding. With reference to Figures 1 and 2, the functions of external components are defined as follows : R0 and C0 set the PLL center frequency. R1 sets the system bandwidth, and C1 sets the loop filter time constant and the loop damping factor. C_F and R_F form a one pole post-detection filter for the FSK data output. The resistor R_B (=510kΩ) from pin 7 to pin 8 introduces positive feedback across FSK comparator to facilitate rapid transition between output logic states.

Recommended component values for some of the most commonly used FSK bauds are given in Table 1.

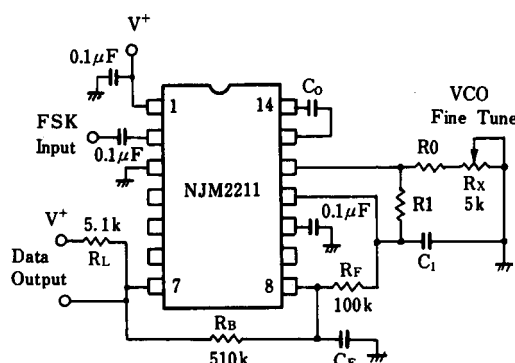


Figure 2. FSK Decoding

Table 1. Recommended Value for FSK

(Ref. Fig. 2)

FSK Band	Component Values
300 Band F ₁ = 1070Hz f ₂ = 1270Hz	C ₀ = 0.039μF C _F = 0.005μF C ₁ = 0.01μF R ₀ = 18kΩ R ₁ = 100kΩ
300 Band f ₁ = 2025Hz f ₂ = 2225Hz	C ₀ = 0.022μF C _F = 0.005μF C ₁ = 0.0047μF R ₀ = 18kΩ R ₁ = 200kΩ
1200 Band f ₁ = 1200Hz f ₂ = 2200Hz	C ₀ = 0.027μF C _F = 0.0022μF C ₁ = 0.01μF R ₀ = 18kΩ R ₁ = 30kΩ

Design Instructions

The circuit of Figure 2 can be tailored for any FSK decoding application by the choice of five key circuit components ; R0, R1, C0, C1 and C_F. For a given set of FSK mark and space frequencies. f₁ and f₂, these parameters can be calculated as follows :

1. Calculate PLL center frequency, f₀

$$f_0 = \frac{f_1 + f_2}{2}$$

2. Chose a value of timing resistor R0 to be in the range of 10kΩ to 100kΩ. This choice is arbitrary. The recommended value is R0 ≅ 20kΩ. The final value of R0 is normally fine-tuned with the series potentiometer, R_x.

3. Calculate value of C0 from Design Equation No.1 or from Typical Performance Characteristics :
C₀ = 1 / R0f₀

4. Calculate R1 to give a Δf equal to the mark-space deviation :
R1 = R0 [f₀ / (f₁ - f₂)]

5. Calculate C1 to set loop damping. (See Design Equation No.4.)
Normally, ξ ≈ 1 / 2 is recommended
Then : C1 = C0 / 4 for ξ = 1 / 2

6. Calculate Data Filter Capacitance, C_F :
For R_F = 100kΩ. R_B = 510kΩ, the recommended value of C_F is :

$$C_F (\text{in } \mu\text{F}) = \frac{3}{\text{Band Rate}}$$

Note : All calculated component values except R0 can be rounded off to the nearest standard value, and R0 can be varied to fine-tune center frequency through a series potentiometer, R_x (see Figure 2).

75 Band FSK demodulator with mark / space frequencies of 1110 / 1170Hz :

$$f_0 = (1110 + 1170) (1 / 2) = 1140 \text{ Hz}$$

Step 3 : Calculate C0 from VCO Frequency vs. Timing Capacitor : $C0 = 0.044\mu F$

Step 4 : Calculate R1 : $R1 = R0 (1140 / 60) = 380k\Omega$

Note : All values except R0 can be rounded off to nearest standard value.

The lock-detect section of the **NJM2211** can be used as a carrier detect option for FSK decoding. The recommended circuit connection for this application is shown in Figure 3. The open-collector lock-detect output, pin 6, is shorted to the data output (pin 7). Thus, the data output will be disabled at "low" state, until there is a carrier within the detection band of the PLL, and the pin 6 output goes "high" to enable the data output.

$$C_D (\mu F) \geq 16 / \text{capture range in Hz}$$

Tone Detection

Both logic outputs at pins 5 and 6 are open-collector type stages, and require external pull-up resistors R_{L1} and R_{L2} as shown in Figure 4.

[illegible][illegible]

Figure 4. Tone Detection

Design Instructions

The circuit of Figure 4 can be optimized for any tone-detection application by the choice of five key circuit components : R_0 , R_1 , C_0 , C_1 , and C_D . For a given input tone frequency, f_s , these parameters are calculated as follows :

1. Choose R_0 to be in the range of $15k\Omega$ to $100k\Omega$. This choice is arbitrary.
2. Calculate C_0 to set center frequency, f_0 equal to f_s : $C_0 = 1 / R_0 f_s$.
3. Calculate R_1 to set bandwidth $\pm \Delta f$ (see Design Equation No.5) : $R_1 = R_0 (f_0 / \Delta f)$

Note : The total detection bandwidth covers the frequency range of $f_0 = \Delta f$

4. Calculate value of C_1 for a given loop damping factor :

$$C_1 = C_0 / 16\xi^2$$

Normally $\xi \approx 1/2$ is optimum for most tone-detector applications, giving $C_1 = 0.25 C_0$.

Increasing C_1 improves the out-of band signal rejection, but increases the PLL capture time.

5. Calculate value of filter capacitor C_D . To avoid chatter at the logic output, with $R_D = 470k\Omega$, C_D must be :

$$C_D (\mu F) \geq (16 / \text{capture range in Hz})$$

Increasing C_D slows the logic output response time.

Design Examples

Tone detector with a detection band of $1kHz \pm 20Hz$:

Step 1 : Choose $R_0 = 20k\Omega$ ($18k\Omega$ in series with $5k\Omega$ potentiometer).

Step 2 : Choose C_0 for $f_0 = 1kHz$: $C_0 = 0.05\mu F$.

Step 3 : Calculate R_1 : $R_1 = (R_0)(1000 / 20) = 1M\Omega$.

Step 4 : Calculate C_1 : for $\xi = 1/2$, $C_1 = 0.25\mu F$, $C_2 = 0.013\mu F$.

Step 5 : Calculate C_D : $C_D = 16 / 38 = 0.42\mu F$.

Step 6 : Fine tune the center frequency with the $5k\Omega$ potentiometer, R_X .

Linear FM Detection

The **NJM2211** can be used as a linear FM detector for a wide range of analog communications and telemetry applications. The recommended circuit connection for the application is shown in Figure 5. The demodulated output is taken from the loop phase detector output (pin 11), through a post detection filter made up of R_F and C_F , and an external buffer amplifier. This buffer amplifier is necessary because of the high impedance output at pin 11. Normally, a non-inverting unity gain op amp can be used as a buffer amplifier, as shown in Figure 5.

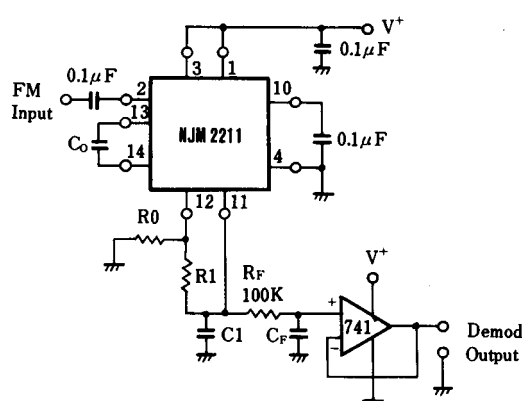







Figure 5. Linear FM Detector

The FM detector gain, i.e., the output voltage change per unit of FM deviation, can be given as :

$$V_{OUT} = R_1 V_R / 100 R_0 \text{ Volts/\% deviation}$$

where V_R is the internal reference voltage. For the choice of extremal components R_1 , R_0 , C_D , C_1 and C_F , see the section on Design Equations.

■ TYPICAL CHARACTERISTICS

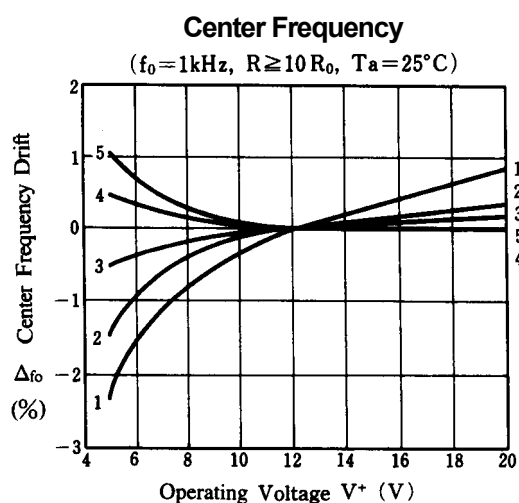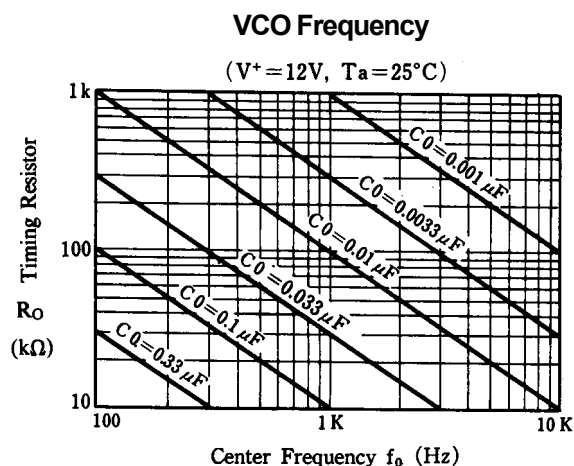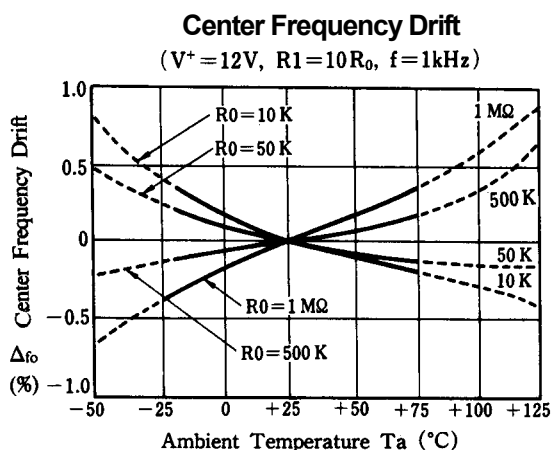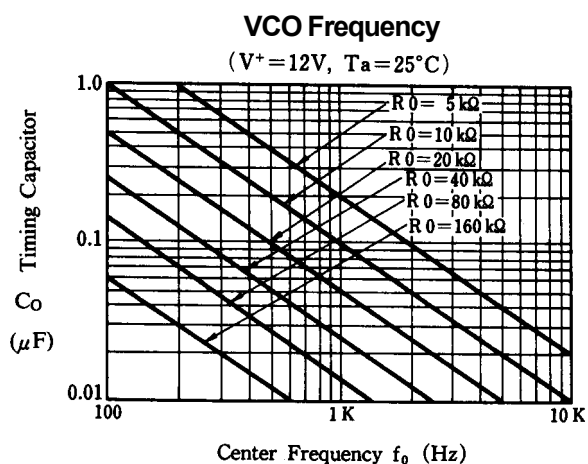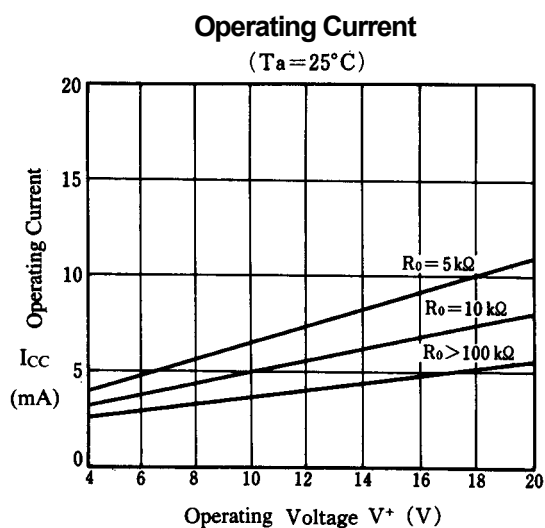

Curve	R_0
1	5 K
2	10 K
3	30 K
4	100 K
5	300 K

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJM2211M-TE1](#) [NJM2211D](#) [NJM2211M](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9