


## QPL MIL-PRF-55342 Qualified Thin Film Resistor, Surface Mount Chip



Thin Film Mil chip resistors feature all sputtered wraparound termination for excellent adhesion and dimensional uniformity. They are ideal in applications requiring stringent performance requirements. Established reliability is assured through 100 % screening and extensive environmental lot testing.

### CONSTRUCTION

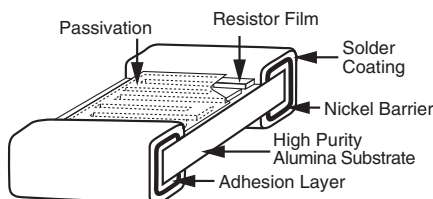

### FEATURES

- Established reliability, "S" failure rate level (10 ppm), C = 2
- High purity alumina substrate 99.6 % purity
- Wraparound termination featuring a tenacious adhesion layer covered with an electroplated nickel barrier layer for + 150 °C operating conditions
- Very low noise and voltage coefficient (< - 25 dB, 0.5 ppm/V)
- Non-inductive
- Laser-trimmed tolerances  $\pm 0.1$  %
- Wraparound resistance less than 0.010  $\Omega$  typical
- In-lot tracking less than 5 ppm/°C
- Complete MIL-testing available in-house
- Antistatic waffle pack or tape and reel packaging available
- Military/aerospace/QPL

### TYPICAL PERFORMANCE

|      | ABSOLUTE |
|------|----------|
| TCR  | 25       |
| TOL. | 0.1      |

### STANDARD ELECTRICAL SPECIFICATIONS

| TEST                           | SPECIFICATIONS                              | CONDITIONS          |
|--------------------------------|---------------------------------------------|---------------------|
| Material                       | Tamelox resistor film (passivated nichrome) | -                   |
| Resistance Range               | 10 $\Omega$ to 6.19 M $\Omega$              | -                   |
| TCR: Absolute                  | $\pm 25$ ppm/°C to $\pm 300$ ppm/°C         | - 55 °C to + 125 °C |
| Tolerance: Absolute            | $\pm 0.1$ % to $\pm 10$ %                   | + 25 °C             |
| Stability: Absolute            | $\Delta R \pm 0.02$ %                       | 2000 h at + 70 °C   |
| Stability: Ratio               | -                                           | -                   |
| Voltage Coefficient            | 0.1 ppm/V                                   | -                   |
| Working Voltage                | 30 V to 200 V                               | -                   |
| Operating Temperature Range    | - 55 °C to + 125 °C                         | -                   |
| Storage Temperature Range      | - 55 °C to + 150 °C                         | -                   |
| Noise                          | < - 25 dB                                   | -                   |
| Shelf Life Stability: Absolute | $\Delta R \pm 0.01$ %                       | 1 year at + 25 °C   |

### COMPONENT RATINGS


| CASE SIZE | POWER RATING (mW) | WORKING VOLTAGE (V) | RESISTANCE RANGE ( $\Omega$ ) BY CHARACTERISTICS TOLERANCE |                      |                                      |                               |
|-----------|-------------------|---------------------|------------------------------------------------------------|----------------------|--------------------------------------|-------------------------------|
|           |                   |                     | E<br>(0.1 %, 0.25 %, 0.5 %)                                | E<br>(1 %, 2 %, 5 %) | H, K, L, M<br>(0.1 %, 0.25 %, 0.5 %) | H, K, L, M<br>(1 %, 2 %, 5 %) |
| M55342/01 | 50                | 40                  | 49.9 to 150K                                               | 49.9 to 150K         | 20 to 150K                           | 20 to 150K                    |
| M55342/02 | 125               | 40                  | 49.9 to 301K                                               | 49.9 to 301K         | 20 to 301K                           | 20 to 301K                    |
| M55342/03 | 200               | 75                  | 49.9 to 649K                                               | 49.9 to 649K         | 10 to 649K                           | 10 to 649K                    |
| M55342/04 | 150               | 125                 | 49.9 to 1.69M                                              | 49.9 to 1.69M        | 10 to 1.69M                          | 10 to 1.69M                   |
| M55342/05 | 225               | 175                 | 49.9 to 3.16M                                              | 49.9 to 3.16M        | 10 to 3.16M                          | 10 to 3.16M                   |
| M55342/06 | 150               | 50                  | 49.9 to 475K                                               | 49.9 to 475K         | 10 to 475K                           | 10 to 475K                    |
| D55342/07 | 250               | 100                 | 49.9 to 1.5M                                               | 49.9 to 1.5M         | 10 to 1.5M                           | 10 to 1.5M                    |
| M55342/08 | 800               | 150                 | 49.9 to 4.02M                                              | 49.9 to 4.02M        | 10 to 4.02M                          | 10 to 4.02M                   |
| M55342/09 | 1000              | 200                 | 49.9 to 6.19M                                              | 49.9 to 6.19M        | 10 to 6.19M                          | 10 to 6.19M                   |
| M55342/10 | 500               | 75                  | 49.9 to 1M                                                 | 49.9 to 1M           | 49.9 to 1M                           | 49.9 to 1M                    |
| M55342/11 | 50                | 30                  | 49.9 to 100K                                               | 49.9 to 100K         | 20 to 100K                           | 20 to 100K                    |
| M55342/12 | 100               | 50                  | 49.9 to 258K                                               | 49.9 to 261K         | 10 to 258K                           | 10 to 261K                    |

#### Note

- Values listed are a guide, refer to MIL spec for value/tolerance allowance



**DIMENSIONS** in inches



| CASE SIZE | TERM. | L                     | W             | T              | D                     | E                     |
|-----------|-------|-----------------------|---------------|----------------|-----------------------|-----------------------|
| M55342/01 | B     | 0.055 ± 0.006         | 0.025 ± 0.005 | 0.010 to 0.030 | 0.010 ± 0.005         | 0.015 ± 0.005         |
| M55342/02 | B     | 0.055 ± 0.006         | 0.050 ± 0.005 | 0.012 to 0.033 | 0.010 ± 0.005         | 0.015 ± 0.005         |
| M55342/03 | B     | 0.105 ± 0.007         | 0.050 ± 0.005 | 0.015 to 0.033 | 0.015 ± 0.005         | 0.015 ± 0.005         |
| M55342/04 | B     | 0.155 ± 0.007         | 0.050 ± 0.005 | 0.015 to 0.033 | 0.015 ± 0.005         | 0.015 ± 0.005         |
| M55342/05 | B     | 0.230 ± 0.007         | 0.075 ± 0.005 | 0.015 to 0.033 | 0.020 ± 0.005         | 0.020 ± 0.005         |
| M55342/06 | B     | 0.080 ± 0.006         | 0.050 ± 0.005 | 0.015 to 0.033 | 0.016 ± 0.008         | 0.015 ± 0.005         |
| D55342/07 | B     | 0.126 ± 0.008         | 0.063 ± 0.005 | 0.015 to 0.033 | 0.020 + 0.005/- 0.010 | 0.020 + 0.005/- 0.010 |
| M55342/08 | B     | 0.209 + 0.009/- 0.018 | 0.098 ± 0.005 | 0.015 to 0.033 | 0.020 ± 0.005         | 0.020 ± 0.005         |
| M55342/09 | B     | 0.259 + 0.009/- 0.015 | 0.124 ± 0.005 | 0.015 to 0.033 | 0.020 ± 0.005         | 0.020 ± 0.005         |
| M55342/10 | B     | 0.105 ± 0.007         | 0.100 ± 0.005 | 0.015 to 0.033 | 0.015 ± 0.005         | 0.015 ± 0.005         |
| M55342/11 | B     | 0.040 ± 0.005         | 0.025 ± 0.005 | 0.010 to 0.030 | 0.010 ± 0.005         | 0.015 ± 0.005         |
| M55342/12 | B     | 0.064 ± 0.006         | 0.032 ± 0.005 | 0.010 to 0.033 | 0.012 ± 0.005         | 0.015 ± 0.005         |

**ENVIRONMENTAL TESTS**

| ENVIRONMENTAL TEST         | MIL-PRF-55342 LIMITS<br>(ΔR ±) | VISHAY PERFORMANCE<br>(ΔR ±) |
|----------------------------|--------------------------------|------------------------------|
| Thermal Shock              | 0.1 %                          | 0.020 %                      |
| Low Temperature Operation  | 0.1 %                          | 0.025 %                      |
| Short Time Overload        | 0.1 %                          | 0.050 %                      |
| High Temperature Exposure  | 0.1 %                          | 0.009 %                      |
| Resistance to Bonding      | 0.2 %                          | 0.006 %                      |
| Moisture Resistance        | 0.2 %                          | 0.004 %                      |
| TCR                        | ± 25 ppm/°C                    | < 15 ppm/°C                  |
| Life (2000 h at + 70 °C)   | 0.5 %                          | 0.02 %                       |
| Life (10 000 h at + 70 °C) | 2.0 %                          | 0.04 %                       |

**MECHANICAL SPECIFICATIONS**

|                    |                     |
|--------------------|---------------------|
| Resistive Element  | TameloX             |
| Substrate Material | Alumina             |
| Chip Terminations  | Solder over nickel  |
| Fused Solder       | Plated solder 90/10 |

**FSCM CAGE # - 57489**



## GLOBAL PART NUMBER INFORMATION

New Global Part Numbering: M55342E06B1C00RTS V

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| M | 5 | 5 | 3 | 4 | 2 | E | 0 | 6 | B | 1 | C | 0 | 0 | R | T | S | V |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|

| GLOBAL MODEL                                            | TCR CHARACTERISTIC                                                                                                      | CASE SIZE                                                                                                                                                                                                                                    | TERMINATION           | OHMIC VALUE                                                                                                                                                                                                                                                                                                                                                                                                           | FAILURE RATE                                                                                                                                             | PACKAGING                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | THIN FILM CODE <sup>(1)</sup>                                                                         |
|---------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| <b>M55342</b><br>or<br><b>D55342</b><br>(/07 size only) | <b>E</b> = 25 ppm/°C<br><b>H</b> = 50 ppm/°C<br><b>K</b> = 100 ppm/°C<br><b>L</b> = 200 ppm/°C<br><b>M</b> = 300 ppm/°C | <b>01</b> = 0502<br><b>02</b> = 0505<br><b>03</b> = 1005<br><b>04</b> = 1505<br><b>05</b> = 2208<br><b>06</b> = 0705<br><b>07</b> = 1206<br><b>08</b> = 2010<br><b>09</b> = 2512<br><b>10</b> = 1010<br><b>11</b> = 0402<br><b>12</b> = 0603 | <b>B</b> = Solderable | Three digits and a letter. Letter identifies tolerance, acts as multiplier and decimal locator.<br><br>MULTIPLIER<br>Tolerance    1 Ω    1 kΩ    1 MΩ<br>0.1 %        A        B        C<br>0.25 %       R        U        V<br>0.5 %        W        Y        Z<br>1 %           D        E        F<br>2 %           G        H        T<br>5 %           J        K        L<br>10 %          M        N        P | <b>M</b> = 1.0 % per 1000 h<br><b>P</b> = 0.1 % per 1000 h<br><b>R</b> = 0.01 % per 1000 h<br><b>S</b> = 0.001 % per 1000 h<br><b>C</b> = Non ER version | <b>Standard Packaging:</b><br><b>BS</b> = BULK<br>100 min., 1 mult<br><b>WS</b> = WAFFLE<br>100 min., 1 mult<br><b>W0</b> = WAFFLE<br>100 min., 100 mult<br>TAPE AND REEL<br><b>T0</b> = 100 min., 100 mult<br><b>T1</b> = 1000 min., 1000 mult<br><b>T3</b> = 300 min., 300 mult<br><b>T5</b> = 500 min., 500 mult<br><b>TF</b> = Full reel (2K, 4K, or 5K dependent on case size) per tape and reel document 60034<br><b>TS</b> = 100 min., 1 mult<br><b>Special Packaging:</b><br>WAFFLE<br><b>WI</b> = 100 min., 1 mult (item single lot date code)<br><b>WP</b> = 100 min., 1 mult (package unit single lot date code)<br>TAPE AND REEL<br><b>TI</b> = 100 min., 1 mult (item single lot date code)<br><b>TP</b> = 100 min., 1 mult (package unit single lot date code) | <b>V</b><br>for<br>K, L and M<br>TCR<br>W/tolerance<br>≥ 1 %<br><b>M</b> = Part marked <sup>(2)</sup> |

Historical Part Number example: M55342K06B5E60R (for reference purposes only)

|               |                    |           |             |                     |              |
|---------------|--------------------|-----------|-------------|---------------------|--------------|
| <b>M55342</b> | <b>K</b>           | <b>06</b> | <b>B</b>    | <b>5E60</b>         | <b>R</b>     |
| SERIES        | TCR CHARACTERISTIC | CASE SIZE | TERMINATION | VALUE AND TOLERANCE | FAILURE RATE |

## Notes

<sup>(1)</sup> Only add a V at the end of part number to specify Vishay Dale Thin Film for K, L and M TCR and tolerance 1 % and higher<sup>(2)</sup> Option 1 marking only case size 01, 02, 11, 12 not available due to size



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9