

CBTL02043A; CBTL02043B

3.3 V, 2 differential channel, 2 : 1 multiplexer/demultiplexer switch

Rev. 4.1 — 30 March 2015

Product data sheet

1. General description

CBTL02043A/B is a 2 differential channel, 2-to-1 multiplexer/demultiplexer switch for USB 3.1, PCI Express Generation 3, or other high-speed serial interface applications. The CBTL02043A/B can switch two differential signals to one of two locations. Using a unique design technique, NXP has minimized the impedance of the switch such that the attenuation observed through the switch is negligible, and also minimized the channel-to-channel skew as well as channel-to-channel crosstalk, as required by the high-speed serial interface. CBTL02043A/B allows expansion of existing high-speed ports for extremely low power.

The device's pinouts are optimized to match different application layouts. CBTL02043A has input and output pins on the opposite of the package, and is suitable for edge connector(s) with different signal sources on the motherboard. CBTL02043B has outputs on both sides of the package, and the device can be placed between two connectors to multiplex differential signals from a controller. Please refer to [Section 8](#) for layout examples.

2. Features and benefits

- 2 bidirectional differential channel, 2 : 1 multiplexer/demultiplexer
- High-speed signal switching for 10 Gbps applications
- High bandwidth: 10 GHz at -3 dB
- Low insertion loss:
 - ◆ -0.5 dB at 100 MHz
 - ◆ -1.3 dB at 4.0 GHz
- Low return loss: -13.5 dB at 4 GHz
- Low crosstalk: -35 dB at 4 GHz
- Low off-state isolation: -20 dB at 4 GHz
- Low intra-pair skew: 5 ps typical
- Low inter-pair skew: 35 ps maximum
- V_{DD} operating range: 3.3 V \pm 10 %
- Shutdown pin (XSD) for power-saving mode
 - ◆ Standby current less than 1 μ A
- ESD tolerance:
 - ◆ 2000 V HBM
 - ◆ 1000 V CDM
- DHVQFN20 package



3. Applications

- Routing of high-speed differential signals with low signal attenuation
 - ◆ PCIe Gen3
 - ◆ DisplayPort 1.2
 - ◆ USB 3.1
 - ◆ SATA 6 Gbit/s

4. Ordering information

Table 1. Ordering information

| Type number | Topside marking | Package | | |
|--------------|-----------------|----------|---|----------|
| | | Name | Description | Version |
| CBTL02043ABQ | TL02043A | DHVQFN20 | plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 20 terminals; body 2.5 × 4.5 × 0.85 mm ^[1] | SOT764-1 |
| CBTL02043BBQ | TL02043B | DHVQFN20 | plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 20 terminals; body 2.5 × 4.5 × 0.85 mm ^[1] | SOT764-1 |

[1] Total height after printed-circuit board mounting = 1.0 mm maximum.

4.1 Ordering options

Table 2. Ordering options

| Type number | Orderable part number | Package | Packing method | Minimum order quantity | Temperature |
|--------------|-----------------------|----------|-------------------------------------|------------------------|-------------------------------------|
| CBTL02043ABQ | CBTL02043ABQ,115 | DHVQFN20 | Reel 7" Q1/T1 *standard mark SMD | 3000 | T _{amb} = -40 °C to +85 °C |
| CBTL02043BBQ | CBTL02043BBQ,115 | DHVQFN20 | Reel 7" Q1/T1 *standard mark SMD | 3000 | T _{amb} = -40 °C to +85 °C |

5. Functional diagram

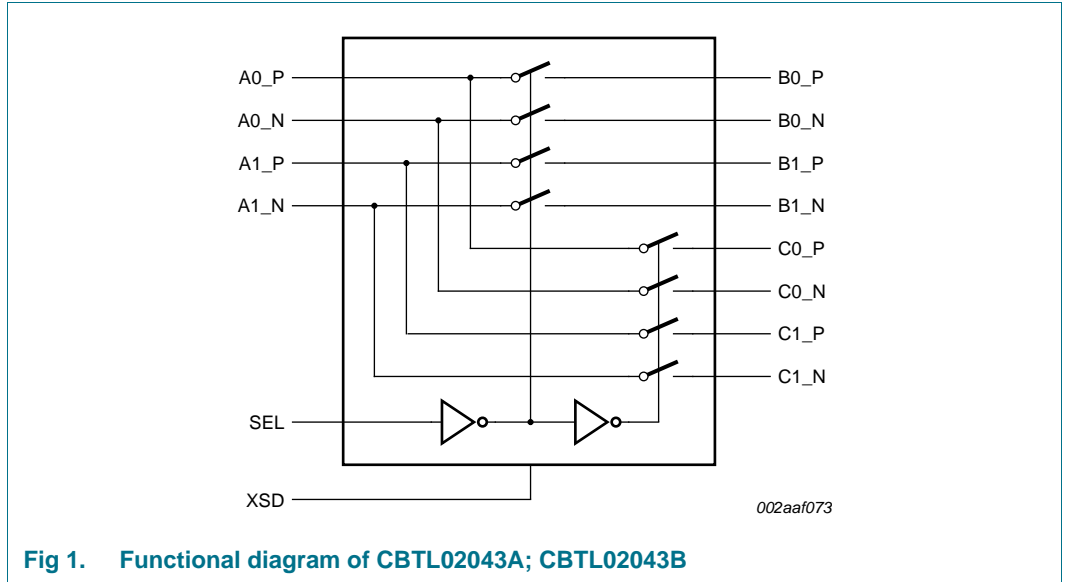


Fig 1. Functional diagram of CBTL02043A; CBTL02043B

6. Pinning information

6.1 Pinning

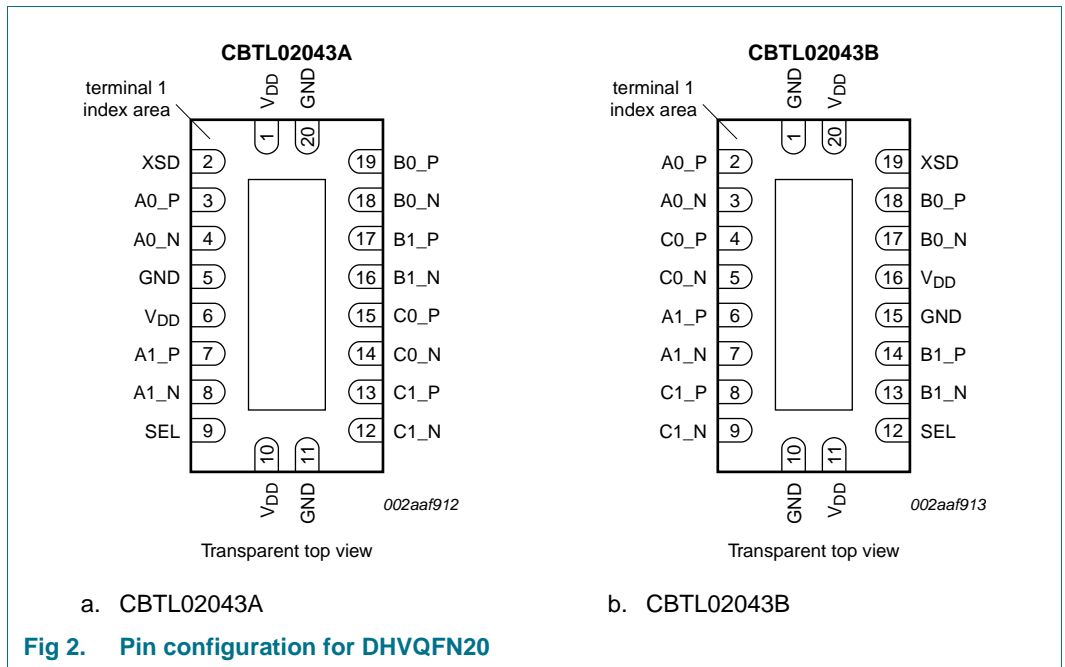


Fig 2. Pin configuration for DHVQFN20

6.2 Pin description

Table 3. Pin description

| Symbol | Pin | | Type | Description |
|--------------------|-----------------------|-----------------------|-------------------------|--|
| | CBTL02043A | CBTL02043B | | |
| A0_P | 3 | 2 | I/O | channel 0, port A differential signal input/output |
| A0_N | 4 | 3 | I/O | channel 0, port A differential signal input/output |
| A1_P | 7 | 6 | I/O | channel 1, port A differential signal input/output |
| A1_N | 8 | 7 | I/O | channel 1, port A differential signal input/output |
| B0_P | 19 | 18 | I/O | channel 0, port B differential signal input/output |
| B0_N | 18 | 17 | I/O | channel 0, port B differential signal input/output |
| B1_P | 17 | 14 | I/O | channel 1, port B differential signal input/output |
| B1_N | 16 | 13 | I/O | channel 1, port B differential signal input/output |
| C0_P | 15 | 4 | I/O | channel 0, port C differential signal input/output |
| C0_N | 14 | 5 | I/O | channel 0, port C differential signal input/output |
| C1_P | 13 | 8 | I/O | channel 1, port C differential signal input/output |
| C1_N | 12 | 9 | I/O | channel 1, port C differential signal input/output |
| SEL | 9 | 12 | CMOS single-ended input | operation mode select SEL = LOW: A ↔ B SEL = HIGH: A ↔ C |
| XSD | 2 | 19 | CMOS single-ended input | Shutdown pin; should be driven LOW or connected to V _{SS} for normal operation. When HIGH, all paths are switched off (non-conducting high-impedance state), and supply current consumption is minimized. |
| V _{DD} | 1, 6, 10 | 11, 16, 20 | power | positive supply voltage, 3.3 V (± 10 %) |
| GND ^[1] | 5, 11, 20, center pad | 1, 10, 15, center pad | power | supply ground |

- [1] DHVQFN20 package die supply ground is connected to both GND pins and exposed center pad. GND pins and the exposed center pad must be connected to supply ground for proper device operation. For enhanced thermal, electrical, and board level performance, the exposed pad needs to be soldered to the board using a corresponding thermal pad on the board and for proper heat conduction through the board, thermal vias need to be incorporated in the printed-circuit board in the thermal pad region.

7. Functional description

Refer to [Figure 1 “Functional diagram of CBTL02043A; CBTL02043B”](#).

7.1 Function selection and shutdown function

The CBTL02043A/B provides a shutdown function to minimize power consumption when the application is not active, but power to the CBTL02043A/B is provided. The XSD pin (active HIGH) places all channels in high-impedance state (non-conducting) while reducing current consumption to near-zero. When XSD pin is LOW, the device operates normally.

Table 4. Function selection

X = *Don't care*.

| XSD | SEL | Function |
|------|------|-------------------------------|
| HIGH | X | An, Bn and Cn pins are high-Z |
| LOW | LOW | An to Bn and vice versa |
| LOW | HIGH | An to Cn and vice versa |

8. Application design-in information

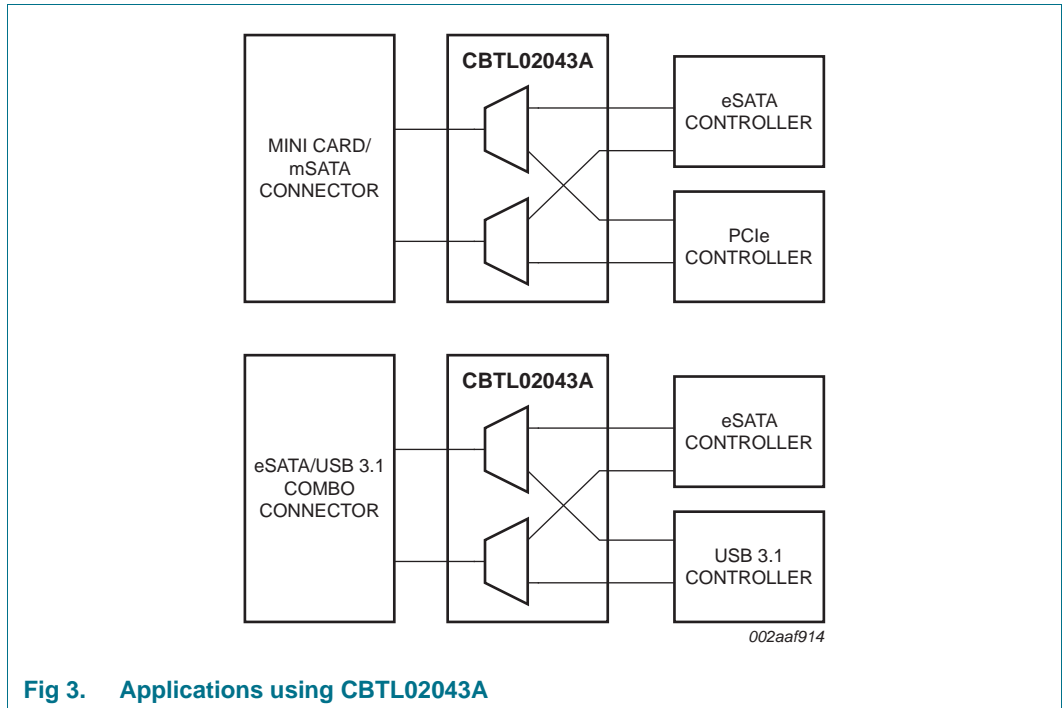


Fig 3. Applications using CBTL02043A

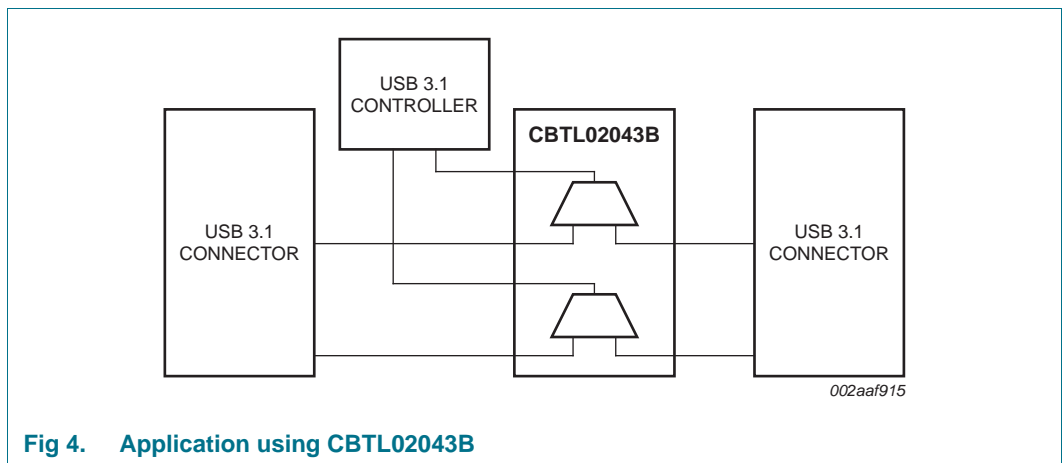


Fig 4. Application using CBTL02043B

9. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

| Symbol | Parameter | Conditions | Min | Max | Unit |
|------------|---------------------------------|------------|-------|------|------|
| V_{DD} | supply voltage | | -0.3 | +4.6 | V |
| T_{case} | case temperature | | -40 | +85 | °C |
| T_{stg} | storage temperature | | -65 | +150 | °C |
| V_{ESD} | electrostatic discharge voltage | HBM | [1] - | 2000 | V |
| | | CDM | [2] - | 1000 | V |

[1] Human Body Model: ANSI/EOS/ESD-S5.1-1994, standard for ESD sensitivity testing, Human Body Model - Component level; Electrostatic Discharge Association, Rome, NY, USA.

[2] Charged Device Model: ANSI/EOS/ESD-S5.3-1-1999, standard for ESD sensitivity testing, Charged Device Model - Component level; Electrostatic Discharge Association, Rome, NY, USA.

10. Recommended operating conditions

Table 6. Recommended operating conditions

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|-----------|---------------------|-----------------------|-----|-----|----------|------|
| V_{DD} | supply voltage | | 3.0 | 3.3 | 3.6 | V |
| V_I | input voltage | | - | - | V_{DD} | V |
| T_{amb} | ambient temperature | operating in free air | -40 | - | +85 | °C |

11. Static characteristics

Table 7. Static characteristics

$V_{DD} = 3.3 \text{ V} \pm 10 \%$; $T_{amb} = -40 \text{ °C}$ to $+85 \text{ °C}$; unless otherwise specified.

| Symbol | Parameter | Conditions | Min | Typ ^[1] | Max | Unit |
|----------|----------------------------|---|--------------|--------------------|------------------------|------|
| I_{DD} | supply current | operating mode; $V_{DD} = \text{max.}$; XSD = LOW | - | 1.35 | 2.5 | mA |
| | | shutdown mode; $V_{DD} = \text{max.}$; XSD = HIGH | - | - | 1 | μA |
| I_{IH} | HIGH-level input current | $V_{DD} = \text{max.}$; $V_I = V_{DD}$ | - | - | ± 5 ^[2] | μA |
| I_{IL} | LOW-level input current | $V_{DD} = \text{max.}$; $V_I = \text{GND}$ | - | - | ± 5 ^[2] | μA |
| V_{IH} | HIGH-level input voltage | SEL, XSD pins | $0.65V_{DD}$ | - | - | V |
| V_{IL} | LOW-level input voltage | SEL, XSD pins | - | - | $0.35V_{DD}$ | V |
| V_I | input voltage | differential pins | - | - | 2.4 | V |
| | | SEL, XSD pins | - | - | V_{DD} | V |
| V_{IC} | common-mode input voltage | | 0 | - | 2 | V |
| V_{ID} | differential input voltage | peak-to-peak | - | - | 1.6 | V |

[1] Typical values are at $V_{DD} = 3.3 \text{ V}$, $T_{amb} = 25 \text{ °C}$, and maximum loading.


[2] Input leakage current is $\pm 50 \text{ μA}$ if differential pairs are pulled to HIGH and LOW.

12. Dynamic characteristics

Table 8. Dynamic characteristics
 $V_{DD} = 3.3\text{ V} \pm 10\%$; $T_{amb} = -40\text{ °C}$ to $+85\text{ °C}$; unless otherwise specified.

| Symbol | Parameter | Conditions | Min | Typ ^[1] | Max | Unit |
|----------------------------------|-------------------------------------|---|-----|--------------------|-----|------|
| DDIL | differential insertion loss | channel is OFF | | | | |
| | | f = 4 GHz | - | -20 | - | dB |
| | | f = 100 MHz | - | -50 | - | dB |
| | | channel is ON | | | | |
| | | f = 4 GHz | - | -1.3 | - | dB |
| | | f = 100 MHz | - | -0.5 | - | dB |
| DDNEXT | differential near-end crosstalk | adjacent channels are ON | | | | |
| | | f = 4 GHz | - | -35 | - | dB |
| | | f = 100 MHz | - | -65 | - | dB |
| B _{-3dB} | -3 dB bandwidth | | - | 10 | - | GHz |
| DDRL | differential return loss | f = 4 GHz | - | -13.5 | - | dB |
| | | f = 100 MHz | - | -25 | - | dB |
| R _{on} | ON-state resistance | V _{DD} = 3.3 V; V _I = 2 V; I _I = 19 mA | - | 6 | - | Ω |
| C _{io(on)} | on-state input/output capacitance | | - | 1.5 | - | pF |
| t _{PD} | propagation delay | from Port A to Port B, or Port A to Port C, or vice versa | - | 60 | - | ps |
| Switching characteristics | | | | | | |
| t _{startup} | start-up time | supply voltage valid or XSD going LOW to channel specified operating conditions | - | - | 10 | ms |
| t _{PZH} | OFF-state to HIGH propagation delay | | - | - | 300 | ns |
| t _{PZL} | OFF-state to LOW propagation delay | | - | - | 70 | ns |
| t _{PHZ} | HIGH to OFF-state propagation delay | | - | - | 50 | ns |
| t _{PLZ} | LOW to OFF-state propagation delay | | - | - | 50 | ns |
| t _{sk(dif)} | differential skew time | intra-pair | - | 5 | - | ps |
| t _{sk} | skew time | inter-pair | - | - | 35 | ps |

[1] Typical values are at V_{DD} = 3.3 V; T_{amb} = 25 °C, and maximum loading.

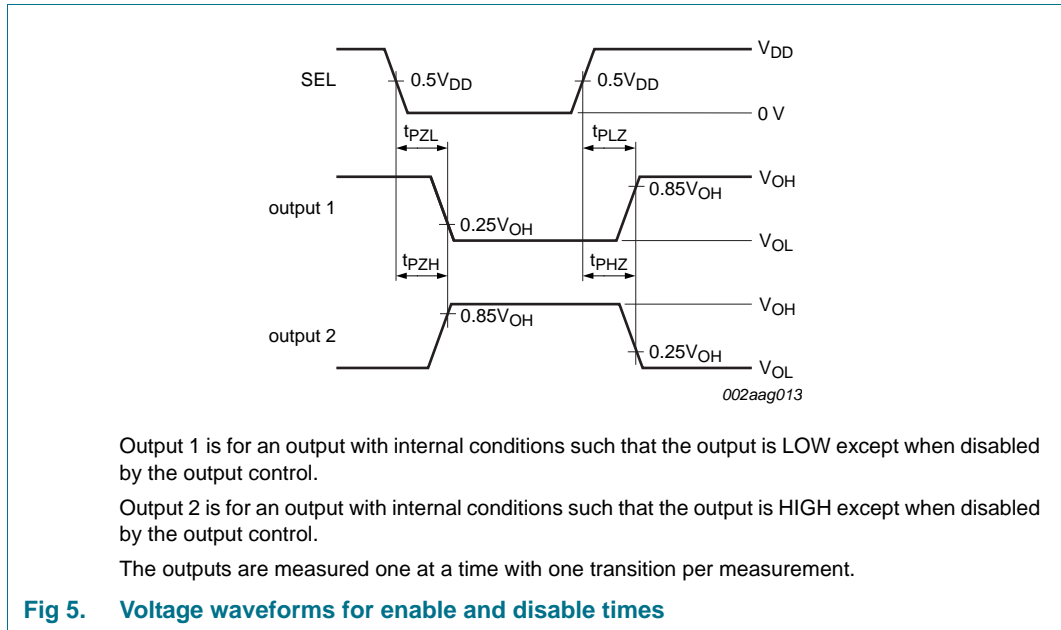

13. Test information

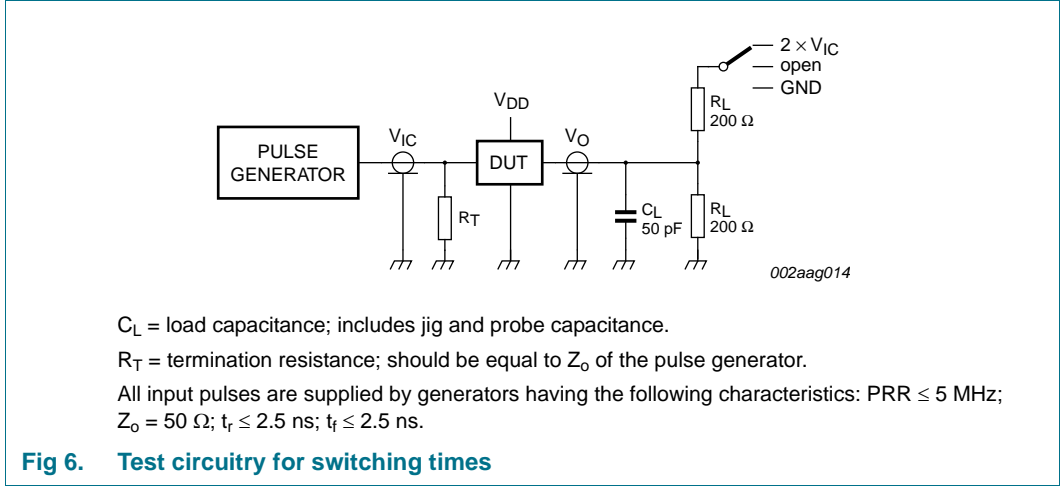


Fig 6. Test circuitry for switching times

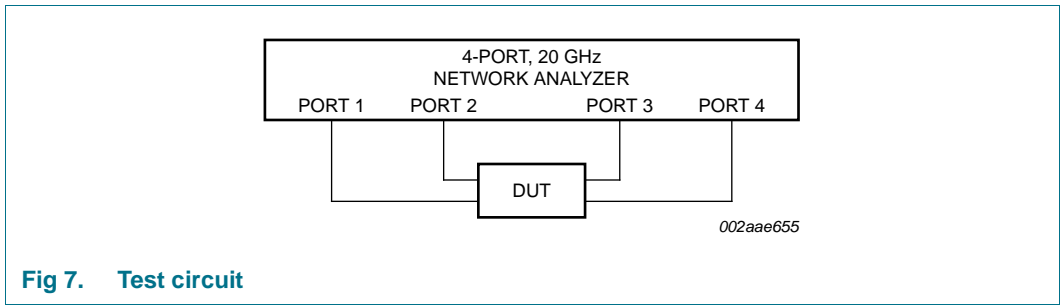


Fig 7. Test circuit

Table 9. Test data

| Test | Load | | Switch |
|--|-------|--------------|-------------------|
| | C_L | R_L | |
| t_{PLZ} , t_{PZL} (output on B side) | 50 pF | 200 Ω | $2 \times V_{IC}$ |
| t_{PHZ} , t_{PZH} (output on B side) | 50 pF | 200 Ω | GND |
| t_{PD} | - | 200 Ω | open |

14. Package outline

DHVQFN20: plastic dual in-line compatible thermal enhanced very thin quad flat package; no leads; 20 terminals; body 2.5 x 4.5 x 0.85 mm

SOT764-1

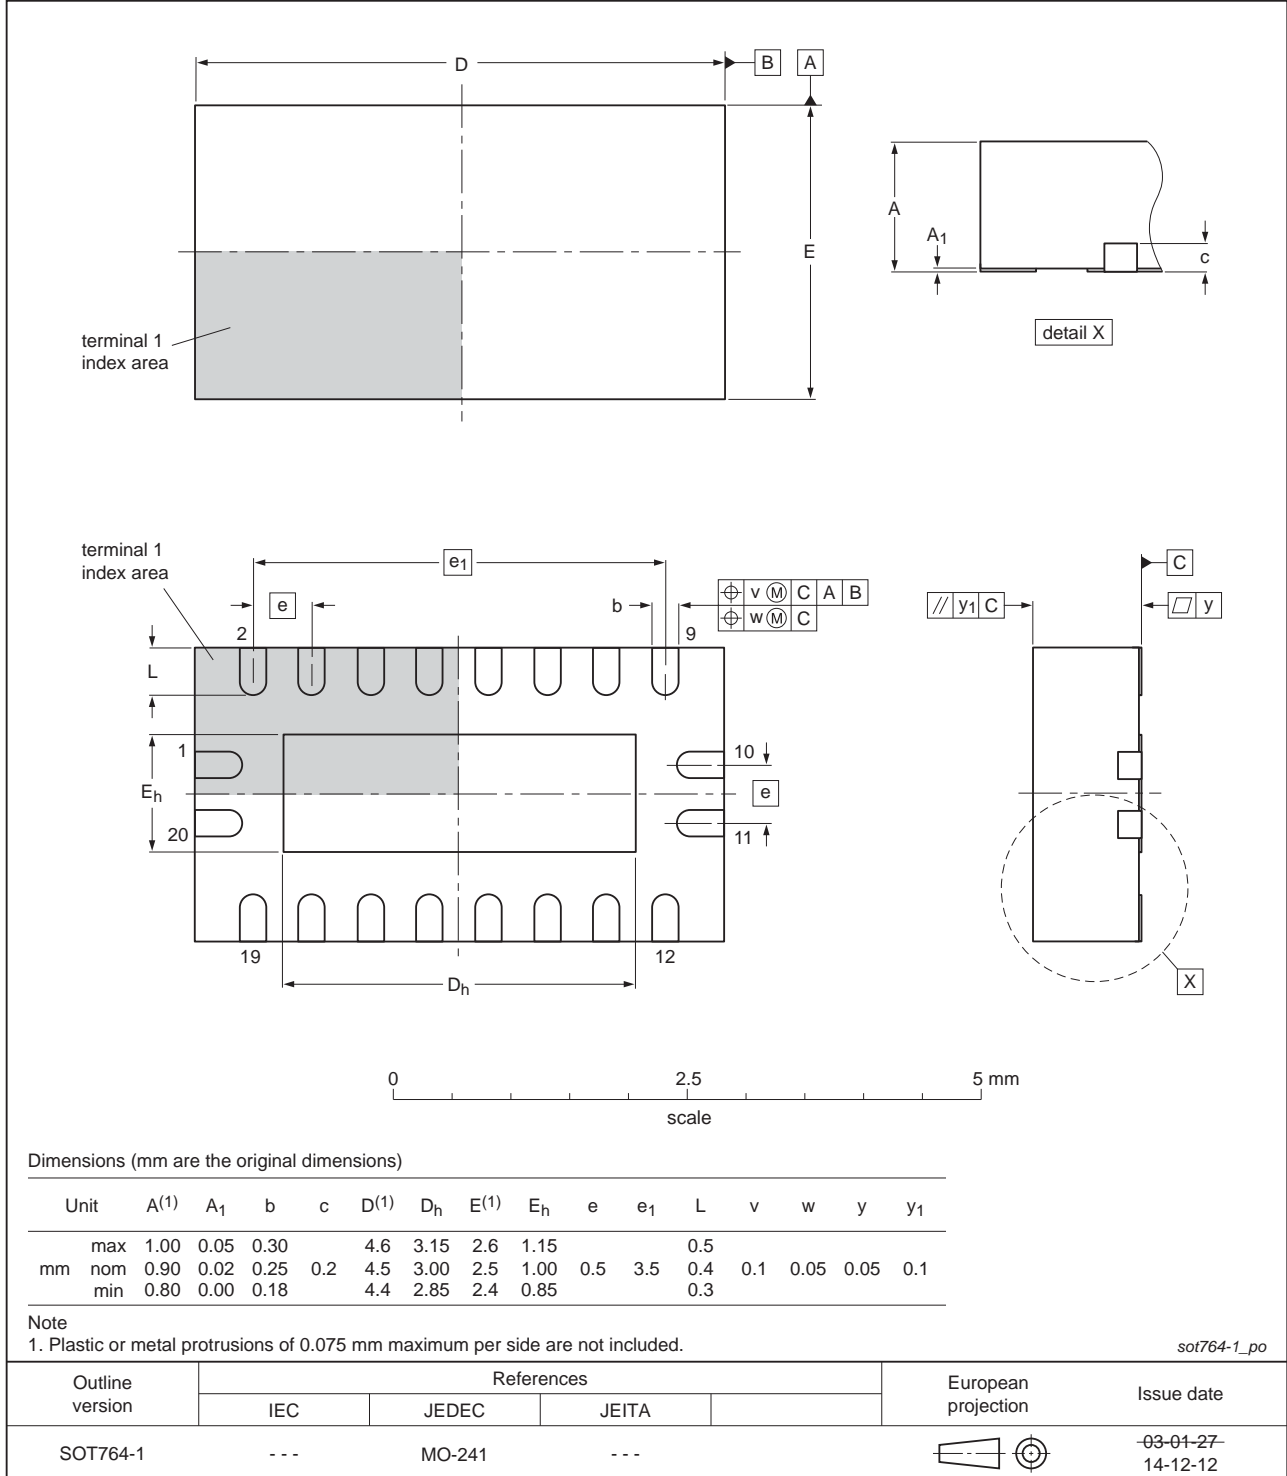


Fig 8. Package outline SOT764-1 (DHVQFN20)

15. Soldering of SMD packages

This text provides a very brief insight into a complex technology. A more in-depth account of soldering ICs can be found in Application Note *AN10365 "Surface mount reflow soldering description"*.

15.1 Introduction to soldering

Soldering is one of the most common methods through which packages are attached to Printed Circuit Boards (PCBs), to form electrical circuits. The soldered joint provides both the mechanical and the electrical connection. There is no single soldering method that is ideal for all IC packages. Wave soldering is often preferred when through-hole and Surface Mount Devices (SMDs) are mixed on one printed wiring board; however, it is not suitable for fine pitch SMDs. Reflow soldering is ideal for the small pitches and high densities that come with increased miniaturization.

15.2 Wave and reflow soldering

Wave soldering is a joining technology in which the joints are made by solder coming from a standing wave of liquid solder. The wave soldering process is suitable for the following:

- Through-hole components
- Leaded or leadless SMDs, which are glued to the surface of the printed circuit board

Not all SMDs can be wave soldered. Packages with solder balls, and some leadless packages which have solder lands underneath the body, cannot be wave soldered. Also, leaded SMDs with leads having a pitch smaller than ~0.6 mm cannot be wave soldered, due to an increased probability of bridging.

The reflow soldering process involves applying solder paste to a board, followed by component placement and exposure to a temperature profile. Leaded packages, packages with solder balls, and leadless packages are all reflow solderable.

Key characteristics in both wave and reflow soldering are:

- Board specifications, including the board finish, solder masks and vias
- Package footprints, including solder thieves and orientation
- The moisture sensitivity level of the packages
- Package placement
- Inspection and repair
- Lead-free soldering versus SnPb soldering

15.3 Wave soldering

Key characteristics in wave soldering are:

- Process issues, such as application of adhesive and flux, clinching of leads, board transport, the solder wave parameters, and the time during which components are exposed to the wave
- Solder bath specifications, including temperature and impurities

15.4 Reflow soldering

Key characteristics in reflow soldering are:

- Lead-free versus SnPb soldering; note that a lead-free reflow process usually leads to higher minimum peak temperatures (see [Figure 9](#)) than a SnPb process, thus reducing the process window
- Solder paste printing issues including smearing, release, and adjusting the process window for a mix of large and small components on one board
- Reflow temperature profile; this profile includes preheat, reflow (in which the board is heated to the peak temperature) and cooling down. It is imperative that the peak temperature is high enough for the solder to make reliable solder joints (a solder paste characteristic). In addition, the peak temperature must be low enough that the packages and/or boards are not damaged. The peak temperature of the package depends on package thickness and volume and is classified in accordance with [Table 10](#) and [11](#)

Table 10. SnPb eutectic process (from J-STD-020D)


| Package thickness (mm) | Package reflow temperature (°C) | |
|------------------------|---------------------------------|-------|
| | Volume (mm ³) | |
| | < 350 | ≥ 350 |
| < 2.5 | 235 | 220 |
| ≥ 2.5 | 220 | 220 |

Table 11. Lead-free process (from J-STD-020D)

| Package thickness (mm) | Package reflow temperature (°C) | | |
|------------------------|---------------------------------|-------------|--------|
| | Volume (mm ³) | | |
| | < 350 | 350 to 2000 | > 2000 |
| < 1.6 | 260 | 260 | 260 |
| 1.6 to 2.5 | 260 | 250 | 245 |
| > 2.5 | 250 | 245 | 245 |

Moisture sensitivity precautions, as indicated on the packing, must be respected at all times.

Studies have shown that small packages reach higher temperatures during reflow soldering, see [Figure 9](#).

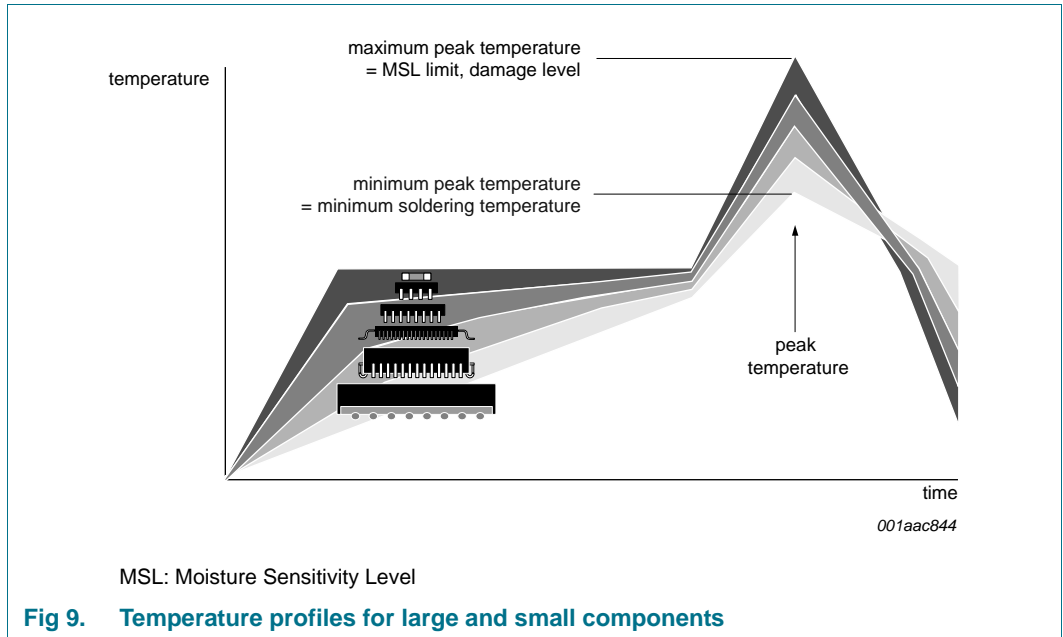

For further information on temperature profiles, refer to Application Note AN10365 “Surface mount reflow soldering description”.

16. Soldering: PCB footprints

Footprint information for reflow soldering of DHVQFN20 package

SOT764-1

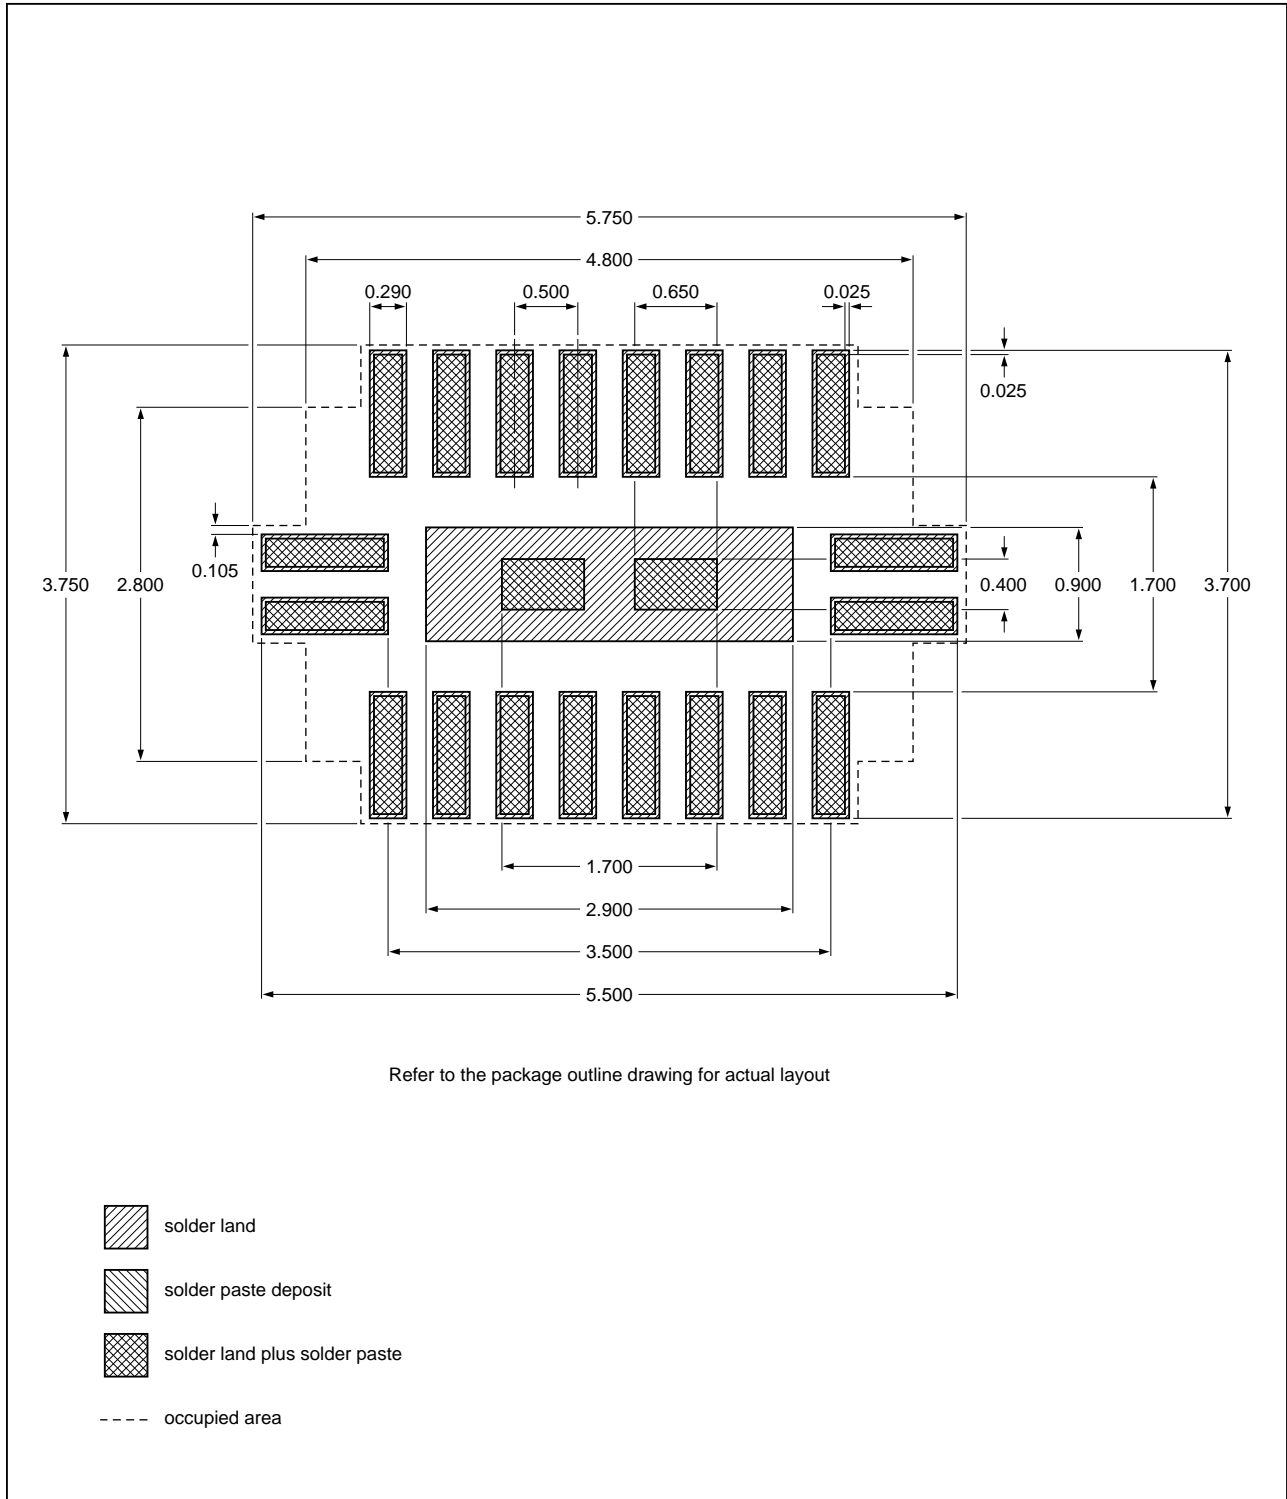


Fig 10. PCB footprint for SOT764-1 (DHVQFN20); reflow soldering

17. Abbreviations

Table 12. Abbreviations

| Acronym | Description |
|---------|---------------------------------------|
| CDM | Charged-Device Model |
| DUT | Device Under Test |
| ESD | ElectroStatic Discharge |
| HBM | Human Body Model |
| I/O | Input/Output |
| PCI | Peripheral Component Interconnect |
| PCIe | PCI Express |
| PRR | Pulse Repetition Rate |
| SATA | Serial Advanced Technology Attachment |
| USB | Universal Serial Bus |

18. Revision history

Table 13. Revision history

| Document ID | Release date | Data sheet status | Change notice | Supersedes |
|-----------------------------|---|--------------------|---------------|---------------------------|
| CBTL02043A_CBTL02043B v.4.1 | 20150330 | Product data sheet | - | CBTL02043A_CBTL02043B v.4 |
| Modifications: | <ul style="list-style-type: none"> Changed "USB 3.0" to "USB 3.1" throughout | | | |
| CBTL02043A_CBTL02043B v.4 | 20141219 | Product data sheet | - | CBTL02043A_CBTL02043B v.3 |
| CBTL02043A_CBTL02043B v.3 | 20130305 | Product data sheet | - | CBTL02043A_CBTL02043B v.2 |
| CBTL02043A_CBTL02043B v.2 | 20111110 | Product data sheet | - | CBTL02043A_CBTL02043B v.1 |
| CBTL02043A_CBTL02043B v.1 | 20110310 | Product data sheet | - | - |

19. Legal information

19.1 Data sheet status

| Document status ^{[1][2]} | Product status ^[3] | Definition |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet | Development | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet | Qualification | This document contains data from the preliminary specification. |
| Product [short] data sheet | Production | This document contains the product specification. |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

19.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

19.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

19.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

20. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: salesaddresses@nxp.com

21. Contents

| | | |
|-----------|--|-----------|
| 1 | General description | 1 |
| 2 | Features and benefits | 1 |
| 3 | Applications | 2 |
| 4 | Ordering information | 2 |
| 4.1 | Ordering options | 2 |
| 5 | Functional diagram | 3 |
| 6 | Pinning information | 3 |
| 6.1 | Pinning | 3 |
| 6.2 | Pin description | 4 |
| 7 | Functional description | 5 |
| 7.1 | Function selection and shutdown function | 5 |
| 8 | Application design-in information | 6 |
| 9 | Limiting values | 7 |
| 10 | Recommended operating conditions | 7 |
| 11 | Static characteristics | 7 |
| 12 | Dynamic characteristics | 8 |
| 13 | Test information | 10 |
| 14 | Package outline | 11 |
| 15 | Soldering of SMD packages | 12 |
| 15.1 | Introduction to soldering | 12 |
| 15.2 | Wave and reflow soldering | 12 |
| 15.3 | Wave soldering | 12 |
| 15.4 | Reflow soldering | 13 |
| 16 | Soldering: PCB footprints | 15 |
| 17 | Abbreviations | 16 |
| 18 | Revision history | 16 |
| 19 | Legal information | 17 |
| 19.1 | Data sheet status | 17 |
| 19.2 | Definitions | 17 |
| 19.3 | Disclaimers | 17 |
| 19.4 | Trademarks | 18 |
| 20 | Contact information | 18 |
| 21 | Contents | 19 |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP Semiconductors N.V. 2015. All rights reserved.

For more information, please visit: <http://www.nxp.com>
For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 30 March 2015
Document identifier: CBTL02043A_CBTL02043B

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9