



## 2N6071A/B Series




### Pin Out



**REAR VIEW  
SHOW TAB**

**TO-225  
CASE 077  
STYLE 5**

1. Cathode
2. Anode
3. Gate



### Description

Designed primarily for full-wave AC control applications, such as light dimmers, motor controls, heating controls and power supplies; or wherever full-wave silicon gate controlled solid-state devices are needed. Triac type thyristors switch from a blocking to a conducting state for either polarity of applied anode voltage with positive or negative gate triggering.

### Features

- Sensitive Gate Triggering Uniquely Compatible for Direct Coupling to TTL, HTL, CMOS and Operational Amplifier Integrated Circuit Logic Functions
- Gate Triggering: 4 Mode - 2N6071A, B; 2N6073A, B; 2N6075A, B
- Blocking Voltages to 600 V
- All Diffused and Glass Passivated Junctions for Greater Parameter Uniformity and Stability
- Small, Rugged, Thermopad Construction for Low Thermal Resistance, High Heat Dissipation and Durability
- Device Marking: Device Type, e.g., 2N6071A, Date Code

### Functional Diagram



### Additional Information



**Datasheet**



**Resources**



**Samples**

### Maximum Ratings and Thermal Characteristics (T<sub>J</sub> = 25°C unless otherwise noted)

| Rating   | Symbol  | Value             | Unit    |
|--|---|-------------------|---------|
| *Peak Repetitive Off-State Voltage (Note 1)<br>(T <sub>J</sub> = -40 to 110°C, Sine Wave, 50 to 60 Hz, Gate Open)<br>2N6071A,B<br>2N6073A,B<br>2N6075A,B | V <sub>DRM</sub> <sup>*</sup><br>V <sub>RPM</sub> | 200<br>400<br>600 | -       |
| *On-State RMS Current (T <sub>C</sub> = 85°C) Full Cycle Sine Wave 50 to 60 Hz   | I <sub>T(RMS)</sub>                               | 4.0               | A       |
| *Peak Non-repetitive Surge Current (One Full cycle, 60 Hz, T <sub>J</sub> = +110°C)  | I <sub>TSM</sub>                                  | 30                | A       |
| Circuit Fusing Considerations (t = 8.3 ms)   | I <sub>zt</sub>                                   | 3.7               | A2s     |
| *Peak Gate Power (Pulse Width "1.0 μs, T <sub>C</sub> = 85°C)  | P <sub>GM</sub>                                   | 10                | W       |
| *Average Gate Power (t = 8.3 ms, T <sub>C</sub> = 85°C)  | P <sub>G(AV)</sub>                                | 0.5               | W       |
| *Peak Gate Voltage (Pulse Width "1.0 μs, T <sub>C</sub> = 85°C)  | V <sub>GM</sub>                                   | 5.0               | V       |
| *Operating Junction Temperature Range  | T <sub>J</sub>                                    | -40 to +110       | °C      |
| *Storage Temperature Range   | T <sub>stg</sub>                                  | -40 to +150       | °C      |
| Mounting Torque (6-32 Screw) (Note 2)  | -   | 8.0               | in. lb. |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- V<sub>DRM</sub> and V<sub>RPM</sub> for all types can be applied on a continuous basis. Blocking voltages shall not be tested with a constant current source such that the voltage ratings of the devices are exceeded.
- Torque rating applies with use of a compression washer. Mounting torque in excess of 6 in. lb. does not appreciably lower case-to-sink thermal resistance. Main terminal 2 and heatsink contact pad are common.

### Thermal Characteristics

| Rating   | Symbol           | Value | Unit |
|--|------------------|-------|------|
| *Thermal Resistance, Junction to Case  | R <sub>θJC</sub> | 3.5   | °C/W |
| Thermal Resistance, Junction to Ambient (Note 1)                               | R <sub>θJA</sub> | 75    | °C/W |
| Maximum Lead Temperature for Soldering Purposes, 1/8" from case for 10 seconds | T <sub>L</sub>   | 260   | °C   |

\*Indicates JEDEC Registered Data.

### Electrical Characteristics - OFF (T<sub>C</sub> = 25°C unless otherwise noted; Electricals apply in both directions)

| Characteristic  | Symbol                                 | Min | Typ | Max | Unit |
|---|--|-----|-----|-----|------|
| *Peak Repetitive Blocking Current (T <sub>J</sub> = 25°C (V <sub>D</sub> = V <sub>DRM</sub> = V <sub>RPM</sub> ; Gate Open) T <sub>J</sub> = 110°C) | I <sub>DRM</sub> ,<br>I <sub>RRM</sub> | -   | -   | 10  | μA   |
|   |  | -   | -   | 2   | mA   |

### Electrical Characteristics - ON (T<sub>C</sub> = 25°C unless otherwise noted; Electricals apply in both directions)

| Characteristic  | Symbol         | Min                  | Typ  | Max   | Unit   |       |
|---|----------------|----------------------|------|-------|--------|-------|
| *Peak On-State Voltage (Note 3) (I <sub>TM</sub> = ±6.0 A Peak)   | C              | -                    | -    | 2     | V      |       |
| *Gate Trigger Voltage (Continuous DC), All Quadrants<br>(Main Terminal Voltage = 12 Vdc, R <sub>i</sub> = 100 Ω, T <sub>J</sub> = -40 °C) | VGT            | -                    | 1.4  | 2.5   | V      |       |
| Gate Non-Trigger Voltage, All Quadrants<br>(Main Terminal Voltage = 12 Vdc, R <sub>L</sub> = 100 Ω, T <sub>J</sub> = 110°C)               | VGD            | .02                  | -    | -     | V      |       |
| *Holding Current<br>(Main Terminal Voltage = 12 Vdc, Gate Open, Initiating Current = ±1 Adc)  | I <sub>H</sub> | -                    | -    | 30    | mA     |       |
|   |                | -                    | -    | 15    | mA     |       |
| Turn-On Time (I <sub>TM</sub> = 14 Adc, I <sub>GT</sub> = 100 mAdc)   | tgt            | -                    | 1.5  | -     | μs     |       |
| QUADRANT<br>(Maximum Value)   |                |                      |      |       |        |       |
|   | Type           | IGT @ T <sub>J</sub> | I mA | II mA | III mA | IV mA |
| Gate Trigger Current (Continuous DC)<br>(Main Terminal Voltage = 12 Vdc, R <sub>L</sub> = 100 Ω)  | 2N6071A        | +25°C                | 5    | 5     | 5      | 10    |
|   | 2N6073A        | -40°C                | 20   | 20    | 20     | 30    |
|   | 2N6075A        |                      |      |       |        |       |
|   | 2N6071B        | +25°C                | 3    | 3     | 3      | 5     |
|   | 2N6073B        | -40°C                | 15   | 15    | 15     | 20    |
|   | 2N6075B        |                      |      |       |        |       |

3. Pulse Test: Pulse Width ≤ 2.0 ms, Duty Cycle ≤ 2%.

\*Indicates JEDEC Registered Data.

### Dynamic Characteristics

| Characteristic  | Symbol     | Min | Typ | Max | Unit                   |
|---|------------|-----|-----|-----|------------------------|
| Critical Rate of Rise of Commutation Voltage<br>@ $V_{DRM}$ , $T_J = 85^\circ\text{C}$ , Gate Open, $I_{TM} = 5.7\text{ A}$ , Exponential Waveform, Commutating $di/dt = 2.0\text{ A/ms}$ | $dv/dt(c)$ | -   | 5   | 10  | $\text{V}/\mu\text{s}$ |

### SAMPLE APPLICATION: TTL-Sensitive Gate 4 Ampere Triac Triggers in Modes II and III



Trigger devices are recommended for gating on Triacs. They provide:

1. Consistent predictable turn-on points.
2. Simplified circuitry.
3. Fast turn-on time for cooler, more efficient and reliable operation.

### Voltage Current Characteristic of Triacs (Bidirectional Device)

| Symbol    | Parameter                                 |
|-----------|---|
| $V_{DRM}$ | Peak Repetitive Forward Off State Voltage |
| $I_{DRM}$ | Peak Forward Blocking Current             |
| $V_{RRM}$ | Peak Repetitive Reverse Off State Voltage |
| $I_{RRM}$ | Peak Reverse Blocking Current             |
| $V_{TM}$  | Maximum On State Voltage                  |
| $I_H$     | Holding Current                           |



### Sensitive Gate Logic Reference

| IC Logic Functions    | Firing Quadrant |                |                |                |
|-----------------------|-----------------|----------------|----------------|----------------|
|                       | I               | II             | III            | IV             |
| TTL                   | -               | 2N6071A Series | 2N6071A Series | -              |
| HTL                   | -               | 2N6071A Series | 2N6071A Series | -              |
| CMOS (NAND)           | 2N6071B Series  | -              | -              | 2N6071B Series |
| CMOS (Buffer)         | -               | 2N6071B Series | 2N6071B Series | -              |
| Operational Amplifier | 2N6071A Series  | -              | -              | 2N6071A Series |
| Zero Voltage Switch   | -               | 2N6071A Series | 2N6071A Series | -              |

**Quadrant Definitions for a Triac**



**Ratings and Characteristic Curves**

**Figure 1. Average Current Derating**



**Figure 2. RMS Current Derating**



**Figure 3. Power Dissipation**



**Figure 4. Power Dissipation**



**Figure 5. Typical Gate-Trigger Voltage**



**Figure 6. Typical Gate-Trigger Current**



**Figure 7. Maximum On-State Characteristics**



**Figure 8. Typical Holding Current**




**Figure 9. Maximum Allowable Surge Current**



**Figure 10. Thermal Response**




### Dimensions

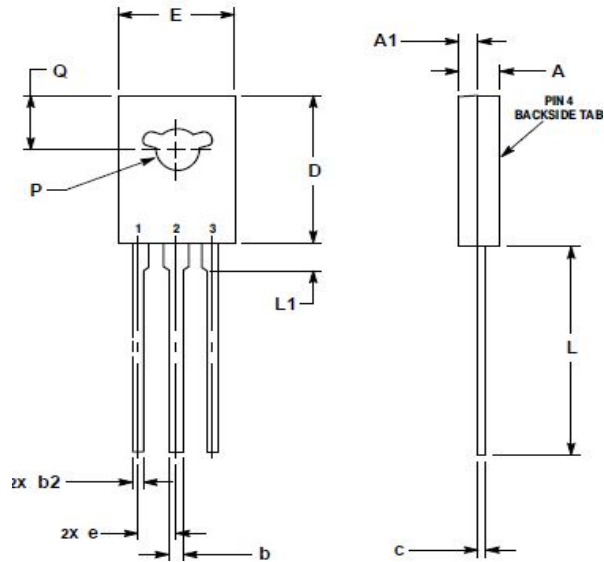

| Dim | Inches    |       | Millimeters |       |
|-----|-----------|-------|-------------|-------|
|     | Min       | Max   | Min         | Max   |
| A   | 0.102     | 0.110 | 2.60        | 2.80  |
| A1  | 0.047     | 0.055 | 1.20        | 1.40  |
| b   | 0.028     | 0.034 | 0.70        | 0.86  |
| b2  | 0.028     | 0.034 | 0.70        | 0.86  |
| c   | 0.019     | 0.022 | 0.49        | 0.57  |
| D   | 0.417     | 0.449 | 10.60       | 11.40 |
| E   | 0.291     | 0.323 | 7.40        | 8.20  |
| e   | 0.090 TYP |       | 2.29 TYP    |       |
| L   | 0.551     | 0.630 | 14.00       | 16.00 |
| L1  | 0.091     | 0.106 | 2.30        | 2.70  |
| P   | 0.118     | 0.134 | 3.00        | 3.40  |
| Q   | 0.142     | 0.157 | 3.60        | 4.00  |

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. 077-01 THRU -08 OBSOLETE, NEW STANDARD 077-09.


### Part Marking System



REAR VIEW  
SHOW TAB

TO-225  
CASE 077  
STYLE 5

1. Cathode
2. Anode
3. Gate



x = 1,3,5  
y = A,B  
Y = Year  
M = Month  
A = Assembly Site  
XX = Lot Serial Code

### Ordering Information

| Device    | Package             | Shipping†                           |
|-----------|---------------------|-------------------------------------|
| 2N6071A   | TO-225              | 2500 Units / Box                    |
| 2N6071AG  | TO-225<br>(Pb-Free) |                                     |
| 2N6071AT  | TO-225              | 50 Units / Tube<br>1920 Units / Box |
| 2N6071ATG | TO-225<br>(Pb-Free) |                                     |
| 2N6071B   | TO-225              | 2500 Units / Box                    |
| 2N6071BG  | TO-225<br>(Pb-Free) |                                     |
| 2N6071BT  | TO-225              | 50 Units / Tube<br>1920 Units / Box |
| 2N6071BTG | TO-225<br>(Pb-Free) |                                     |
| 2N6073A   | TO-225              | 2500 Units / Box                    |
| 2N6073AG  | TO-225<br>(Pb-Free) |                                     |
| 2N6073B   | TO-225              |                                     |
| 2N6073BG  | TO-225<br>(Pb-Free) |                                     |
| 2N6075A   | TO-225              |                                     |
| 2N6075AG  | TO-225<br>(Pb-Free) |                                     |
| 2N6075B   | TO-225              |                                     |
| 2N6075BG  | TO-225<br>(Pb-Free) |                                     |

**Disclaimer Notice** - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at <http://www.littelfuse.com/disclaimer-electronics>.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9