

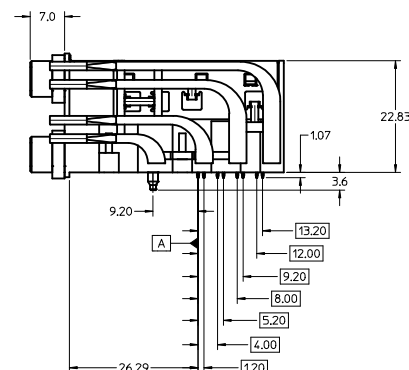
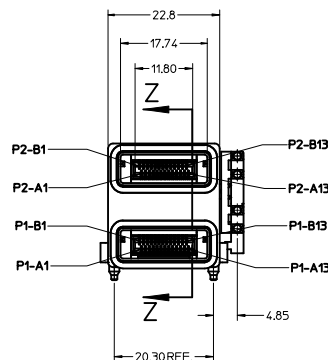
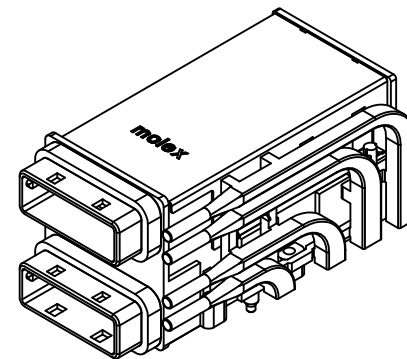
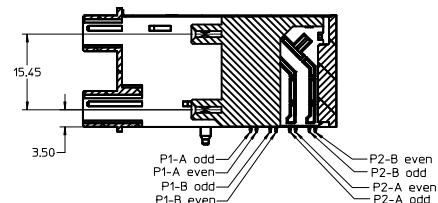




KEY/KEYWAY OPTIONS			
PART NUMBER		KEY POSITION	KEYWAY POSITION
TIN/LEAD	LEAD-FREE		
75758-0001	75758-0021	NONE	NONE
75758-0002	75758-0022	#3	NONE
75758-0003	75758-0023	#4	NONE
75758-0004	75758-0024	#4	#3 & #5
75758-0005	75758-0025	NONE	#3 & #5

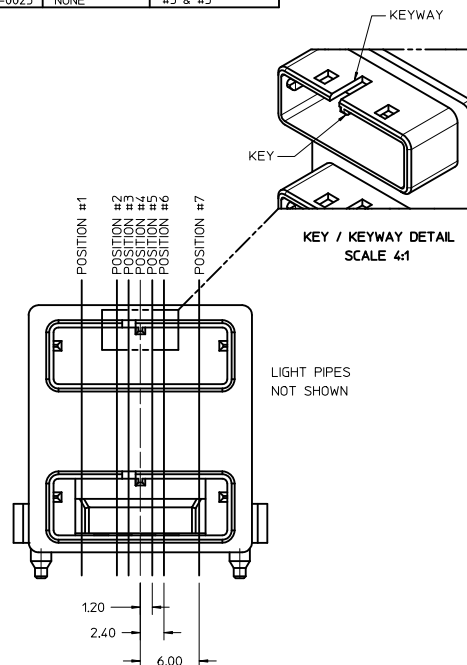

NOTES :



1. MATERIALS :
CONNECTOR HOUSING - HIGH TEMP THERMOPLASTIC,
GLASS-FILLED, UL94V-0,
COLOR - BLACK
EMI HOUSING - DIE CAST ALLOY, NICKEL PLATED FINISH
COVER - STAINLESS STEEL ALLOY
CPI TERMINALS - COPPER ALLOY
EMI GASKETS - CONDUCTIVE POLYMER
LIGHT PIPE - CLEAR THERMOPLASTIC, UL94V-0
2. TERMINAL PLATING :
CONTACT AREA - 0.76μ MIN GOLD OVER 2.54μ MIN NICKEL,
COMPLIANT AREA - 0.76-1.52μ TIN/LEAD (90/10) OVER
2.54μ MIN NICKEL.
3. PACKAGING SPECIFICATION : TRAY PACK IN BOX.
4. REFER TO PS-75586-001 PRODUCT SPEC FOR ALL ELECTRICAL, MECHANICAL
AND ENVIRONMENTAL SPECIFICATIONS.
5. THIS CONNECTOR IS DESIGNED TO MATE WITH MOLEX CABLE SERIES 74548.
6. REQUIRES MOUNTING HARDWARE : (4) M2 X 8MM CAP SCREWS OR EQUIV.
MAX. TORQUE 2.3 in/lbs.

ADD LEAD-FREE #s EC NO: UCP2012-1063 DRAWN: SROGIEL CHKD: APPR: MBANKIS	REV DESCRIPTION 2011/10/13 2011/10/20	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION	TITLE
			mm INCH		MM ONLY		2:1	METRIC		
			4 PLACES +---+---		DRAWN BY DATE		IPASS STACKED 26/26 CIRCUIT CONNECTOR W/LIGHT PIPES			
			3 PLACES +---+---		J/ANTELEZ 10 02/05/2008					
			2 PLACES +---+---		CHECKED BY DATE					
			1 PLACE +---+---		KLANG 02/05/2008					
			ANGULAR ±1/2°		APPROVED BY DATE		MOLEX MOLEX INCORPORATED			
					BANAKI S 02/05/2008					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		DOCUMENT NO.		SHEET NO.				
		75758-000*		SD-75758-001		1 OF 3				
SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

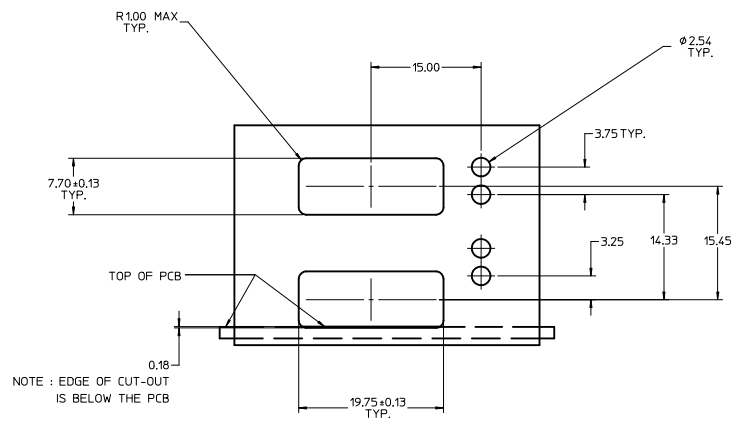

PANEL CUT-OUT

MAXIMUM THICKNESS = 1.50
(NOT SUPPLIED)

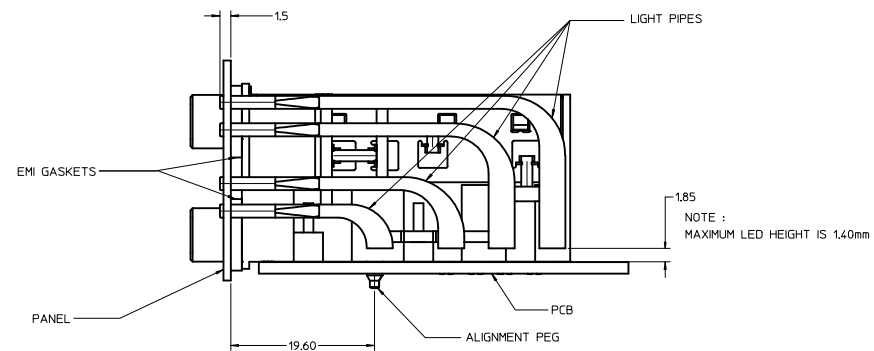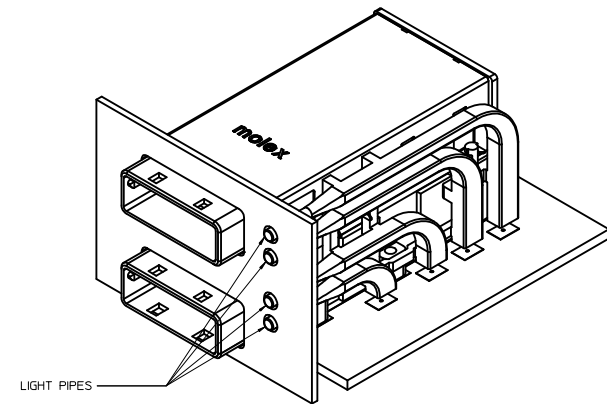

ASSEMBLY VIEW

SEE SHEET 1 IEC NO: UCP2012-1063 DRAWN: SBOGIEL 2011/10/13 CHKD: APPR: MBANKIS 2011/10/20 REV DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
	$\nabla=0$			DRAWN BY	DATE	TITLE			
	$\nabla=0$	4 PLACES $\pm$ ---	$\pm$ ---	JJANTELEZ10	02/05/2008	IPASS STACKED 26/26 CIRCUIT CONNECTOR W/LIGHT PIPES			
	$\nabla=0$	3 PLACES $\pm$ ---	$\pm$ ---	CHECKED BY	DATE				
		2 PLACES $\pm$ 0.25	$\pm$ ---	KLANG	02/05/2008				
	$\nabla=0$	1 PLACE $\pm$ 0.25	$\pm$ ---	APPROVED BY	DATE				
		ANGULAR $\pm$ 1/2°		BANAKIS	02/05/2008				
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. 75758-000*		DOCUMENT NO. SD-75758-001			SHEET NO. 2 OF 3
			SIZE D	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

M

L

K

J

I

H

G

F

E

D

C

B

A

M

L

K

J

I

H

G

F


E

D

C

B

A

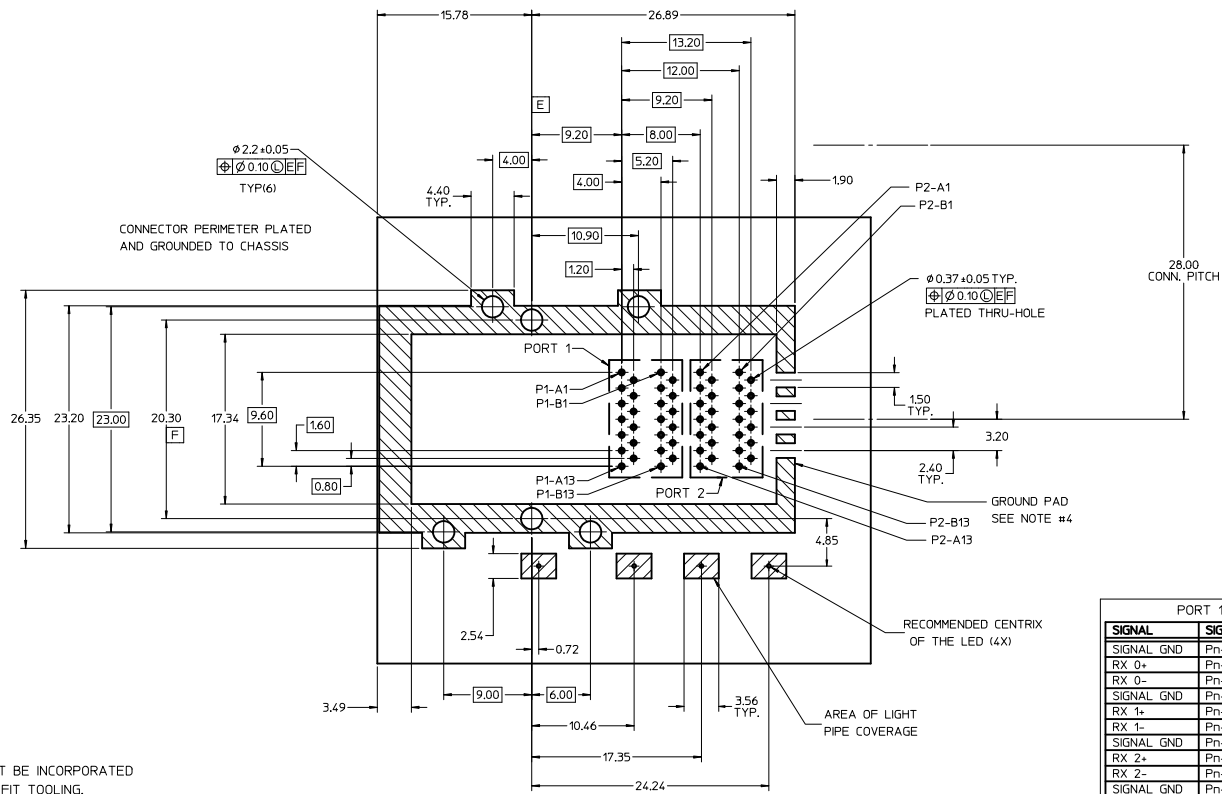

PORT 1		PORT 2	
SIGNAL	SIGNAL PIN	SIGNAL	SIGNAL PIN
SIGNAL GND	Pn-A1	SIGNAL GND	Pn-B1
RX 0+	Pn-A2	TX 0+	Pn-B2
RX 0-	Pn-A3	TX 0-	Pn-B3
SIGNAL GND	Pn-A4	SIGNAL GND	Pn-B4
RX 1+	Pn-A5	TX 1+	Pn-B5
RX 1-	Pn-A6	TX 1-	Pn-B6
SIGNAL GND	Pn-A7	SIGNAL GND	Pn-B7
RX 2+	Pn-A8	TX 2+	Pn-B8
RX 2-	Pn-A9	TX 2-	Pn-B9
SIGNAL GND	Pn-A10	SIGNAL GND	Pn-B10
RX 3+	Pn-A11	TX 3+	Pn-B11
RX 3-	Pn-A12	TX 3-	Pn-B12
SIGNAL GND	Pn-A13	SIGNAL GND	Pn-B13

PIN ASSIGNMENT

NOTES:

- CROSS-HATCHED AREA MUST BE INCORPORATED IN THE FLAT ROCK PRESS-FIT TOOLING.
- RECOMMENDED LED'S INCLUDE THE FOLLOWING :
DIALIGHT : 597-77x1-5xx SERIES
CHICAGO MINIATURE : 7016 SERIES
KINGBRIGHT : APBL3025 SERIES (BICOLOR)
APL3015 SERIES (SINGLE COLOR)
- LED'S MUST HAVE A MAXIMUM HEIGHT OF 1.4mm AND A MINIMUM HEIGHT OF 0.7mm
- PLATE GROUND PAD WITH EMERSION SILVER OR GOLD.
- RECOMMENDED DRILL SIZE FOR 0.37 ϕ FINISHED PTH IS 0.457 ϕ (#77 DRILL)
- RECOMMENDED ANNULAR RING AROUND 0.37 ϕ FINISHED PTH IS 0.73 ϕ

RECOMMENDED PCB LAYOUT








THICKNESS = 1.35mm MIN.

SEE SHEET 1 EC NO: UCP2012-1063 DRAWN BY: DRWNSB001EL CHKD: 2011/10/13 APPR: BANAKIS 2011/10/20	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	TITLE IPASS STACKED 26/26 CIRCUIT CONNECTOR W/LIGHT PIPES MOLEX INCORPORATED	DOCUMENT NO. SD-75758-001	SHEET NO. 3 OF 3
					DRAWN BY DATE JJANTELEZIO 02/05/2008							
					CHECKED BY DATE KLANG 02/05/2008							
					APPROVED BY DATE BANAKIS 02/05/2008							
					MATERIAL NO. 75758-000*							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

20 19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

KEYING & PLATING OPTIONS			
TIN/LEAD PART NUMBER	LEAD FREE PART NUMBER	KEY POSITION	KEYWAY POSITION
75758-0101	75758-0201	NONE	NONE
75758-0102	75758-0202	#3	NONE
75758-0103	75758-0203	#4	NONE
75758-0104	75758-0204	#4	#3 & #5
75758-0105	75758-0205	NONE	#3 & #5
75758-0106	75758-0206	#4	#3
75758-0107	75758-0207	NONE	#3
75758-0108	75758-0208	#4	#5
75758-0109	75758-0209	NONE	#5
75758-0110	75758-0210	#2 & #4	NONE
75758-0111	75758-0211	#4 & #6	NONE

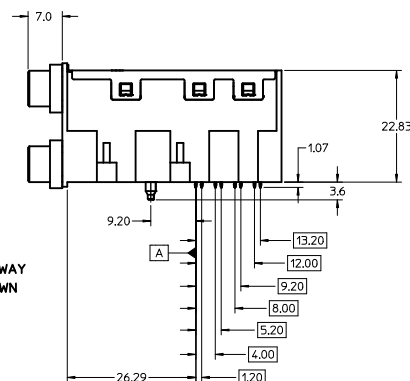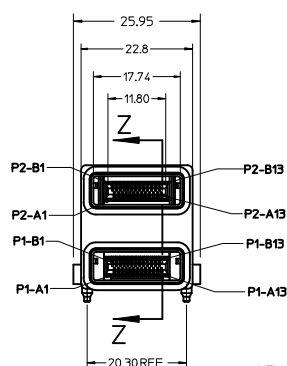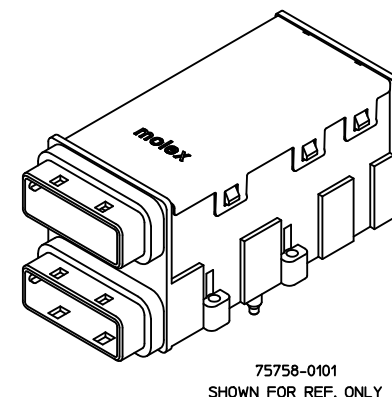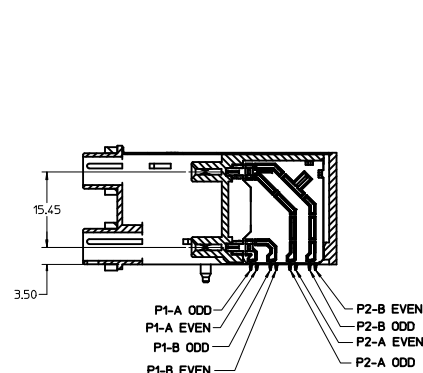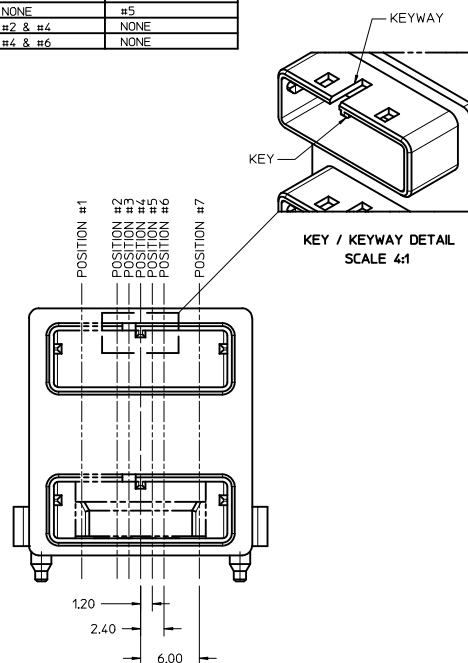


NOTES :

- MATERIALS :
CONNECTOR HOUSING - HIGH TEMP THERMOPLASTIC,
GLASS-FILLED, UL94V-0,
COLOR - BLACK
EMI HOUSING - DIE CAST ALLOY, FINISH: NICKEL
COVER - STAINLESS STEEL ALLOY
CPI TERMINALS - COPPER ALLOY
EMI GASKETS - CONDUCTIVE POLYMER
- TERMINAL PLATING : SEE CHART
OPTION 1) TIN/LEAD - CONTACT AREA - 0.7μ MIN GOLD OVER 2.5μ MIN NICKEL.
COMPLIANT AREA - 0.7-1.54μm TIN/LEAD (90/10) OVER 1.24μm MIN NICKEL.

OPTION 2) LEAD FREE - CONTACT AREA - 0.7μ MIN GOLD OVER 2.5μ MIN NICKEL.
COMPLIANT AREA - 0.7-1.54μm TIN (TIN ONLY) OVER 1.24μm MIN NICKEL.
- PACKAGING SPECIFICATION : TRAY PACK (TBD)
- REFER TO PS-75586-001 PRODUCT SPEC FOR ALL ELECTRICAL, MECHANICAL AND ENVIRONMENTAL SPECIFICATIONS.
- THIS CONNECTOR IS DESIGNED TO MATE WITH MOLEX CABLE SERIES 74548.
- REQUIRES MOUNTING HARDWARE : (4) M2 X 8MM CAP SCREWS OR EQUIV. MAX. TORQUE 2.3 in/lbs.
- PRODUCT IS RoHS COMPLIANT.



ADD LEAD-FREE EC NO: UCP2012-1063 DRAWN BY: JANTALEZ10 CHKD: MBANAKIS APPROVED: MBANAKIS REV: D	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	DESCRIPTION 2011/09/14 2011/10/20	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
			mm INCH		DRAWN BY JANTALEZ10		DATE 01/23/08	TITLE IPASS STACKED 26/26 CIRCUIT CONNECTOR			
			4 PLACES ± --- ± ---		CHECKED BY		DATE 01/23/08	MOLEX INCORPORATED			
			3 PLACES ± --- ± ---		KLANG		DATE 01/23/08	DOCUMENT NO. SD-75758-010			
			2 PLACES ± 0.25 ± ---		APPROVED BY		DATE 01/23/08	SHEET NO. 1 OF 3			
			1 PLACE ± 0.25 ± ---		ANGULAR ±1/2°		MATERIAL NO. 75758-010*		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

19 18 17 16 15 14 13 12 11 10 9 8 7 6 5 4 3 2 1

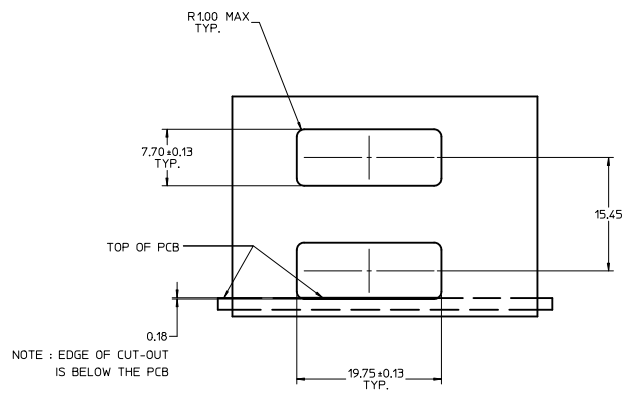

PANEL CUT-OUT

MAXIMUM THICKNESS = 1.50
(NOT SUPPLIED)

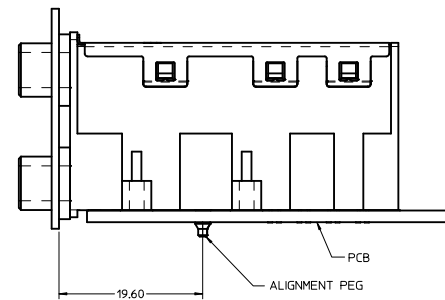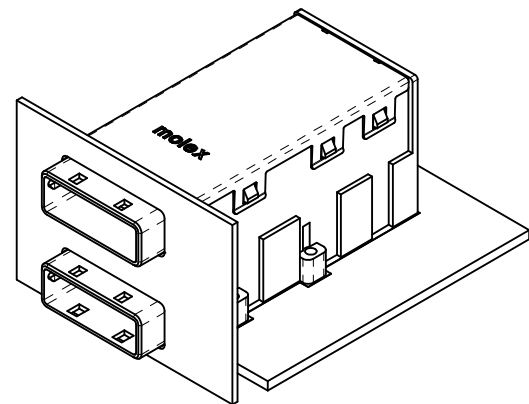

ASSEMBLY VIEW

SEE SHEET 1 EC NO: UCP2012-1063 DRAWN: S80GIEL CHKD: APPR: MBANAKIS	DESCRIPTION 2011/09/14 2011/10/20	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION
			mm	INCH	DRAWN BY JJANTELEZIO	DATE 01/23/08	TITLE IPASS STACKED 26/26 CIRCUIT CONNECTOR		
			4 PLACES $\pm$ ---	$\pm$ ---	CHECKED BY KLANG	DATE 01/23/08			
			3 PLACES $\pm$ ---	$\pm$ ---	APPROVED BY MBANAKIS	DATE 01/23/08			
			2 PLACES ± 0.25	$\pm$ ---	MOLEX INCORPORATED				
			1 PLACE ± 0.25	$\pm$ ---					
			ANGULAR $\pm 1/2^\circ$		MATERIAL NO. 75758-010*	DOCUMENT NO. SD-75758-010	SHEET NO. 2 OF 3		
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9