



ATTENTION
OBSERVE PRECAUTIONS
FOR HANDLING
ELECTROSTATIC
DISCHARGE
SENSITIVE
DEVICES

Part Number: WP710A10VBC/D

Blue

Features

- Low power consumption.
- Popular T-1 diameter package.
- General purpose leads.
- Reliable and rugged.
- Long life - solid state reliability.
- Available on tape and reel.
- RoHS compliant.

Description


The Blue source color devices are made with InGaN Light Emitting Diode.

Static electricity and surge damage the LEDs.

It is recommended to use a wrist band or anti-electrostatic glove when handling the LEDs.

All devices, equipment and machinery must be electrically grounded.

Package Dimensions

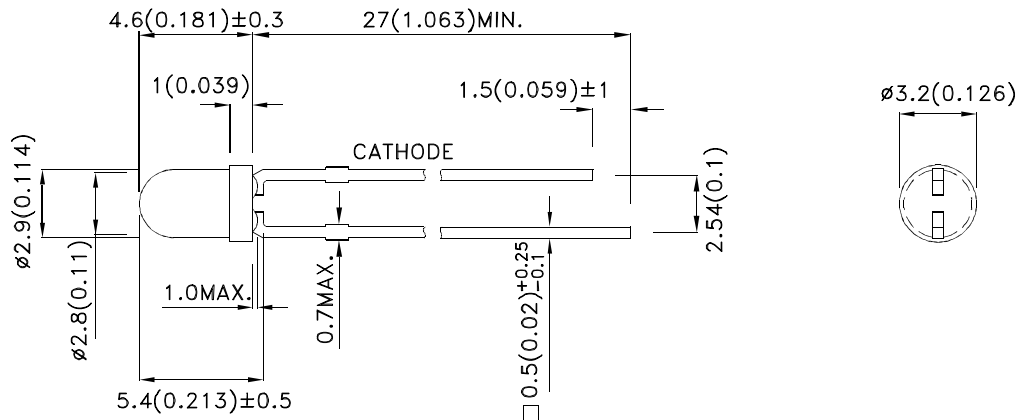

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.



Selection Guide

Part No.	Dice	Lens Type	Iv (mcd) [2] @ 20mA			Viewing Angle [1]
			Code.	Min.	Max.	2θ1/2
WP710A10VBC/D	Blue (InGaN)	Water Clear	Z	2700	3100	20°
			ZA	3100	3600	
			ZB	3600	4200	
			ZC	4200	5000	
			ZD	5000	6000	
			ZE	6000	7000	

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.

2. Luminous intensity/ luminous Flux: +/-15%.

Electrical / Optical Characteristics at TA=25°C

Symbol	Parameter	Device	Code.	Min.	Typ.	Max.	Units	Test Conditions
λpeak	Peak Wavelength	Blue			465		nm	IF=20mA
λD [1]	Dominant Wavelength	Blue	1B	463		466	nm	IF=20mA
			2A	466		469		
			2B	469		471		
Δλ1/2	Spectral Line Half-width	Blue			22		nm	IF=20mA
C	Capacitance	Blue			100		pF	VF=0V;f=1MHz
VF [2]	Forward Voltage	Blue		2.6	3.3	4	V	IF=20mA
IR	Reverse Current	Blue				50	uA	VR = 5V

Notes:

1.Wavelength: +/-1nm.

2. Forward Voltage: +/-0.1V.

Absolute Maximum Ratings at TA=25°C


Parameter	Blue	Units
Power dissipation	120	mW
DC Forward Current	30	mA
Peak Forward Current [1]	100	mA
Reverse Voltage	5	V
Operating/Storage Temperature	-40°C To +85°C	
Lead Solder Temperature [2]	260°C For 3 Seconds	
Lead Solder Temperature [3]	260°C For 5 Seconds	

Notes:

1. 1/10 Duty Cycle, 0.1ms Pulse Width.





2. 2mm below package base.

3. 5mm below package base.

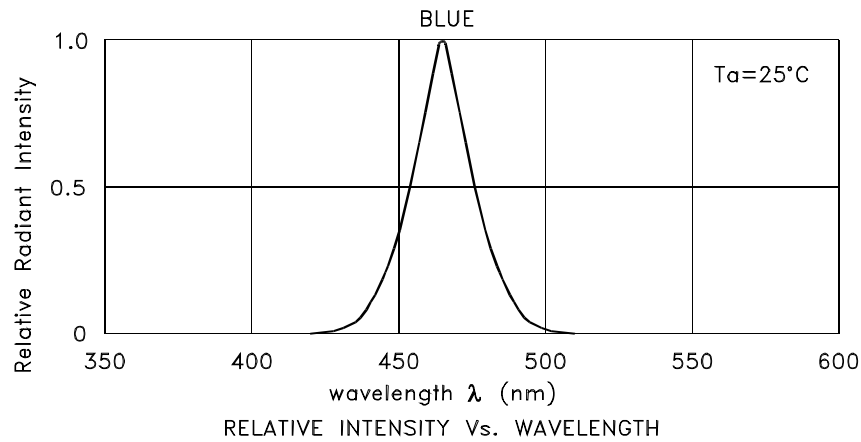


Blue

WP710A10VBC/D

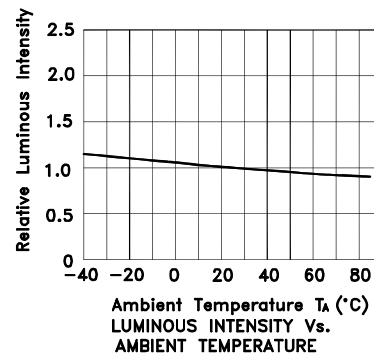

PACKING & LABEL SPECIFICATIONS

WP710A10VBC/D

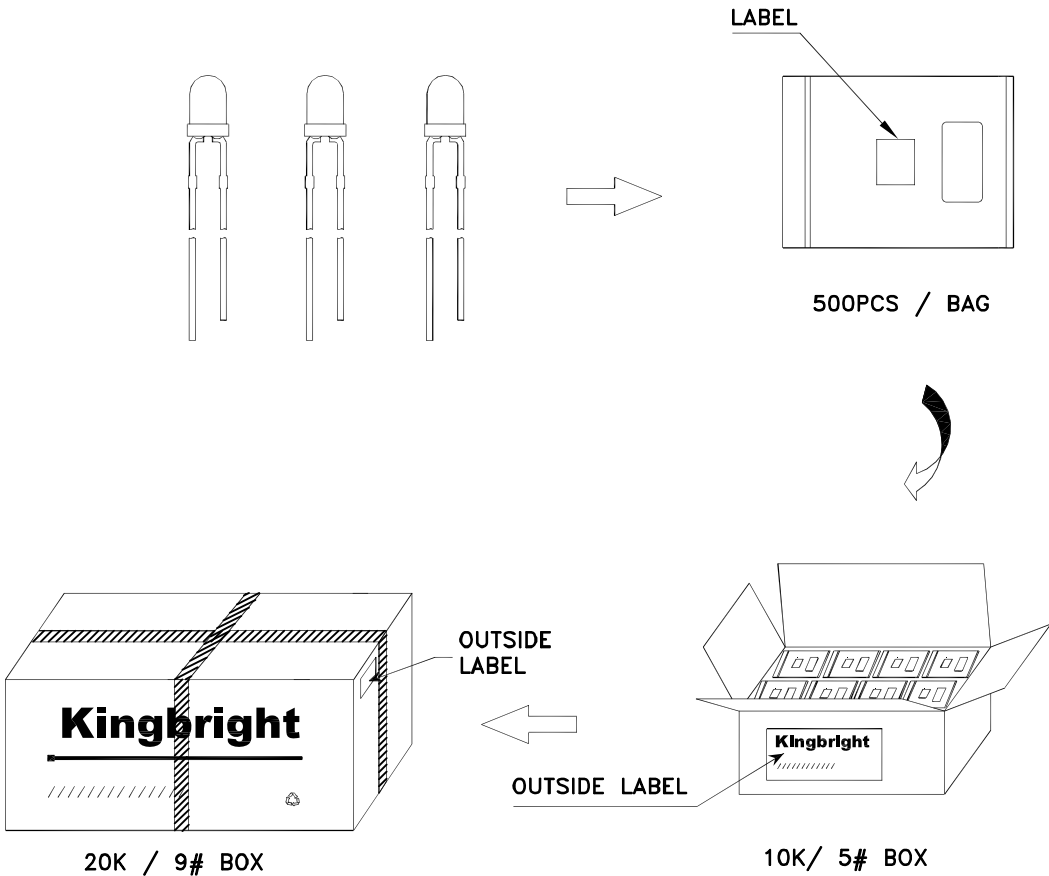

Kingbright	
P/NO: WP710A10xxx	
QTY: 500 pcs	Q.C. Q C XX XX XXXX PASSED
S/N: XXXX	
CODE: XXX	
LOT NO:	
 XXXXXXXXXXXXXXXXXXXX	
RoHS Compliant	

PRECAUTIONS

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures. (Fig. 1)

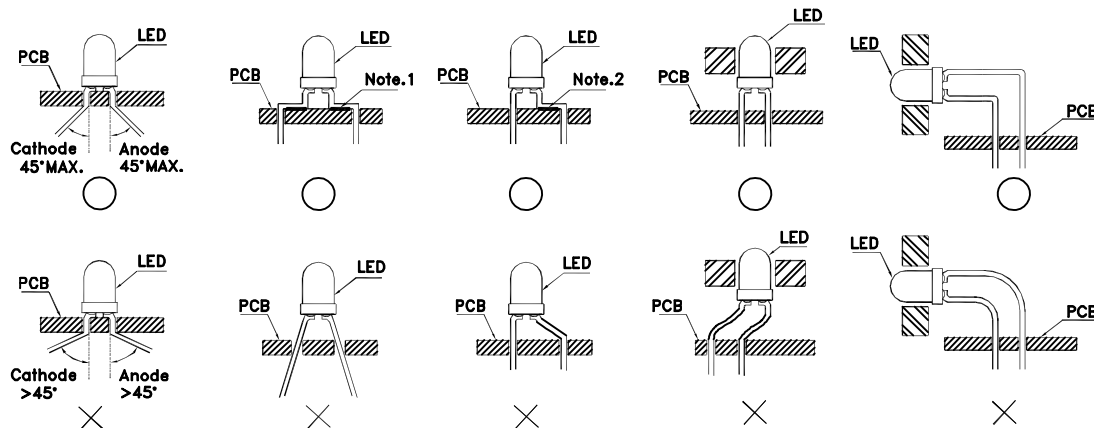


Fig.1

”○” Correct mounting method ”×” Incorrect mounting method

2. When soldering wire to the LED, use individual heat-shrink tubing to insulate the exposed leads to prevent accidental contact short-circuit. (Fig.2)
3. Use stand-offs (Fig.3) or spacers (Fig.4) to securely position the LED above the PCB.

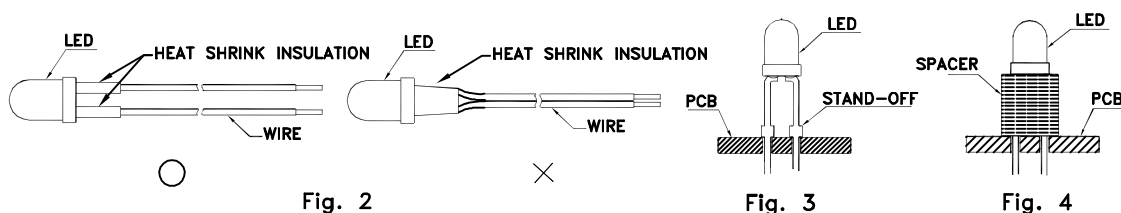


Fig. 2

Fig. 3

Fig. 4

4. Maintain a minimum of 2mm clearance between the base of the LED lens and the first lead bend. (Fig. 5 and 6)
5. During lead forming, use tools or jigs to hold the leads securely so that the bending force will not be transmitted to the LED lens and its internal structures. Do not perform lead forming once the component has been mounted onto the PCB. (Fig. 7)

6. Do not bend the leads more than twice. (Fig. 8)




Fig. 5




Fig. 6




Fig. 7






Fig. 8

7. During soldering, component covers and holders should leave clearance to avoid placing damaging stress on the LED during soldering.



8. The tip of the soldering iron should never touch the lens epoxy.

9. Through-hole LEDs are incompatible with reflow soldering.

10. If the LED will undergo multiple soldering passes or face other processes where the part may be subjected to intense heat, please check with Kingbright for compatibility.

11. Recommended Wave Soldering Profiles:



Notes:

1. Recommend pre-heat temperature of 105°C or less (as measured with a thermocouple attached to the LED pins) prior to immersion in the solder wave with a maximum solder bath temperature of 260°C
2. Peak wave soldering temperature between 245°C ~ 255°C for 3 sec (5 sec max).
3. Do not apply stress to the epoxy resin while the temperature is above 85°C.
4. Fixtures should not incur stress on the component when mounting and during soldering process.
5. SAC 305 solder alloy is recommended.
6. No more than one wave soldering pass.

All design applications should refer to Kingbright application notes available at <http://www.KingbrightUSA.com/ApplicationNotes>

LED Reliability Test Report

NO. REC2013001020

☐ : ___year___month plan schedule☒ : ___Customer's requirement☐ :Verification

supplier	KINGBRIGHT	chip type	/
laboratory	Kingbright Laboratory	chip lot.	/
P/N	WP710A10VBC/D	Scope Of Inspection	WI-MQ00-R-0105

NO	TEST ITEM	TEST DATE	TEST CONDITION	STANDARDS	JUDGEMENT	LTPD	SAMPLE
1	Continuous operating	2012/11/5 ~ 2012/12/17	IF=20mA Ta=25Degree C. T=1000hr	A schedule	PASSED	10%	22pcs
2	High temp. and hum. storage	2012/11/5 ~ 2012/12/17	Ta=85Degree C. T=1000hr RH=85%RH	B schedule	PASSED	10%	22pcs
3	High temp. and hum. Operating	2012/11/5 ~ 2012/12/17	Ta=85Degree C. T=1000hr RH=85%RH IF=5mA	B schedule	PASSED	10%	22pcs
4	Solderability	2012/11/7	Ta=245Degree C. T=5sec	Cover 95%	PASSED	20%	18PCS
5	Soldering resistance	2012/11/10	Ta=260Degree C. T=10sec(MAX)	A schedule	PASSED	20%	18PCS
6	Thermal shock	2012/11/10 ~ 2012/11/12	Ta=0Degree C.~100Degree C. T=5min~5min×100cycles	B schedule	PASSED	10%	22pcs
7	Drop	2012/11/12 ~ 2012/11/12	H=100cm T=3cycles	B schedule	PASSED	10%	22pcs
8	Vibration	2012/11/12	Accelerate speed 200m/s ² Frequency=100~2000Hz, T=48min, X.Y.Z Three directions,Four times	A schedule	PASSED	10%	22pcs

Standard schedule

A	Characteristics item	Symbol	Standards
	Forward voltage	VF(V)	USL(MAX)
	Reverse current	IR(μA)	USL(MAX)
	Intensity value	IV(mcd)	Initial valueX0.6(min)
	Apperance	/	Damage

Standard schedule

B	Characteristics item	Symbol	standards
	Forward voltage	VF(V)	USL(MAX)
	Reverse current	IR(μA)	USL(MAX)
	Intensity value	IV(mcd)	Initial valueX0.8(min)
	Appearance	/	Damage

P.S:LTPD(Lot Tolerance Percent Defective).

Specification

Characteristics	Symbol	spec
VF	VF(V)	MAX 4 V
IR	IR(μA)	MAX 50 μA
IV	IV(mcd)	MIN 2100 mcd
remark	LSL	Initial SPEC LSL
	USL	Initial SPEC USL

Tested by:Zang Yongfeng

Checked by:Hou Gang

Approved by:Alex Huang

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9