


# NetKey® Fiber Optic Connectors – Pre-Polished Cam Termination

## specifications

Pre-polished fiber optic connectors are TIA/EIA-604 FOCIS compliant and contain a factory-terminated fiber, eliminating field polishing and adhesive. Pre-polished fiber optic connectors captivate fiber and buffer in one action allowing for up to two re-terminations with no degradation in performance.

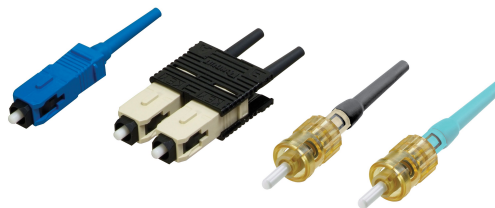

## technical information

	ST Opticam® Connectors	SC Opticam® Connectors
<b>Standards compliance:</b>	TIA/EIA-604 FOCIS-2 compliant; exceeds TIA/EIA-568-B.3 requirements	TIA/EIA-604 FOCIS-3 compliant exceeds TIA/EIA-568-B.3 requirements
<b>Fiber compatibility:</b>	62.5/125µm OM1, 50/125µm OM2, 10Gig™ 50/125µm laser optimized OM3/OM4 and 9/125µm OS1/OS2	
<b>Fiber size and type:</b>	900µm tight-buffered fiber; 250µm coated fiber, by using F250BT-C 250 micron fiber build-up tube kit or FO6CB or FO12CB fan-out kit	
<b>Performance:</b>	Insertion loss: Composite 0.3dB average (multimode) Return loss: Composite >20dB (multimode)	

## key features and benefits

	ST Opticam® Connectors	SC Opticam® Connectors
<b>Factory pre-polished fiber stub end face</b>	Eliminates inconsistent and time-consuming field polishing to deliver required optical performance; reduces termination time (less than half the time of field polish connectors) and the number of installation tools required	
<b>Dual cam design with fiber and buffer clamps</b>	Secures both the fiber and the buffer during the camming step to facilitate consistent termination results; reduces the termination time compared to conventional termination methods Allows up to two re-terminations to achieve optimum termination results; reduces the number of rejected connectors and terminations to provide yield rates approaching 100% for lower installed cost	
<b>Translucent housing assembly</b>	Facilitates inspection of the fiber termination quality; results in rapid installations, improved termination yields, and lower installed costs	
<b>Mechanical cable retention</b>	Consistently provides higher than industry standard cable retention; requires no adhesive, speeding installation	
<b>Non-optical disconnect</b>	—	Maintains data transmission under tensile loads for jacketed cable

### Opticam® Termination Tool

<b>Universal termination</b>	Secures both fiber and buffer in one action for all OptiCam® Connectors with connector specific cradles (included); ensures fast, consistent, and optimal terminations
<b>Integrated visual termination indicator (VTI)</b>	Offers visual indication of proper termination after the cam step has been completed; virtually eliminates operator error to deliver a higher yield for a lower installed cost

## applications

- Fiber optic backbone and horizontal applications
- Maintenance or emergency restoration of fiber networks
- Retrofit/initial install in both behind-the-wall (BTW) permanent side of panelized interconnect and cross-connect
- Remote areas and confined spaces
- OptiCam® Termination Tool gives installers the flexibility to terminate in very close proximity to the application

[www.panduit.com](http://www.panduit.com)

# PANDUIT®

DATA SHEET

### NetKey® SC OptiCam® Pre-Polished Connectors with Composite Ferrule

<b>50/125µm mm simplex:</b>	NKFSCMPC5BL
<b>50/125µm mm simplex (100 pk.):</b>	NKFSCMPC5BL-C
<b>62.5/125µm mm simplex:</b>	NKFSCMPC6EI
<b>62.5/125µm mm simplex (100 pk.):</b>	NKFSCMPC6EI-C

### NetKey® ST OptiCam® Pre-Polished Connectors with Composite Ferrule

<b>50/125µm mm simplex:</b>	NKFSTMPC5BL
<b>50/125µm mm simplex (100 pk.):</b>	NKFSTMPC5BL-C
<b>62.5/125µm mm simplex:</b>	NKFSTMPC6EI
<b>62.5/125µm mm simplex (100 pk.):</b>	NKFSTMPC6EI-C

### OptiCam® 1.6/2.0mm Boot Assemblies

<b>10Gig® Multimode (Aqua):</b>	FMCBT2AQ-X*
<b>Multimode (Black):</b>	FMCBT2BL-X*
<b>Singlemode (Blue):</b>	FSCMT2UB-X*

\*X = Bag of 10 boots; 100 per carton

### OptiCam® 3.0mm Boot Assemblies

<b>10Gig® Multimode (Aqua):</b>	FMCBT3AQ-X*
<b>Multimode (Black):</b>	FMCBT3BL-X*
<b>Singlemode (Blue):</b>	FSCMT3UB-X*


\*X = Bag of 10 boots; 100 per carton

### OptiCam® Termination Tooling


<b>OptiCam® Termination Kit:</b>	FCAMKIT
<b>OptiCam® Conversion Kit (upgrades OptiCrimp® to also terminate OptiCam® Connectors):</b>	FPPKIT-CVY
<b>Field polish kit upgrade (upgrades field polish kit to also terminate OptiCam® Connectors):</b>	FIELDKITUPG
<b>ST cradles (2 per pkg.):</b>	FSTC
<b>SC cradles (2 per pkg.):</b>	FSCC

# NetKey® Fiber Optic Connectors – Pre-Polished Cam Termination

## NetKey® SC OptiCam® Pre-Polished Simplex Connector

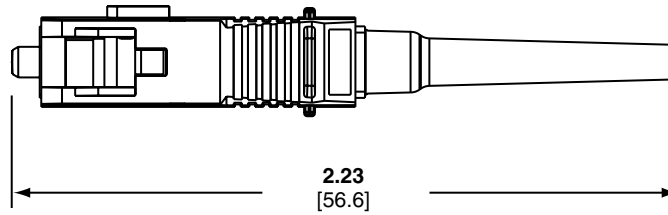

## NetKey® ST OptiCam® Pre-Polished Simplex Connector

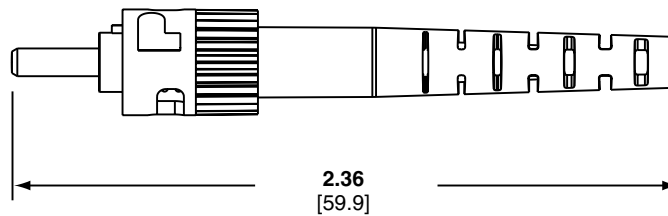

## OptiCam® Termination Tool



**CLASS 1M LASER PRODUCT**

Dimensions are in inches [Dimensions in brackets are metric]

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT CANADA  
Markham, Ontario  
cs-cdn@panduit.com  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
cs-emea@panduit.com  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
cs-ap@panduit.com  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
cs-japan@panduit.com  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
cs-la@panduit.com  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
cs-aus@panduit.com  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

For more information

Visit us at [www.panduit.com](http://www.panduit.com)

Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

**PANDUIT®**

©2015 Panduit Corp.  
ALL RIGHTS RESERVED.  
**NKDS59--WW-ENG**  
Replaces WW-NKDS17  
4/2015

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9