

8

7

6

5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

ATLANTIC VERSION TERMINATOR INTERFACE ADAPTER

PART NUMBER

REVISION

DESCRIPTION

FEED TYPE

CONVERT TO

PART NUMBERS REQUIRED

2151667-1

A

FINE CRIMP HEIGHT ADJUST

MECHANICAL

PNEUMATIC FEED

SERVO LATCH PLATE

SMART APPLICATOR

2119950-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151667-5

8-2151667-4

2119641-1

1901094-3

-

2119799-1

-

-

2063440-1

2168400-6 (QUANTITY 2)

-

2151667-2

A

FINE CRIMP HEIGHT ADJUST

PNEUMATIC

MECHANICAL FEED

SERVO LATCH PLATE

SMART APPLICATOR

2119949-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151667-5

8-2151667-4

2119653-1

1901094-3

-

-

-

-

-

-

-

-

-

-

2151667-5

A

FINE CRIMP HEIGHT ADJUST

SERVO LATCH PLATE⁴

MECHANICAL FEED

PNEUMATIC FEED

2119949-1

2119950-1

-

1338685-1

-

-

5-18022-5

5-18022-5

-

2119653-1

2119641-1

2119799-1

-

-

-

-

-

-

-

-

-

2151667-6

A

NON-CRIMP HEIGHT ADJUST

SERVO LATCH PLATE⁴¹²

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

2151667-7

A

FINE CRIMP HEIGHT ADJUST

NONE

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

7-2151667-7

A

CRIMP TOOLING KIT

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

APPLICATOR DATA

CRIMP

SIZE

TYPE

WIRE

1.78 mm [.070]

F

INSUL

3.18 mm [1.25]

F

APPLICATOR INSTRUCTIONS

408-10389

TERMINAL DATA: TE TERMINAL

TE CRIMP SPECIFICATION

TERMINAL NAME: PIN & SOCKET, VAL-U-LOK

WIRE STRIP LENGTH

INSULATION DIAMETER RANGE

3.00-3.50 mm [.118-.138 IN]

Ø1.50-3.10 mm [.059-.122 IN]

TERMINAL APPLICATION SPECIFICATION

114-13172

-

-

TERMINALS APPLIED

TE TERMINAL

TE TERMINAL

TE TERMINAL

TE TERMINAL

1586055-1

1586055-3

1586054-1

1586054-3

1586055-2

1586055-4

1586054-2

1586054-4

WIRE SIZE

CRIMP HEIGHT mm [INCH]

CRIMP HEIGHT REFERENCE SETTING

16 AWG OR 1.31mm2

1.30+/-0.05 [.051+/- .002]

10.3

1

RECOMMENDED SPARE PARTS

2

GREASE BEARING SURFACES LIGHTLY

3

LUBRICATE DAILY PER THE APPLICATOR INSTRUCTION SHEET SUPPLIED WITH THE APPLICATOR.

4

APPLICATOR SPECIFIC DATA TO BE ENTERED INTO BLANK MEMORY CHIP AT ASSEMBLY. SEE BELOW FOR PART NUMBER:
MECHANICAL FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151667-4
PNEUMATIC FEED WITH "SMART APPLICATOR" CONVERSION: 8-2151667-4
SERVO FEED WITH "FINE CRIMP HEIGHT ADJUST": 8-2151667-5
SERVO FEED WITH "NON-CRIMP HEIGHT ADJUST": 8-2151667-6

5

ADJUSTMENT OF THE STRIPPER MAY BE REQUIRED WHEN MOVING THE APPLICATOR BETWEEN BENCH AND LEADMAKER APPLICATIONS.

6

APPLY PART NUMBER 1-23419-5 LOCTITE TO THREADS OF ITEM 50.

7

GREASE THREADS, GROOVE AND O-RING ON ITEMS 35 & 252.

8

MAGNET, ITEM 166 MUST BE ORIENTED CORRECTLY IN ORDER TO PROPERLY ACTUATE THE COUNTER.

9

CRIMP HEIGHT REFERENCE SETTING WAS THE SETTING USED WHEN THE APPLICATOR WAS QUALIFIED AT THE FACTORY. ADJUSTMENT MAY BE NECESSARY WHEN RUNNING APPLICATOR IN THE FIELD.

10

SPARE FEED CAM STORAGE LOCATION REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

11

TO CONVERT THE APPLICATOR TO A NON-CARRIER CUTTING STYLE, REMOVE ITEM 13 AND ATTACH TO THE LOCATION ON THE BACK SIDE OF THE HOUSING. REFER TO INSTRUCTION SHEET FOR ADDITIONAL INFORMATION.

12

WHEN ASSEMBLING -6 NON-CRIMP HEIGHT ADJUST APPLICATOR USE SHIM PACK 2119957-2 TO ALIGN APPLICATOR'S MAXIMUM WIRE CRIMP HEIGHT AT NORMAL TERMINATOR SHUT HEIGHT

2119950-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151667-5

8-2151667-4

2119641-1

1901094-3

-

2119799-1

-

-

2063440-1

2168400-6 (QUANTITY 2)

-

2119949-1

2119951-1

2161326-1

1338685-1

-

-

5-18022-5

8-2151667-5

8-2151667-4

2119653-1

1901094-3

-

-

-

-

-

-

-

-

-

-

2119949-1

2119950-1

-

1338685-1

-

-

5-18022-5

5-18022-5

-

2119653-1

2119641-1

2119799-1

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

-

2119957-2

APPLICATOR SHIM PACK

260

8-21084-0

O-RING, .676 ID, .070 DIA. MAT.

252

2119640-1

PUSH ROD, AIR FEED

250

2079988-1

BUSHING, LCH5-12, MISUMI

249

2119641-1

FEED CAM, AIR FEED

248

2119798-1

DETENT PIN

247

1-22279-3

SPRING, COMPRESSION

246

2119758-1

RAM, AMP STYLE, SIDE FEED, NON-ADJ.

245

-77

-7

-6

-5

-2

-1

PART NO

DESCRIPTION

ITEM NO

ATLANTIC VERSION

Shown on sheets 1 of 4 & 2 of 4

(Pacific version shown on sheets 3 of 4 & 4 of 4)

SET UP GAUGE 2119599-1

LOC A

DIST 66

P LTR

DESCRIPTION

DATE

DWN

APVD

A

RELEASED

28JUN2012

RW

GB

-

1

1

1

1

1

2119082-9

CAM, SNAIL, INSULATION ADJUSTMENT

244

-

1

1

1

1

1

2079764-1

WASHER, WAVE SPRING, CREST-TO-CREST

243

-

1

1

1

1

1

2119083-1

RETAINER, INSULATION DIAL

242

-

1

1

1

1

1

18023-1

SCR, SKT HD CAP M3 X 5.0

241

-

-

2

2

-

-

2168400-6

SHCS, LOW HEAD, RoHS, M5 X 16

240

-

-

-

-

-

1

2119580-1

MECHANICAL FEED ASSEMBLY

239

-

-

-

-

1

-

2063440-1

AIR FEED MODULE

238

-

-

1

1

-

-

2119740-2

TAG,IDENTIFICATION

213

-

-

1

1

-

-

1901094-3

SPACER, FEEDER

198

-

1

1

1

1

1

993111-1

PIN, SLOTTED SPRING 3.0 X 20.0

177

-

1

1

1

1

1

8-22280-7

SPRING, COMPRESSION

176

-

1

1

1

1

1

1752353-2

GUIDE PIN,HOLDDOWN

175

-

1

1

1

1

1

1901680-2

GUIDE PIN,HOLDDOWN

174

-

-

-

-

2

-

21045-3

RING, RETAIN, EXTERN, 3/16 CRESCENT

172

-

1

1

1

1

1

994969-1

MAGNET, RARE EARTH HIGH ENERGY

166

-

REF

REF

REF

REF

REF

994970-2

COUNTER, MAGNETIC

164

-

-

-

-

1

-

240638-1

SPRING, FEED FINGER

163

-

-

-

-

1

-

3-23627-7

PIN, RETAIN, GRVD, 3/16 X .854

137

-

-

-

-

1

-

2119799-1

HOLDER,FEED FINGER, AF

136

-

-

REF

REF

-

-

SEE NOTE 4

MEMORY CHIP, PROGRAMMED

135

-

-

1

1

-

-

1633743-1

SERVO FEED LATCH ASM

133

-

1

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

119

-

-

REF

REF

-

-

2119944-1

FEED FINGER ASSEMBLY,SF

117

-

1

1

1

1

1

455888-3

SPACER, CRIMPER

82

-

1

1

1

1

1

22278-8

SPRING, COMPRESSION

77

-

1

1

1

1

1

854769-4

HOLDER, INS

74

-

1

1

1

1

1

2119956-1

DOCUMENTATION PACKAGE

71

-

1

-

-

1

1

2119740-1

TAG,IDENTIFICATION

67

-

2

2

2

2

2

2168078-1

SCREW, DRIVE, RH, RoHS

66

-

1

-

1

1

1

2119793-1

LIMITER, ADJUSTMENT BOLT

63

-

3

-

3

3

3

992763-5

SCR, SET, SOC, CONE POINT, M3 x 4.0

62

-

1

1

1

1

1

2079383-4

SCR, BHSC, RoHS (M4 X 8)

60

-

-

-

-

1

1

5-18022-5

SCR, HEX HD CAP, M4 X 6.0

59

-

1

1

1

1

1

21028-2

PIN, SLOTTED SPRING .062 X .250

58

-

-

-

-

1

1

1338685-1

PAWL, FEED

56

-

2

2

2

2

2

2168400-1

SHCS, LOW HEAD, RoHS, M4 X 12

54

-

1

1

1

1

1

1-5018030-0

NUT, HEX, REG, RoHS, M3.5

52

-

1

1

1

1

1

1901681-1

HOLDDOWN, TERMINAL

51

-

1

1

1

1

1

1-1752354-6

STANDOFF,HOLD-DOWN

50

-

-

-

-

1

2

18023-9

SCR, SKT HD CAP M4 X 6.0

49

-

-

-

-

-

1

2119652-1

FEED CAM, PRE FEED

48

-

-

-

-

-

1

2119653-1

FEED CAM, POST FEED

47

-

1

1

1

1

1

2119656-9

APPLICATOR BASIC ASSEMBLY, SF

46

-

1

-

1

1

1

2119370-1

RAM, AMP STYLE, SIDE FEED

44

-

1

1

1

1

1

2079383-7

SCR, BHSC, RoHS (M8 X 25)

41

-

1

-

1

1

1

2119645-1

DISC, NUMBERED FA WIRE ADJUSTMENT

40

-

1

-

1

1

1

2119957-1

APPLICATOR SHIM PACK

39

-

1

1

1

1

1

2119644-2

RAM WASHER, PRECISION

38

-

1

1

1

1

1

2119085-1

FA HEAD, ATLANTIC STYLE

37

-

1

-

1

1

1

2119092-1

BOLT, ADJUSTMENT

35

-

1

1

1

1

1

1752356-1

SUPPORT, TERMINAL

34

-

2

2

2

2

2

2079383-5

SCR, BHSC, RoHS (M4 X 20)

33

-

1

1

1

1

1

2161328-1

HEX HEAD, FLANGED, M5 x 8mm LONG

32

-

1

1

1

1

1

1320908-2

SPACER, STRIP GUIDE

30

-

1

1

1

1

1

2119959-1

ASSEMBLY, STRIP GUIDE

29

-

1

1

1

1

1

1-455888-0

SPACER, CRIMPER

28

-

1

1

1

1

1

1320928-2

STRIP GUIDE

24

-

1

1

1

1

1

2168083-2

SCR, SKT HD CAP, RoHS, M4 X 8.0

21

-

1

1

1

1

1

1-18028-2

WASHER, FLAT, REG M4

20

-

1

1

1

1

1

2119533-1

STRIPPER, SIDE FEED

19

-

1

1

1

1

1

2119806-1

INSERT, SHEAR

13

-

1

1

1

1

1

3-22280-3

SPRING, COMPRESSION

12

-

1

1

1

1

1

1-356885-4

STOP, SHEAR

11

-

1

1

1

1

1

2119805-1

SHEAR HOLDER, FRONT

10

-

1

1

1

1

1

462006-6

FLOATING SHEAR, FRONT

9

-

1

1

1

1

1

1633919-4

ANVIL, COMBINATION

8

-

-

-

-

-

-

-

-

7

-

-

-

-

-

-

-

-

6

-

1

1

1

1

1

2119780-9

DEPRESSOR, SHEAR

5

-

1

1

1

1

1

238011-7

BLOCK, CRIMPER SPACER

4

-

1

1

1

1

1

4-1633961-1

CRIMPER, INSULATION F PREMIUM

3

-

1

1

1

1

1

455888-6

SPACER, CRIMPER

2

-

1

1

1

1

1

3-456404-6

CRIMPER, WIRE PREMIUM

1

-77

-7

-6

-5

-2

-1

PART NO

DESCRIPTION

ITEM NO

THIS IS SUBJECT TO CHANGE WITHOUT NOTICE. THE USER OF THIS DRAWING SHALL BE CONTACTED FOR THE LATEST EDITION.

DWN R.O.WILSON 17MAY2010

CHK K.J.STAKEM 17MAY2010

APVD T.L.FLIN 17MAY2010

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±0.1 2 PLC ±0.02 3 PLC ±0.005 4 PLC ±0.0005 ANGLES ±.1 FINISH

MATERIAL

NAME Ocean Side Feed Applicator

SIZE CASE CODE DRAWING NO 00779 ©=2151667

RESTRICTED TO

Customer Accessible Production Drawing SCALE 1:1 SHEET 1 OF 4 REV A


AMP 4805 REV 31MAR2000

SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION


LOC		DIST		REVISONS			
A	66	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009


FEED TYPE MECHANICAL

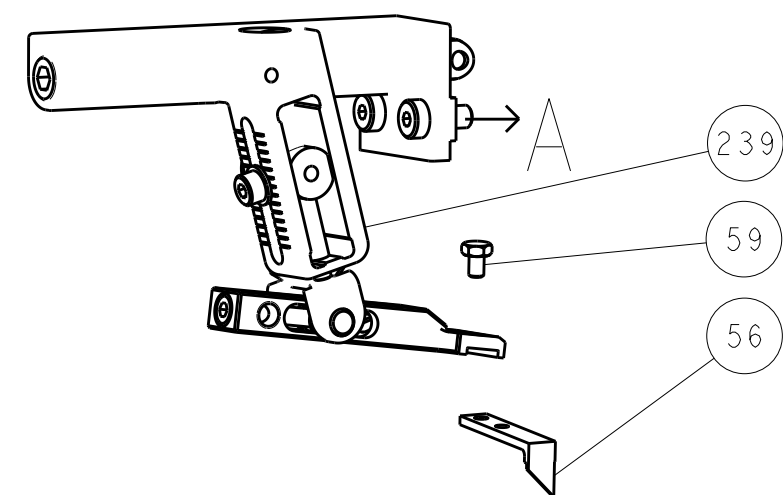




PNEUMATIC

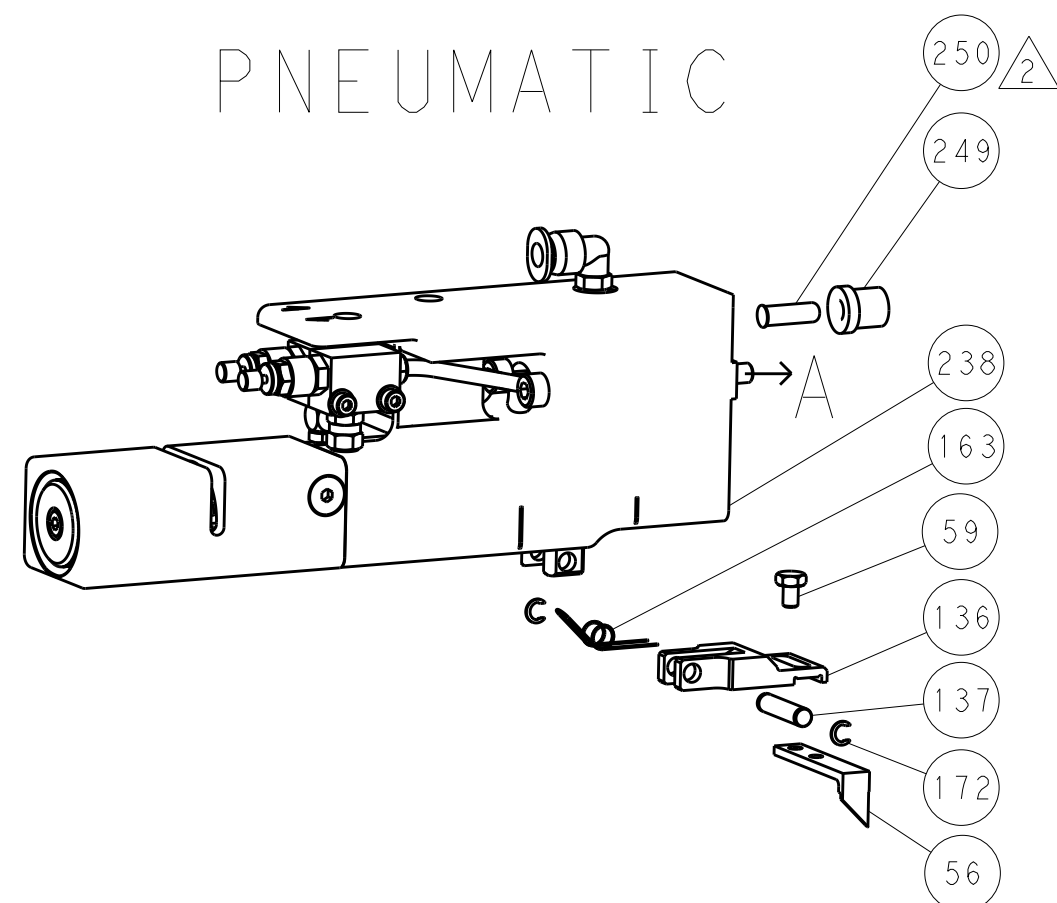


SERVO LATCH PLATE

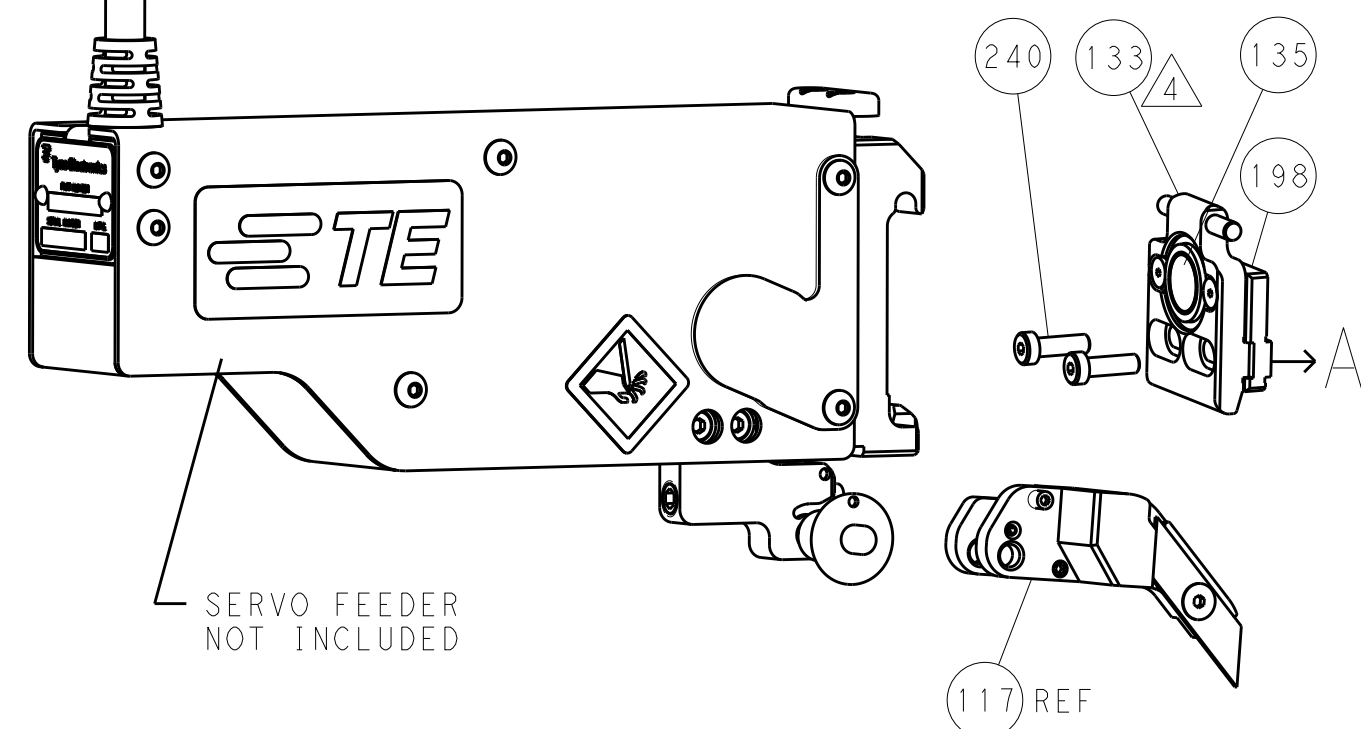


CAM POSITIONS

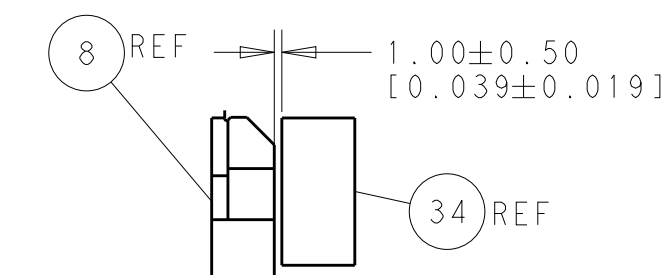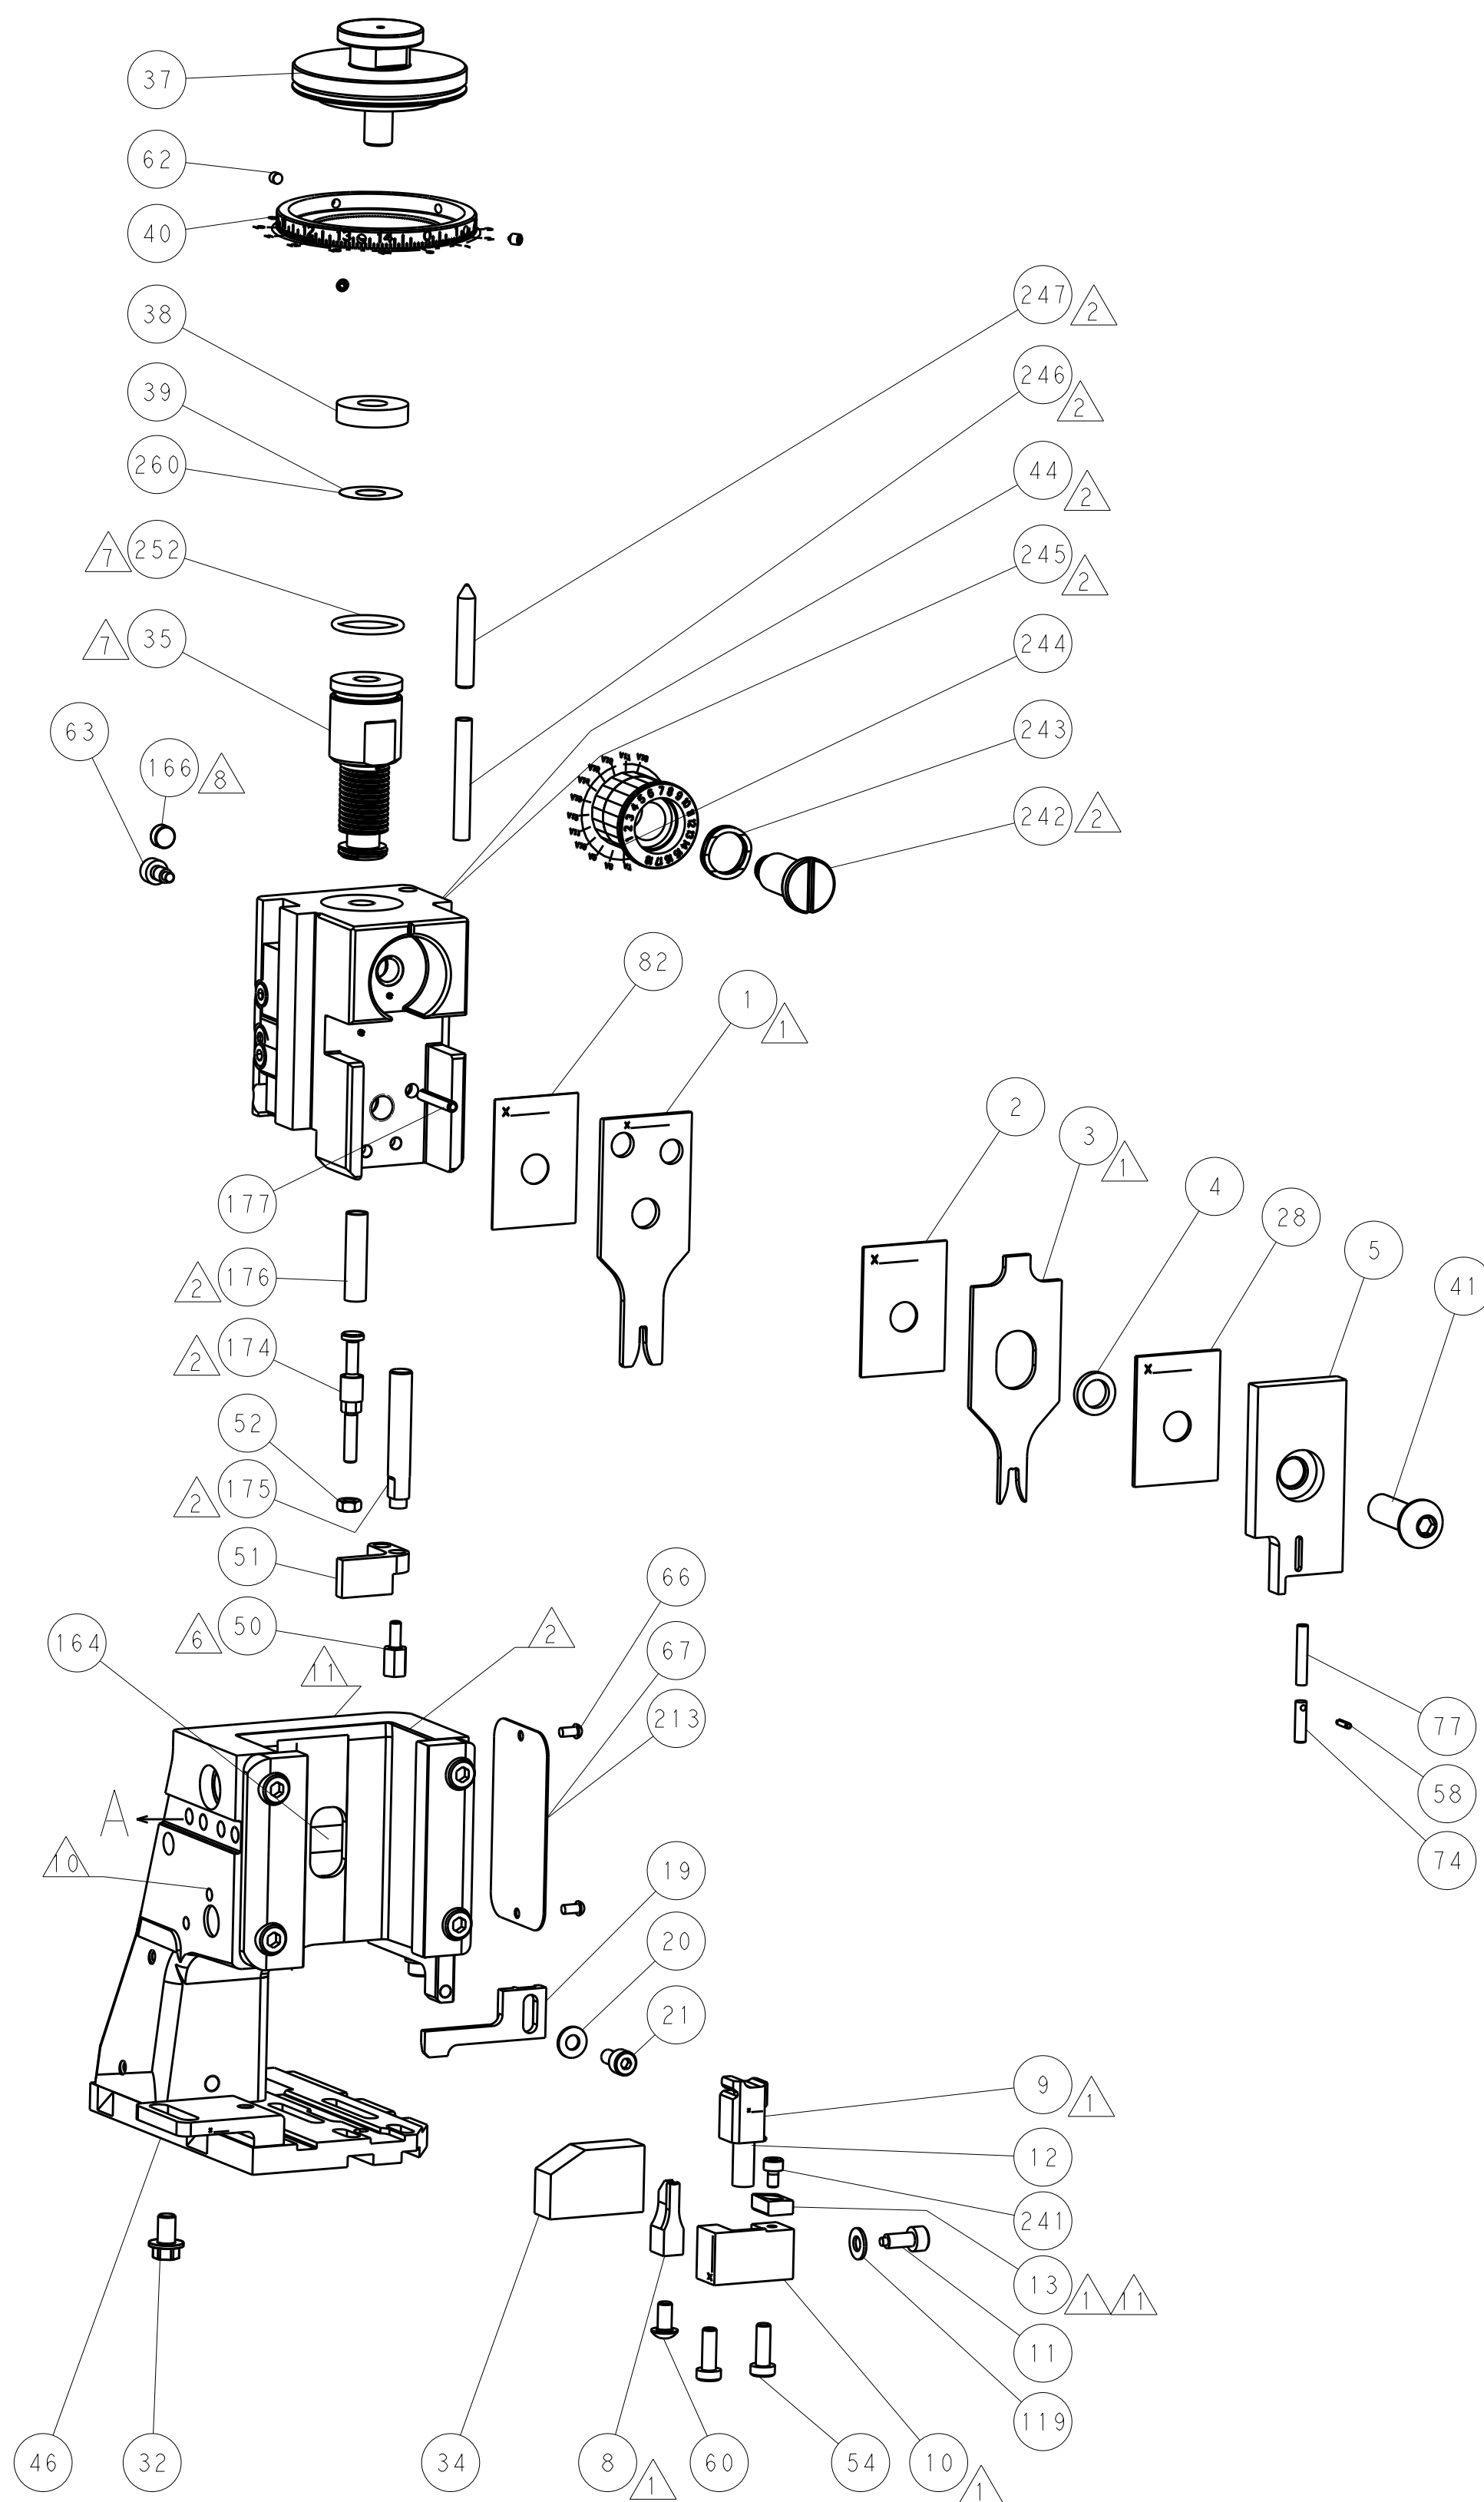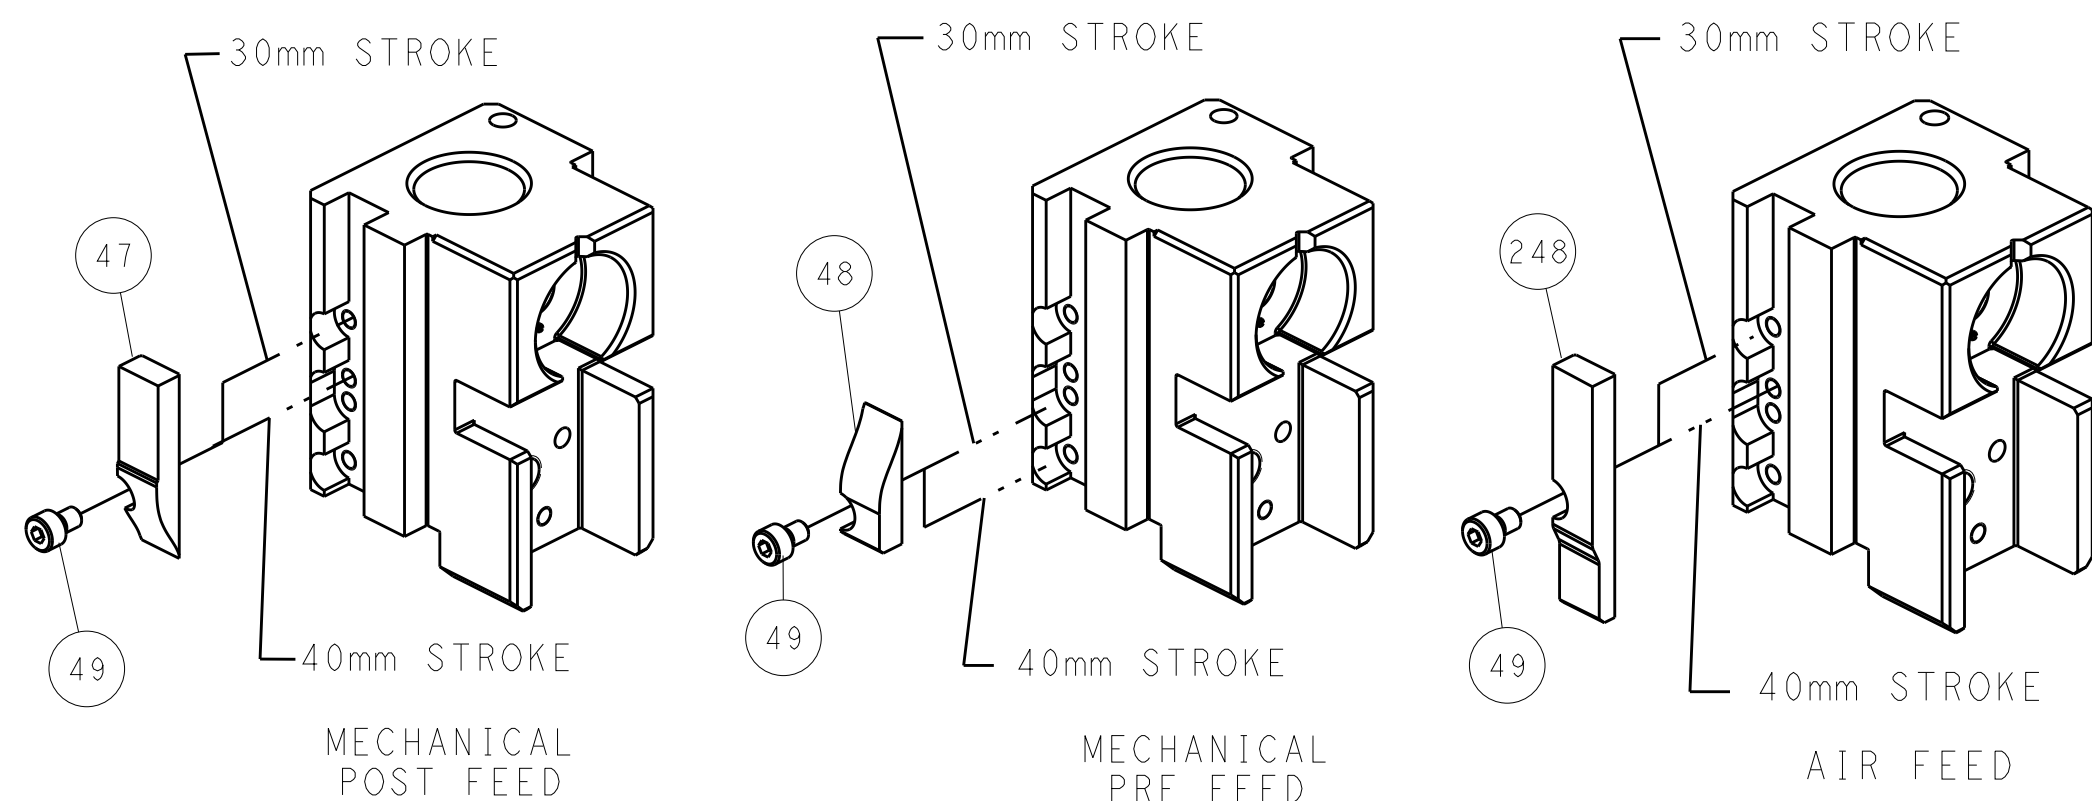

TERMINAL SUPPORT LOCATION

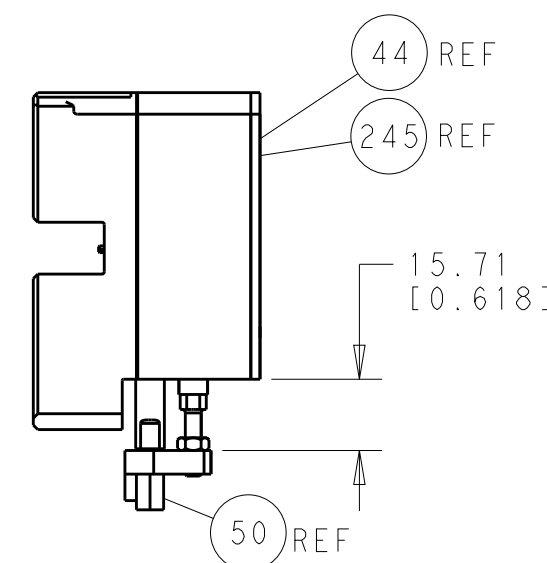

HOLDDOWN SET-UP

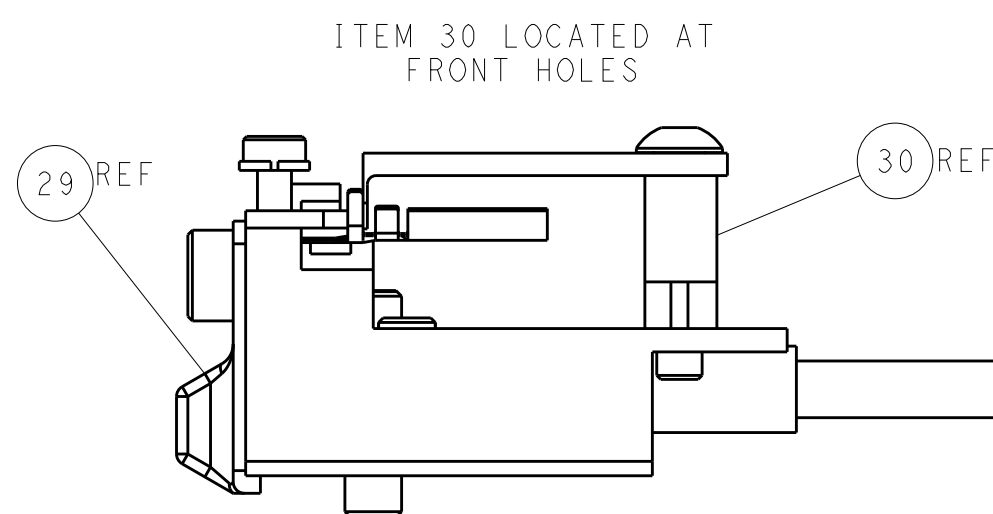

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

ATLANTIC VERSION
Shown on sheets 1 of 4 & 2 of 4
(Pacific version shown on sheets 3 of 4 & 4 of 4)

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS SUBJECT TO CHANGE WITHOUT NOTICE.				OWN: R. O. WILSON 17MAY2010 CHK: K. J. STAKEM 17MAY2010 APVD: T. L. ELGIN 17MAY2010				TE Connectivity Harrisburg, PA 17105-3608			
DIMENSIONS: mm				TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±.02 2 PLC ±.02 3 PLC ±.005 4 PLC ±.0005 ANGLES ±.1				NAME: Ocean Side Feed Applicator			
MATERIAL: -				FINISH: -				SIZE: A1 CAGE CODE: 00779 DRAWING NO: 2151667			
Customer Accessible Production Drawing				SCALE: 1:1				SHEET 2 OF 4 REV A			

SHEETS 3 & 4 ARE NOT REQUIRED FOR ATLANTIC VERSION


DIMENSIONING AND TOLERANCING PER ASME Y14.5M-2009

C


B

A


FEED TYPE MECHANICAL

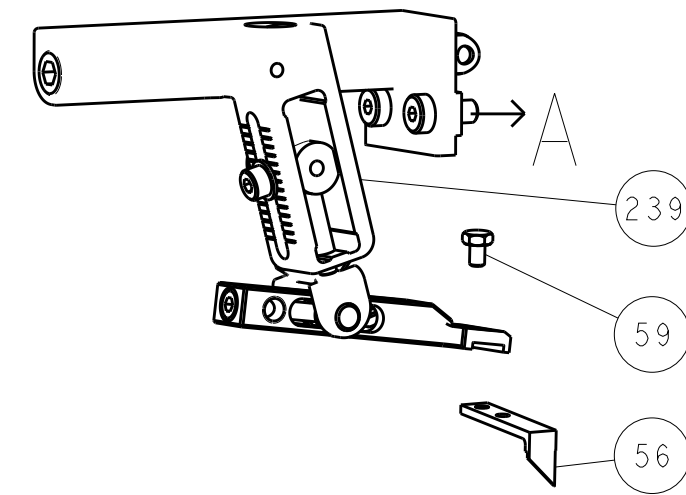




PNEUMATIC

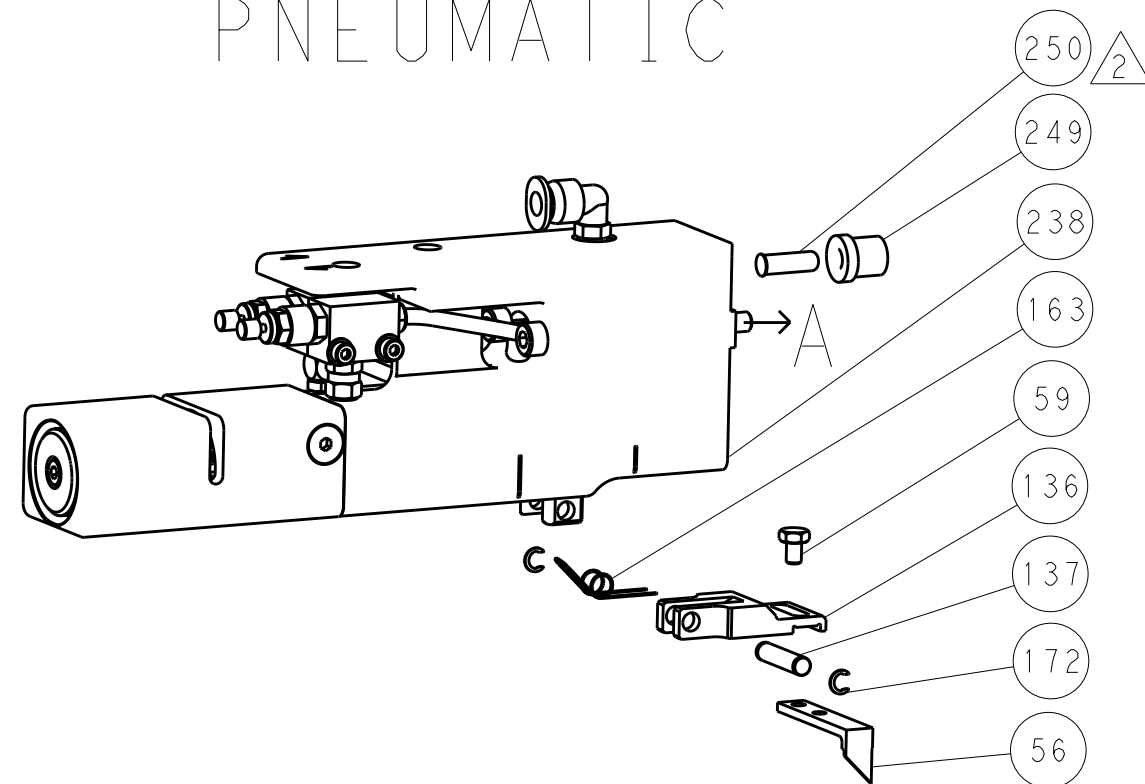


SERVO LATCH PLATE

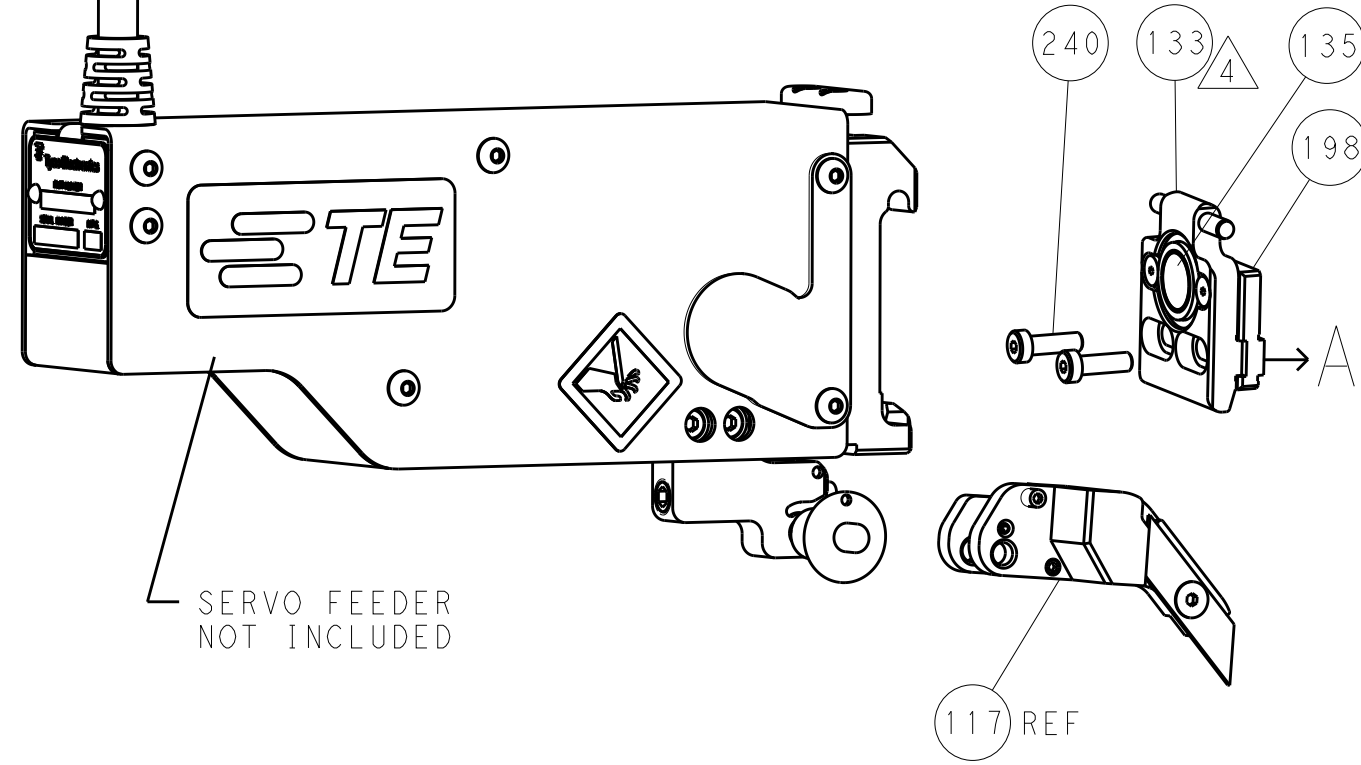


CAM POSITIONS

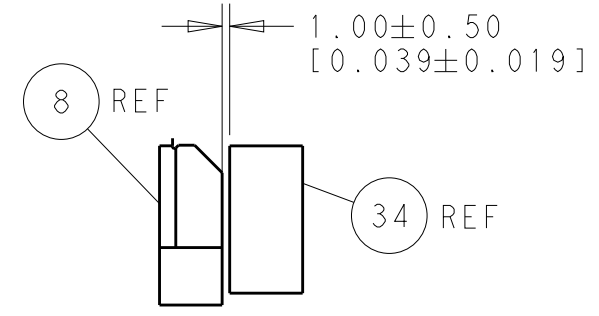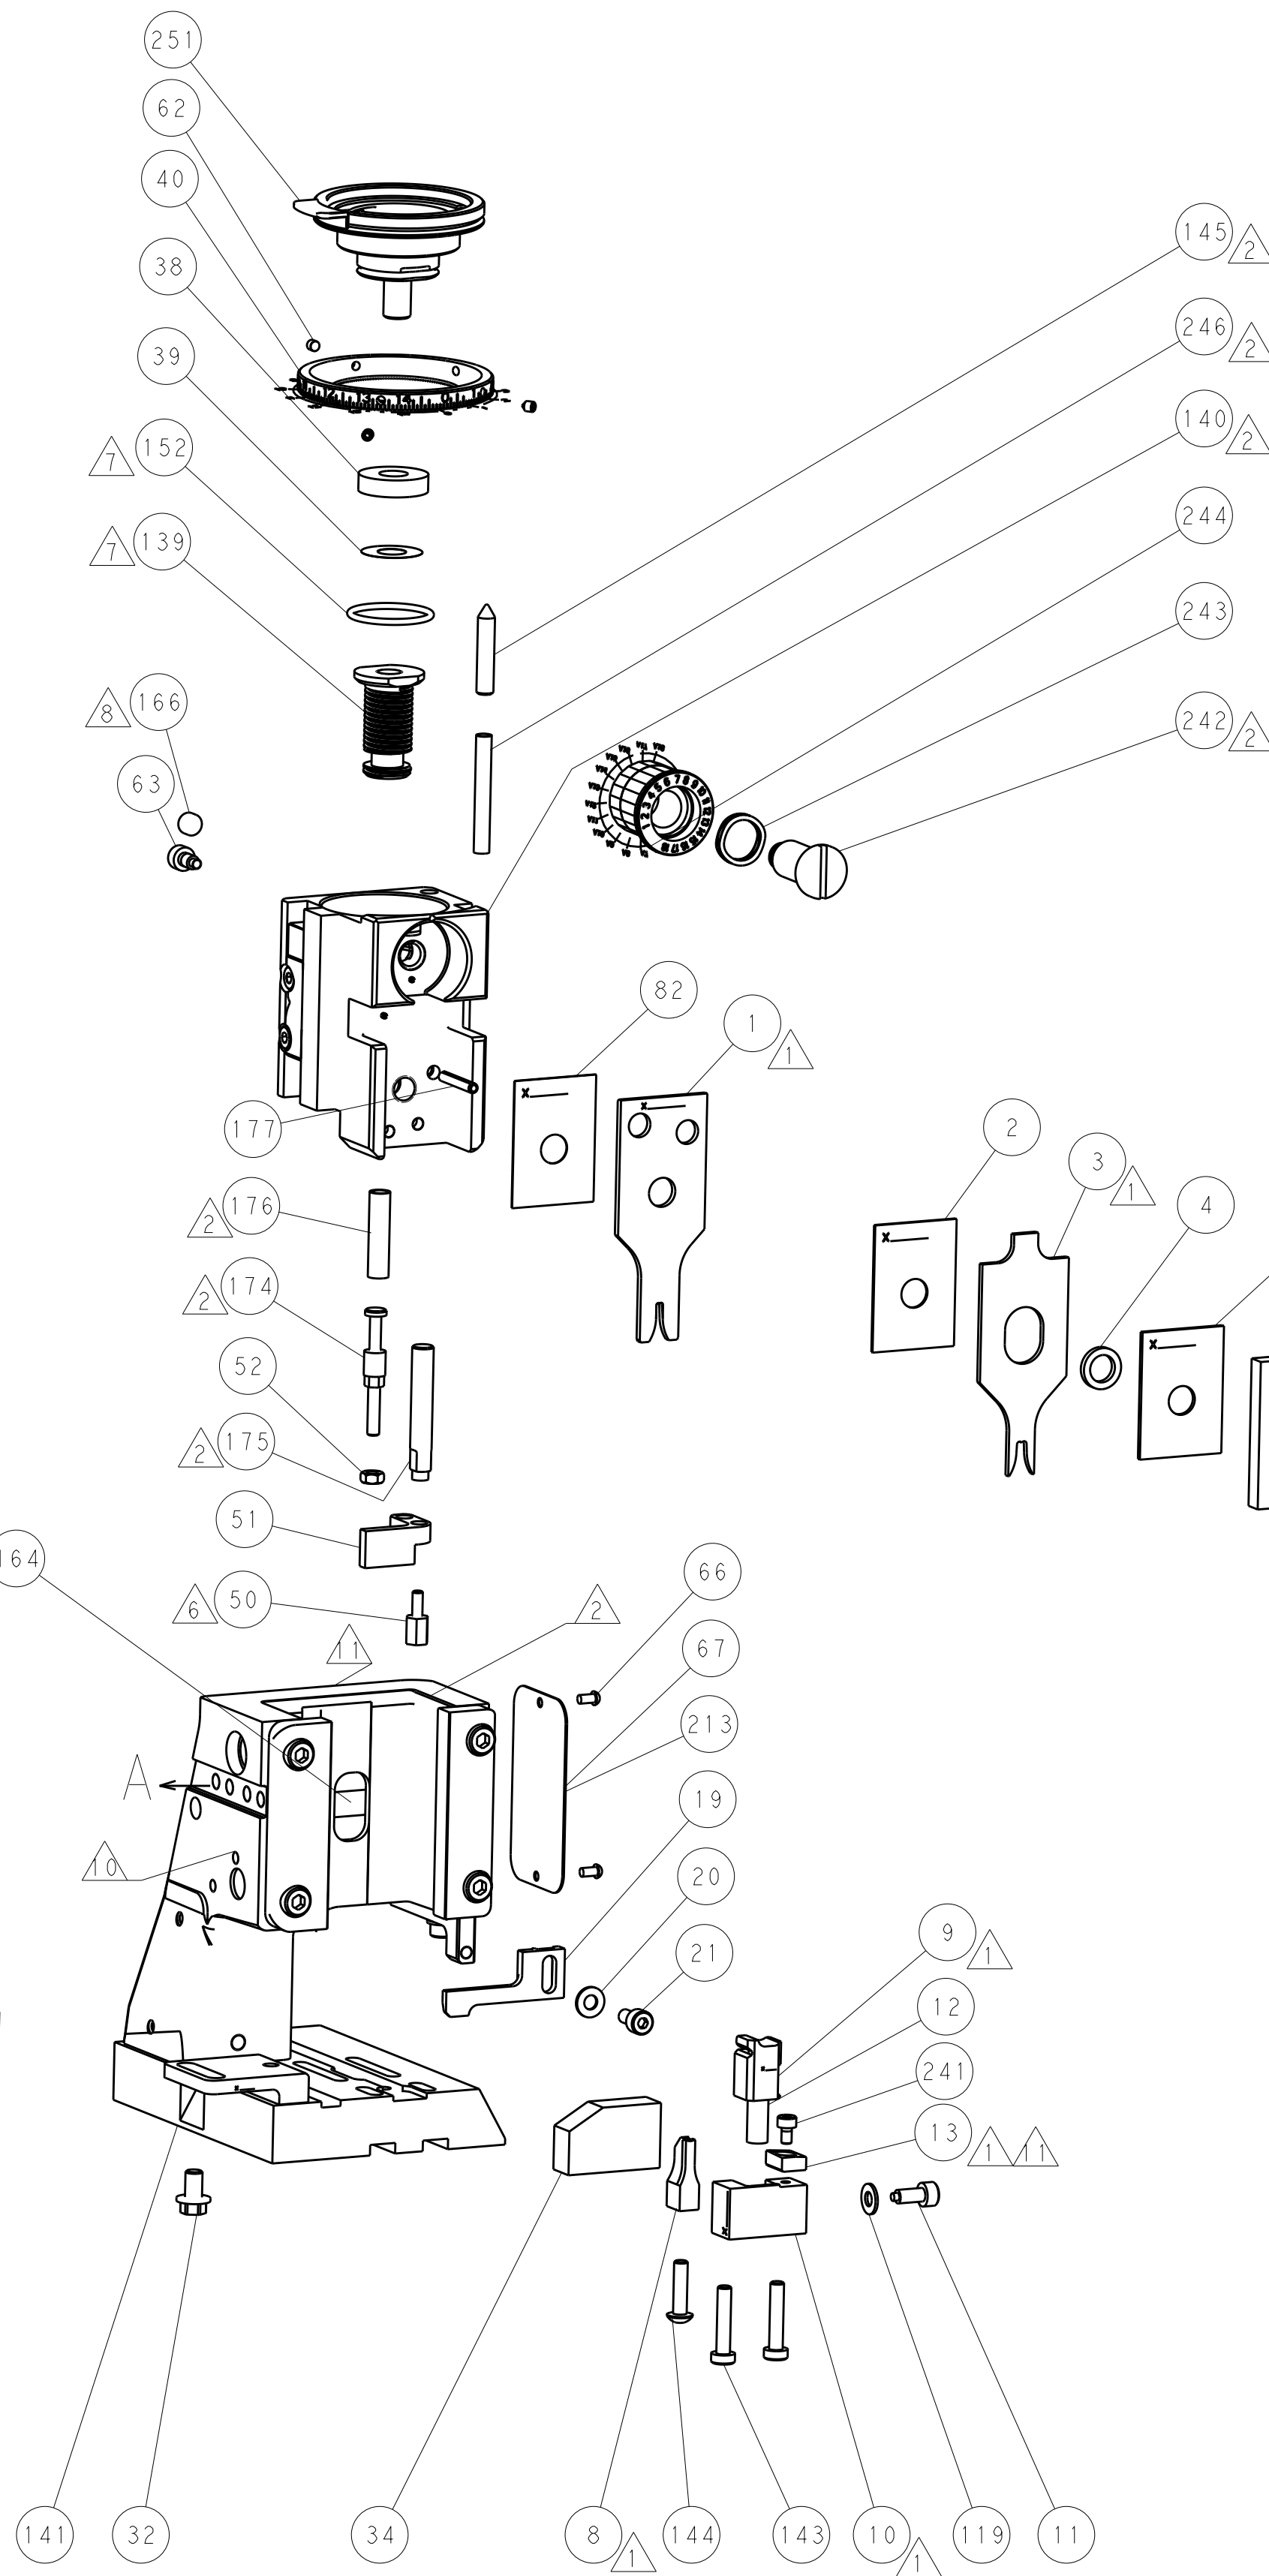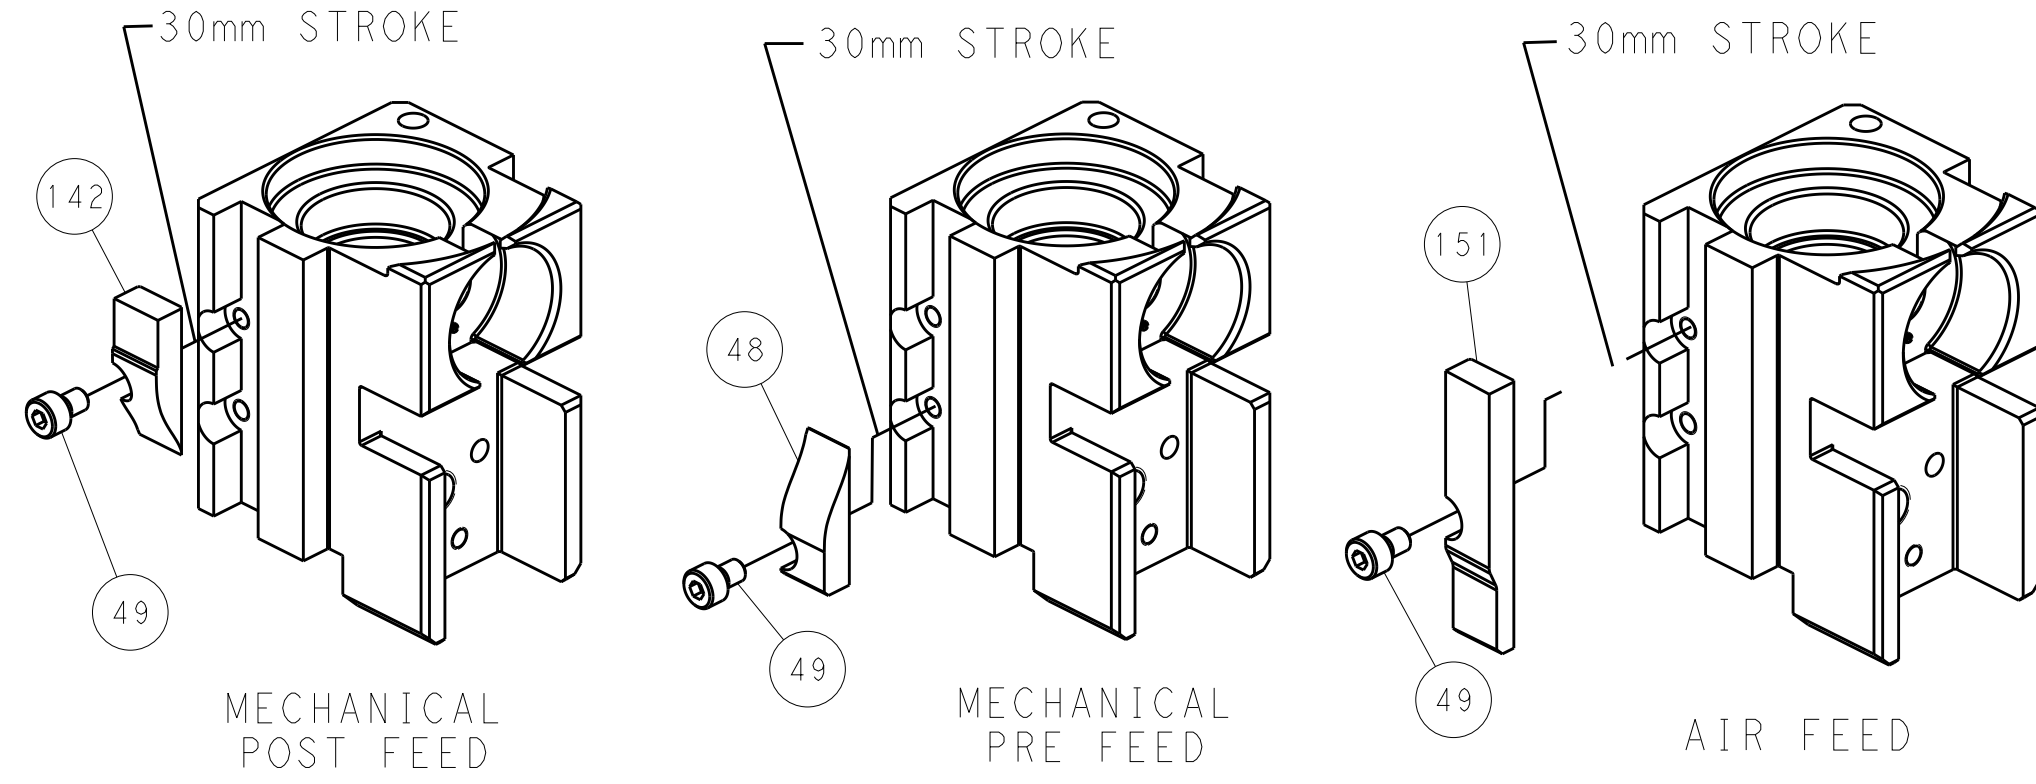

TERMINAL SUPPORT LOCATION

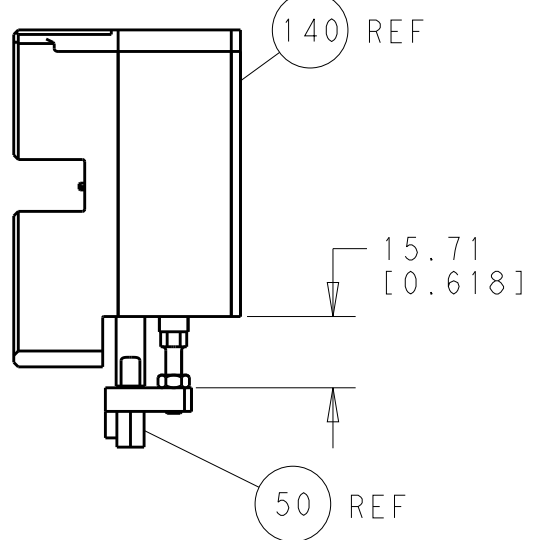

HOLDDOWN SET-UP

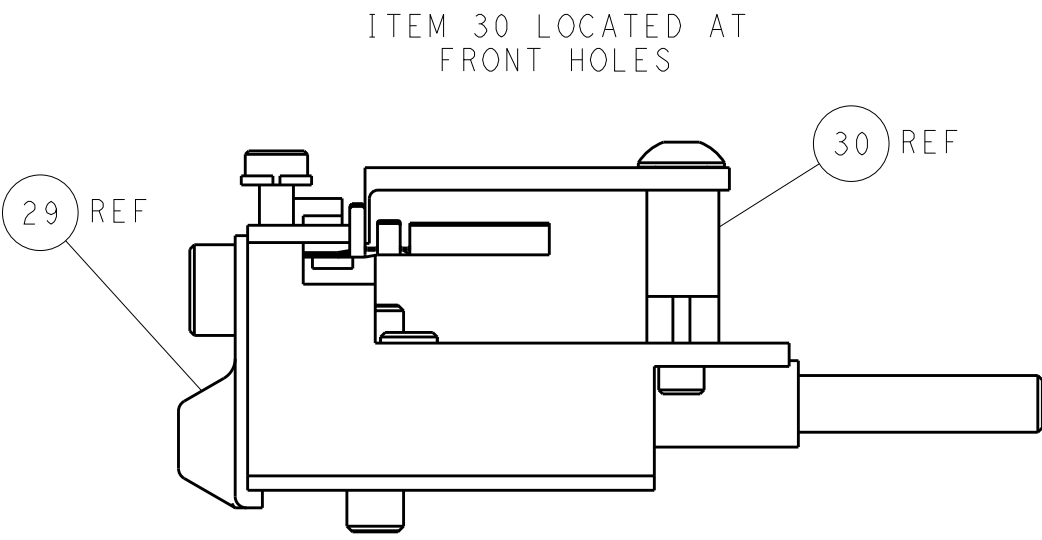

FEED TRACK POSITION
GUIDE BY INSULATION BARREL

PACIFIC VERSION
Shown on sheets 3 of 4 & 4 of 4
(Atlantic version shown on sheets 1 of 4 & 2 of 4)

THIS DRAWING IS UNPUBLISHED. IT IS SUBJECT TO CHANGE WITHOUT NOTICE. ANY CHANGES TO THIS DRAWING SHOULD BE CONTACTED FOR THE LATEST REVISION.		OWN R. Q. WILSON CHK K. J. STAKEM APVD T. L. ELGIN	17MAY2010 17MAY2010 17MAY2010	NAME Ocean Side Feed Applicator
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC
0 PLC ±.1		1 PLC ±.02		APPLICATION SPEC
2 PLC ±.02		3 PLC ±.005		WEIGHT
4 PLC ±.0005		ANGLES		SCALE
FINISH		MATERIAL		SHEET 4 OF 4
Customer Accessible Production Drawing		REV A		RESTRICTED TO

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9