
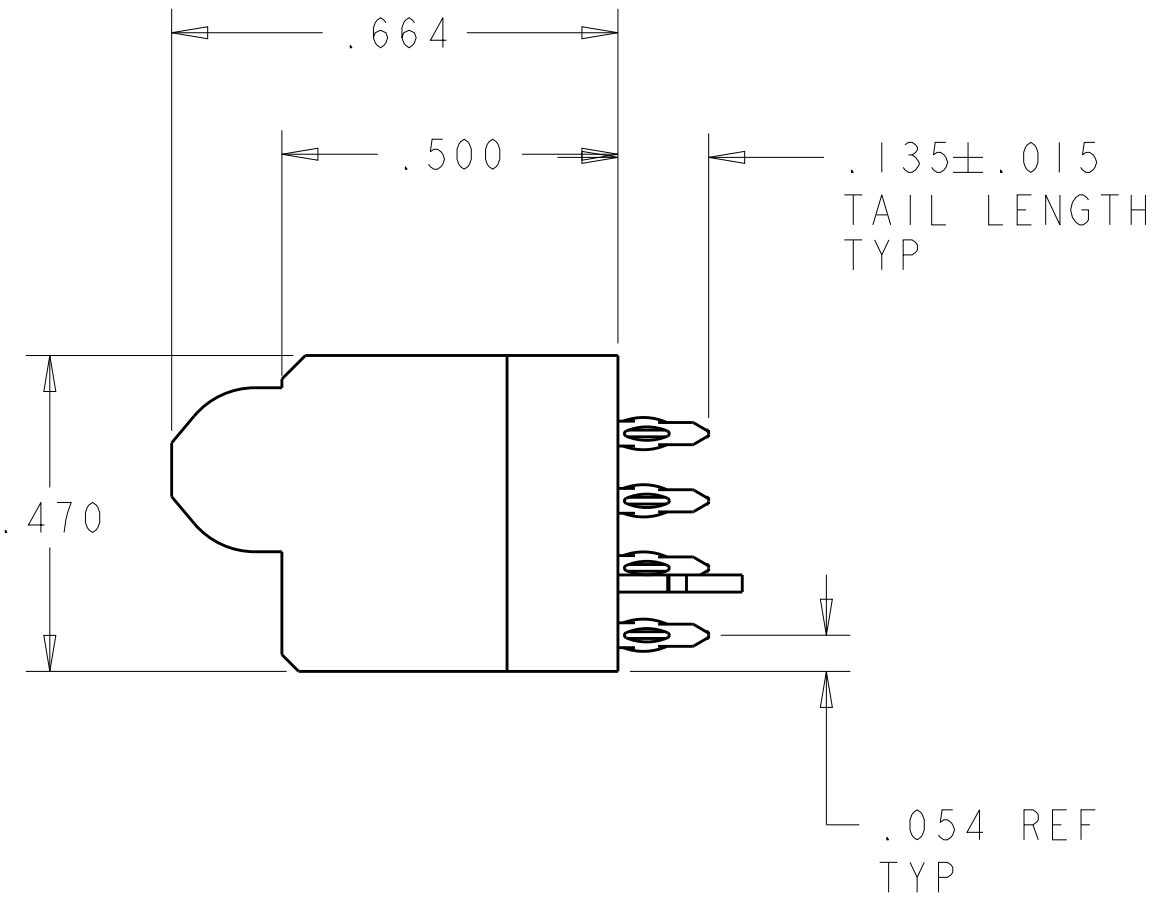
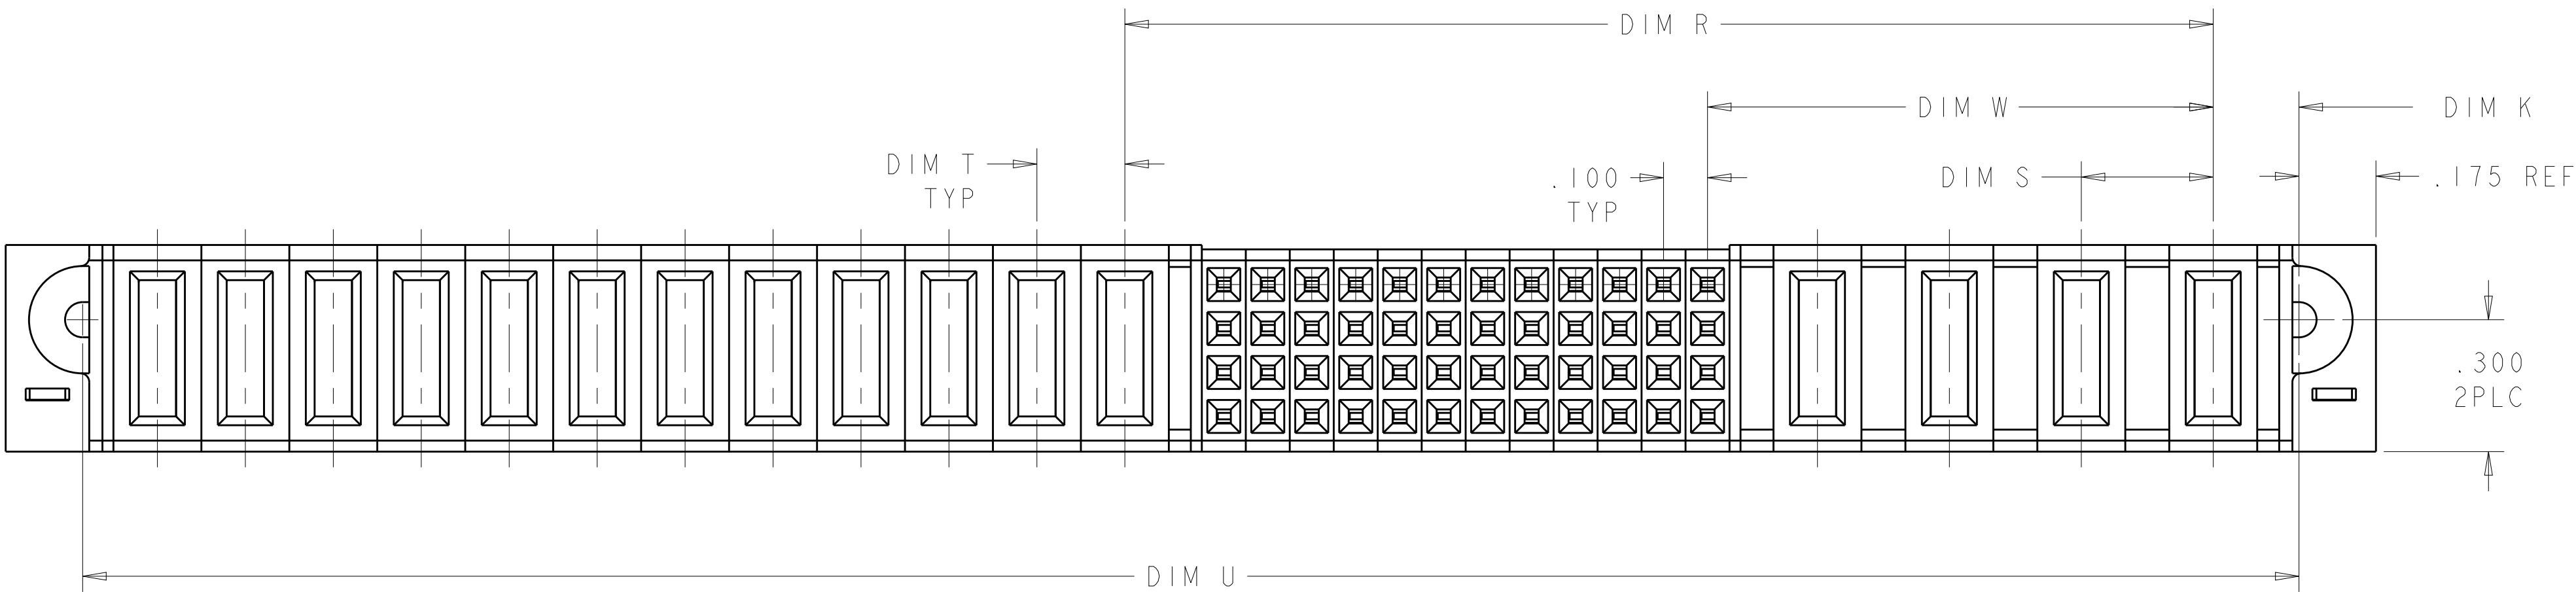
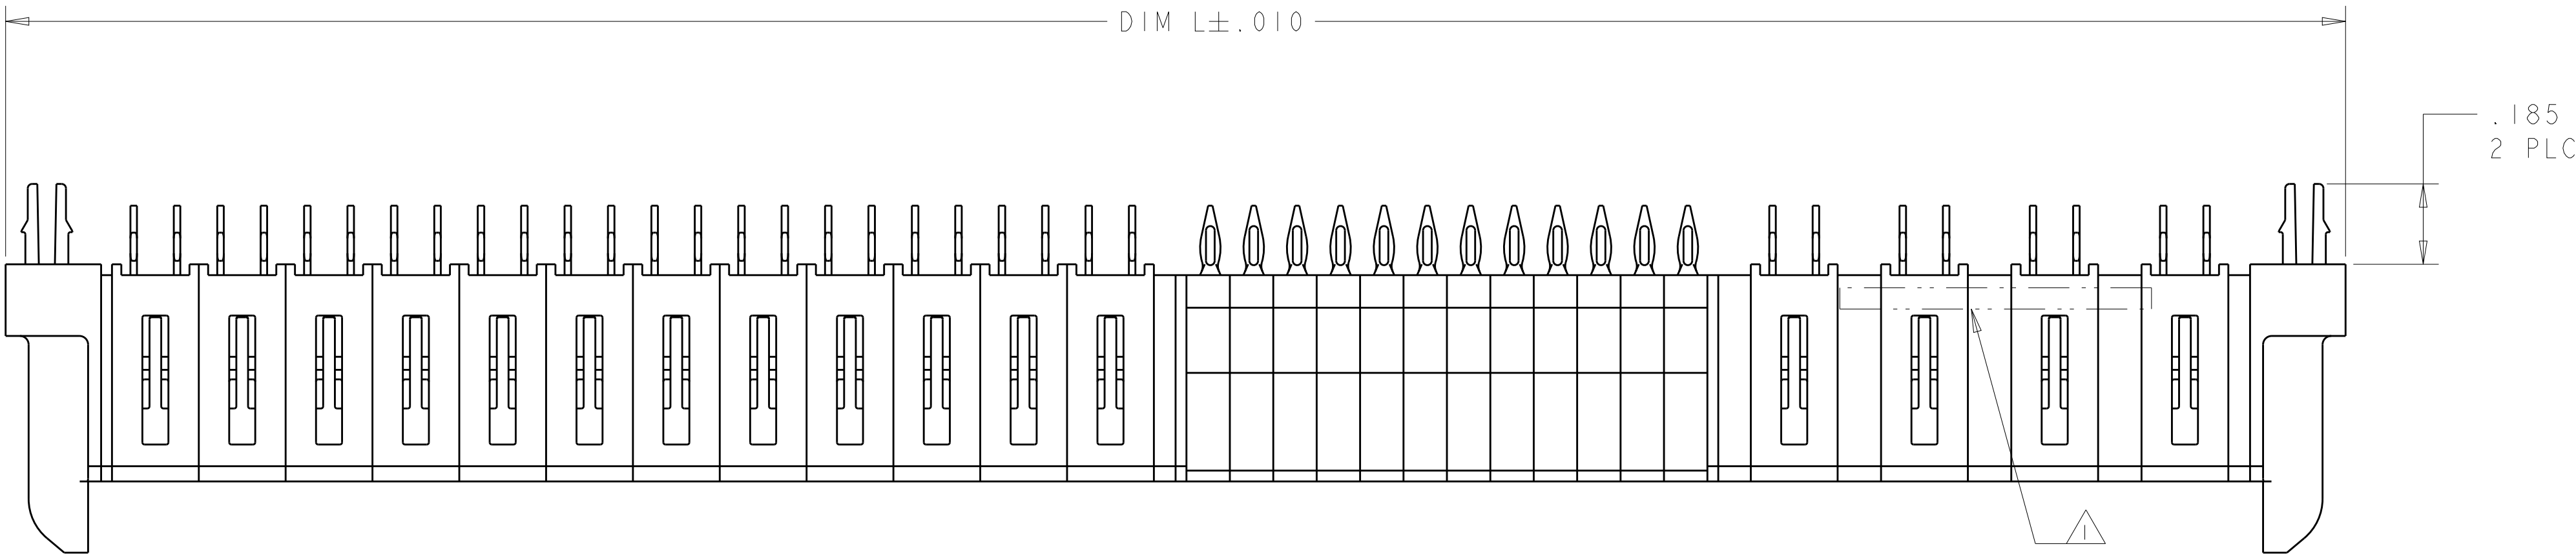


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		J9		REV PER ECR-12-020199	22NOV2012	CZ	SZ	

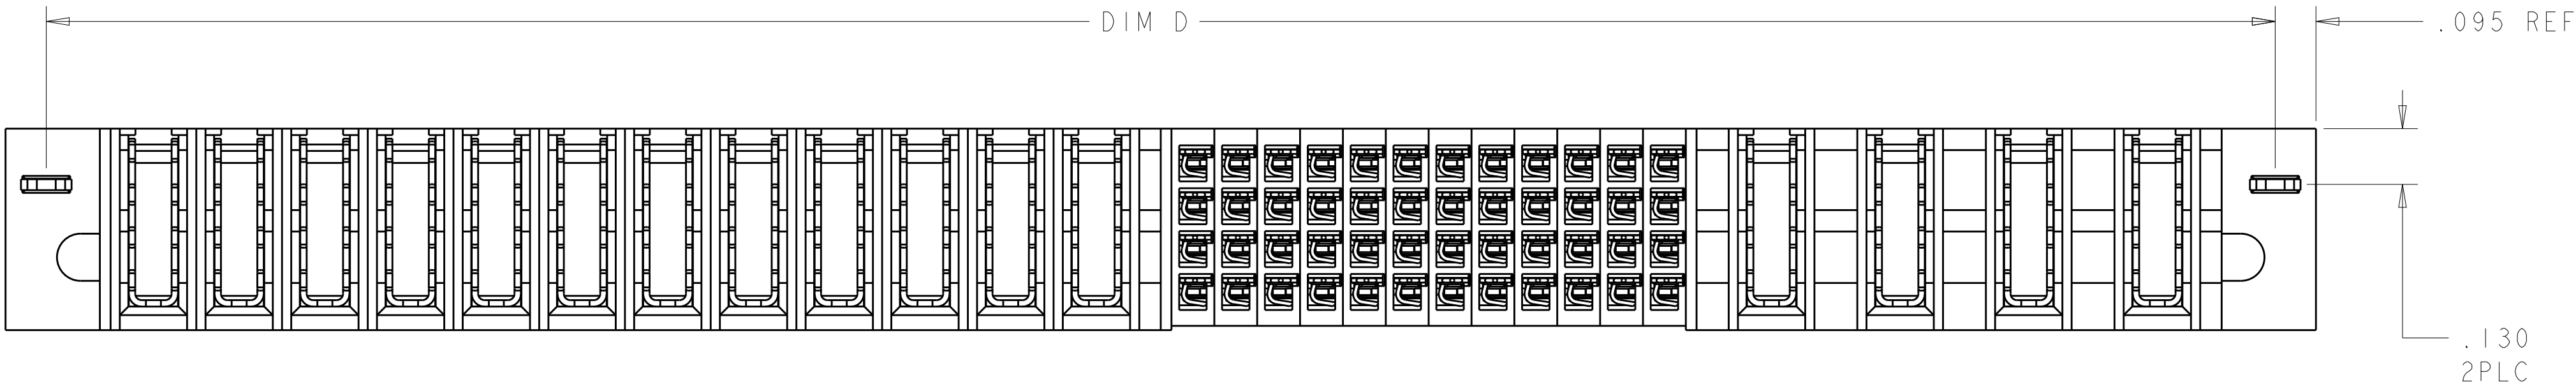

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU		20DEC2007		 TE Connectivity		
		CHK	S. ZHAO		20DEC2007				
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		S. ZHAO		NAME	
INCHES				-				VER RECEP ASSEMBLY SHORT GUIDES, PRESS FIT MULTI-BEAM XLE	
		0 PLC		±		PRODUCT SPEC			
		1 PLC		±		108-2292			
		2 PLC		± 0.01		APPLICATION SPEC			
		3 PLC		± 0.05		114-13251		SIZE	
		4 PLC		± 0.020				CAGE CODE	
		ANGLES		± 7°				DRAWING NO	
MATERIAL		FINISH		-		WEIGHT		RESTRICTED TO	
				-		A		00779	
						C		6450860	
						CUSTOMER DRAWING		SCALE	
								N/A	
								SHEET	
								1	
								OF	
								28	
								REV	
								K2	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	SEE SHEET 1	-	-	-	


- 1 "AMP". PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 2 MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC,UL94 V-O,BLACK.
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
LP CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 3 CONTACT PLATING - NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER AND SIGNAL CONTACTS
- 4 MECHANICAL CONNECTOR KEEP OUT ZONE
- 5 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 6 PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 7 PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 8 FOR P/S/LP CONFIGURATION, PLEASE REFER TO SHEET 3.
- 9 FOR LP/S/P CONFIGURATION, PLEASE REFER TO SHEET 3.
- 10 VARIABLE DIMENSIONS SHOW ON TABLE.
- 11 FOR LP/S/LP CONFIGURATION, PLEASE REFER TO SHEET 3.
- 12 SPECIAL DIMENSIONS SEE SHEET 3

- 68 13 RECOMMEND USING CUSTOMER SUPPLIED SCREWS TO SECURE TO BOARD
TYCO P/N:19024-2.RECOMMEND TORQUE IS TBD.
ASSUMING A CARD THICKNESS OF TBD, FINAL SCREW LENGTH AND CARD THICKNESS ARE FACTORS TO BE
CONSIDERED IF APPLYING A SCREW FOR AN APPLICATION AND MAY VARY FOR EACH APPLICATION.

K2	1.850	.250	.250	.170	1.690	.425	1.100	2.040	2P + 24S + 2P	5-6450860-2
	1.185	-	-	.1025 ¹¹	1.025	.2725 ¹¹	.705 ¹¹	1.375	2LP + 16S + 2LP	4-6450860-8
	2.850	.250	.250	.170	2.690	.925	1.600	3.040	4P + 24S + 4P	4-6450860-7
	2.150	.250	.250	.170	1.990	.475	1.400	2.340	2P + 32S + 2P	4-6450860-6
	2.705	.115	.10 ¹⁰	.170	2.545	1.800	2.1575	2.895	3ACP+3P+12S+2LP	4-6450860-5 ⁸
	4.450	.250	.250	.170	4.290	1.925	2.200	4.640	8P + 8S + 8P	4-6450860-4
	1.400	.250	.250	.145	1.240	.425	.700	1.590	2P + 8S + 2P	4-6450860-3
	1.330	.250	-	.1275	1.170	.2725	.5725	1.520	2LP + 8S + 2P	4-6450860-2
	2.400	.200	.200	.145	2.240	.775	1.350	2.590	4HDP + 20S + 4HDP	4-6450860-1
	1.350	-	-	.170	1.190	.175	.850	1.540	1P + 24S + 1P	4-6450860-0
	1.360	-	.230 ⁹	.1275 ⁹	1.200	.4775 ⁹	.8525 ⁹	1.550	4LP + 12S + 1P	3-6450860-9
	2.550	.250	.250	.170	2.390	.475	1.800	2.740	2P + 48S + 2P	3-6450860-6
	3.850	.250	.250	.170	3.690	1.425	2.100	4.040	6P + 24S + 6P	3-6450860-5
	1.075	-	-	.1025 ¹¹	.915	.2725 ¹¹	.480	1.265	2LP + 8S + 3LP	3-6450860-4
	1.330	.250	-	.1275	1.170	.2725	.5725	1.520	2LP + 8S + 2P	3-6450860-3
	1.800	.250	.250	.220	1.640	.450	.950	1.990	2P + 16S + 2P	3-6450860-2
	2.870	.230	.230	.1525 ¹¹	2.710	.6550 ¹¹	2.2125 ¹¹	3.060	4LP + 60S + 4LP	3-6450860-1
	.975	-	-	.1025 ¹¹	.815	.2725 ¹¹	.380 ¹¹	1.165	2LP + 4S + 3LP	3-6450860-0
	1.950	.250	.250	.170	1.790	.475	1.200	2.140	2P + 24S + 2P	2-6450860-9
	2.550	.250	.250	.170	2.390	.925	1.300	2.740	4P + 12S + 4P	2-6450860-8
	5.635	.250	.250	.170	5.475	.475	1.885 ¹²	5.825	2P + 32S + 4LP + 14P	2-6450860-6 ¹²
	3.570	.250	.230 ⁹	.1525 ⁹	3.410	2.1125 ⁹	2.8375 ⁹	3.760	18LP + 24S + 2P	2-6450860-5
	6.050	.250	.250	.145	5.890	1.950	3.850	6.240	8P + 72S + 8P	2-6450860-1
	1.950	.250	.250	.170	1.790	.475	1.200	2.140	2P + 24S + 2P	2-6450860-0
	3.350	.200	.200	.170	3.190	1.175	1.850	3.540	6HDP + 24S + 6HDP	1-6450860-7
	-	.250	.230 ⁹	.1275 ⁹	2.205	.7325 ⁹	1.4075 ⁹	2.555	6LP + 24S + 3P	1-6450860-6
	2.450	.200	.200	.170	2.290	.775	1.350	2.640	4HDP + 20S + 4HDP	1-6450860-5
	2.150	.200	.200	.170	1.990	.775	1.050	2.340	4HDP + 8S + 4HDP	1-6450860-4
	2.450	- ¹⁰	.250	.170	2.290	.925	1.200	2.640	4P + 8S + 4P	1-6450860-3
	3.450	- ¹⁰	.250	.170	3.290	1.425	1.700	3.640	6P + 8S + 6P	1-6450860-2
	2.800	.300	.250	.170	2.640	.925	1.700	2.990	4P + 28S + 3ACP	1-6450860-0
	2.510	-	-	.170	2.350	.455	1.6875	2.700	1P+2LP+48S+2LP+1P	6450860-9
	2.800	.300	.250	.170	2.640	.925	1.700	2.990	4P + 28S + 3ACP	6450860-7
	2.425	.250	.300	.170	2.265	.500	1.175	2.615	2ACP + 24S + 4P	6450860-6
	3.665		.230	.1025	3.505	.7325	1.4075	3.855	6LP + 24S + 10P	6450860-5
	2.530	- ¹⁰	.250 ⁹	.170 ⁹	2.370	1.175 ⁹	1.9825 ⁹	2.720	5P + 32S + 2LP	6450860-4
	5.545	.230	.250	.195	5.385	2.975	4.2325 ⁸	5.735	12P + 48S + 8LP	6450860-3
	5.200	.200 ⁸	.300	.195	5.040	1.150	2.475 ⁸	5.390	4ACP + 48S + 12HDP	6450860-2
	.985	-	-	.1025 ¹¹	.825	.2725 ¹¹	.505 ¹¹	1.175	2LP + 8S + 2LP	6450860-1
	D	T	S	K	U	W	R	L	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL

-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

-

DWN
D. ZHU

CHK
S. ZHAO

APVD
S. ZHAO

PRODUCT SPEC
108-2292

APPLICATION SPEC
114-13251

WEIGHT
-

CUSTOMER DRAWING

ZODEC2007

ZODEC2007

-

NAME
VER RECEP ASSEMBLY
SHORT GUIDES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
6450860

RESTRICTED TO
-

SCALE
N/A



SHEET
2

OF
28



REV
K2

TE Connectivity


LOC		DIST		REVISIONS			
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

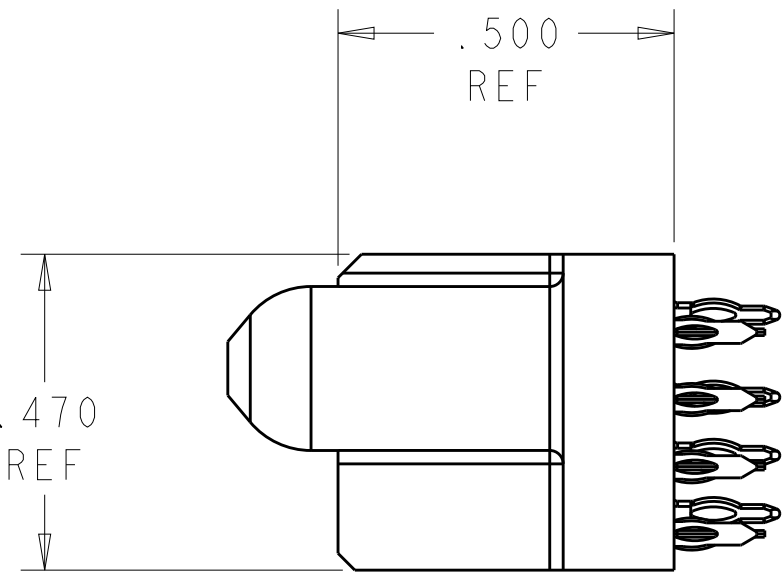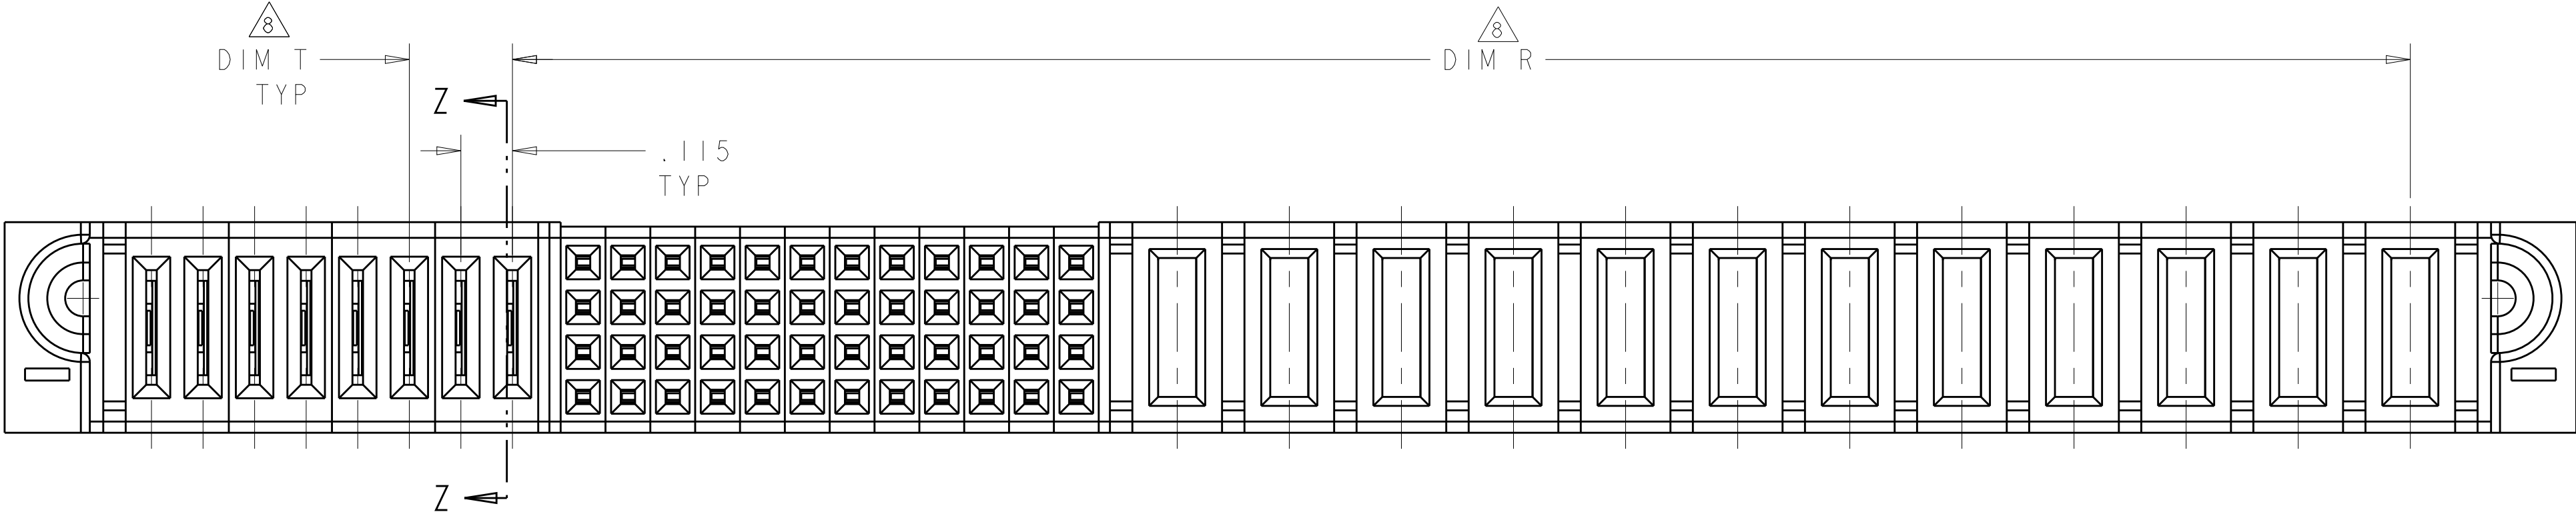


FOR P/S/LP CONFIGURATION
UNSPECIFIED DIMENSION REFER TO SHEET 1

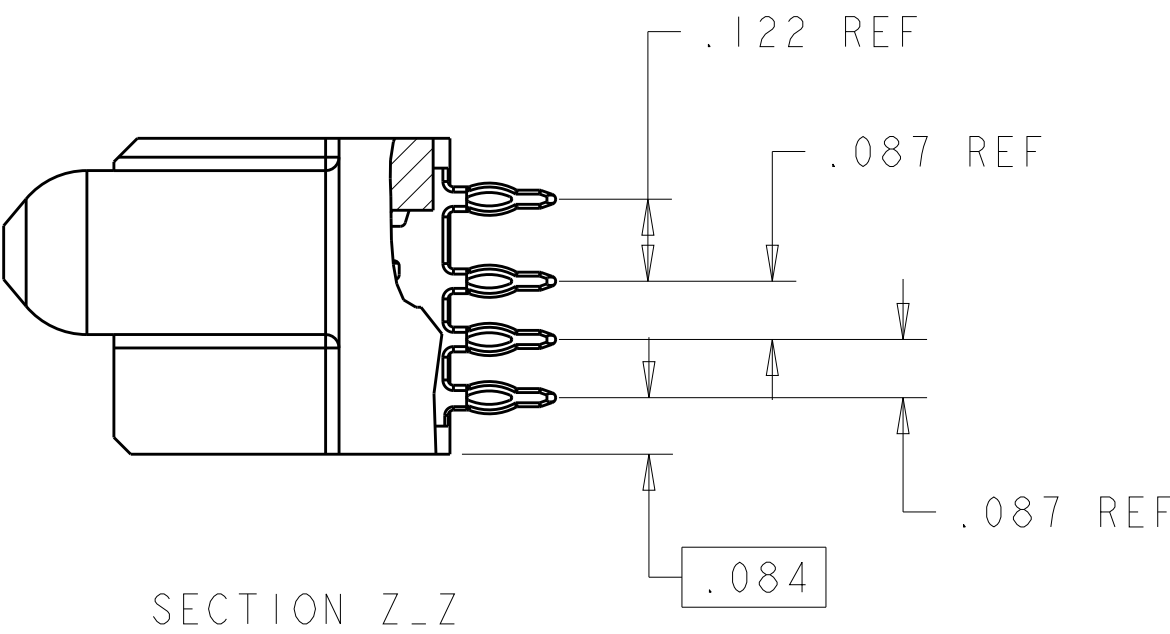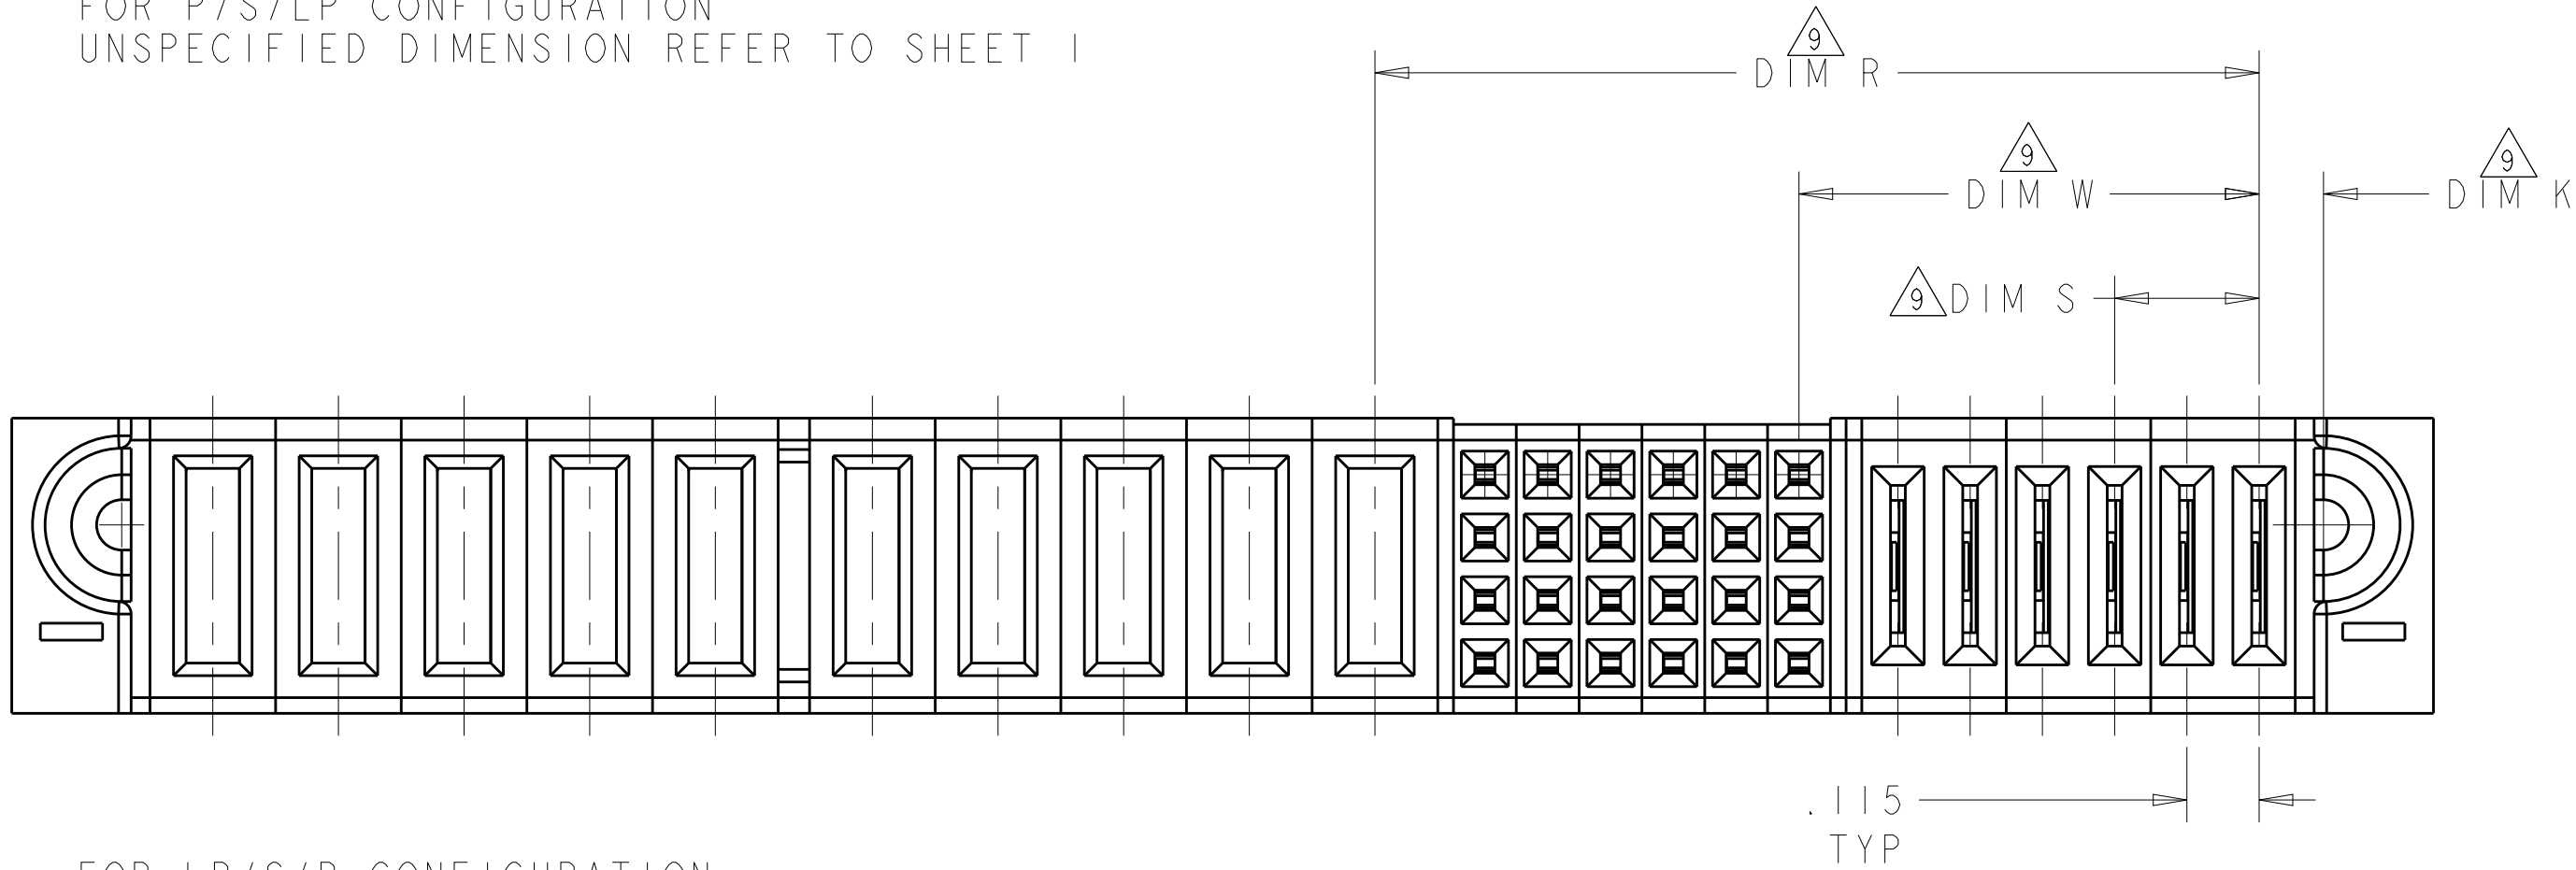


FOR LP/S/P CONFIGURATION
UNSPECIFIED DIMENSION REFER TO SHEET 1

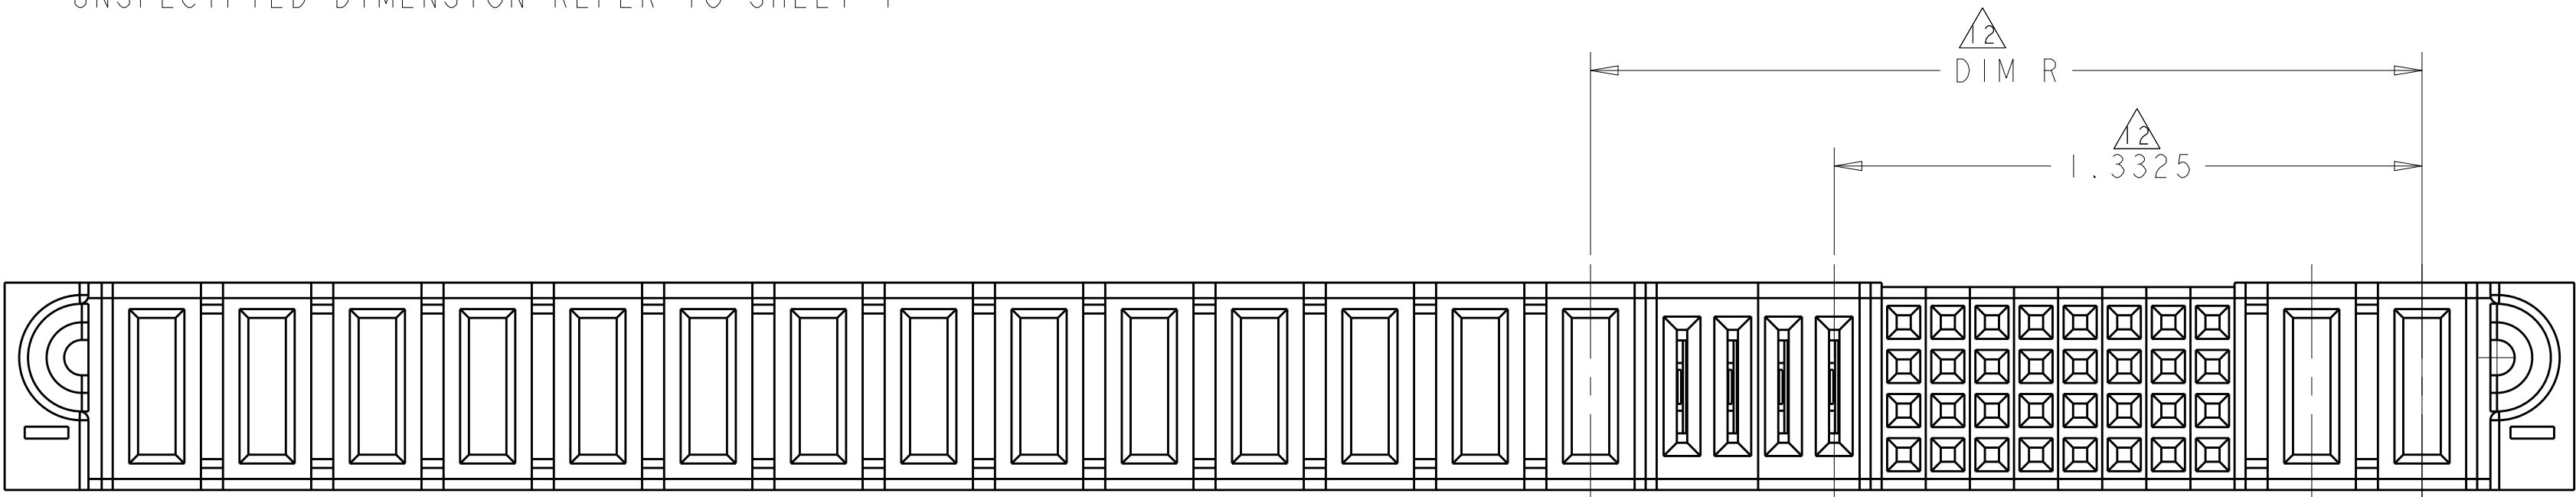


FOR PART 2-6450860-6

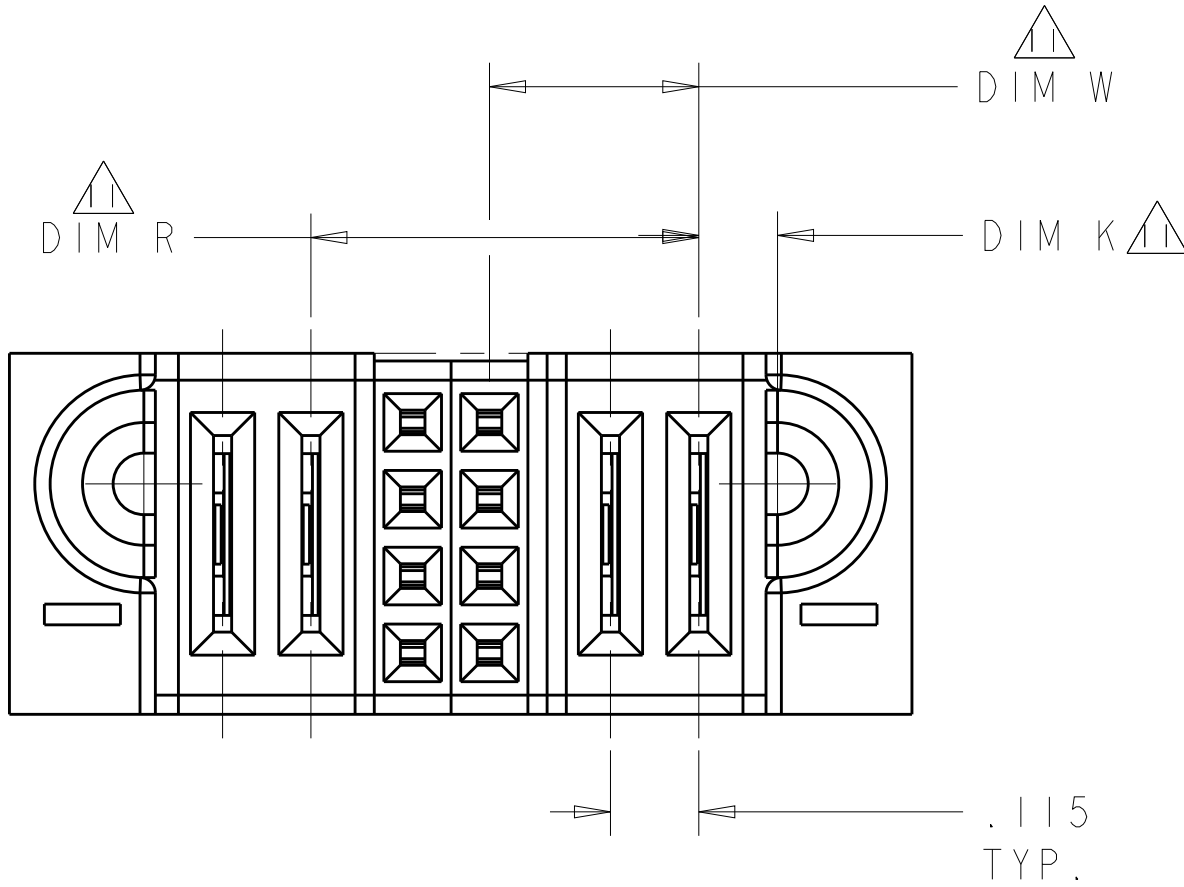


FOR LP/S/LP(6450860-1 AND 3-6450860-0) CONFIGURATION
UNSPECIFIED DIM REFER TO SHEET 1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. ZHU	20DEC2007	 TE Connectivity					
		CHK S. ZHAO	20DEC2007						
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME					
INCHES									
		0 PLC	±"	PRODUCT SPEC					
		1 PLC	±.01						
		2 PLC	±.01						
		3 PLC	±.005						
		4 PLC	±.0020	APPLICATION SPEC					
		ANGLES	±2°						
		FINISH	-	114-13251					
			-						
MATERIAL				WEIGHT					
CUSTOMER DRAWING				SCALE		SHEET 3 OF 28			
				N/A		REV K2			

LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	DWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER												SIGNAL												POWER					
			P16	P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	I2	I1	I0	9	8	7	6	5	4	3	2	1	P4	P3	P2	P1		
6450860-2	D C B A		GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS		
															AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS	GS		
																AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS		GS
																AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	GS	GS	GS		GS
4ACP + 48S + 12HDP																																

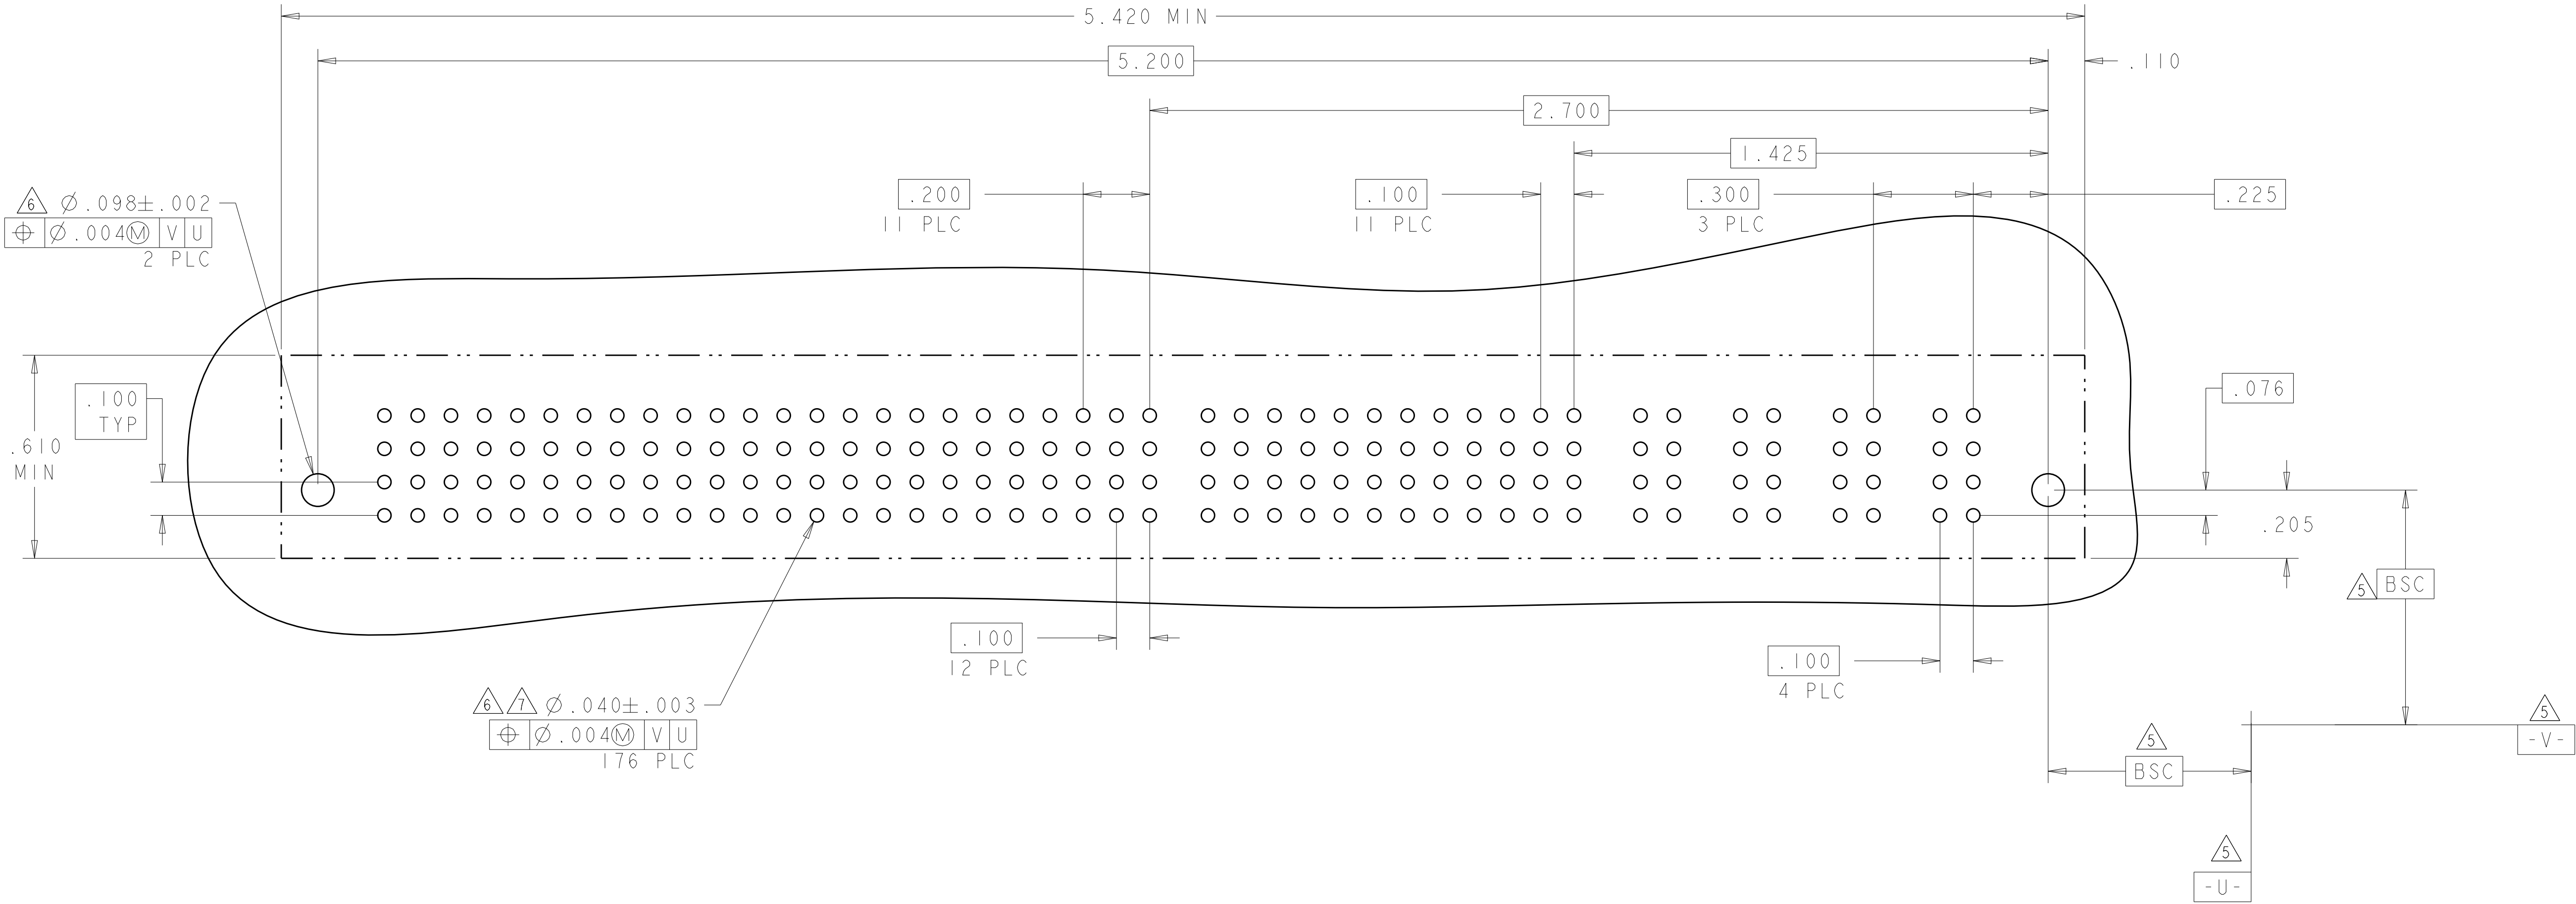

LSI	STD LP POWER PRESS FIT CONTACT
GP	MFBL POWER PRESS FIT CONTACTS
GS	STD POWER PRESS FIT CONTACTS
AP	SIGNAL PRESS FIT CONTACT
CODE	DESCRIPTION
CONTACT TABLE	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL
-

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±"
±.01
±.005
±.0020
#2°
-

DWN
D. ZHU
CHK
S. ZHAO
APVD
S. ZHAO

20DEC2007
20DEC2007
-

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

CUSTOMER DRAWING

NAME

VER RECEP ASSEMBLY
SHORT GUIDES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450860

RESTRICTED TO
-

SCALE
N/A

SHEET
4

OF
28


REV
K2

4805 (3/11)



[illegible]4805 (3/11)

PART NUMBER	ROWS		SIGNAL									POWER							
			LP2	LP1	8	7	6	5	4	3	2	1	P5	P4	P3	P2		P1	
6450860-4	D		LSI		AP	AP	AP	AP	AP	AP	AP	AP	GS	GP	GS	GP	GP		
	C				AP	AP	AP	AP	AP	AP	AP	AP							AP
	B				AP	AP	AP	AP	AP	AP	AP	AP							AP
	A				AP	AP	AP	AP	AP	AP	AP	AP							AP
5P + 32S + 2LP																			

NO CONTACT LOADED

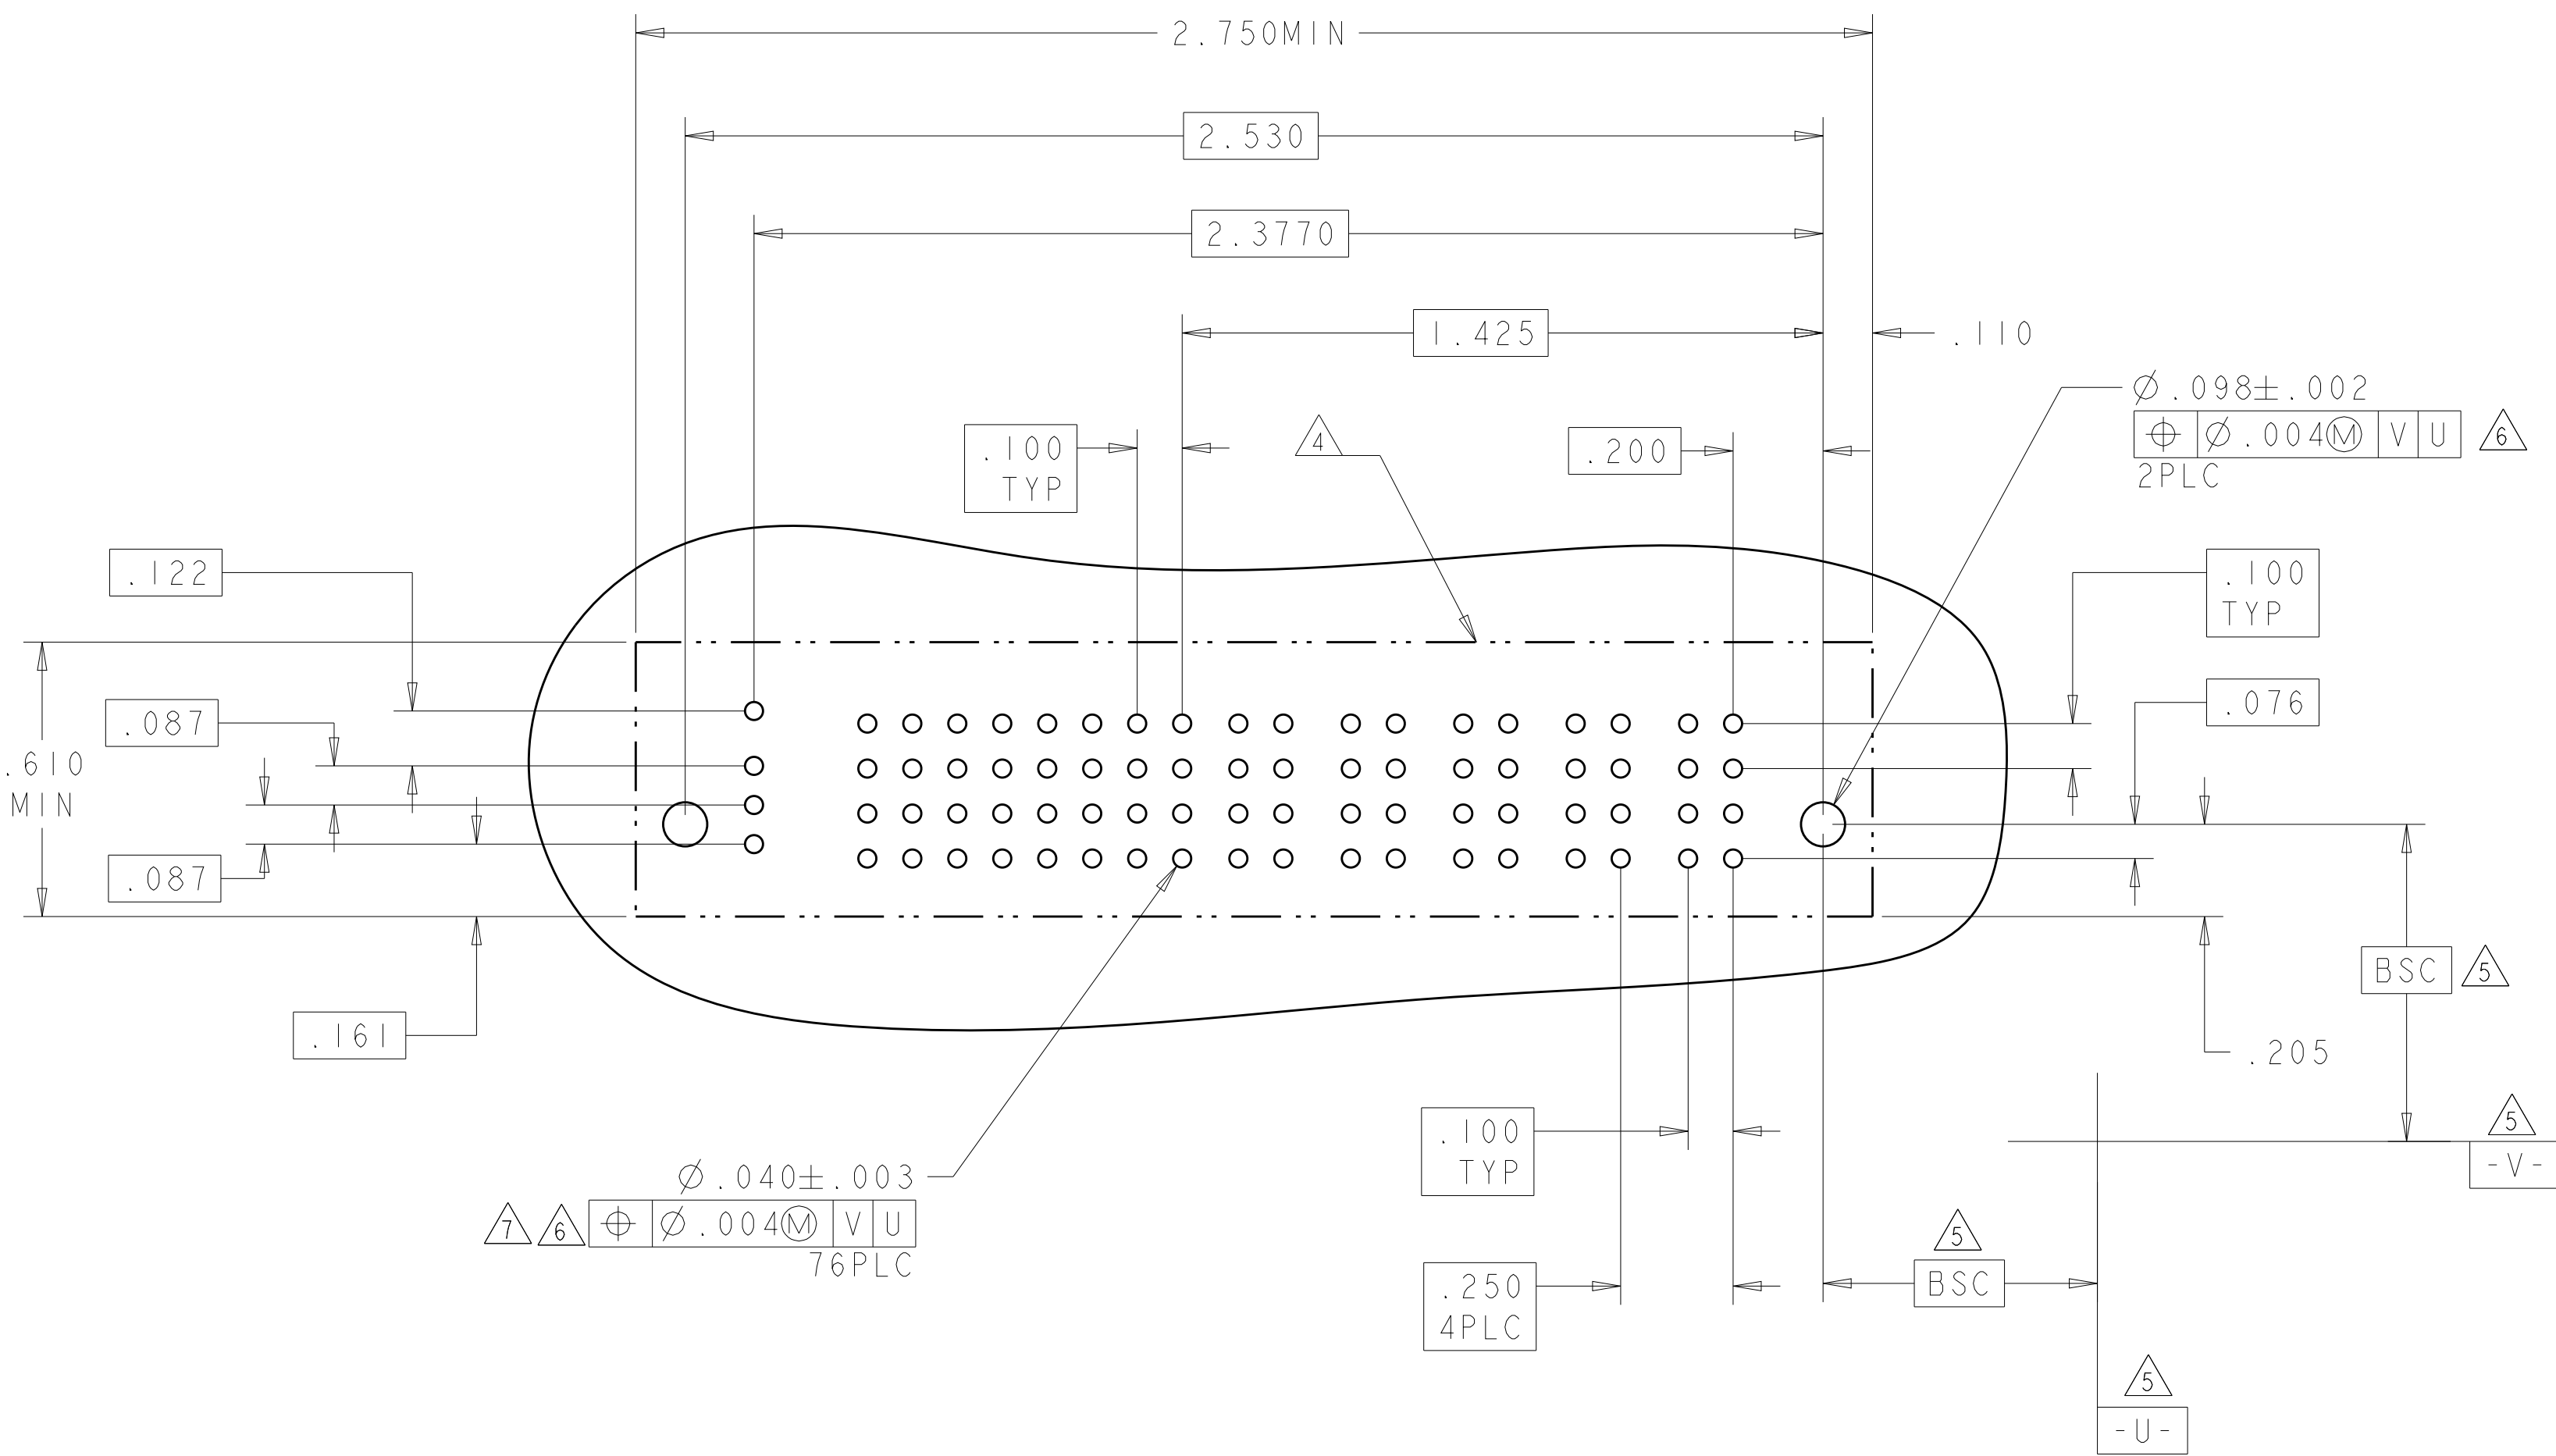4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

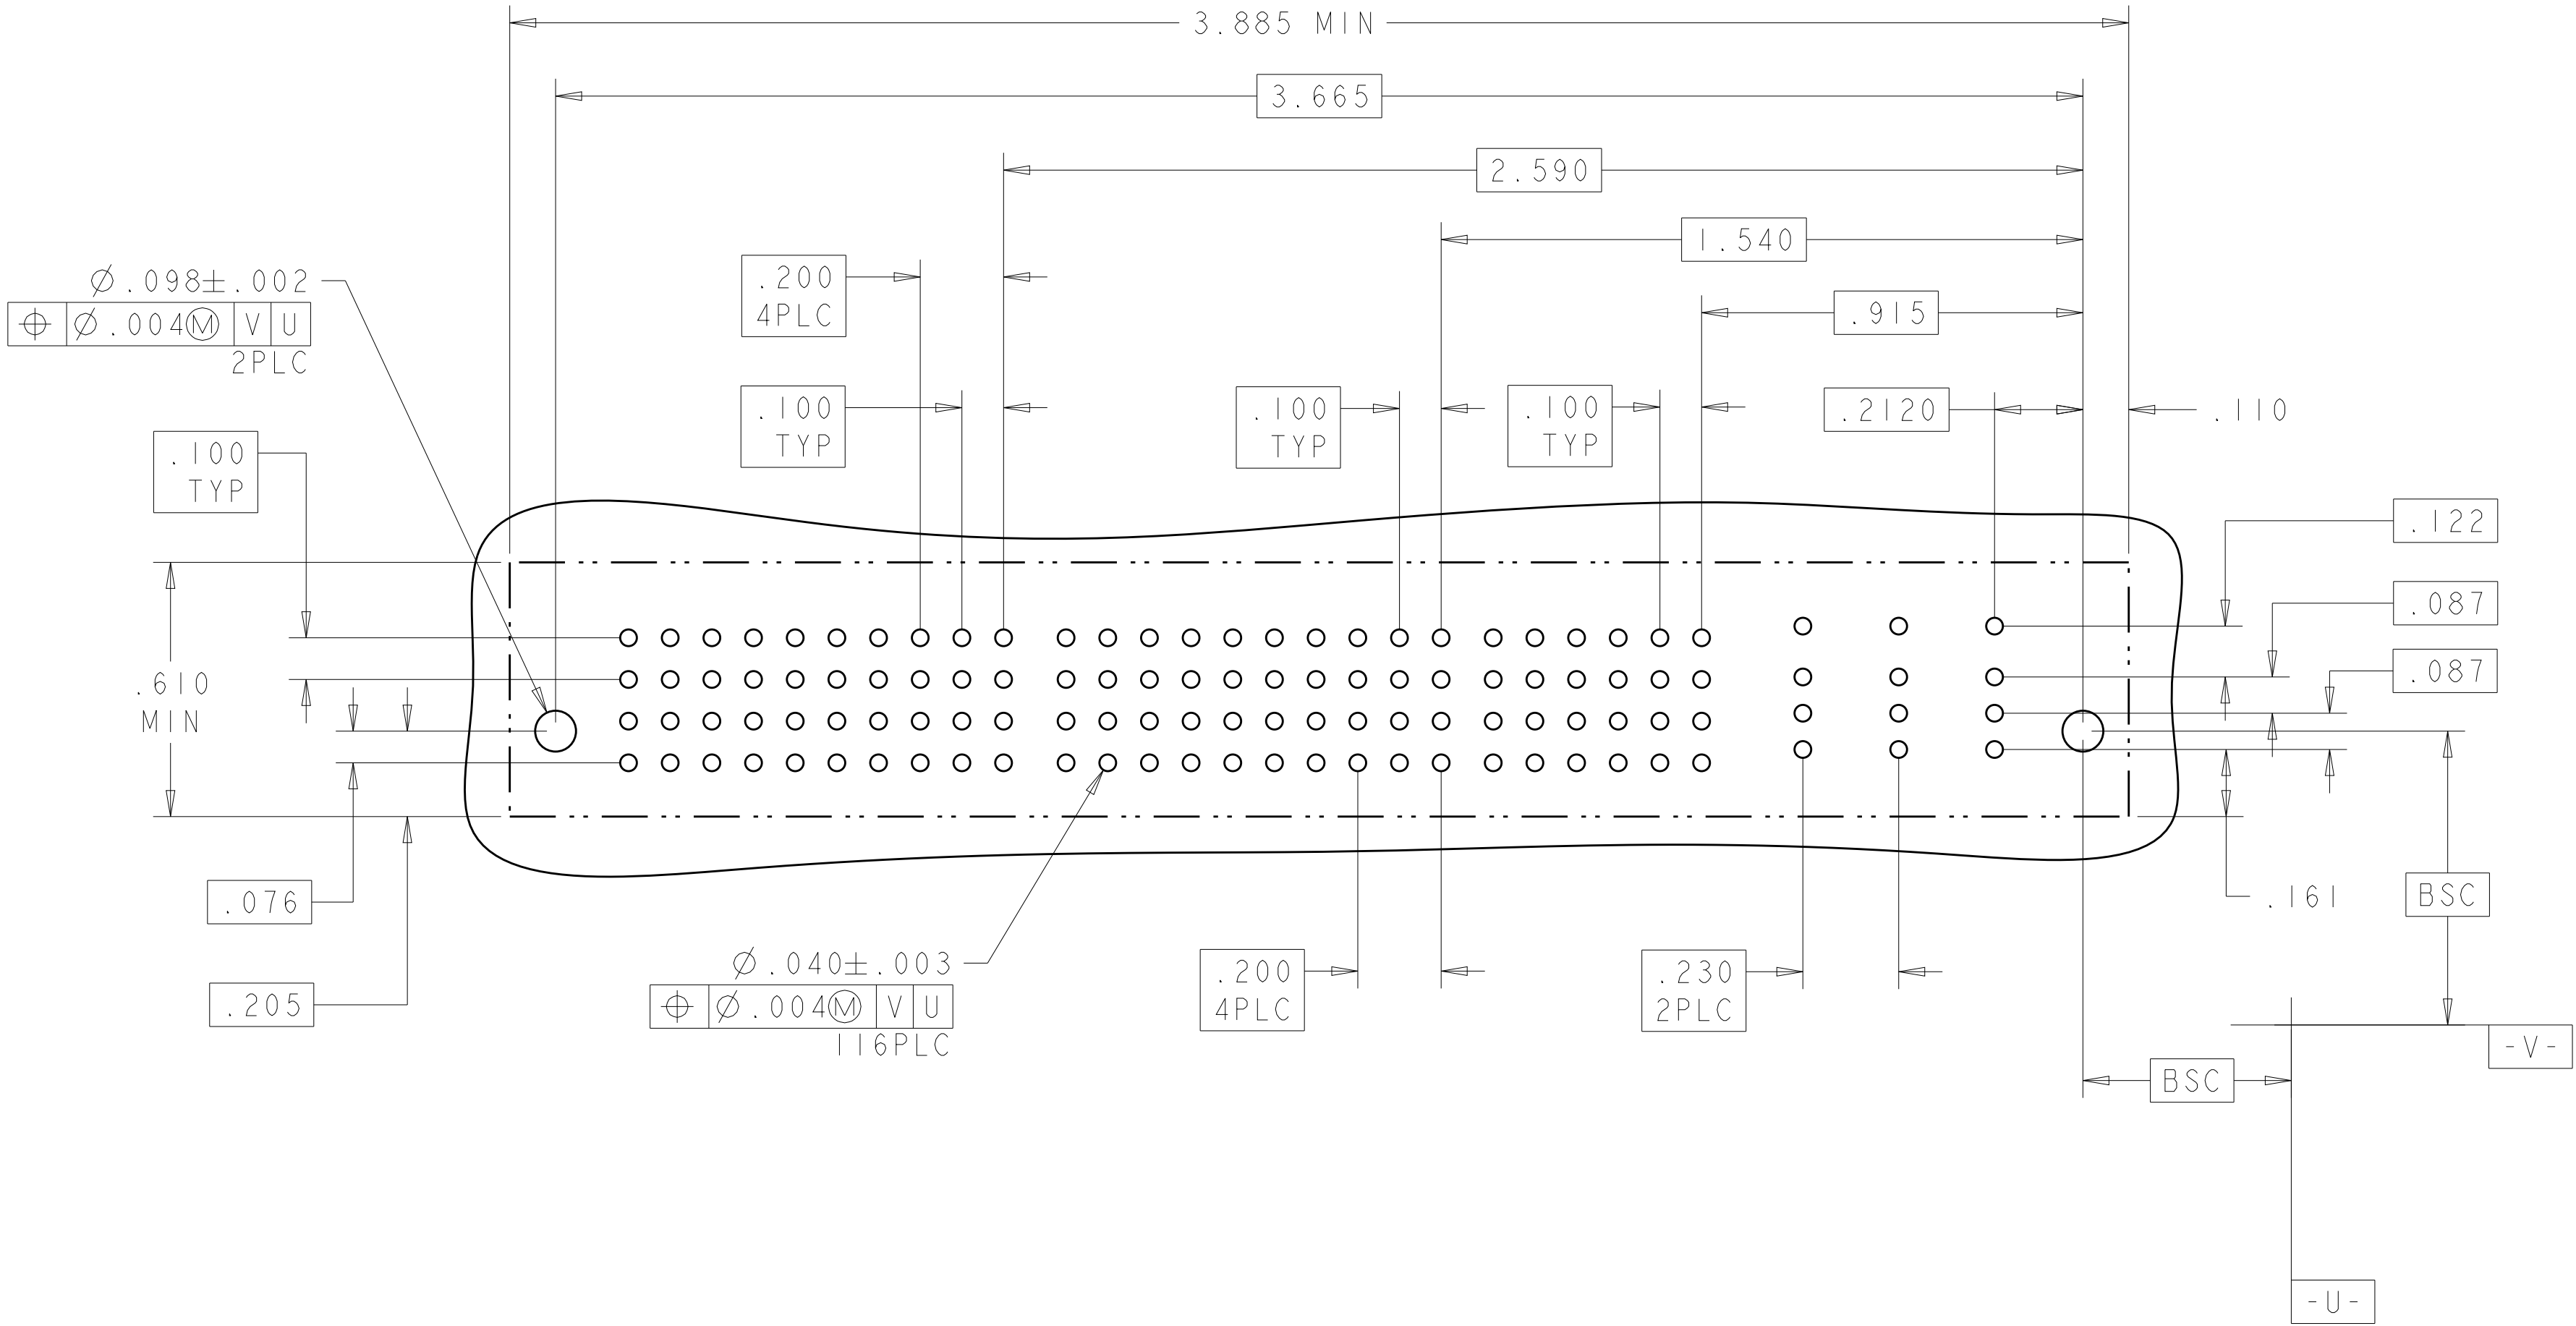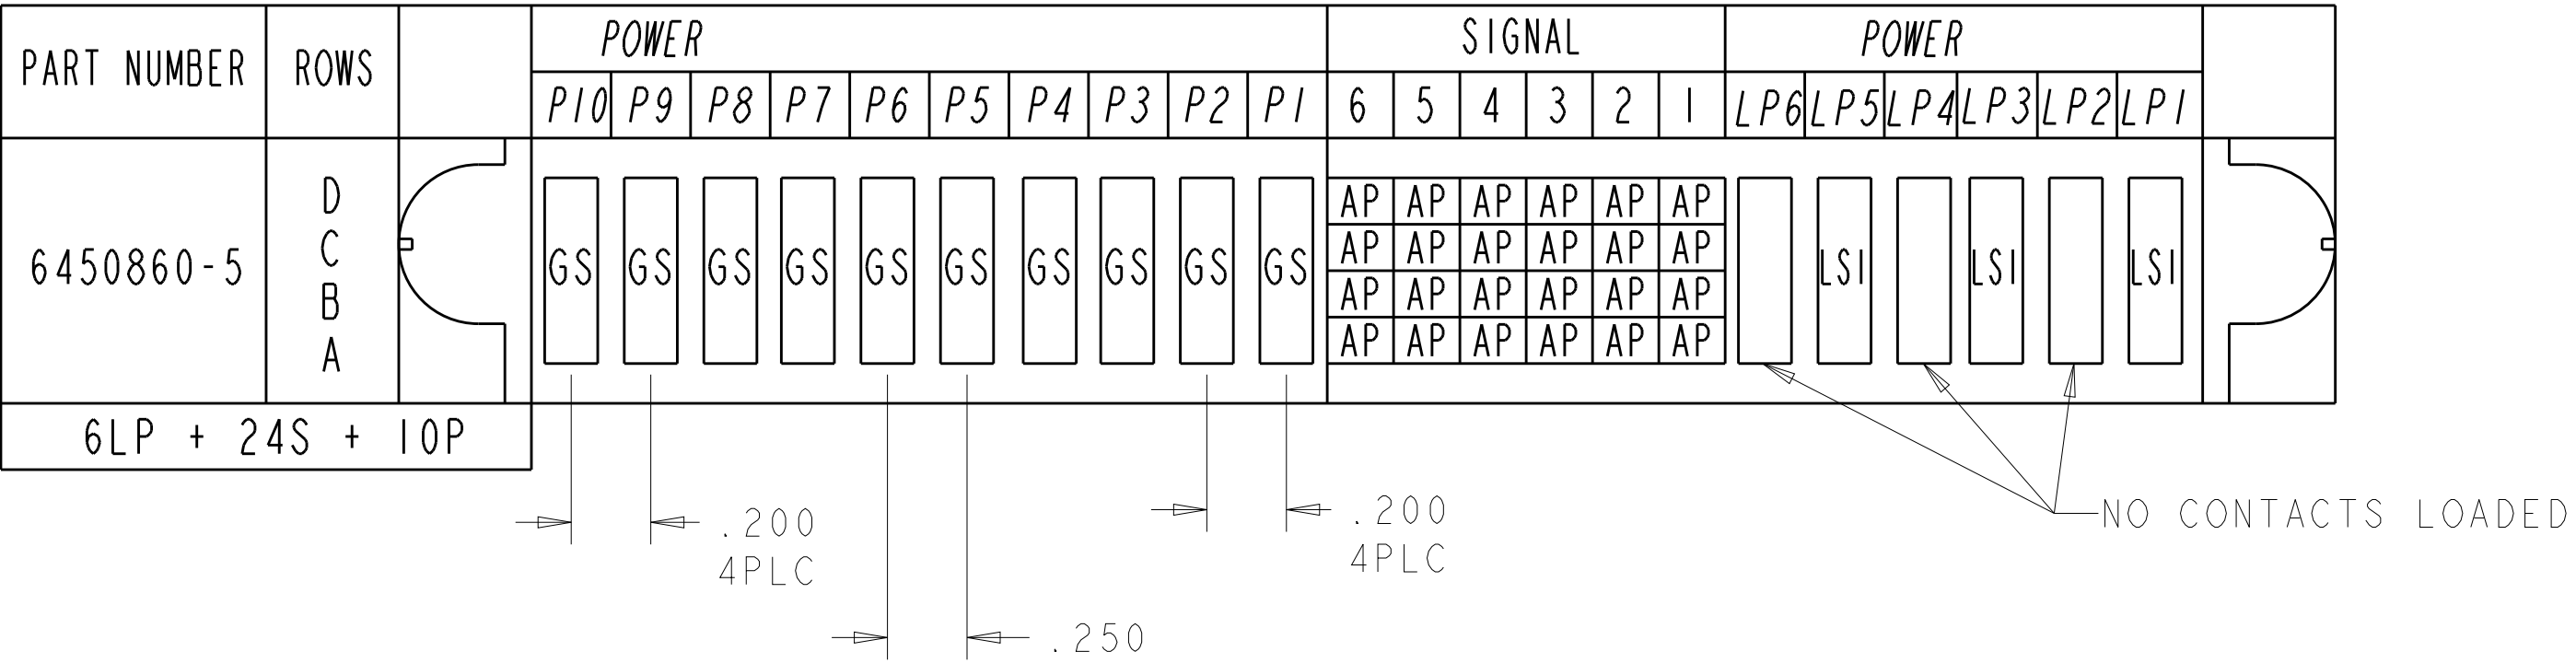

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.0020

ANGLES ±2°

FINISH

MATERIAL

-

DWN

D. ZHU

20DEC2007

CHK

S. ZHAO

20DEC2007

APVD

S. ZHAO

-

PRODUCT SPEC

108-2292

APPLICATION SPEC

114-13251

WEIGHT

-

CUSTOMER DRAWING

NAME

VER RECEP ASSEMBLY
SHORT GUIDES, PRESS FIT
MULTI-BEAM XLE

SIZE

A1

CAGE CODE

00779

DRAWING NO

6450860

RESTRICTED TO

-

SCALE

N/A

SHEET

7

OF

28

REV





K2



TE Connectivity

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			SIGNAL							POWER				
			P7	P6	P5	7	6	5	4	3	2	1	P4	P3	P2	P1	
6450860-7	D C B A																


NO CONTACTS LOADED

PART NUMBER	ROWS		POWER		SIGNAL		POWER				
			P4	P3	2	1	P2	P1			
6450860-1	D C B A										
2LP + 8S + 2LP											

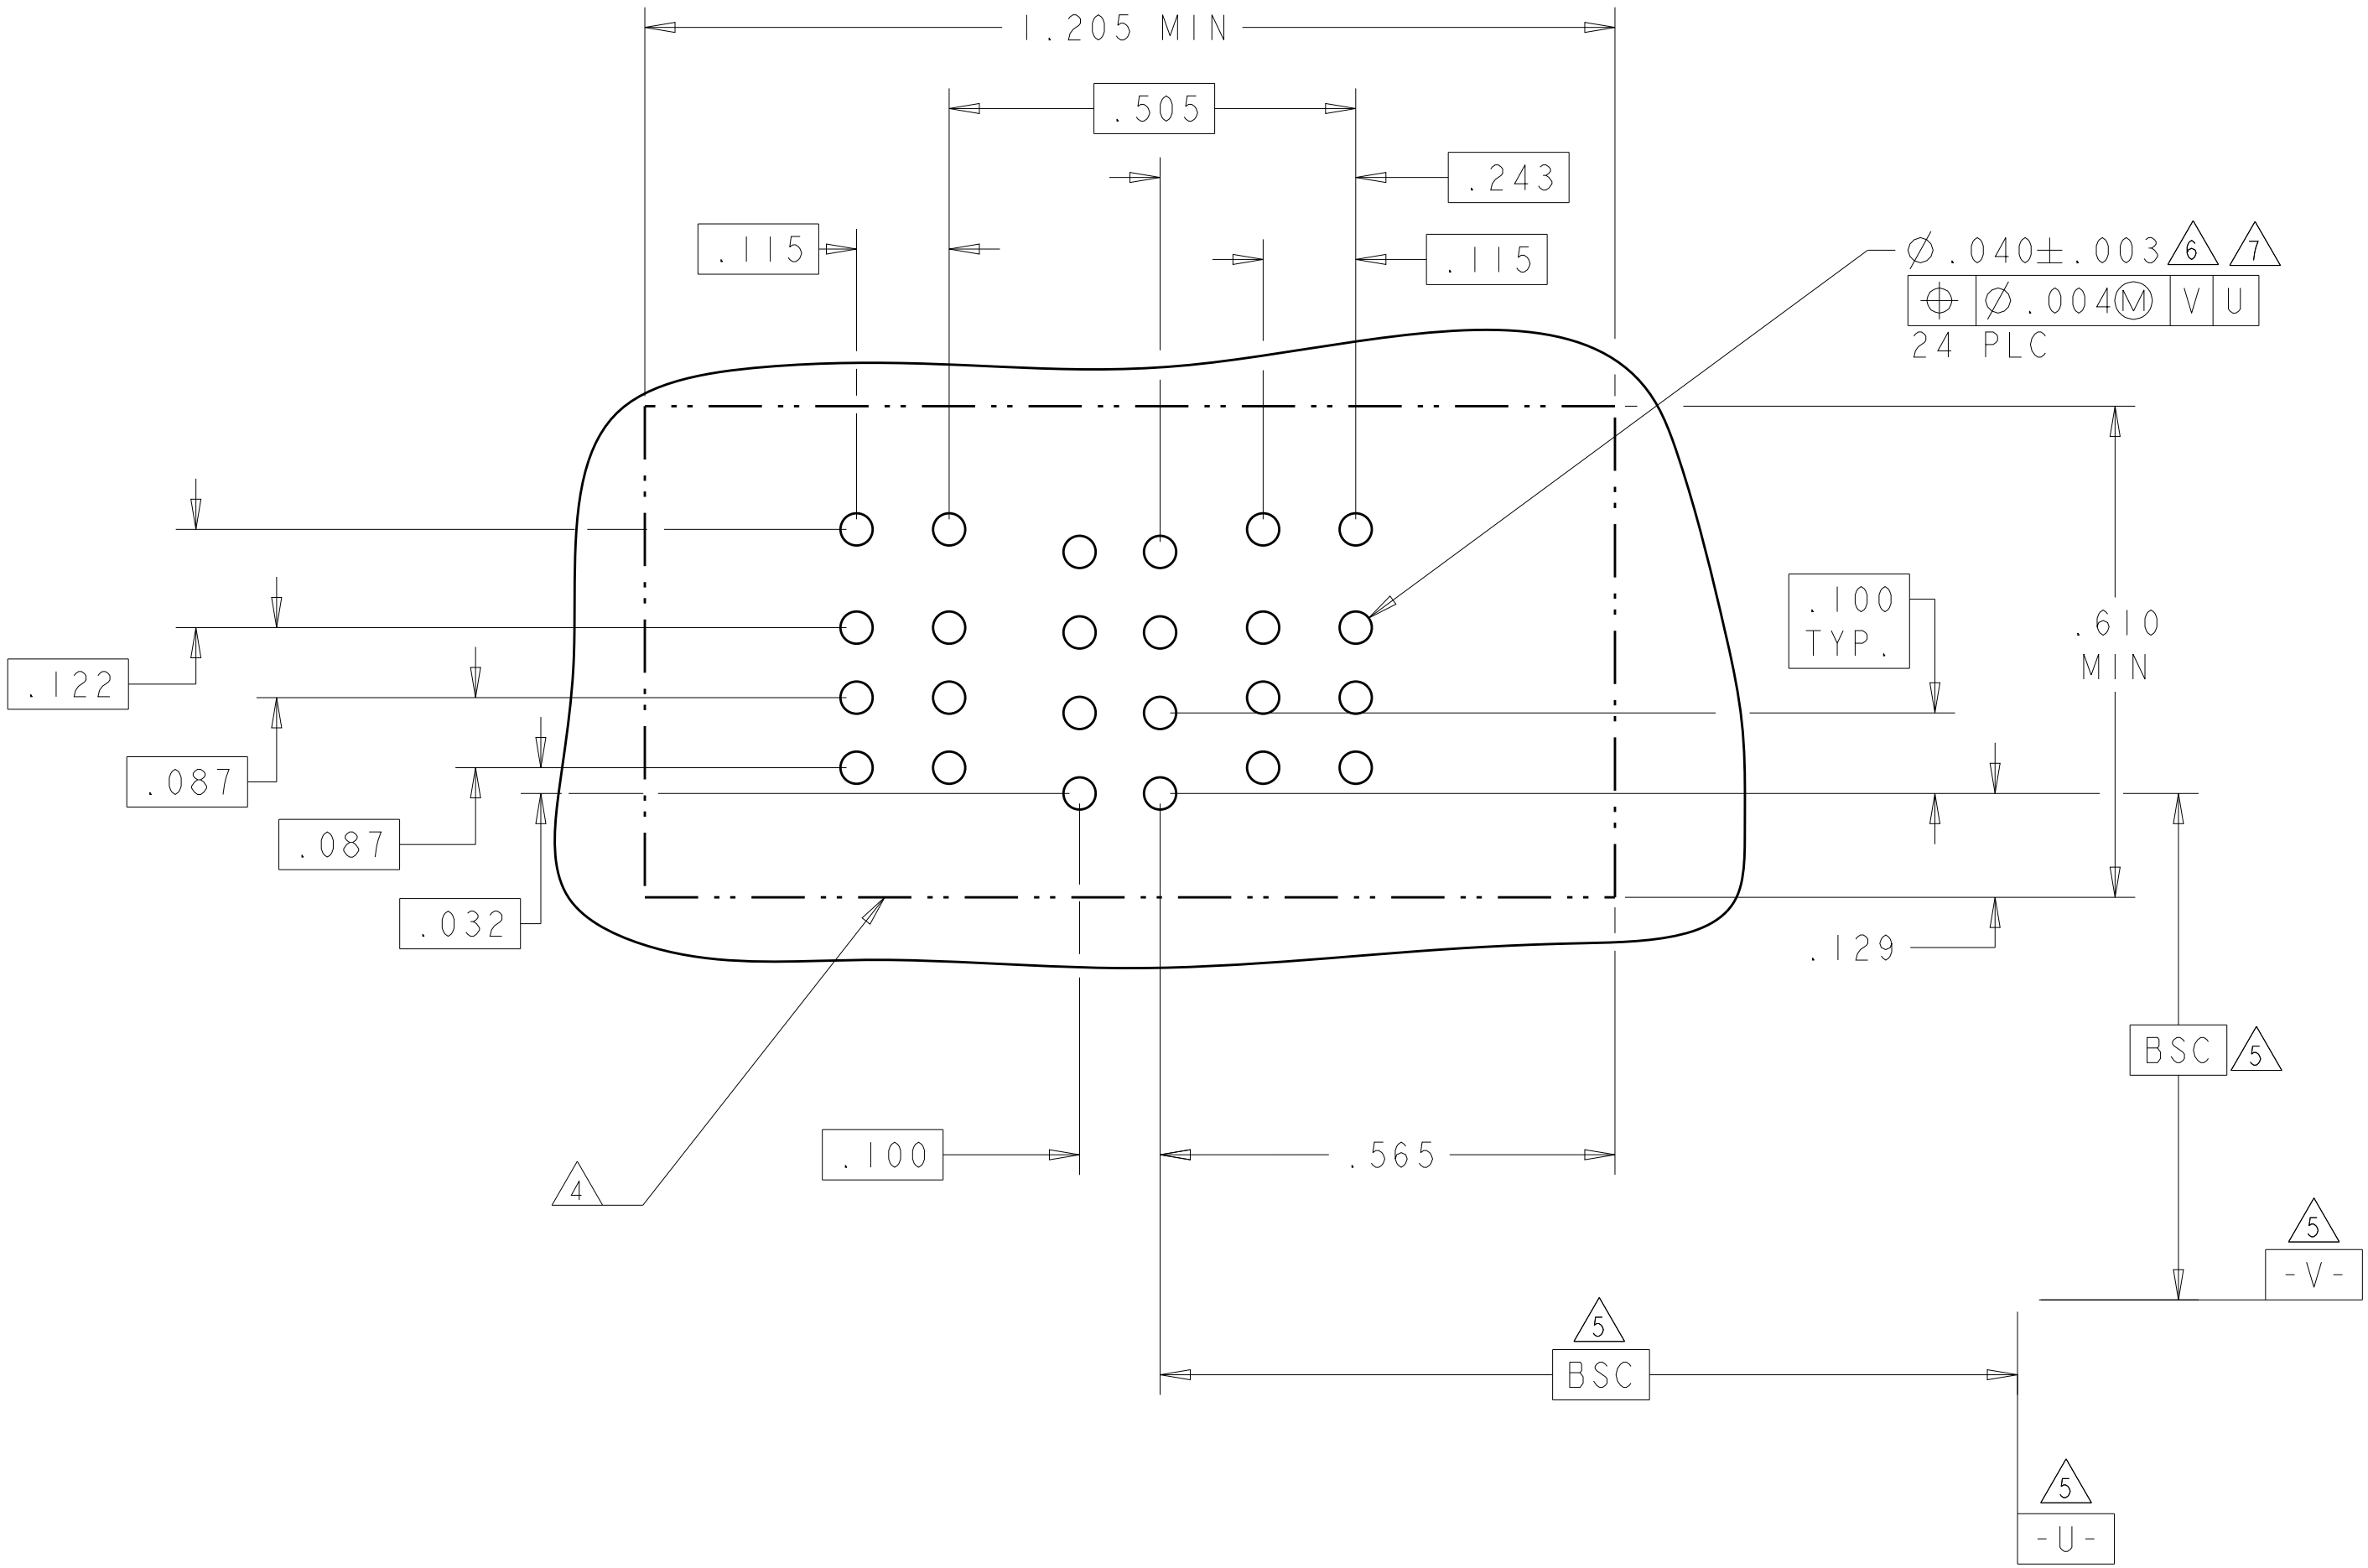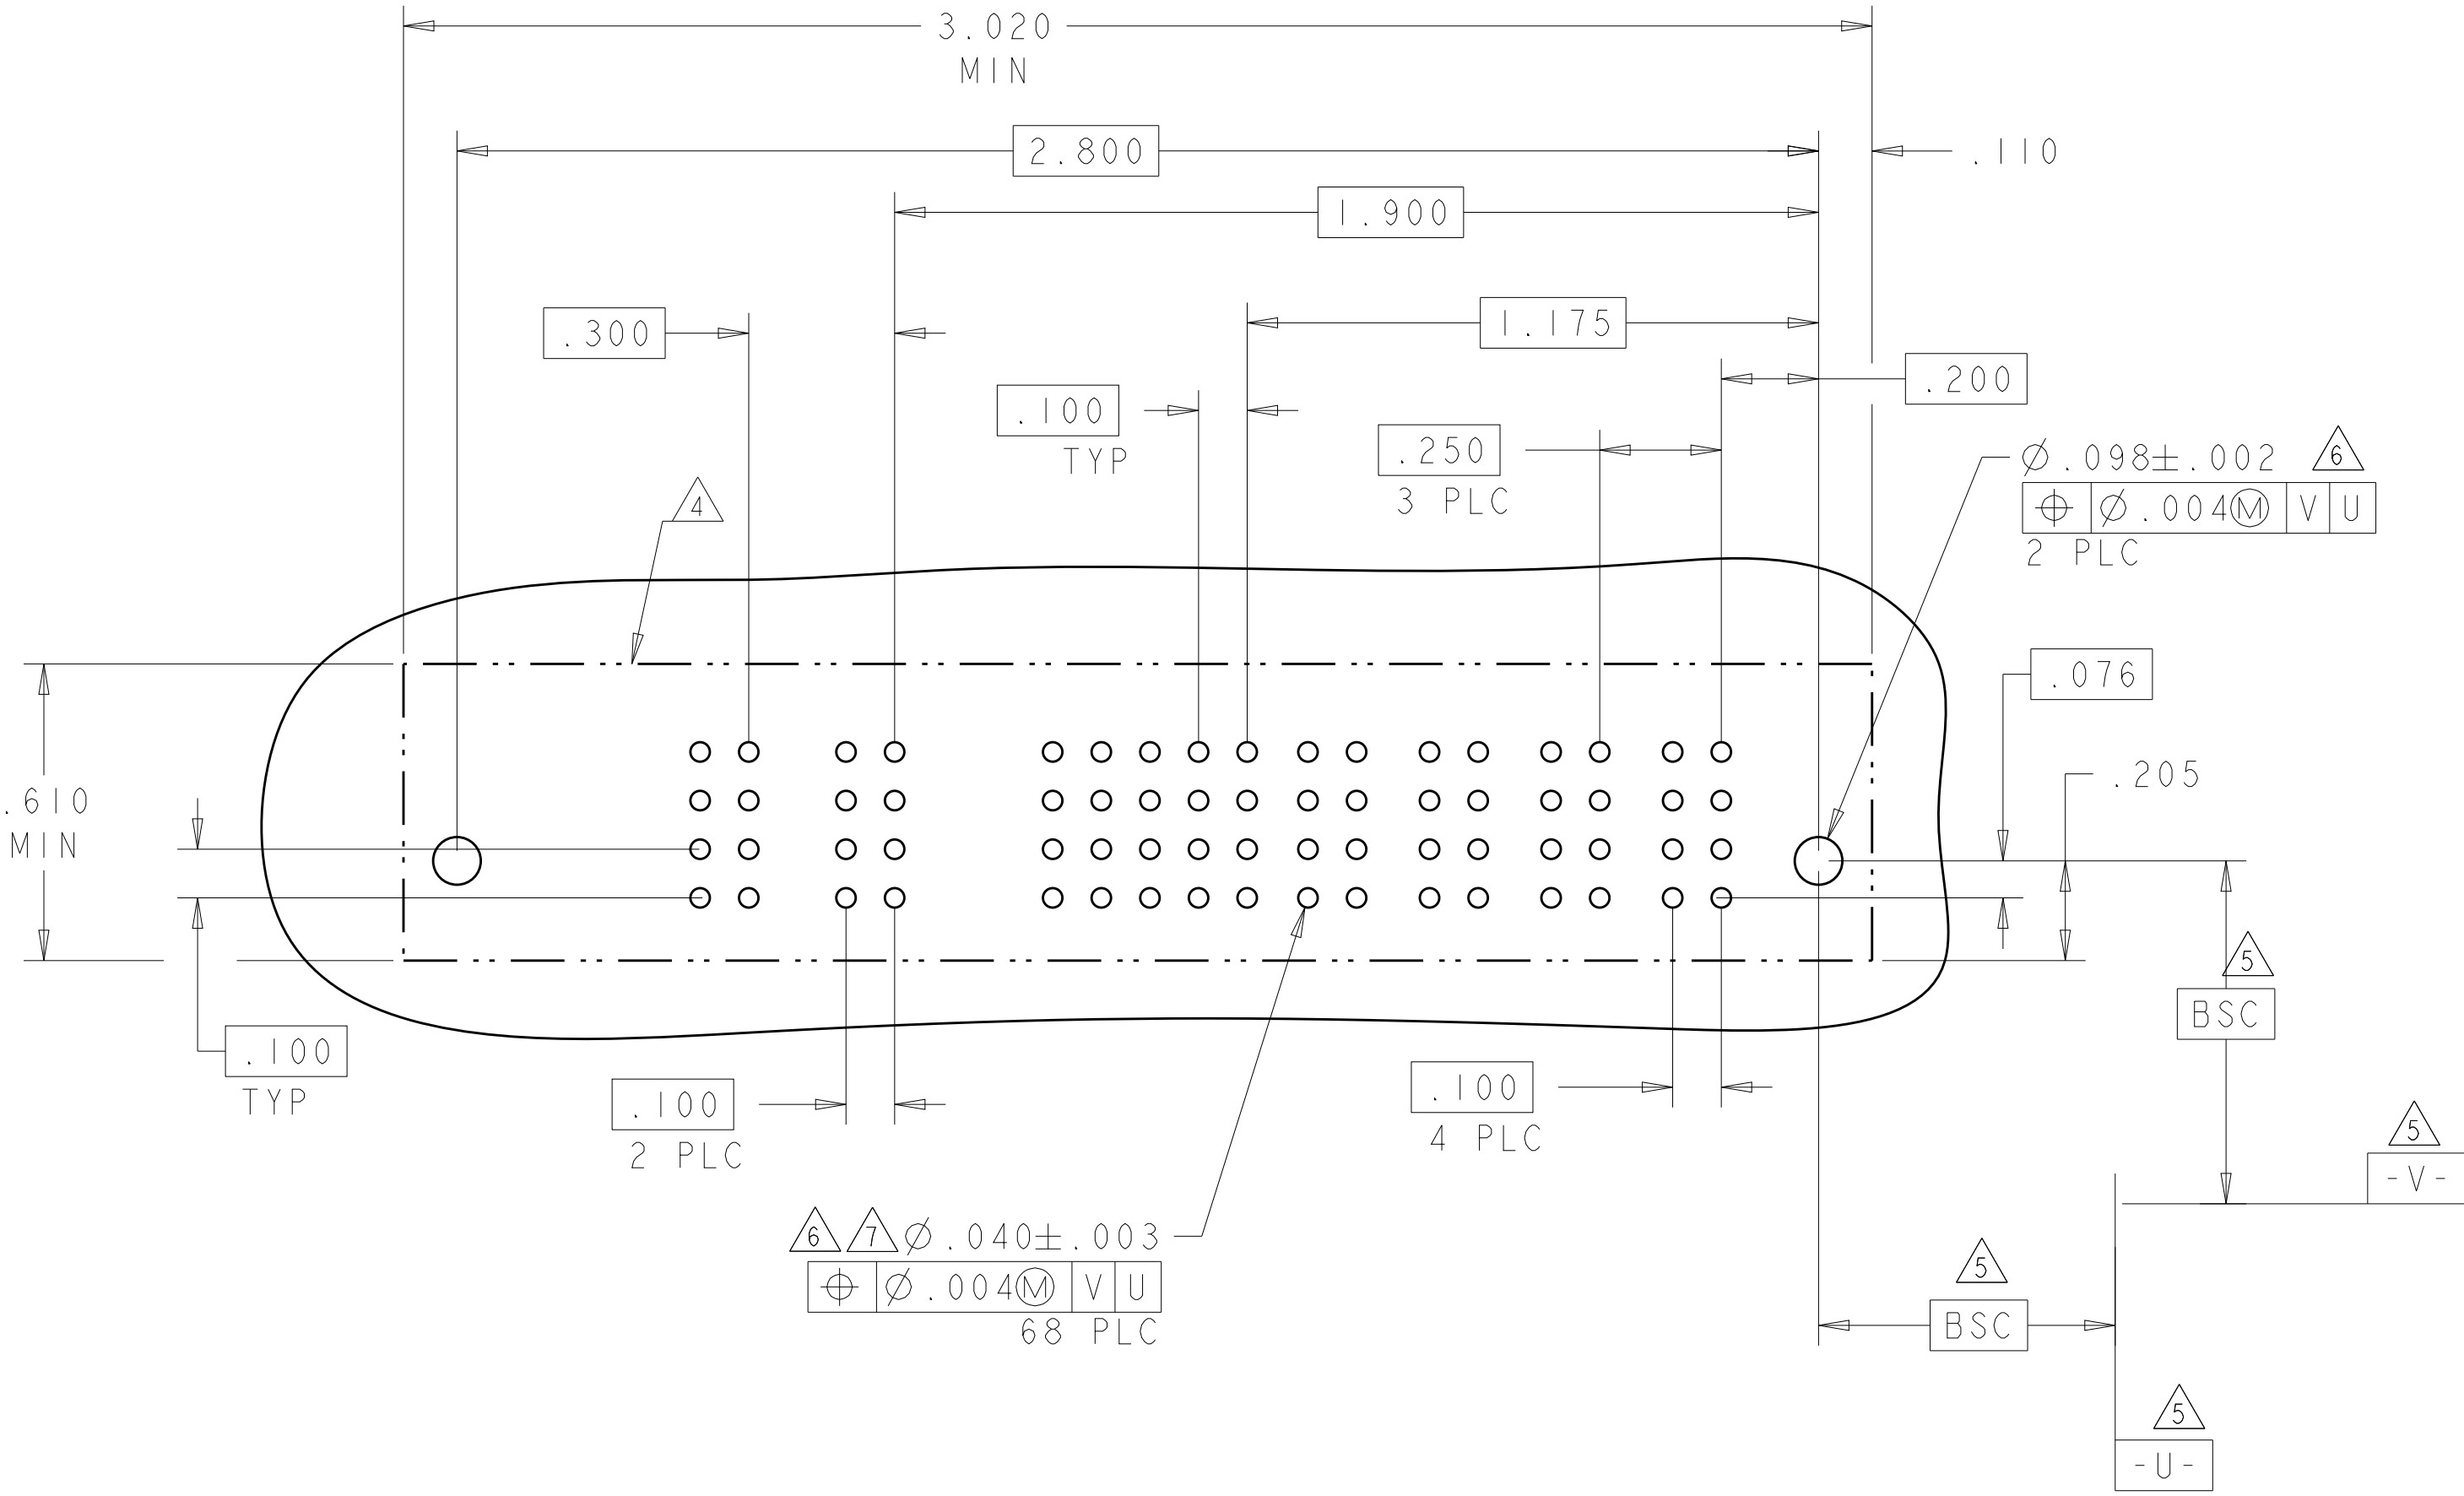


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER			SIGNAL												POWER			
			P2	LP4	LP3	I2	I1	I0	9	8	7	6	5	4	3	2	1	LP2	LPI	PI	
6450860-9	D		GP	LSI	LSI	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	LSI	LSI	GP	
	C					AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP				
	B					AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP				
	A	HD				AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP				
IP + 2LP + 48S + 2LP + IP																					

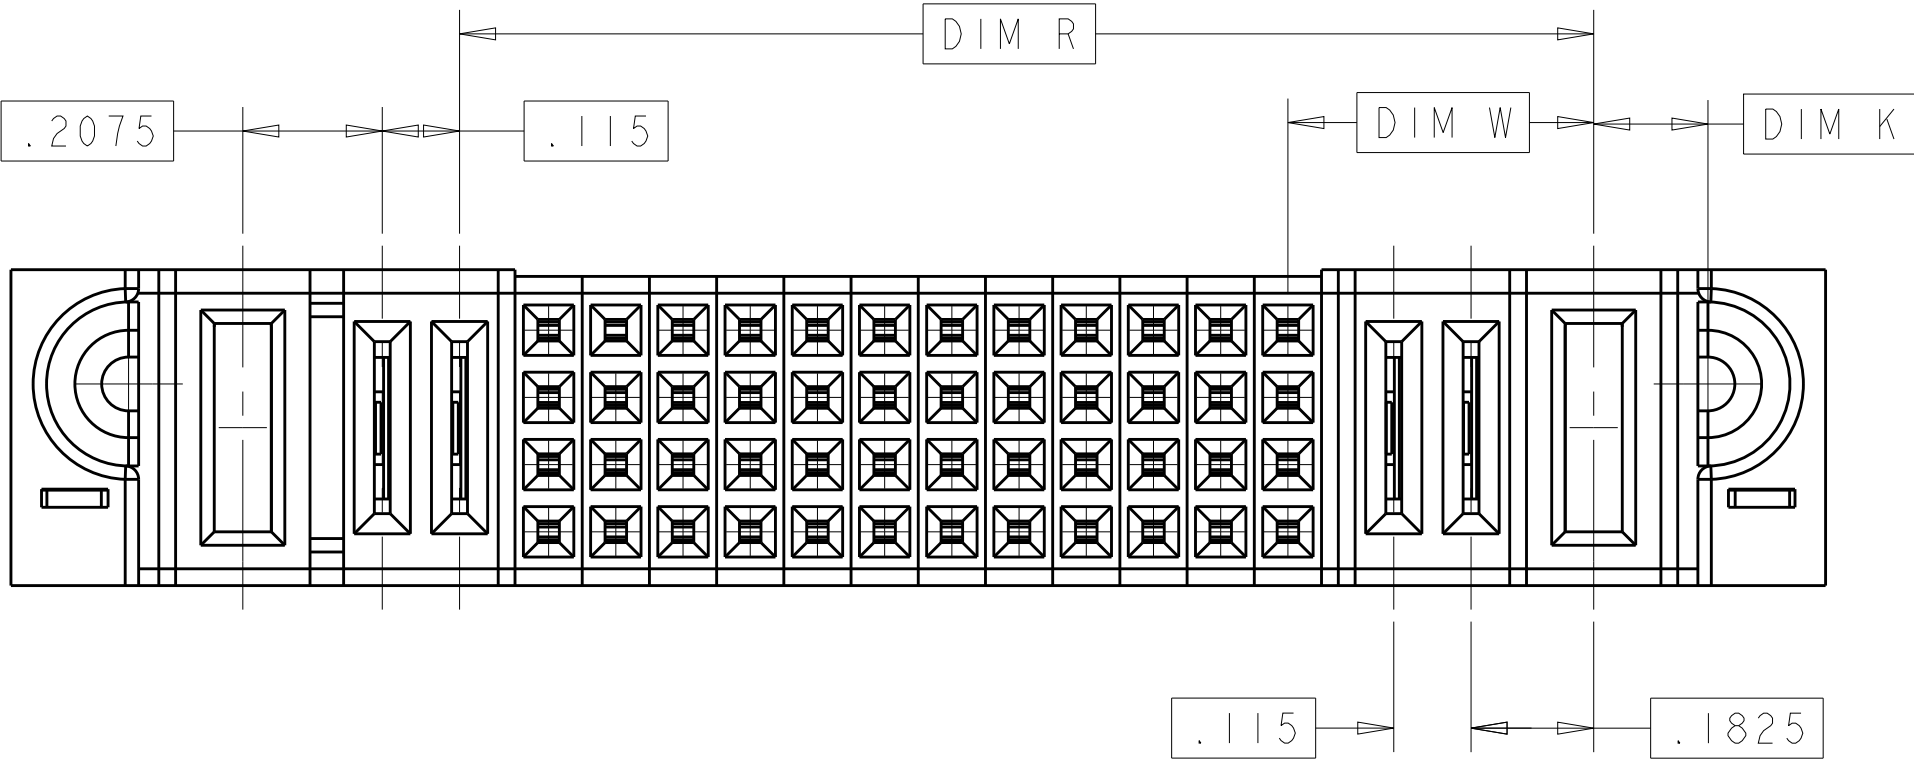

P/N:6450860-9 CONFIGURATION
UNSPECIFIED DIMENSION REFER TO SHEET 1

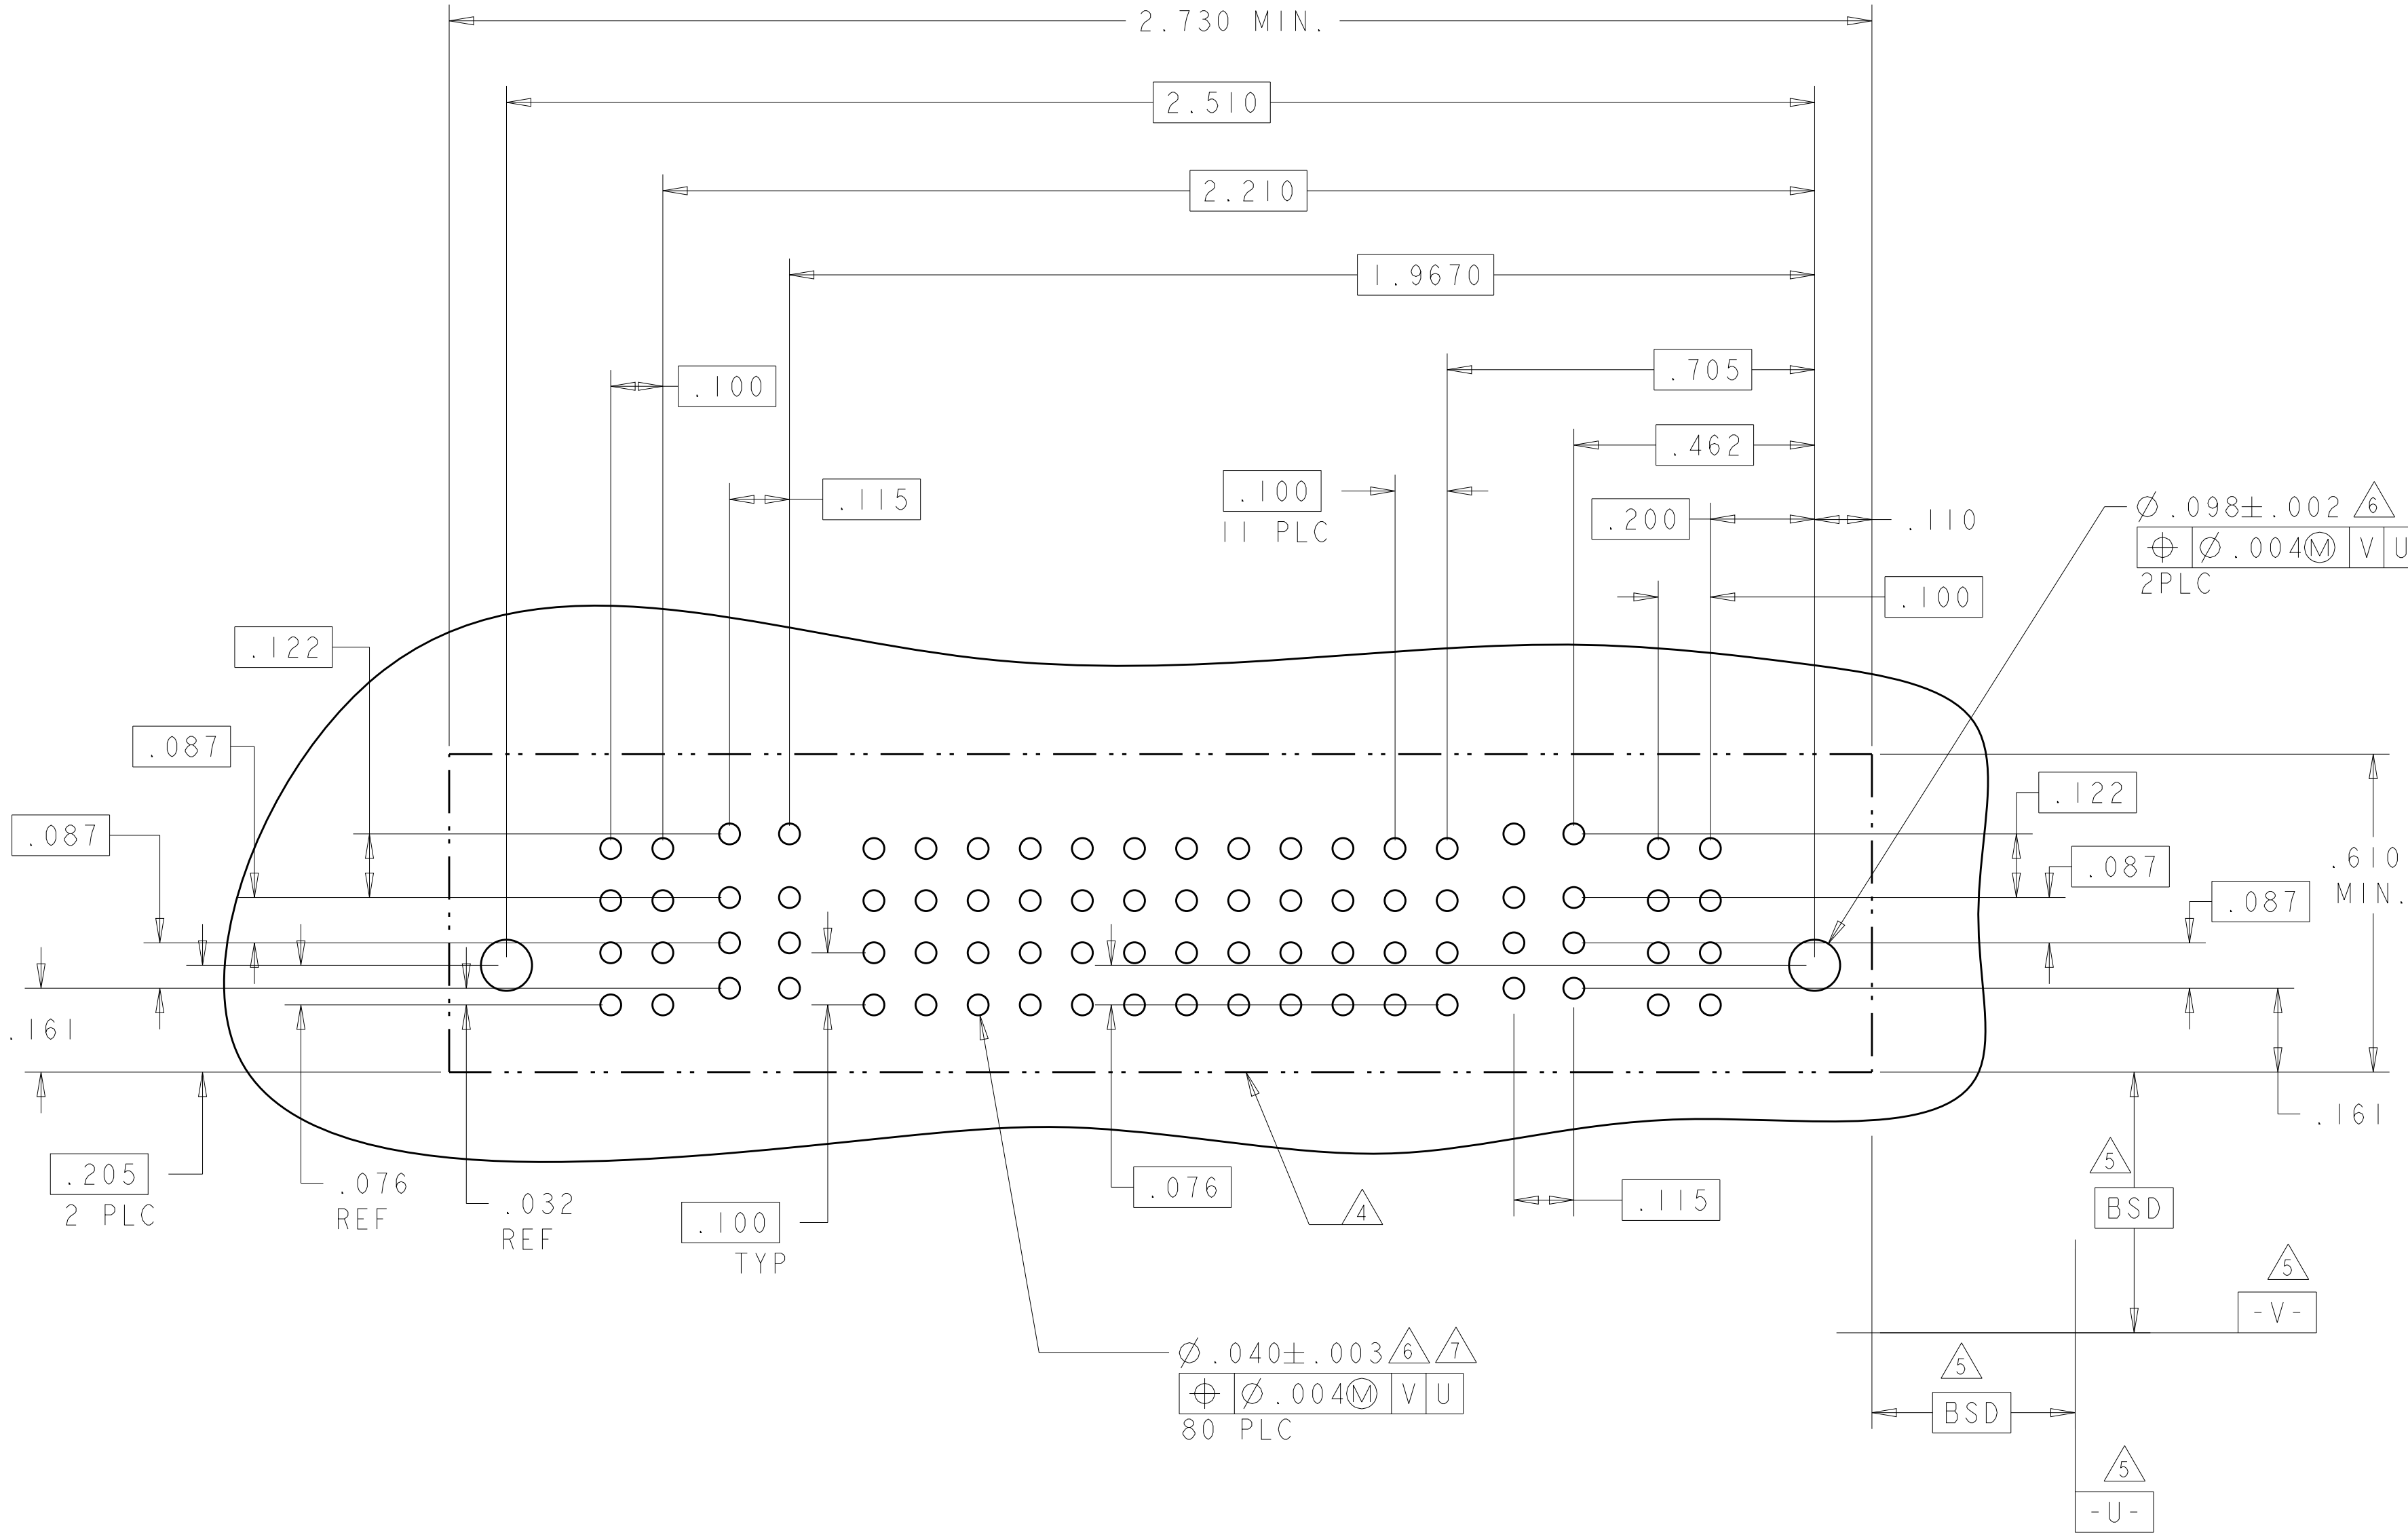

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D.ZHU
CHK
S.ZHAO
APVD
S.ZHAO

20DEC2007
20DEC2007
-

DIMENSIONS:
INCHES

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
-

MATERIAL
-

CUSTOMER DRAWING

NAME
VER RECEP ASSEMBLY
SHORT GUIDES, PRESS FIT
MULTI-BEAM XLE

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=6450860

RESTRICTED TO
-

SCALE
N/A


SHEET
9

OF
28


REV
K2


PART NUMBER	ROWS		POWER			SIGNAL							POWER					
			P7	P6	P5	7	6	5	4	3	2	1	P4	P3	P2	P1		
1-6450860-0	D C B A																	
4P + 28S + 3ACP																		

NO CONTACTS LOADED

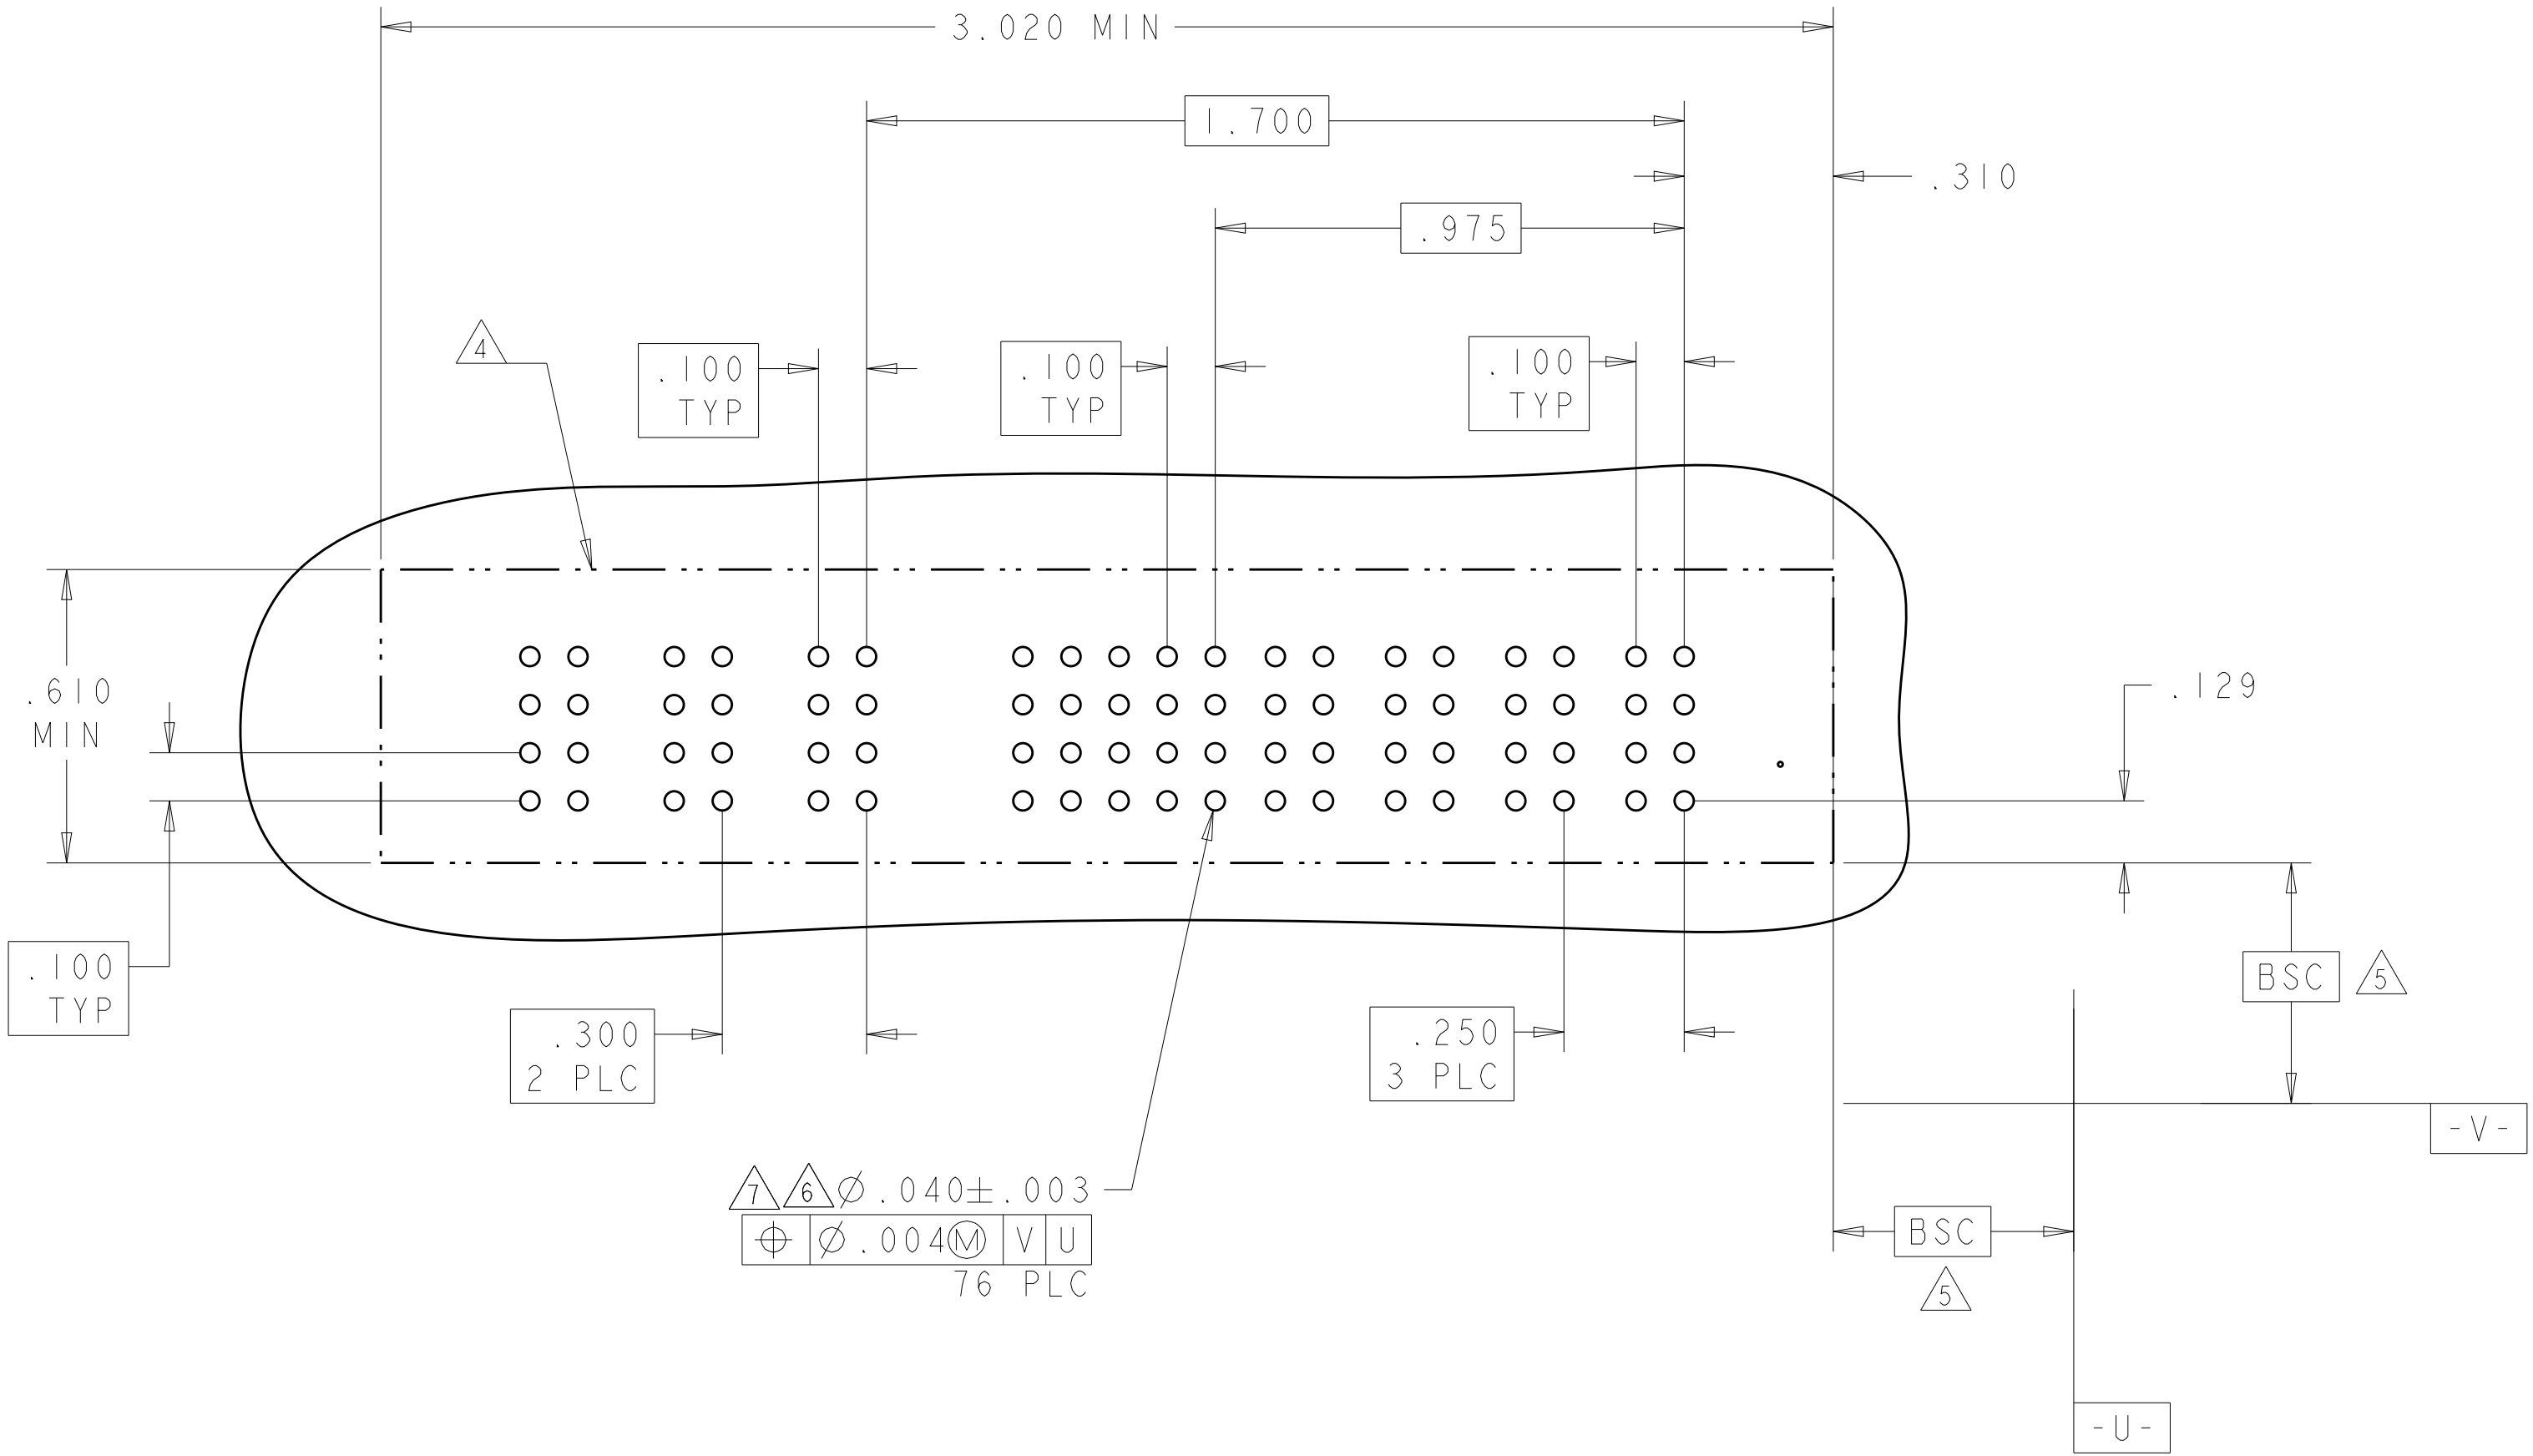


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.ZHU 20DEC2007		 TE Connectivity	
DIMENSIONS: INCHES		CHW S.ZHAO 20DEC2007			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S.ZHAO		VER RECEP ASSEMBLY SHORT GUIDES, PRESS FIT MULTI-BEAM XLE	
		PRODUCT SPEC			
		108-2292			
		APPLICATION SPEC			
0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		114-13251		SIZE CAGE CODE DRAWING NO RESTRICTED TO A 100779 © 6450860 -	
MATERIAL		FINISH		WEIGHT	
-		-		-	
CUSTOMER DRAWING				SCALE N/A SHEET 10 OF 28 REV K2	

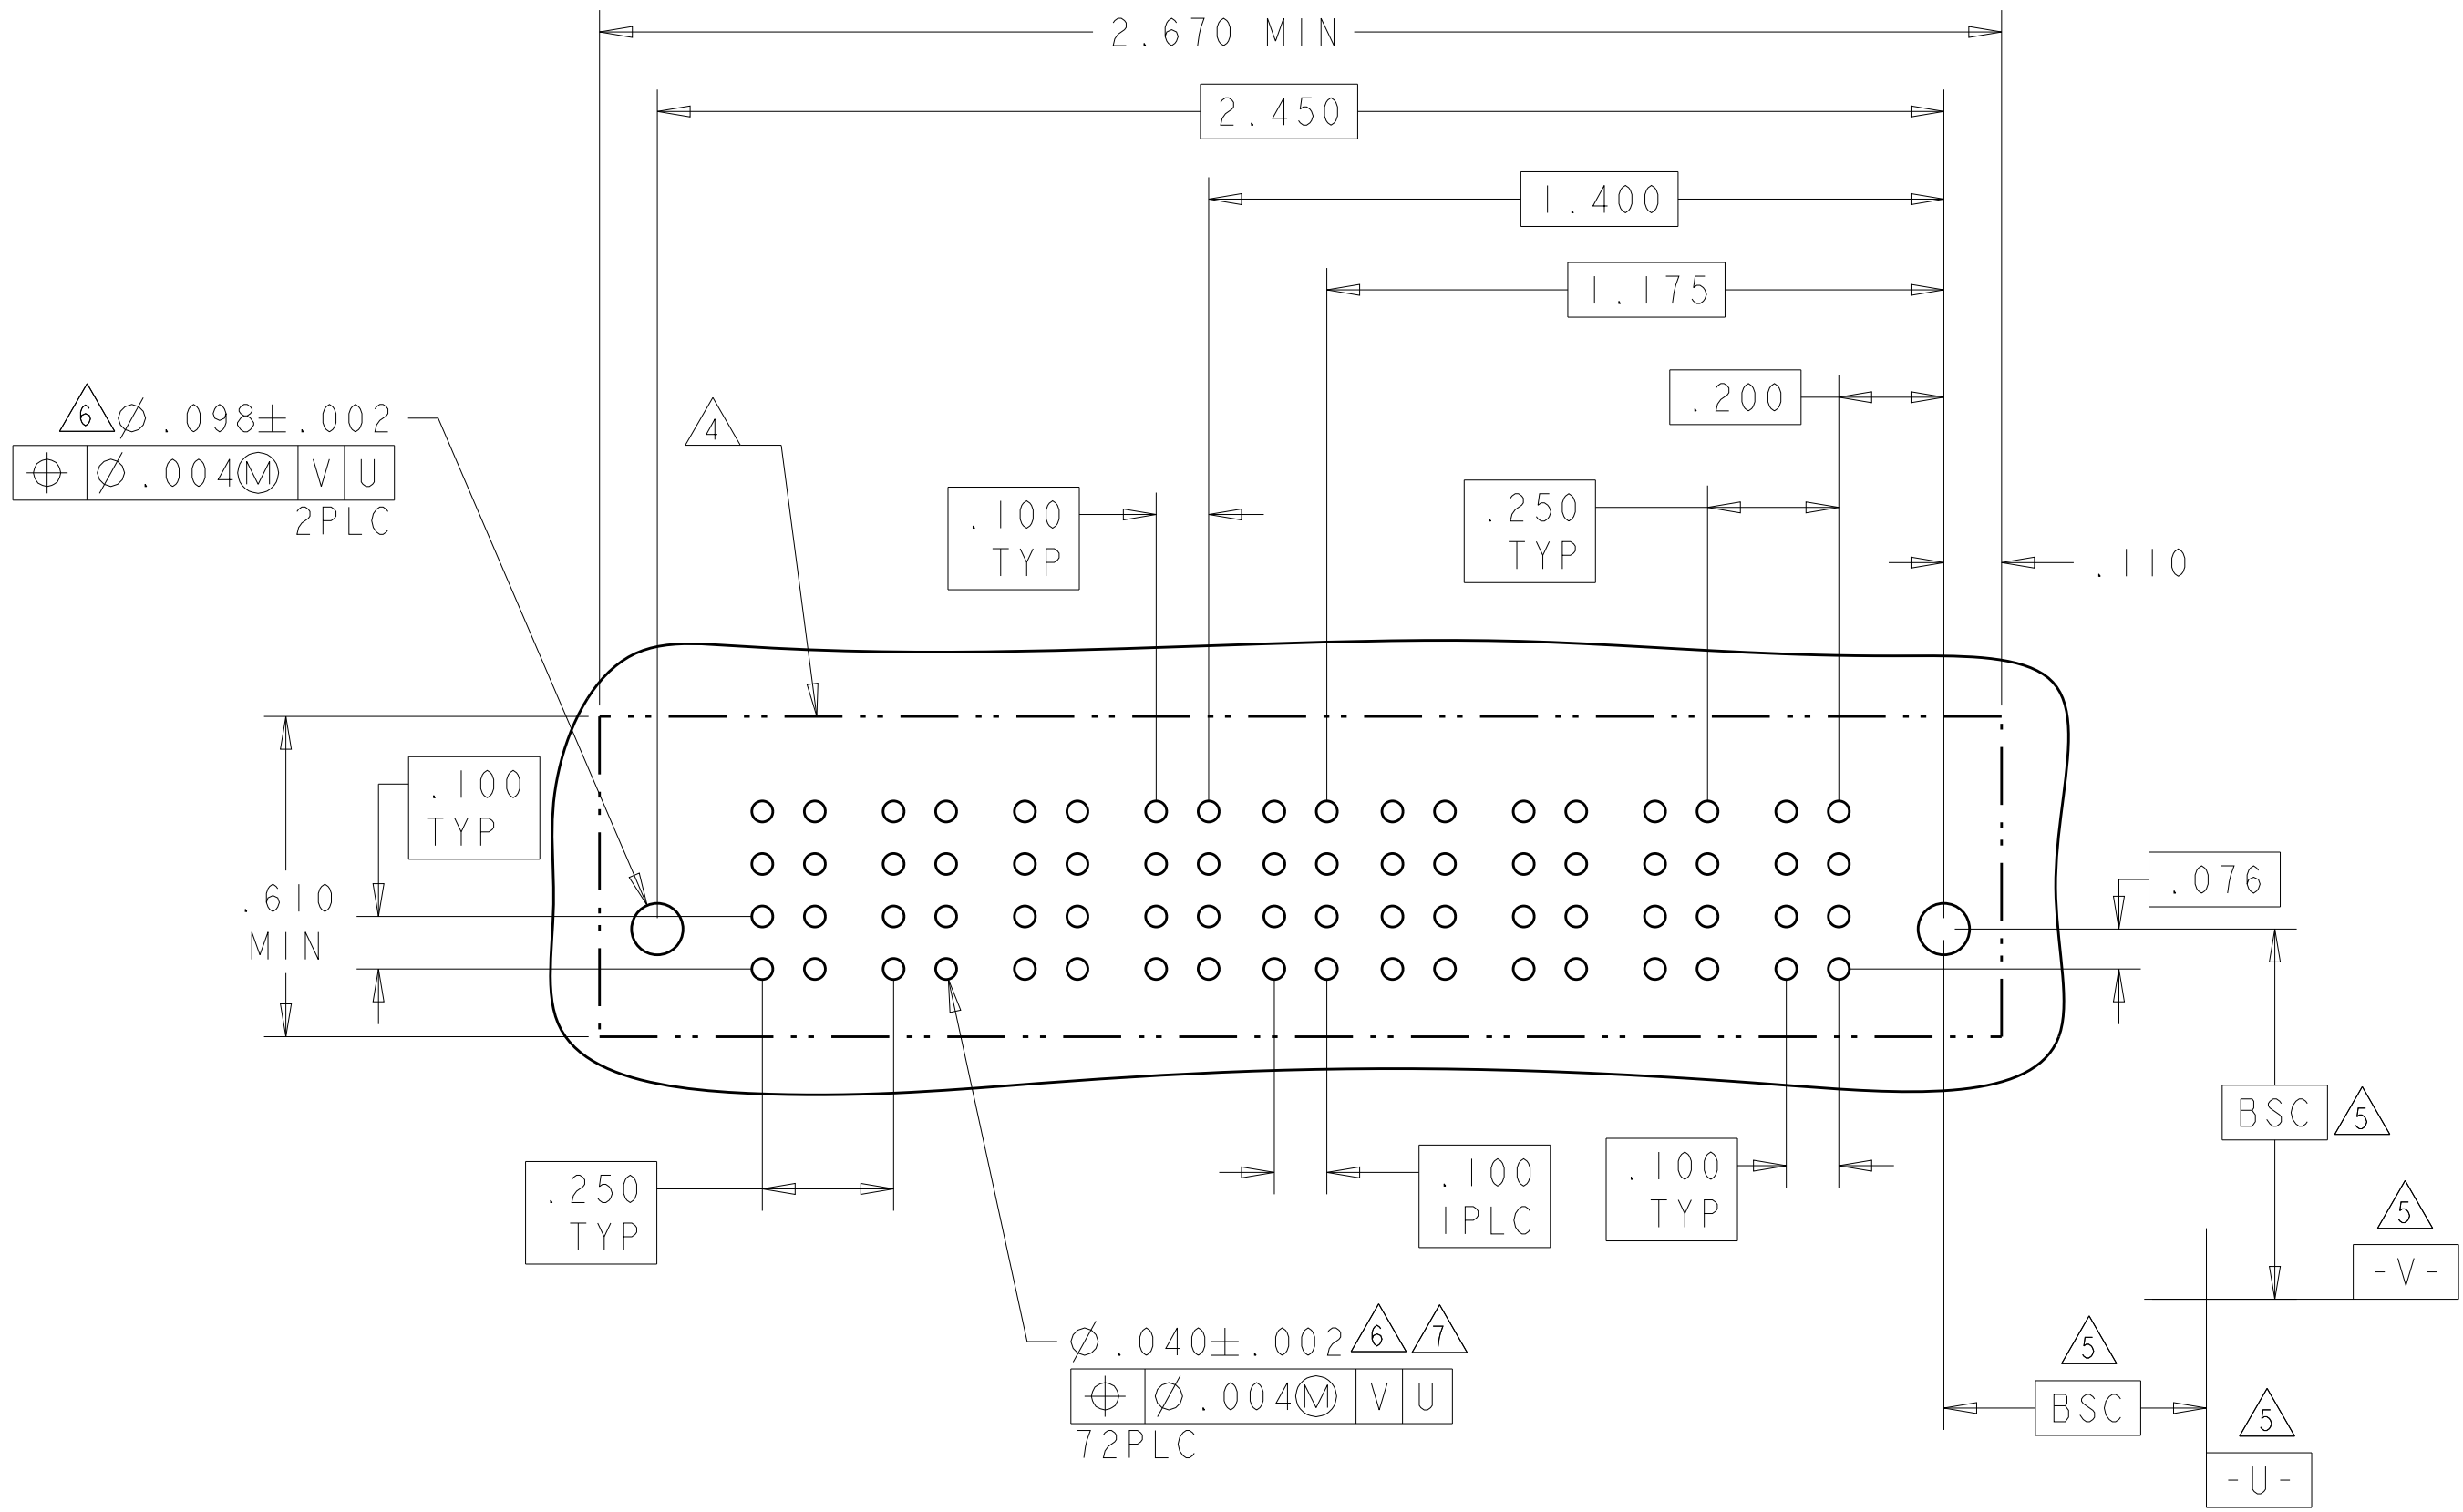[illegible]4805 (3/11)

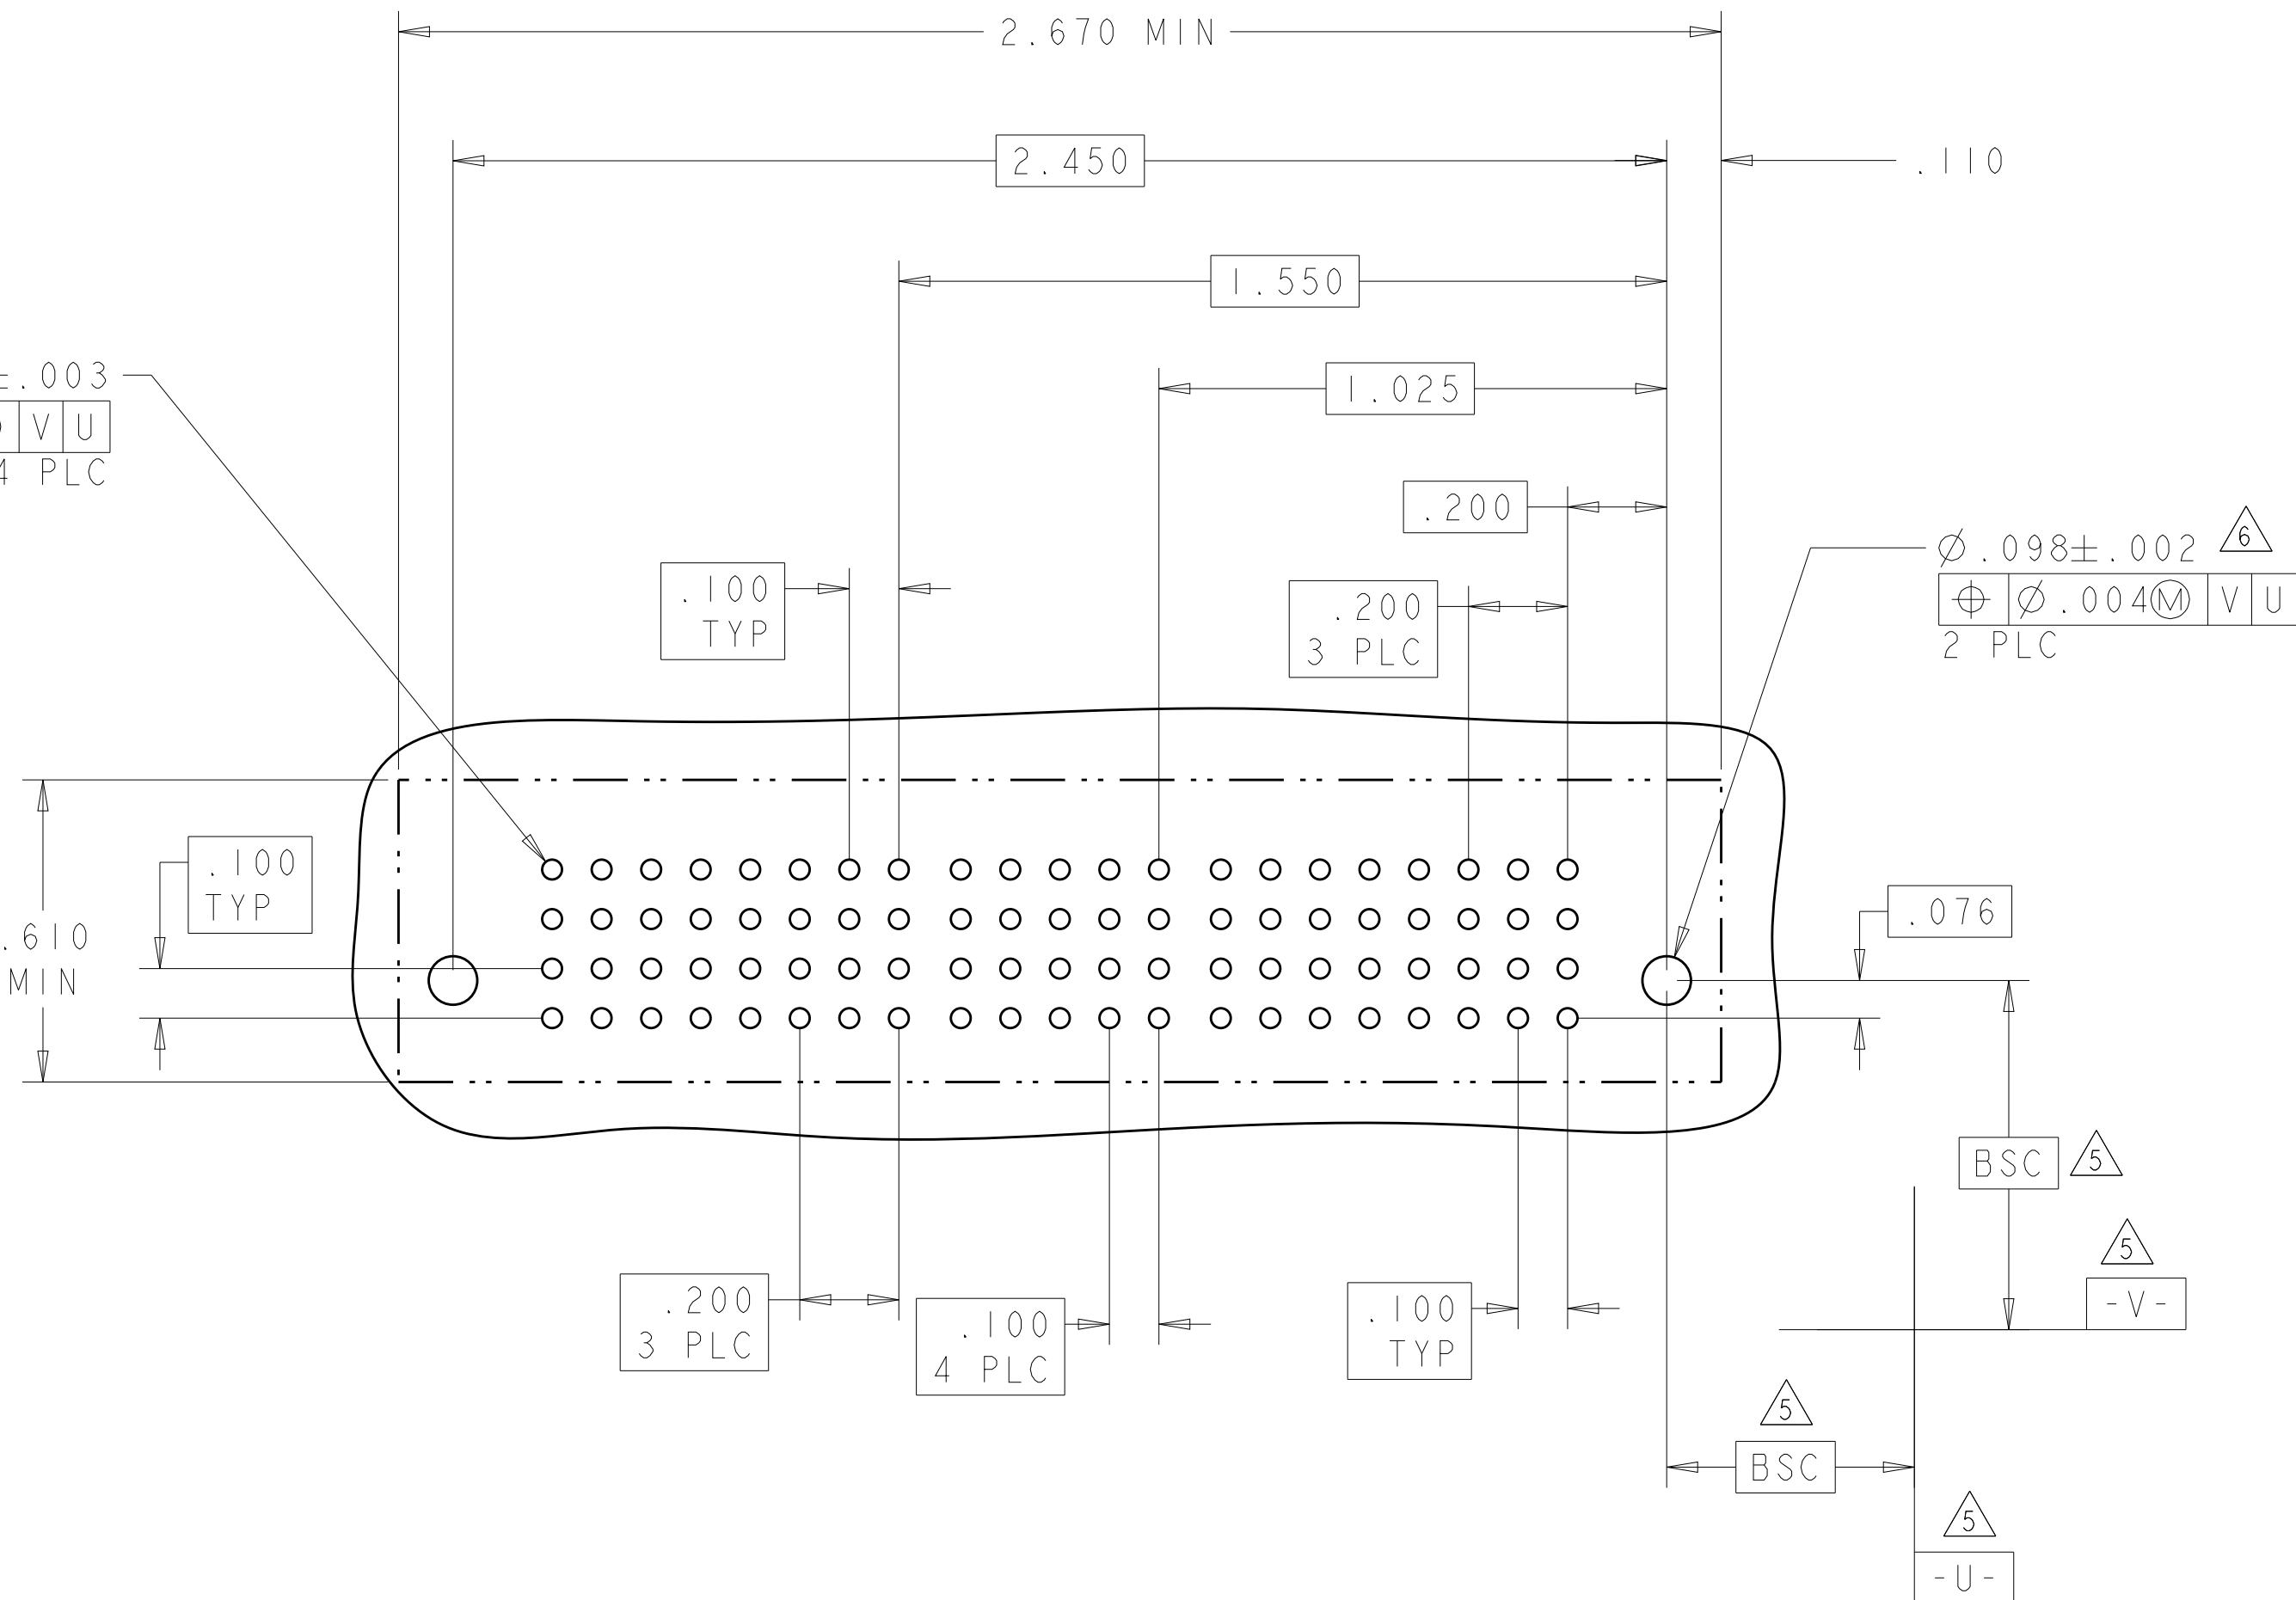
[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER						SIGNAL						POWER						
			P12	P11	P10	P9	P8	P7	6	5	4	3	2	1	P6	P5	P4	P3	P2	P1	
1-6450860-7	D C B A							AP	AP	AP	AP	AP	AP								
								AP	AP	AP	AP	AP	AP								
								AP	AP	AP	AP	AP	AP								
								AP	AP	AP	AP	AP	AP								
6HDP + 24S + 6HDP																					



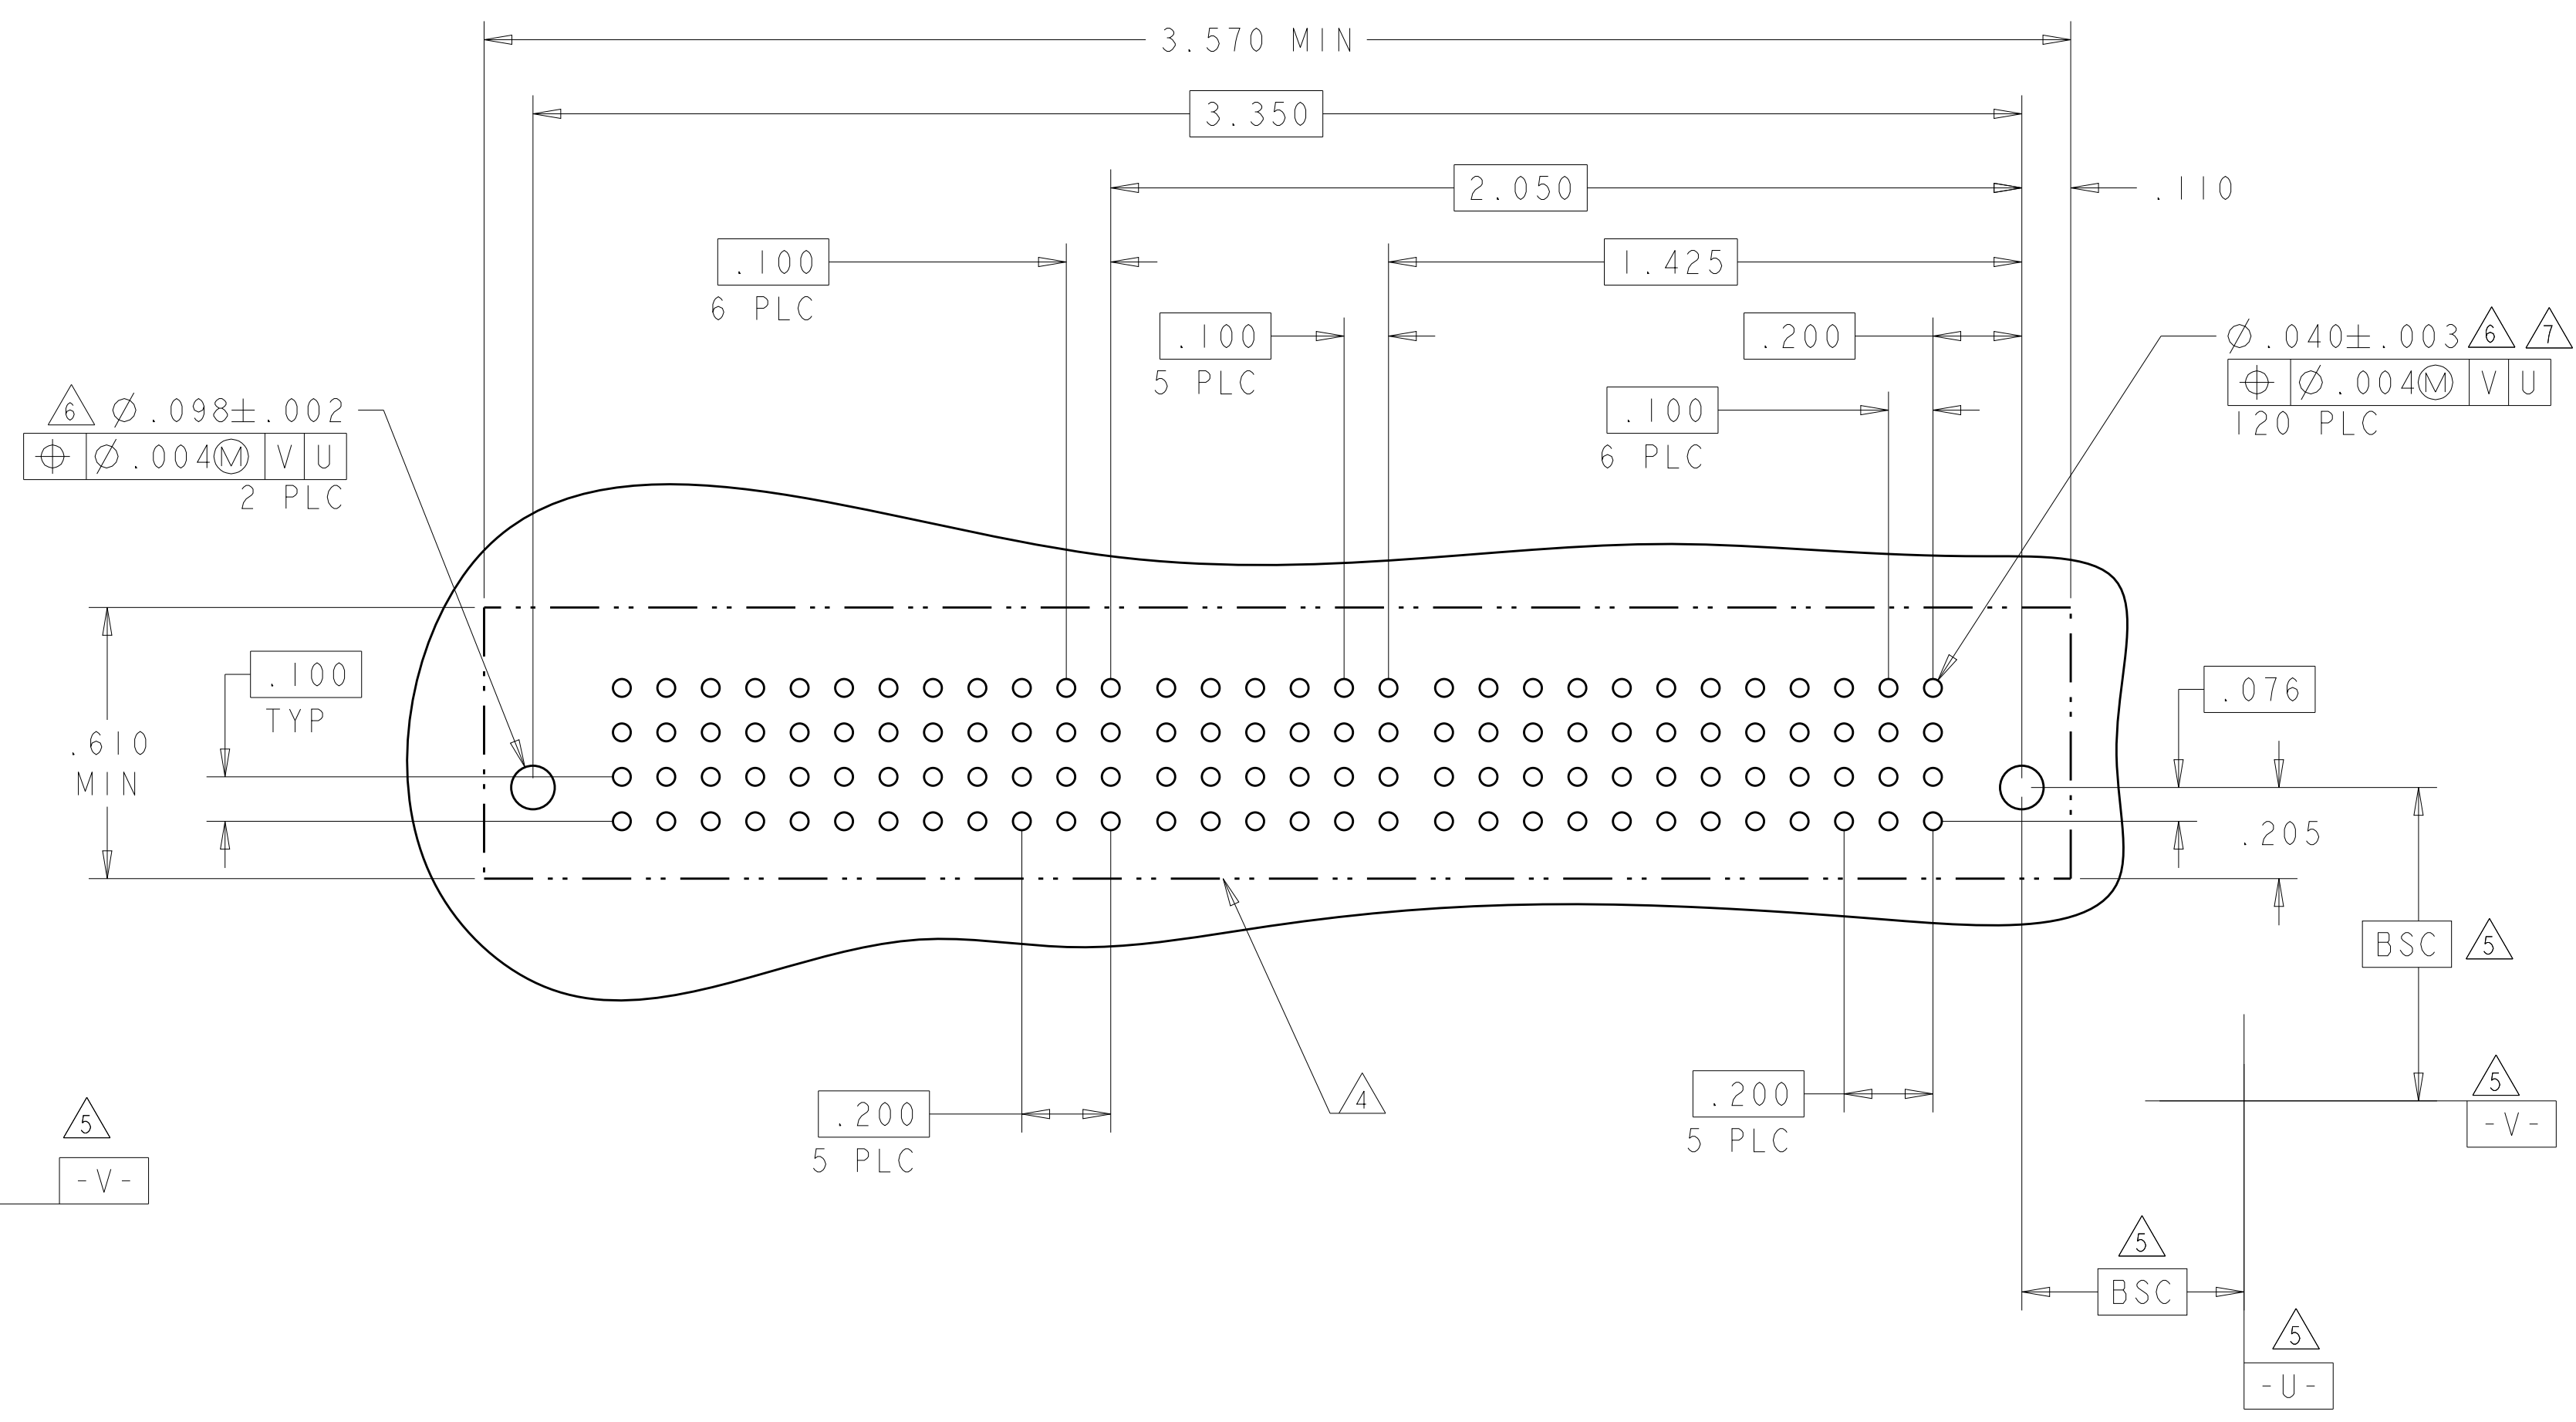



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D_ZHU 20DEC2007		 TE Connectivity	
		CHK S_ZHAO 20DEC2007			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		NAME PRODUCT SPEC 108-2292 APPLICATION SPEC 114-13251	
		FINISH WEIGHT		VER RECEP ASSEMBLY SHORT GUIDES, PRESS FIT MULTI-BEAM XLE	
MATERIAL :		CUSTOMER DRAWING		SIZE A1	
				CAGE CODE 100779	
				DRAWING NO C=6450860	
				RESTRICTED TO -	
				SCALE N/A	
				SHEET 13 OF 28	
				REV K2	


PART NUMBER	ROWS		POWER				SIGNAL			POWER				
			P8	P7	P6	P5	3	2	1	P4	P3	P2	P1	
2-6450860-8	D		GS	GS	GS	GS	AP	AP	AP	GS	GS	GS	GS	
	C						AP	AP	AP					
	B						AP	AP	AP					
	A						AP	AP	AP					
4P + 12S + 4P														

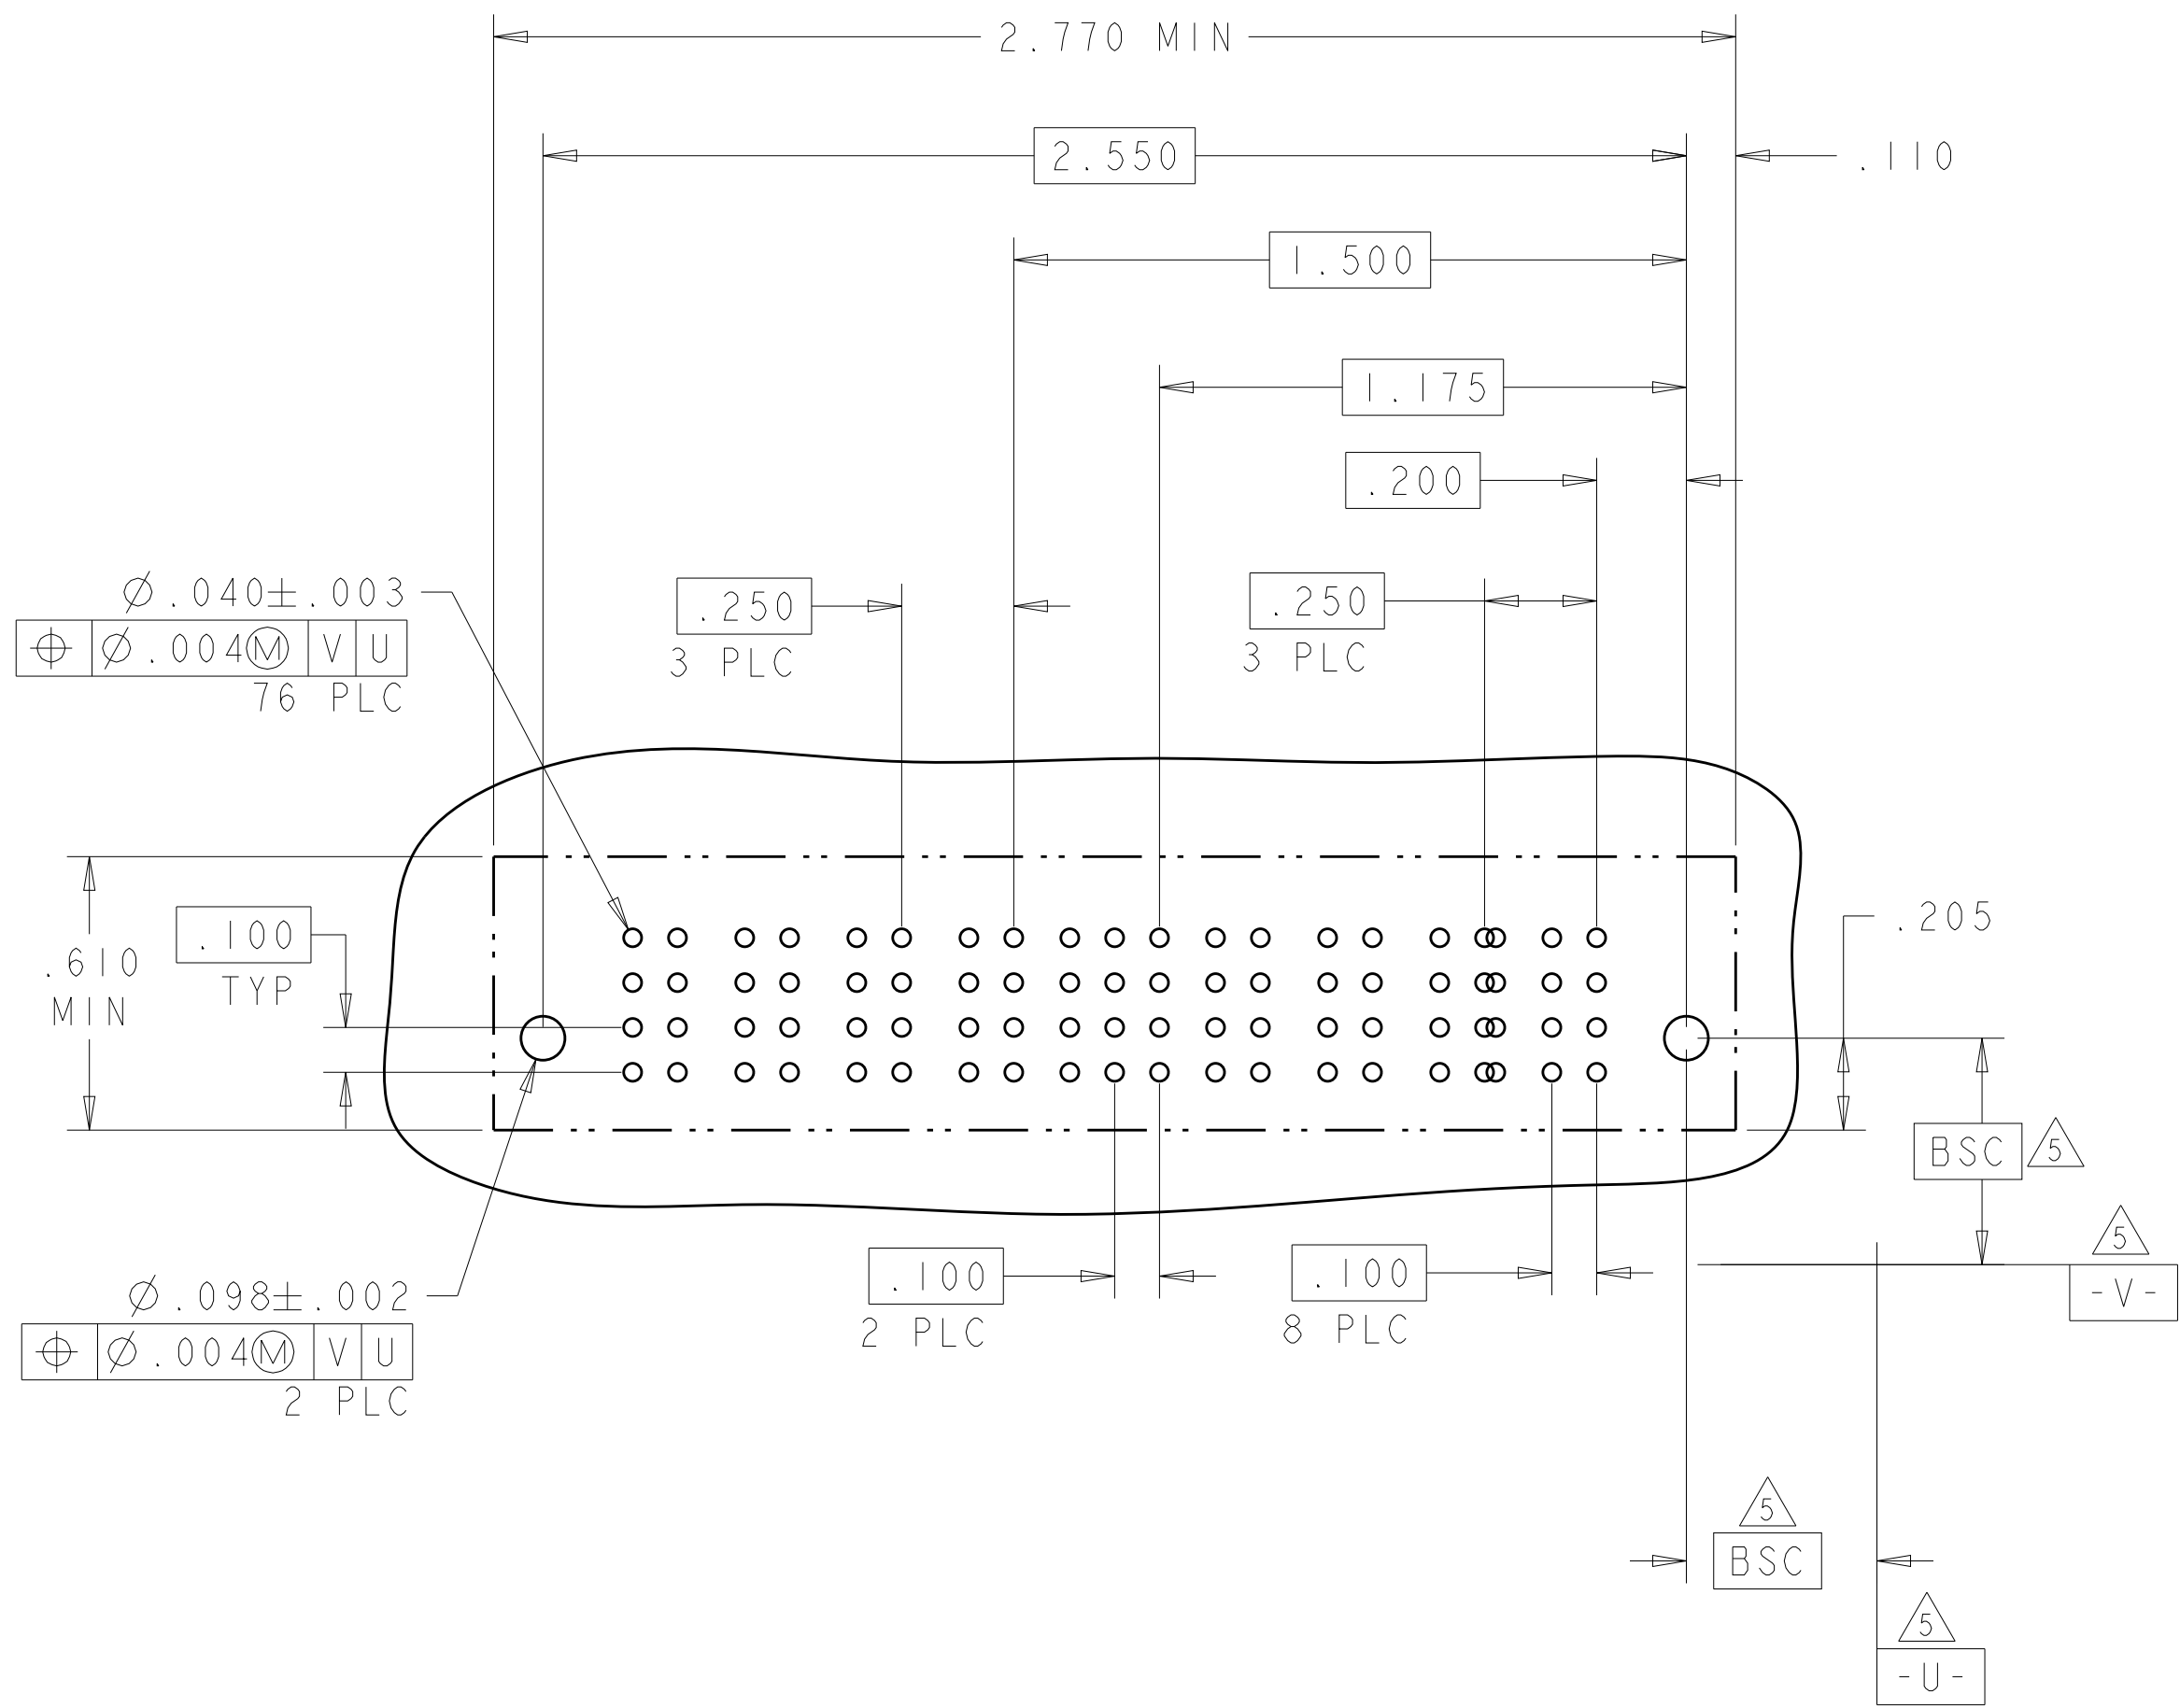
4805 (3/11)

LOC		DIST		REVISIONS				
ES	00	P	LYR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	

PART NUMBER	ROWS		POWER								SIGNAL																POWER																					
			P16	P15	P14	P13	P12	P11	P10	P9	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	P8	P7	P6	P5	P4	P3		P2	P1											
2-6450860-1	D C B A										AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP								
											AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP		
											AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP
											AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP
8P + 72S + 8P																																																

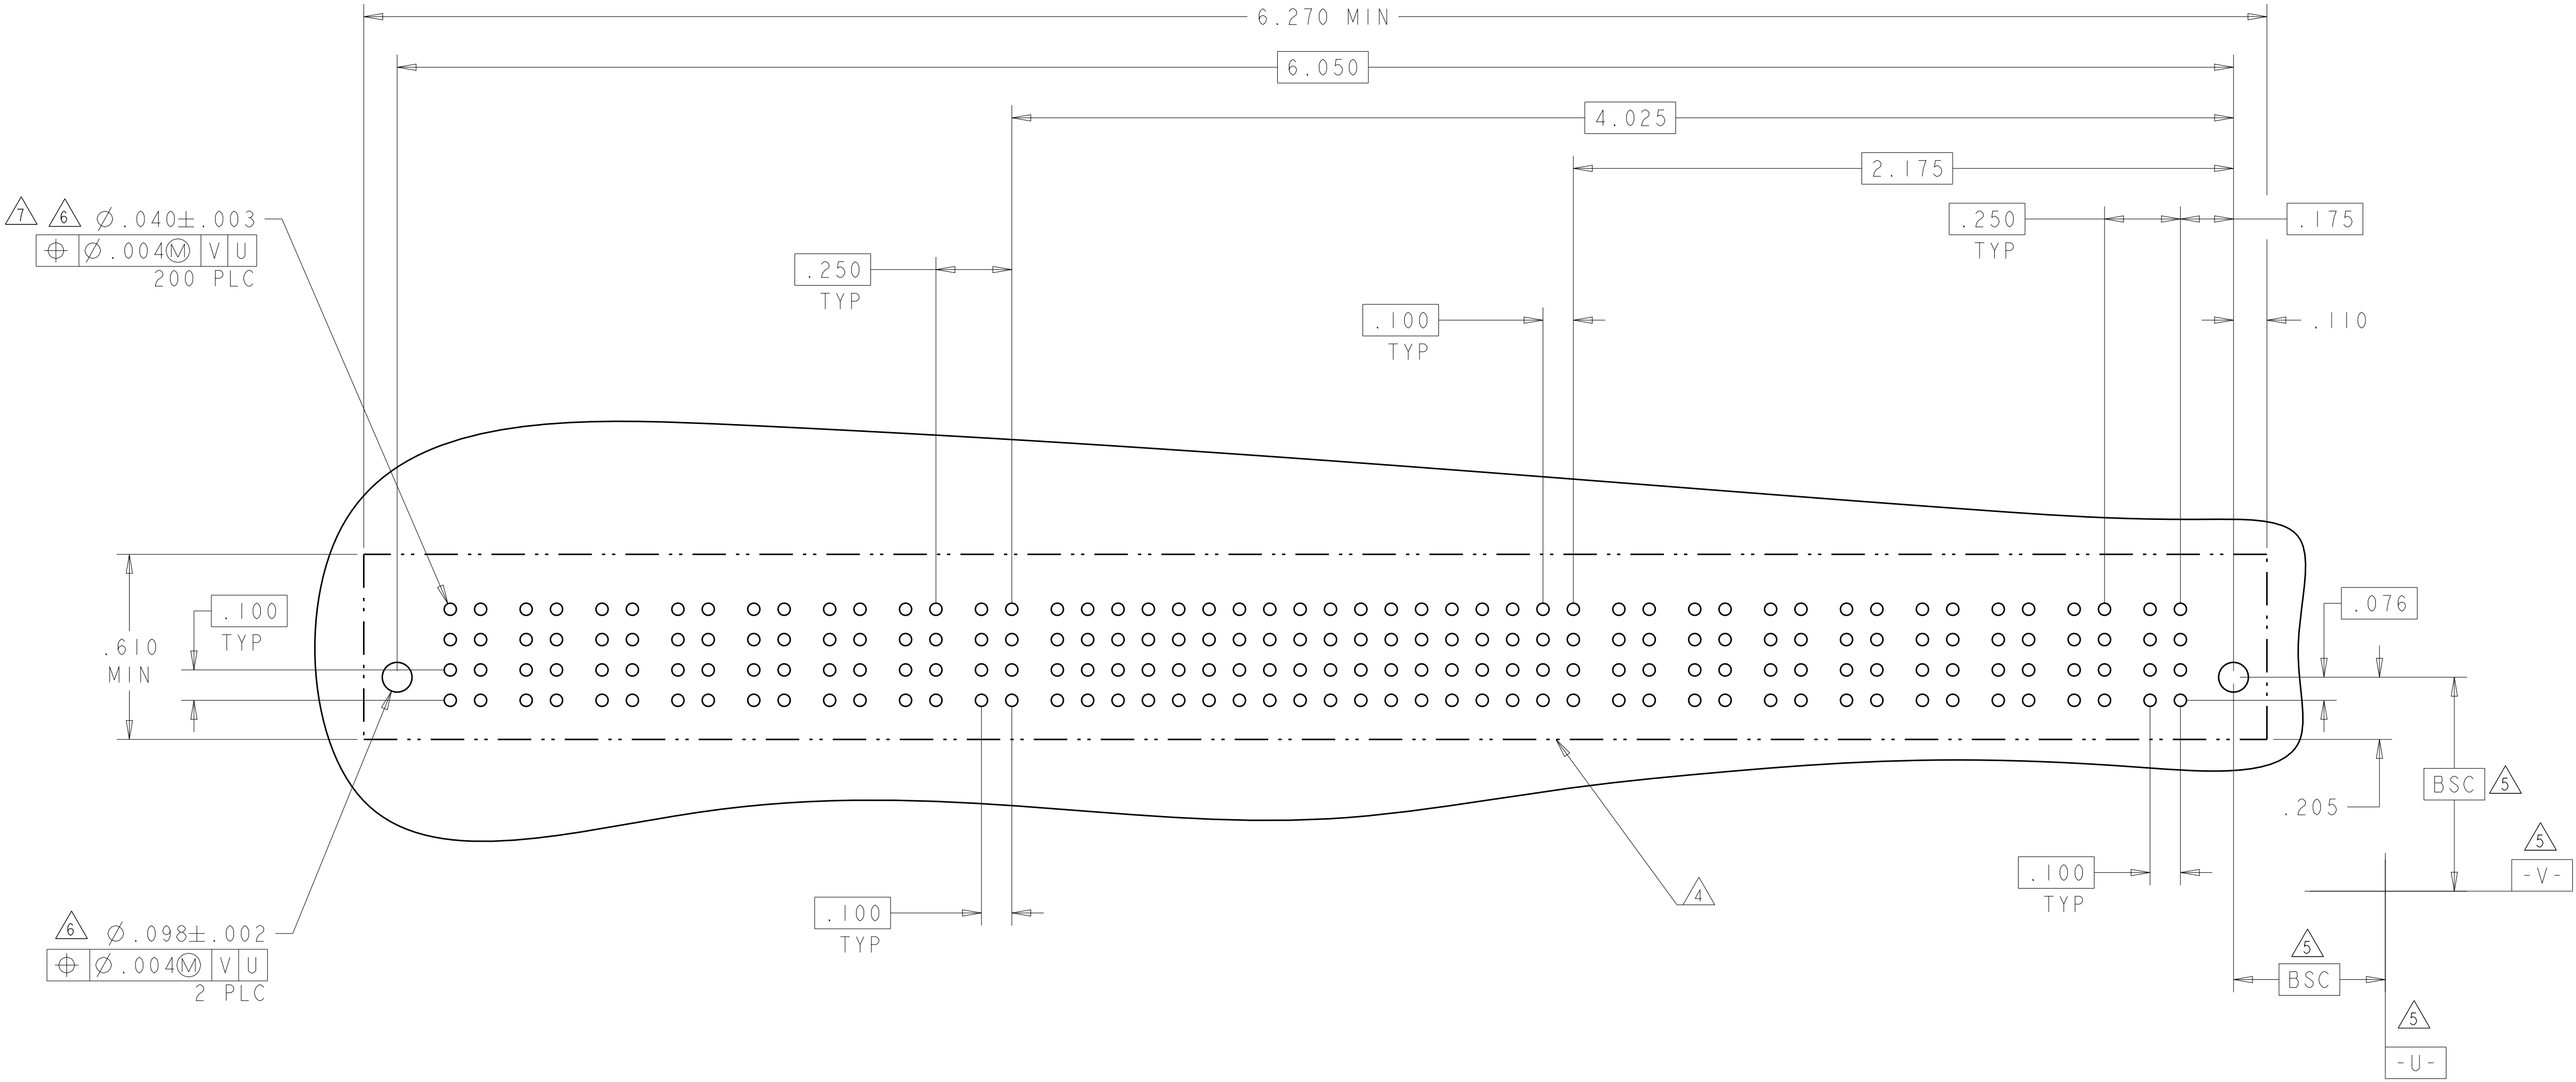



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	20DEC2007	 TE Connectivity	
		CHK	S. ZHAO	20DEC2007		
DIMENSIONS:		APVD	S. ZHAO	-	NAME	
INCHES						
		TOLERANCES UNLESS OTHERWISE SPECIFIED:			PRODUCT SPEC	
		0 PLC ± .				
		1 PLC ± .01			108-2292	
		2 PLC ± .01			APPLICATION SPEC	
		3 PLC ± .005			114-13251	
		4 PLC ± .0020			WEIGHT	
		ANGLES ± .0020			CUSTOMER DRAWING	
		FINISH			SCALE	
MATERIAL					N/A	
					SHEET 15 OF 28	
					REV K2	

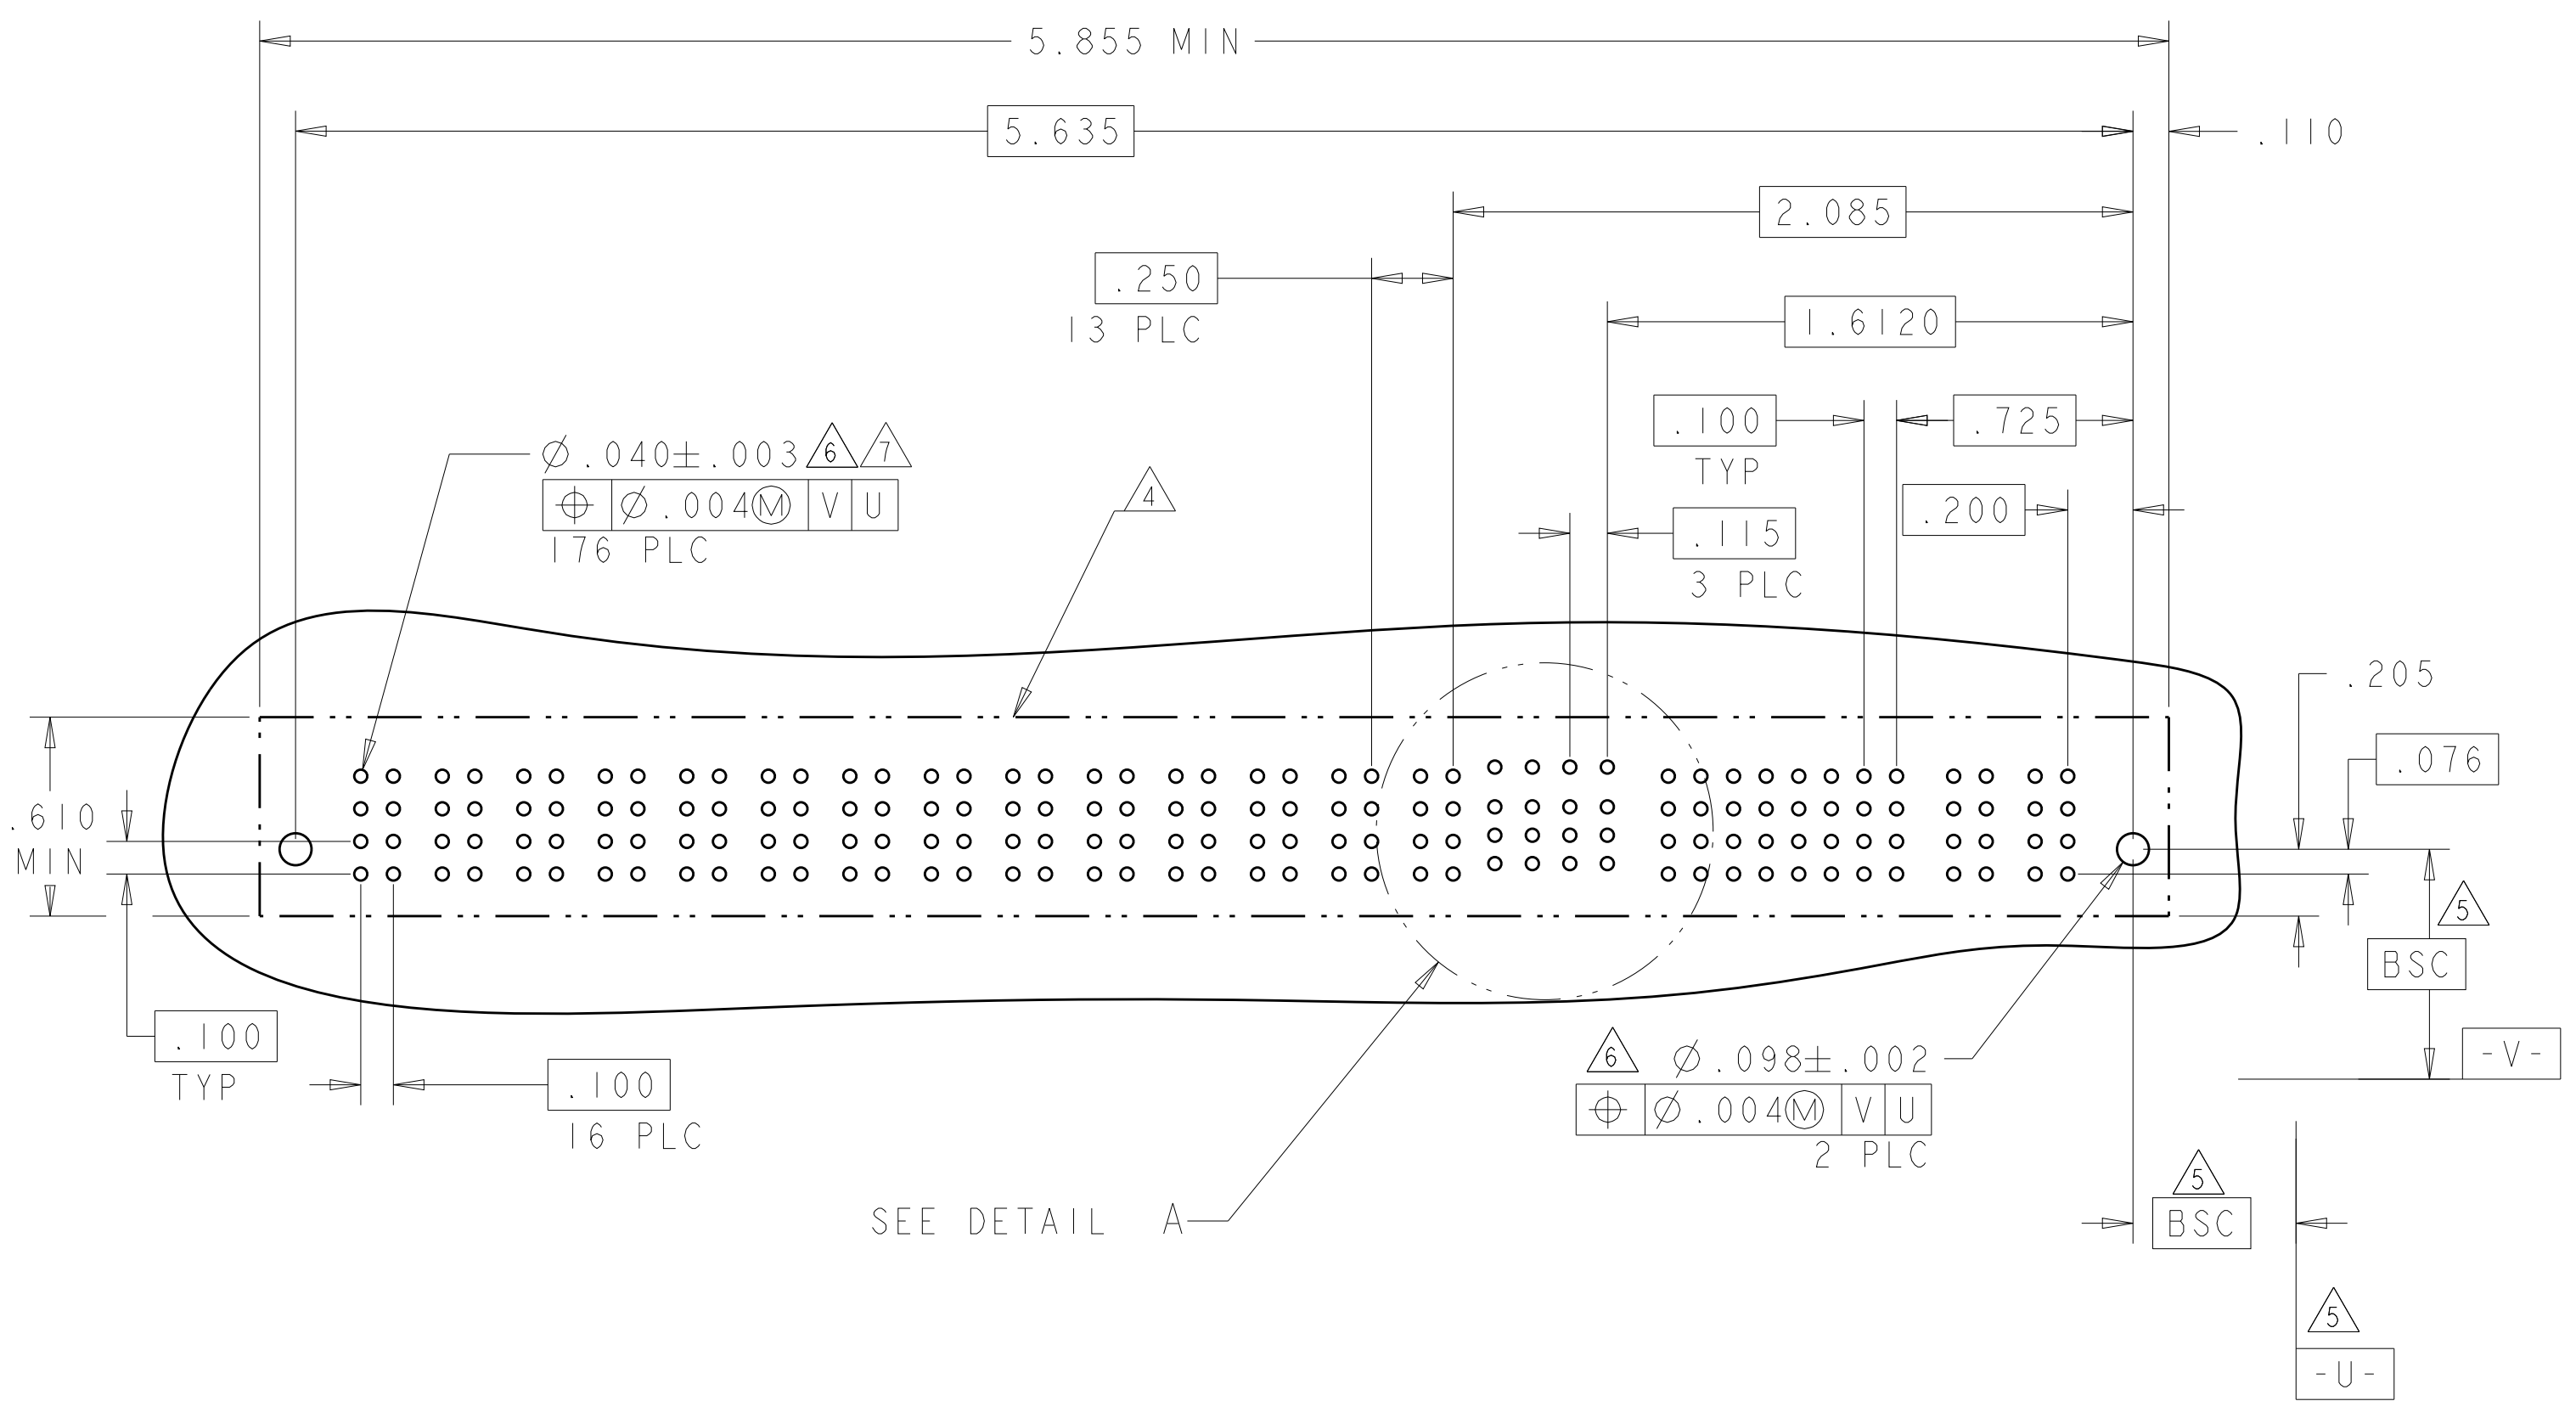[illegible]4805 (3/11)

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
-	-	SEE SHEET 1			-	-	-	


PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P4	P3	6	5	4	3	2	1	P2	P1	
2-6450860-9	D		GS	GS	AP	AP	AP	AP	AP	AP	GS	GS	
	C				AP	AP	AP	AP	AP	AP			
	B				AP	AP	AP	AP	AP	AP			
	A				AP	AP	AP	AP	AP	AP			
2P + 24S + 2P													HD


PART NUMBER	ROWS		POWER			SIGNAL	POWER		
			P5	P4	P3	I	P2	P1	
3-6450860-0	D		LSI	LSI	LSI	AP	LSI	LSI	
	C					AP			
	B					AP			
	A					AP			
2LP + 4S + 3LP									

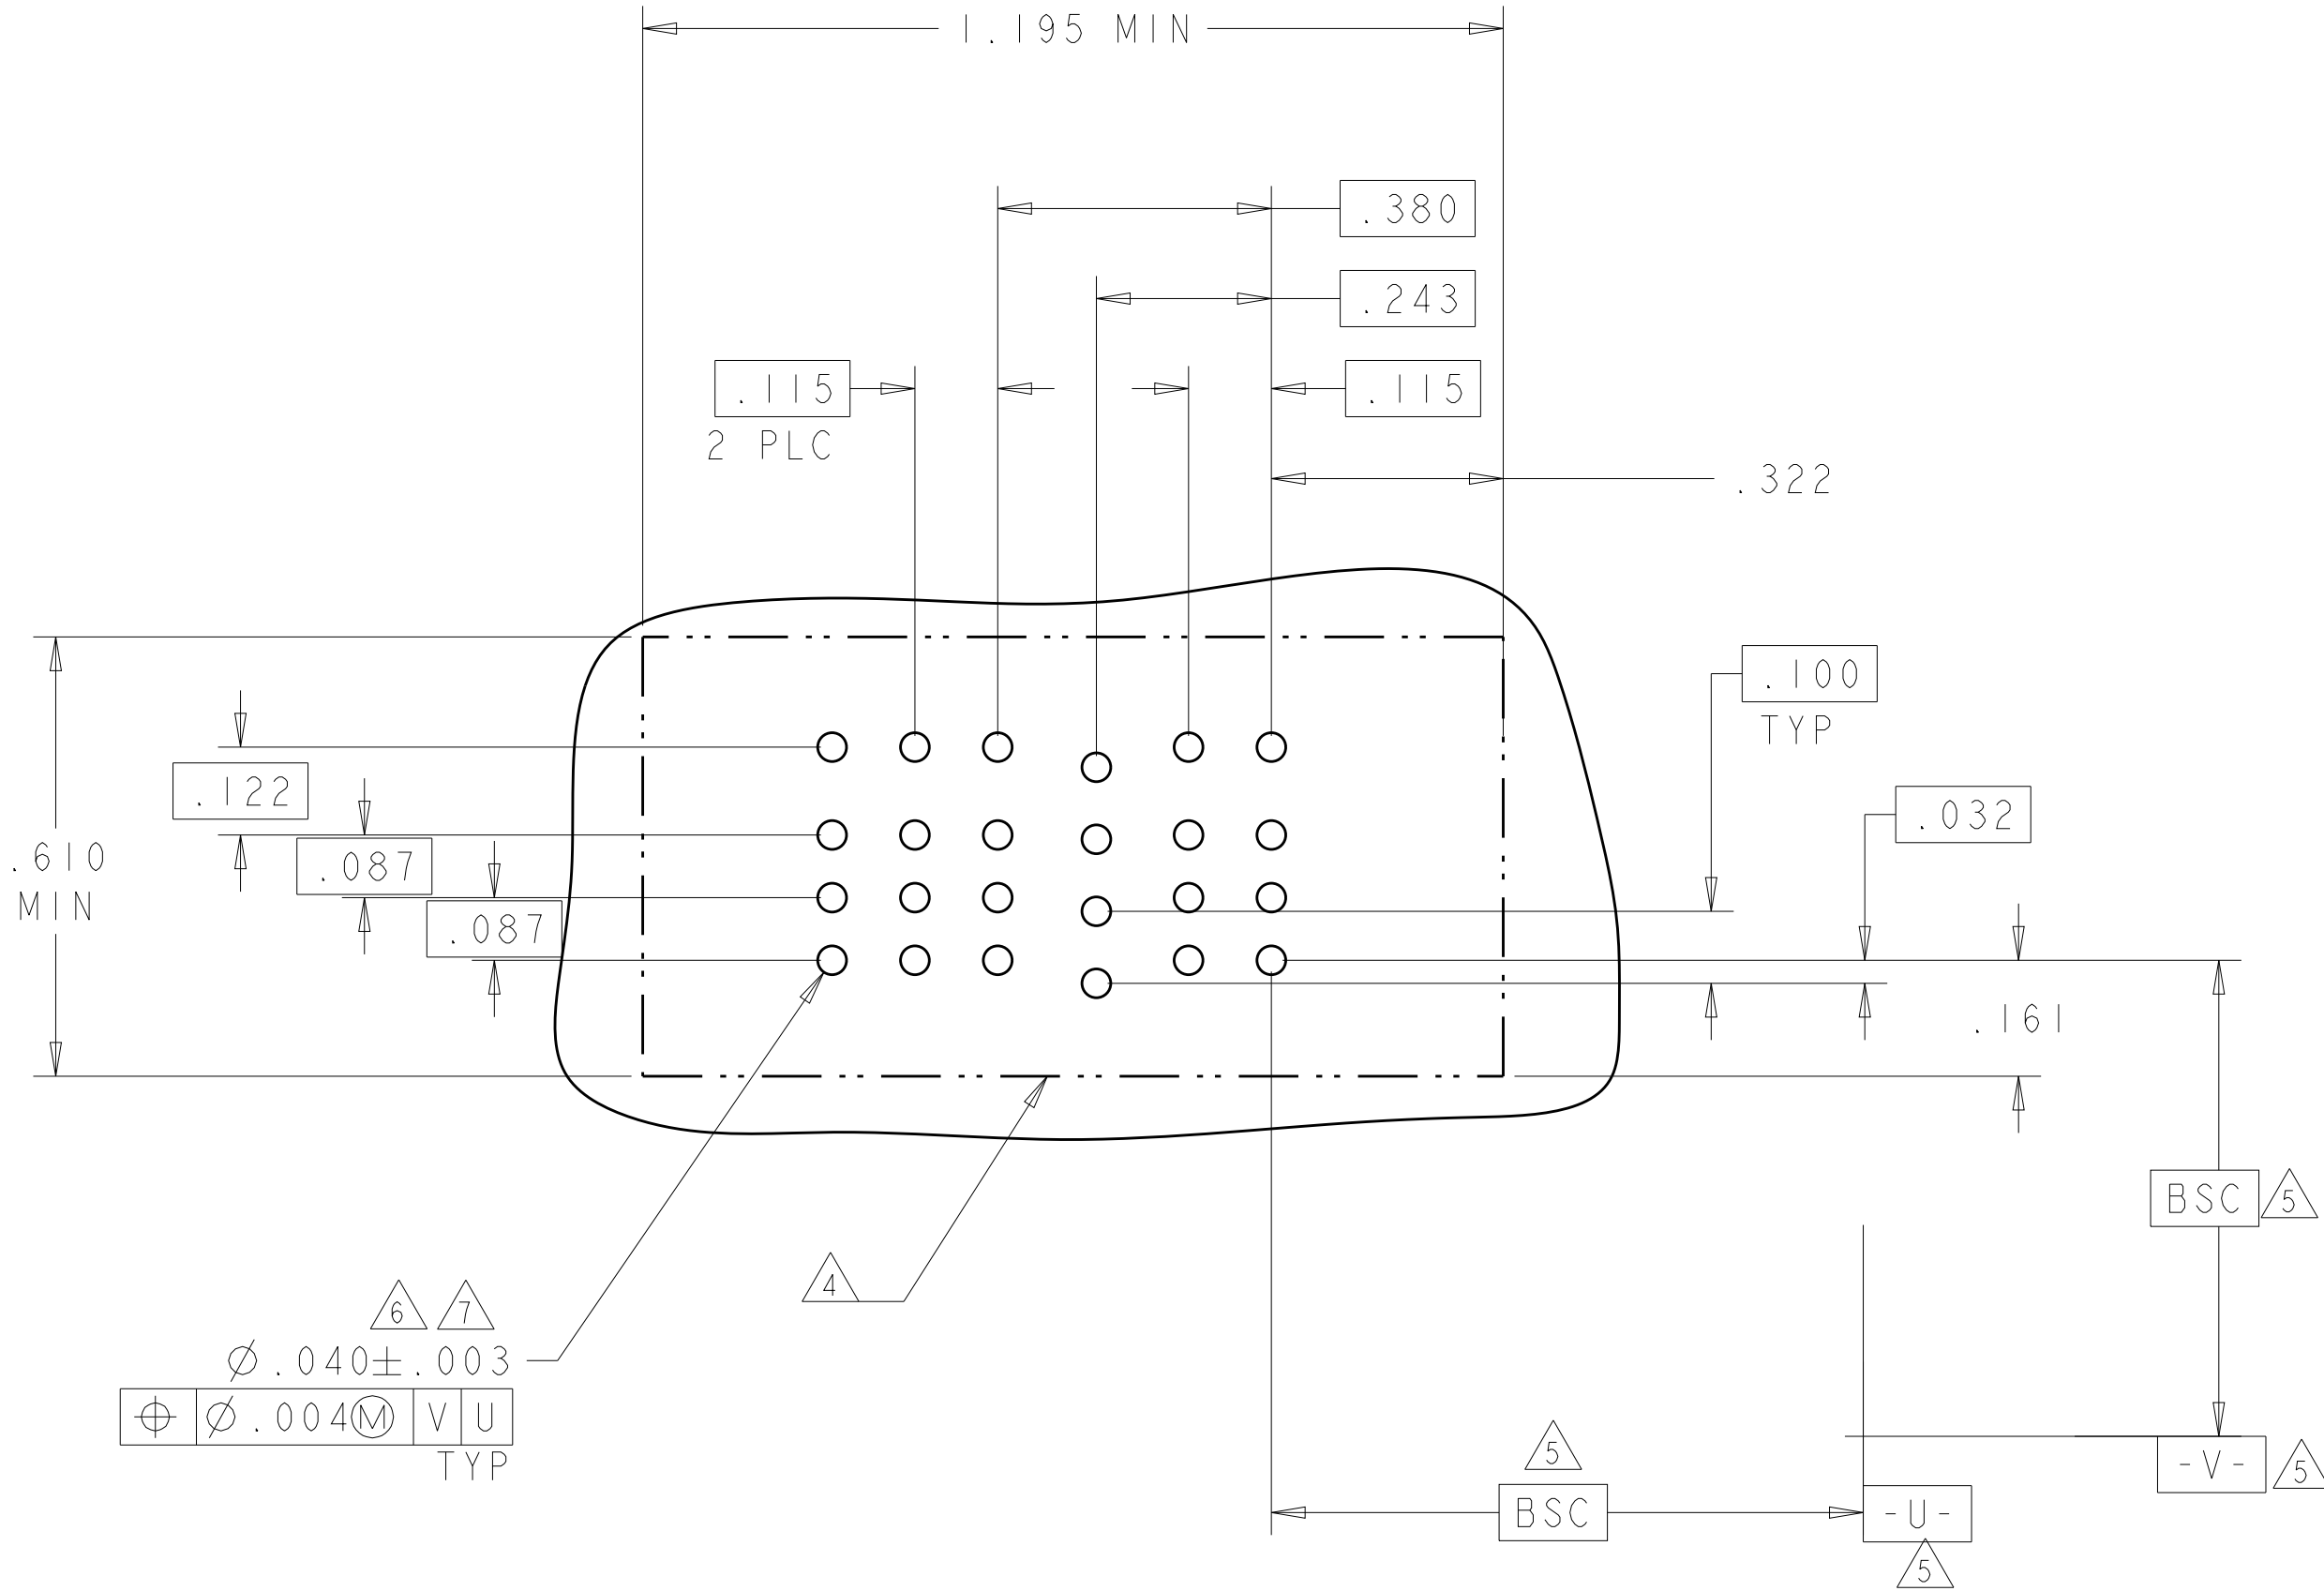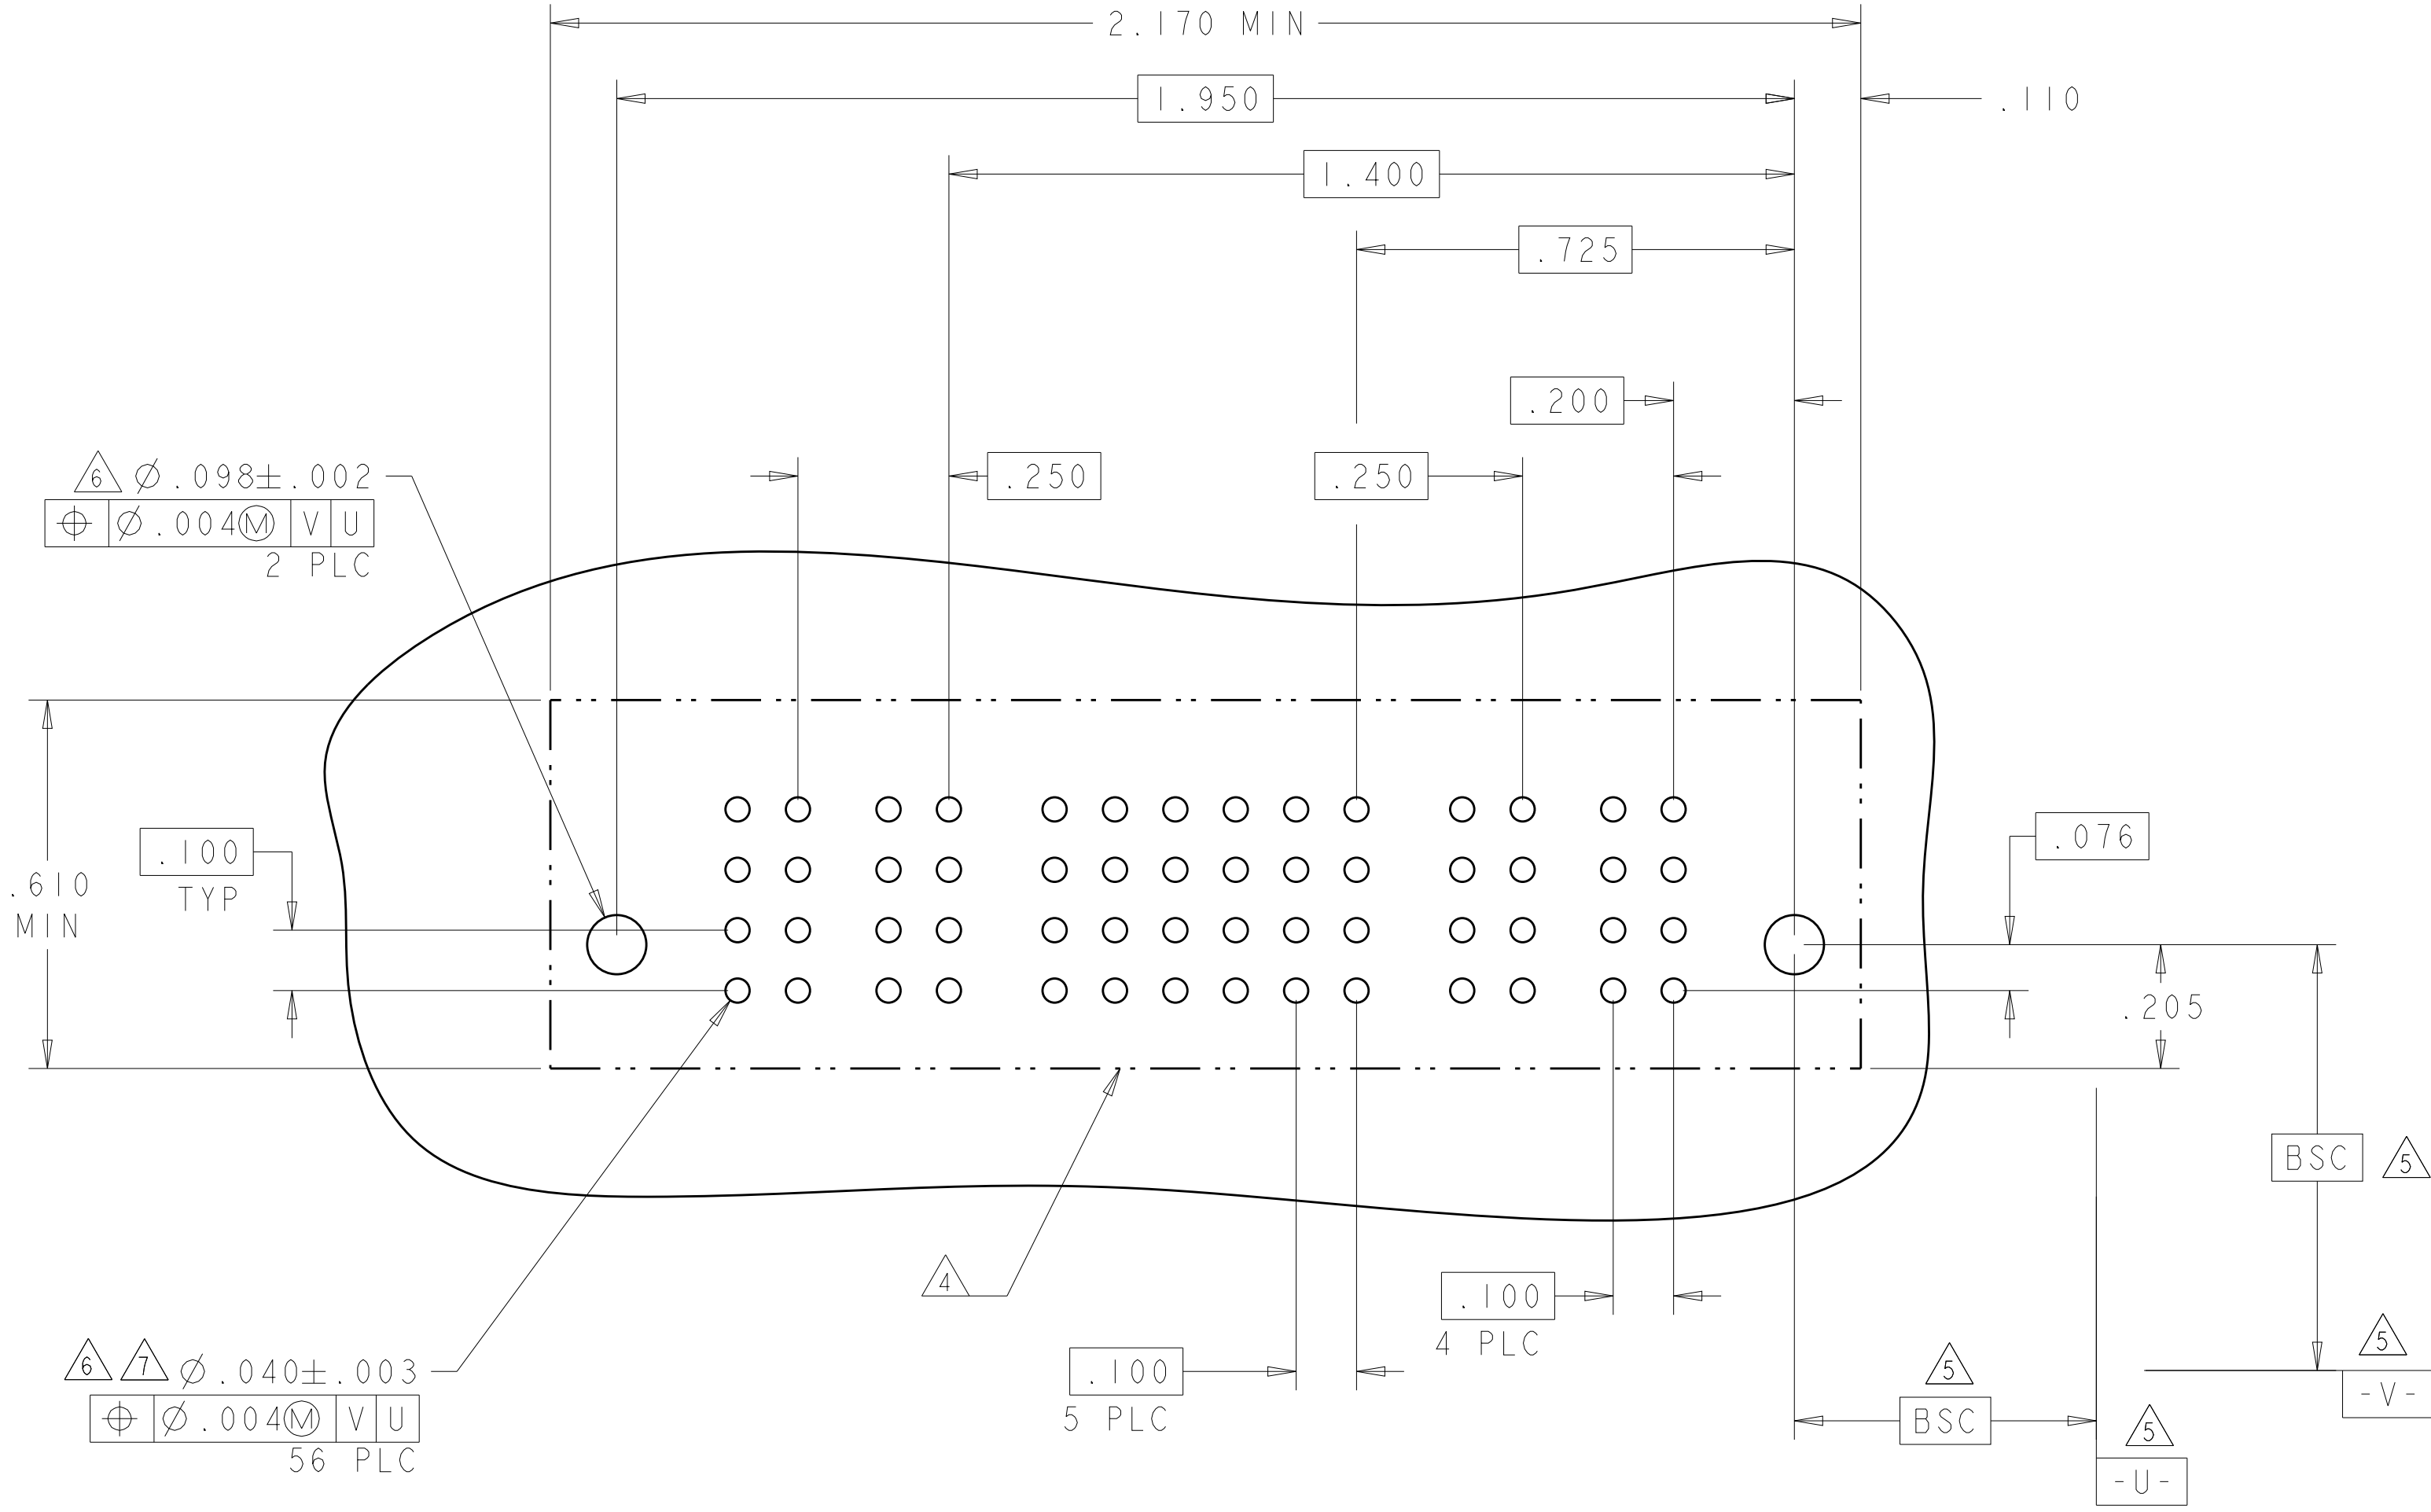

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: D. ZHU	20DEC2007		
DIMENSIONS: INCHES		CHK: S. ZHAO	20DEC2007		
		APVD: S. ZHAO	-	NAME	
		PRODUCT SPEC		VER RECP ASSEMBLY	
MATERIAL: -		APPLICATION SPEC		SHORT GUIDES, PRESS FIT	
		WEIGHT: -		MULTI-BEAM XLE	
FINISH: -		CUSTOMER DRAWING		SIZE: A1	
		SCALE: N/A		SHEET 17 OF 28	
				REV: K2	


G 4

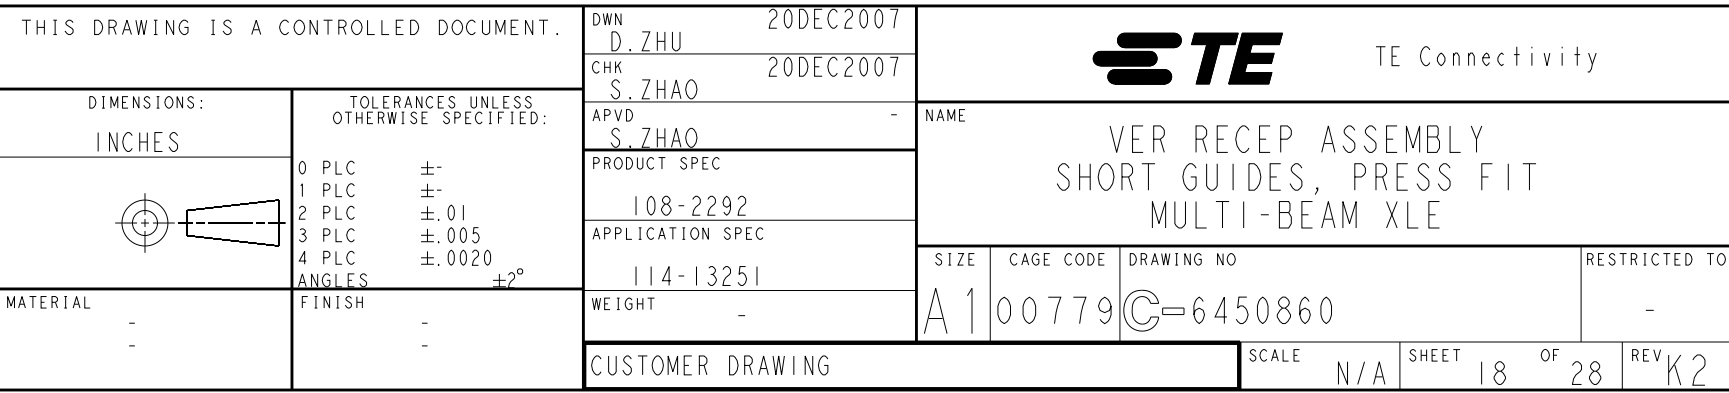

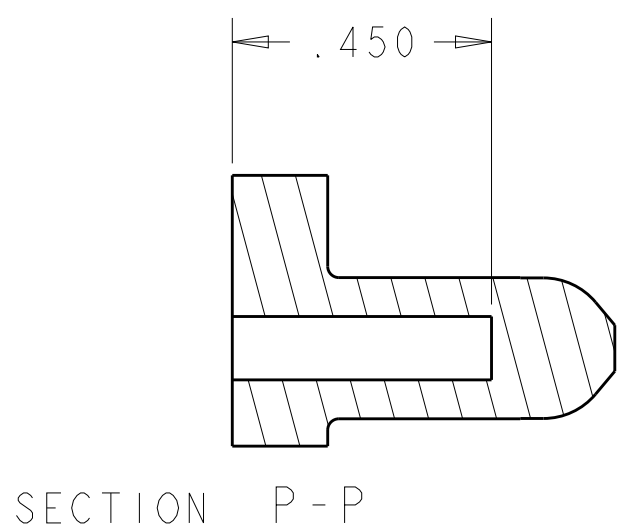


3-6450860-3


PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P4	P3	2	1	P2	P1	
3-6450860-3	D C B A								
2LP + 8S + 2P									

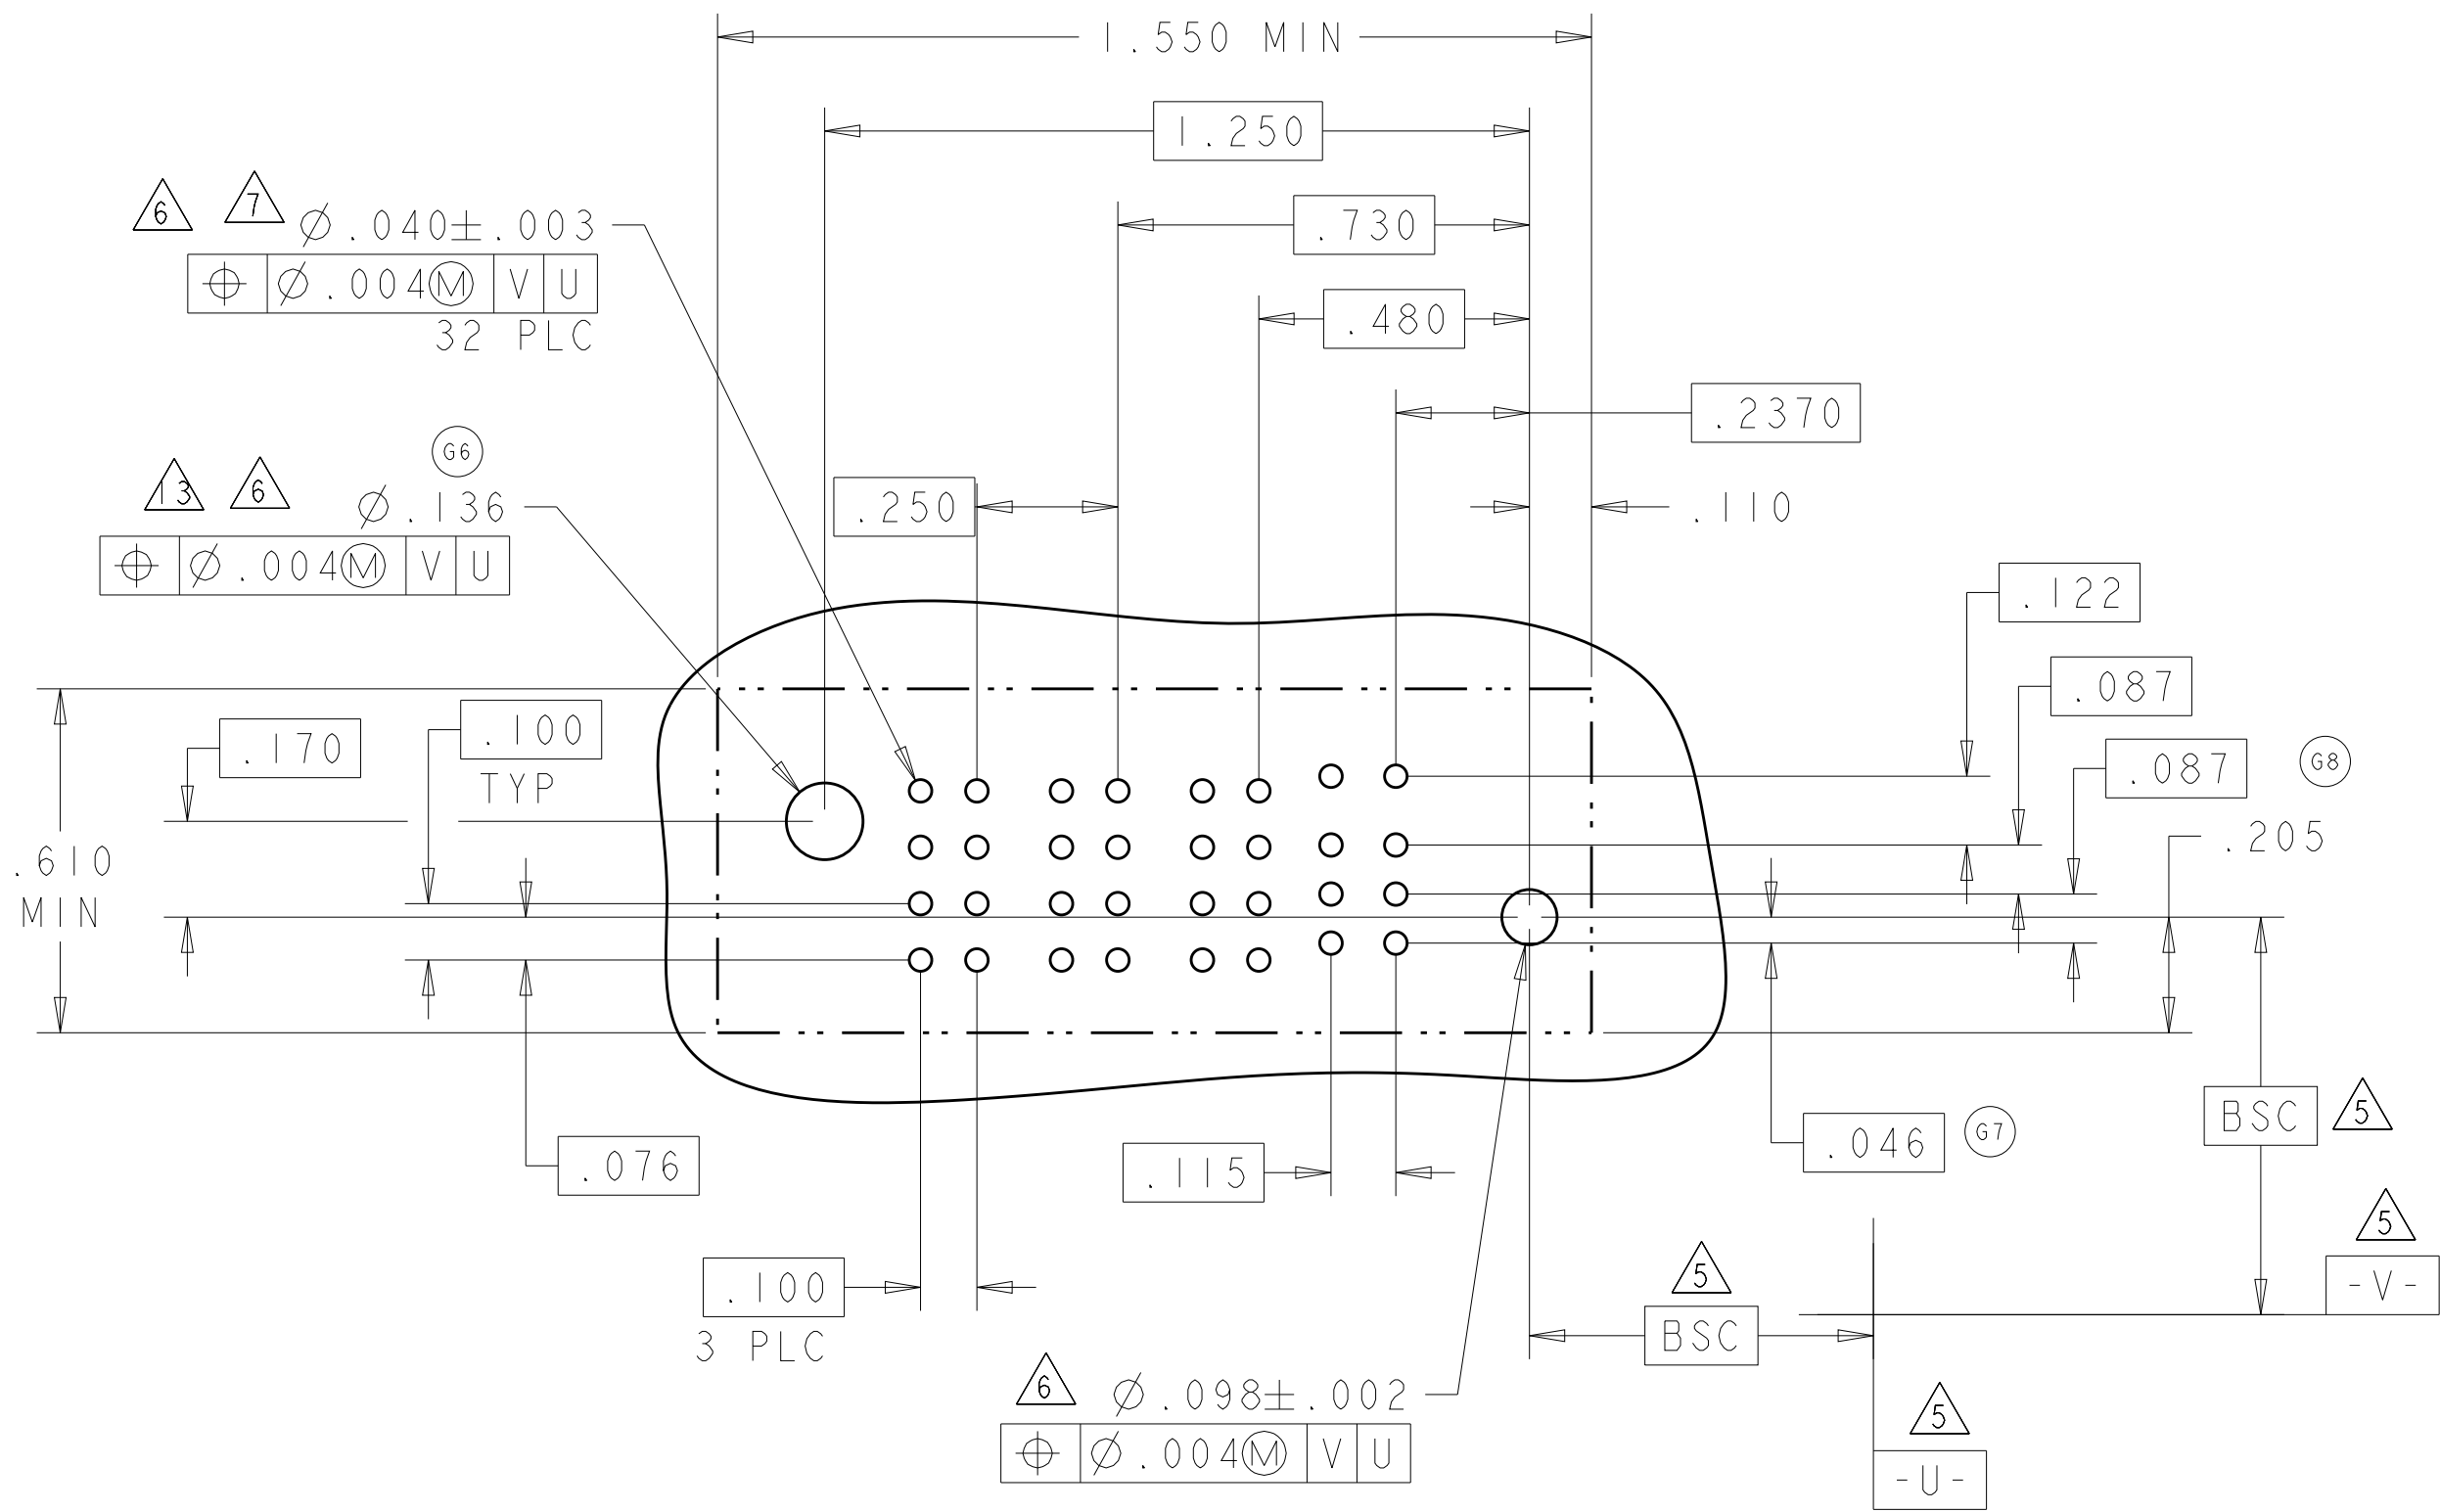4805 (3/11)


[illegible]4805 (3/11)

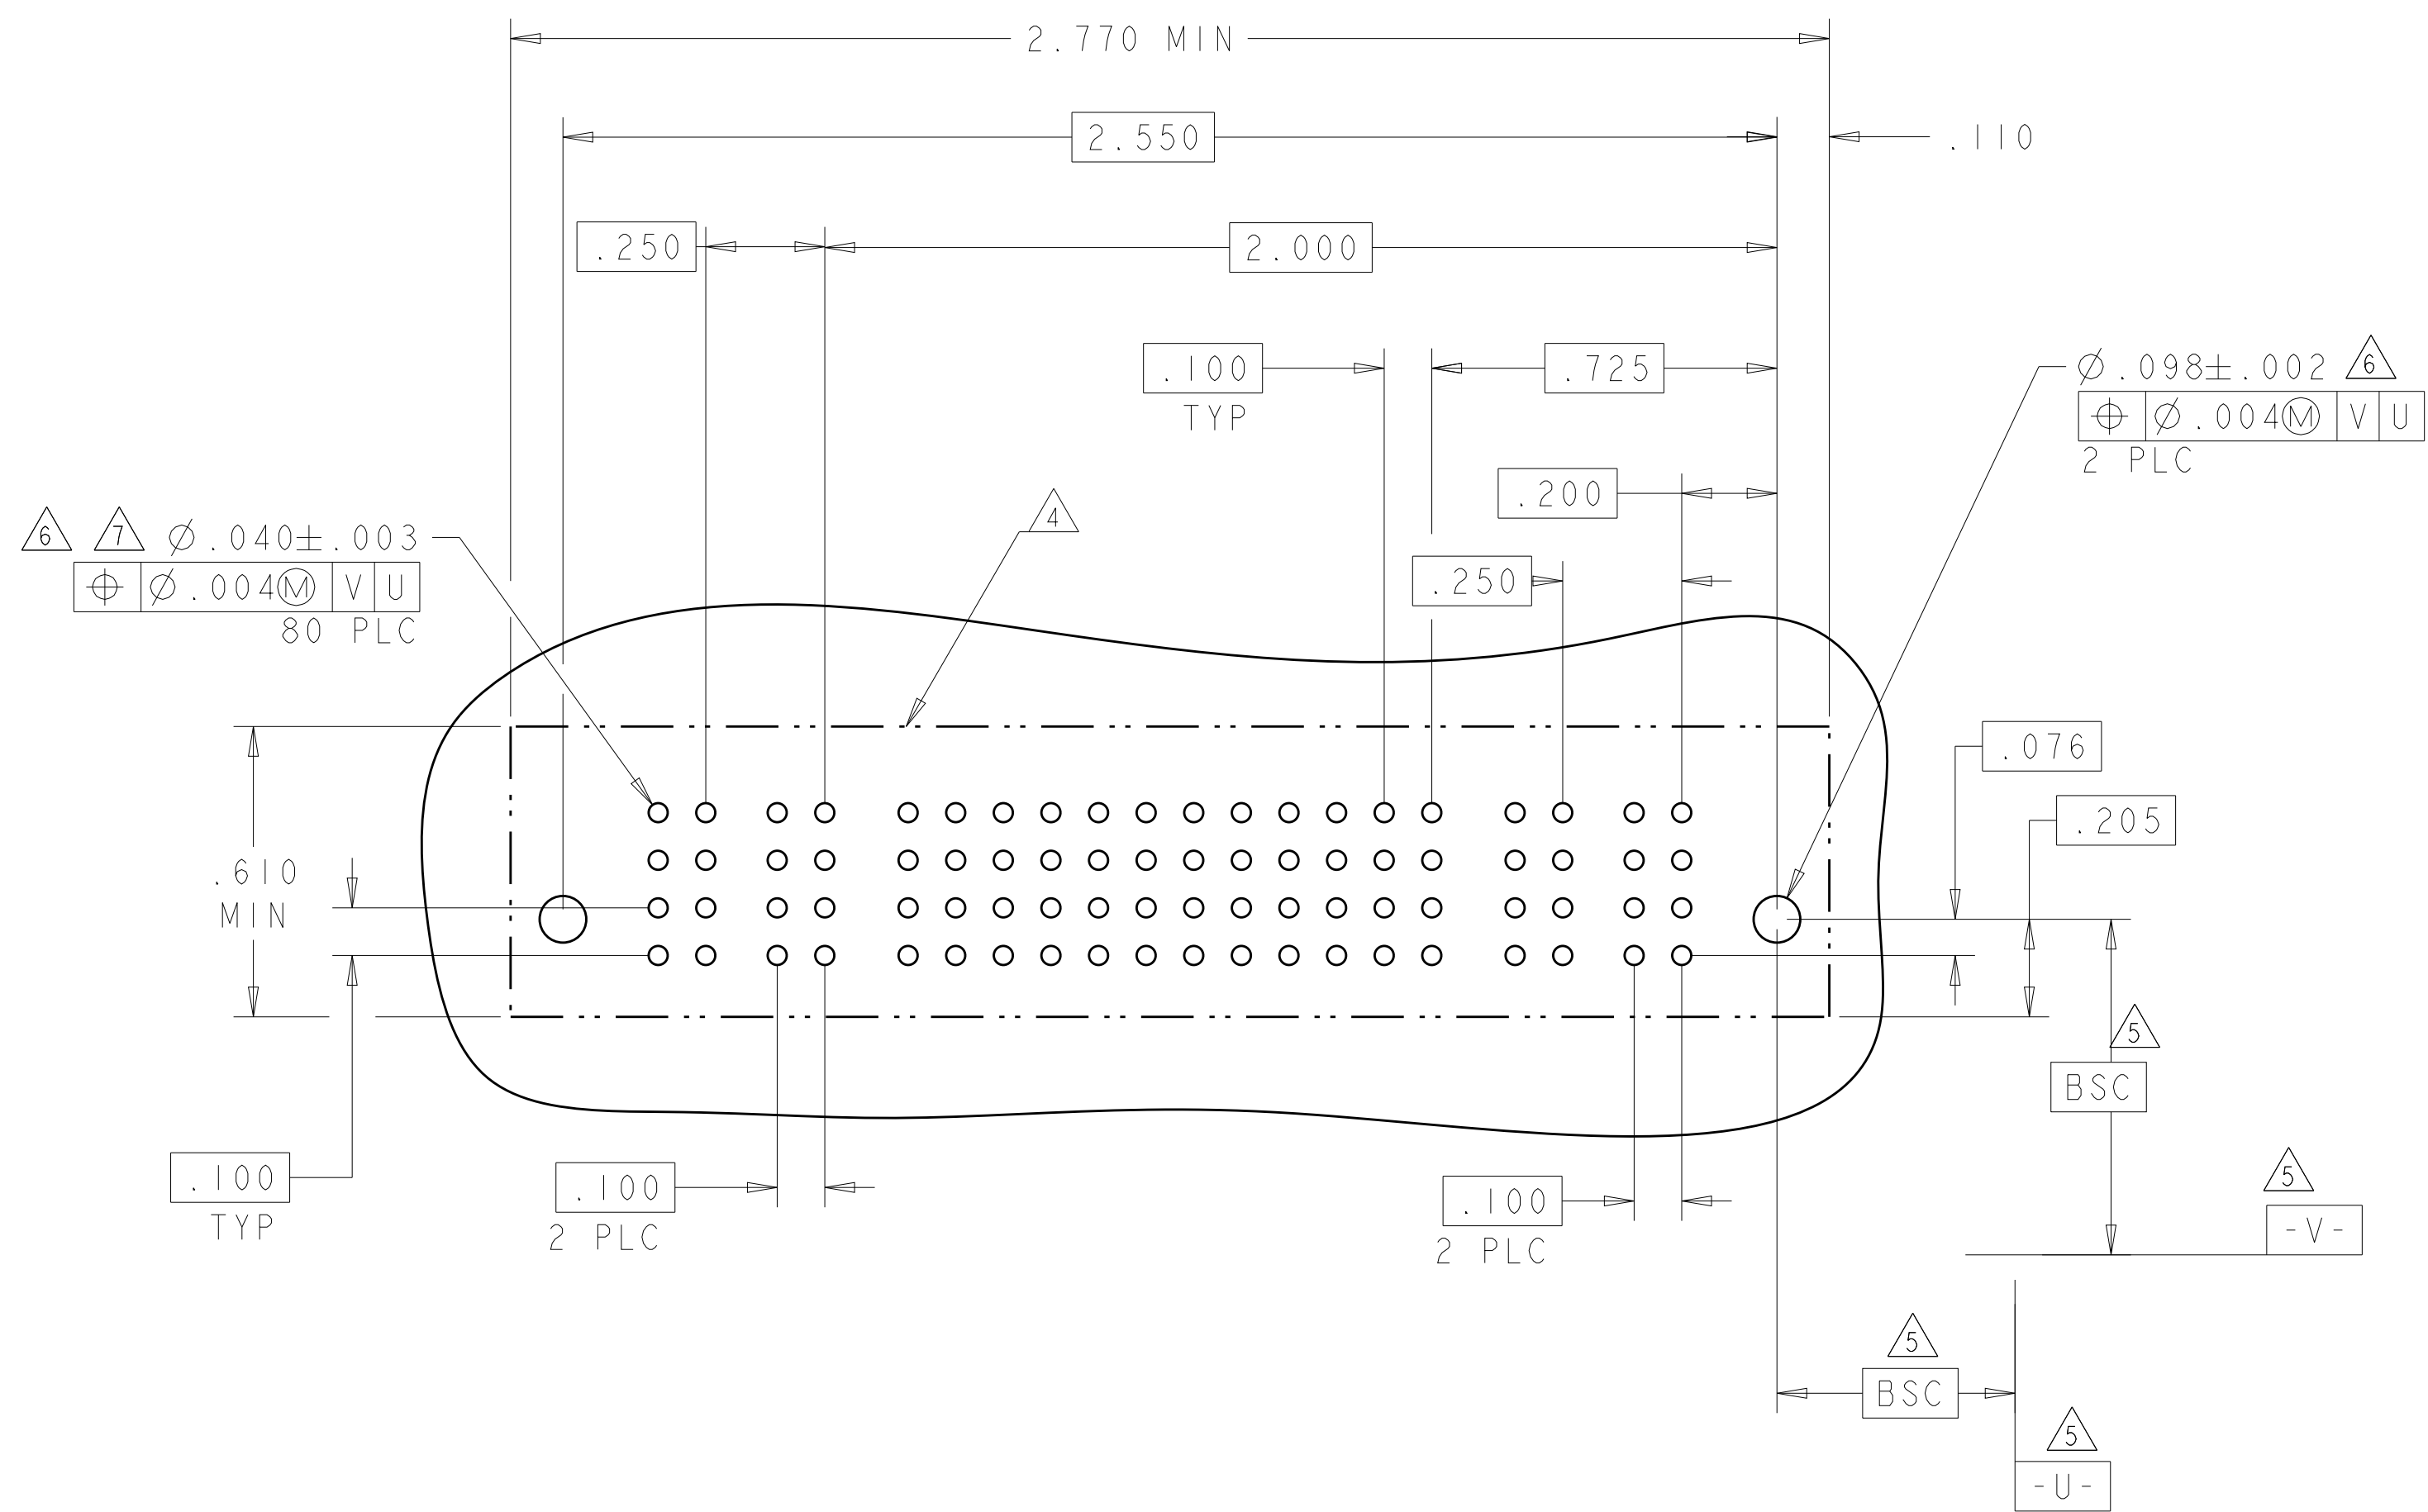[illegible]4805 (3/11)




PART NUMBER	ROWS		POWER	SIGNAL						POWER	
			P2	6	5	4	3	2	1	P1	
4-6450860-0	D			AP	AP	AP	AP	AP	AP		
	C			AP	AP	AP	AP	AP	AP		
	B			AP	AP	AP	AP	AP	AP		
	A			AP	AP	AP	AP	AP	AP		
				AP	AP	AP	AP	AP	AP		
IP + 24S + IP											

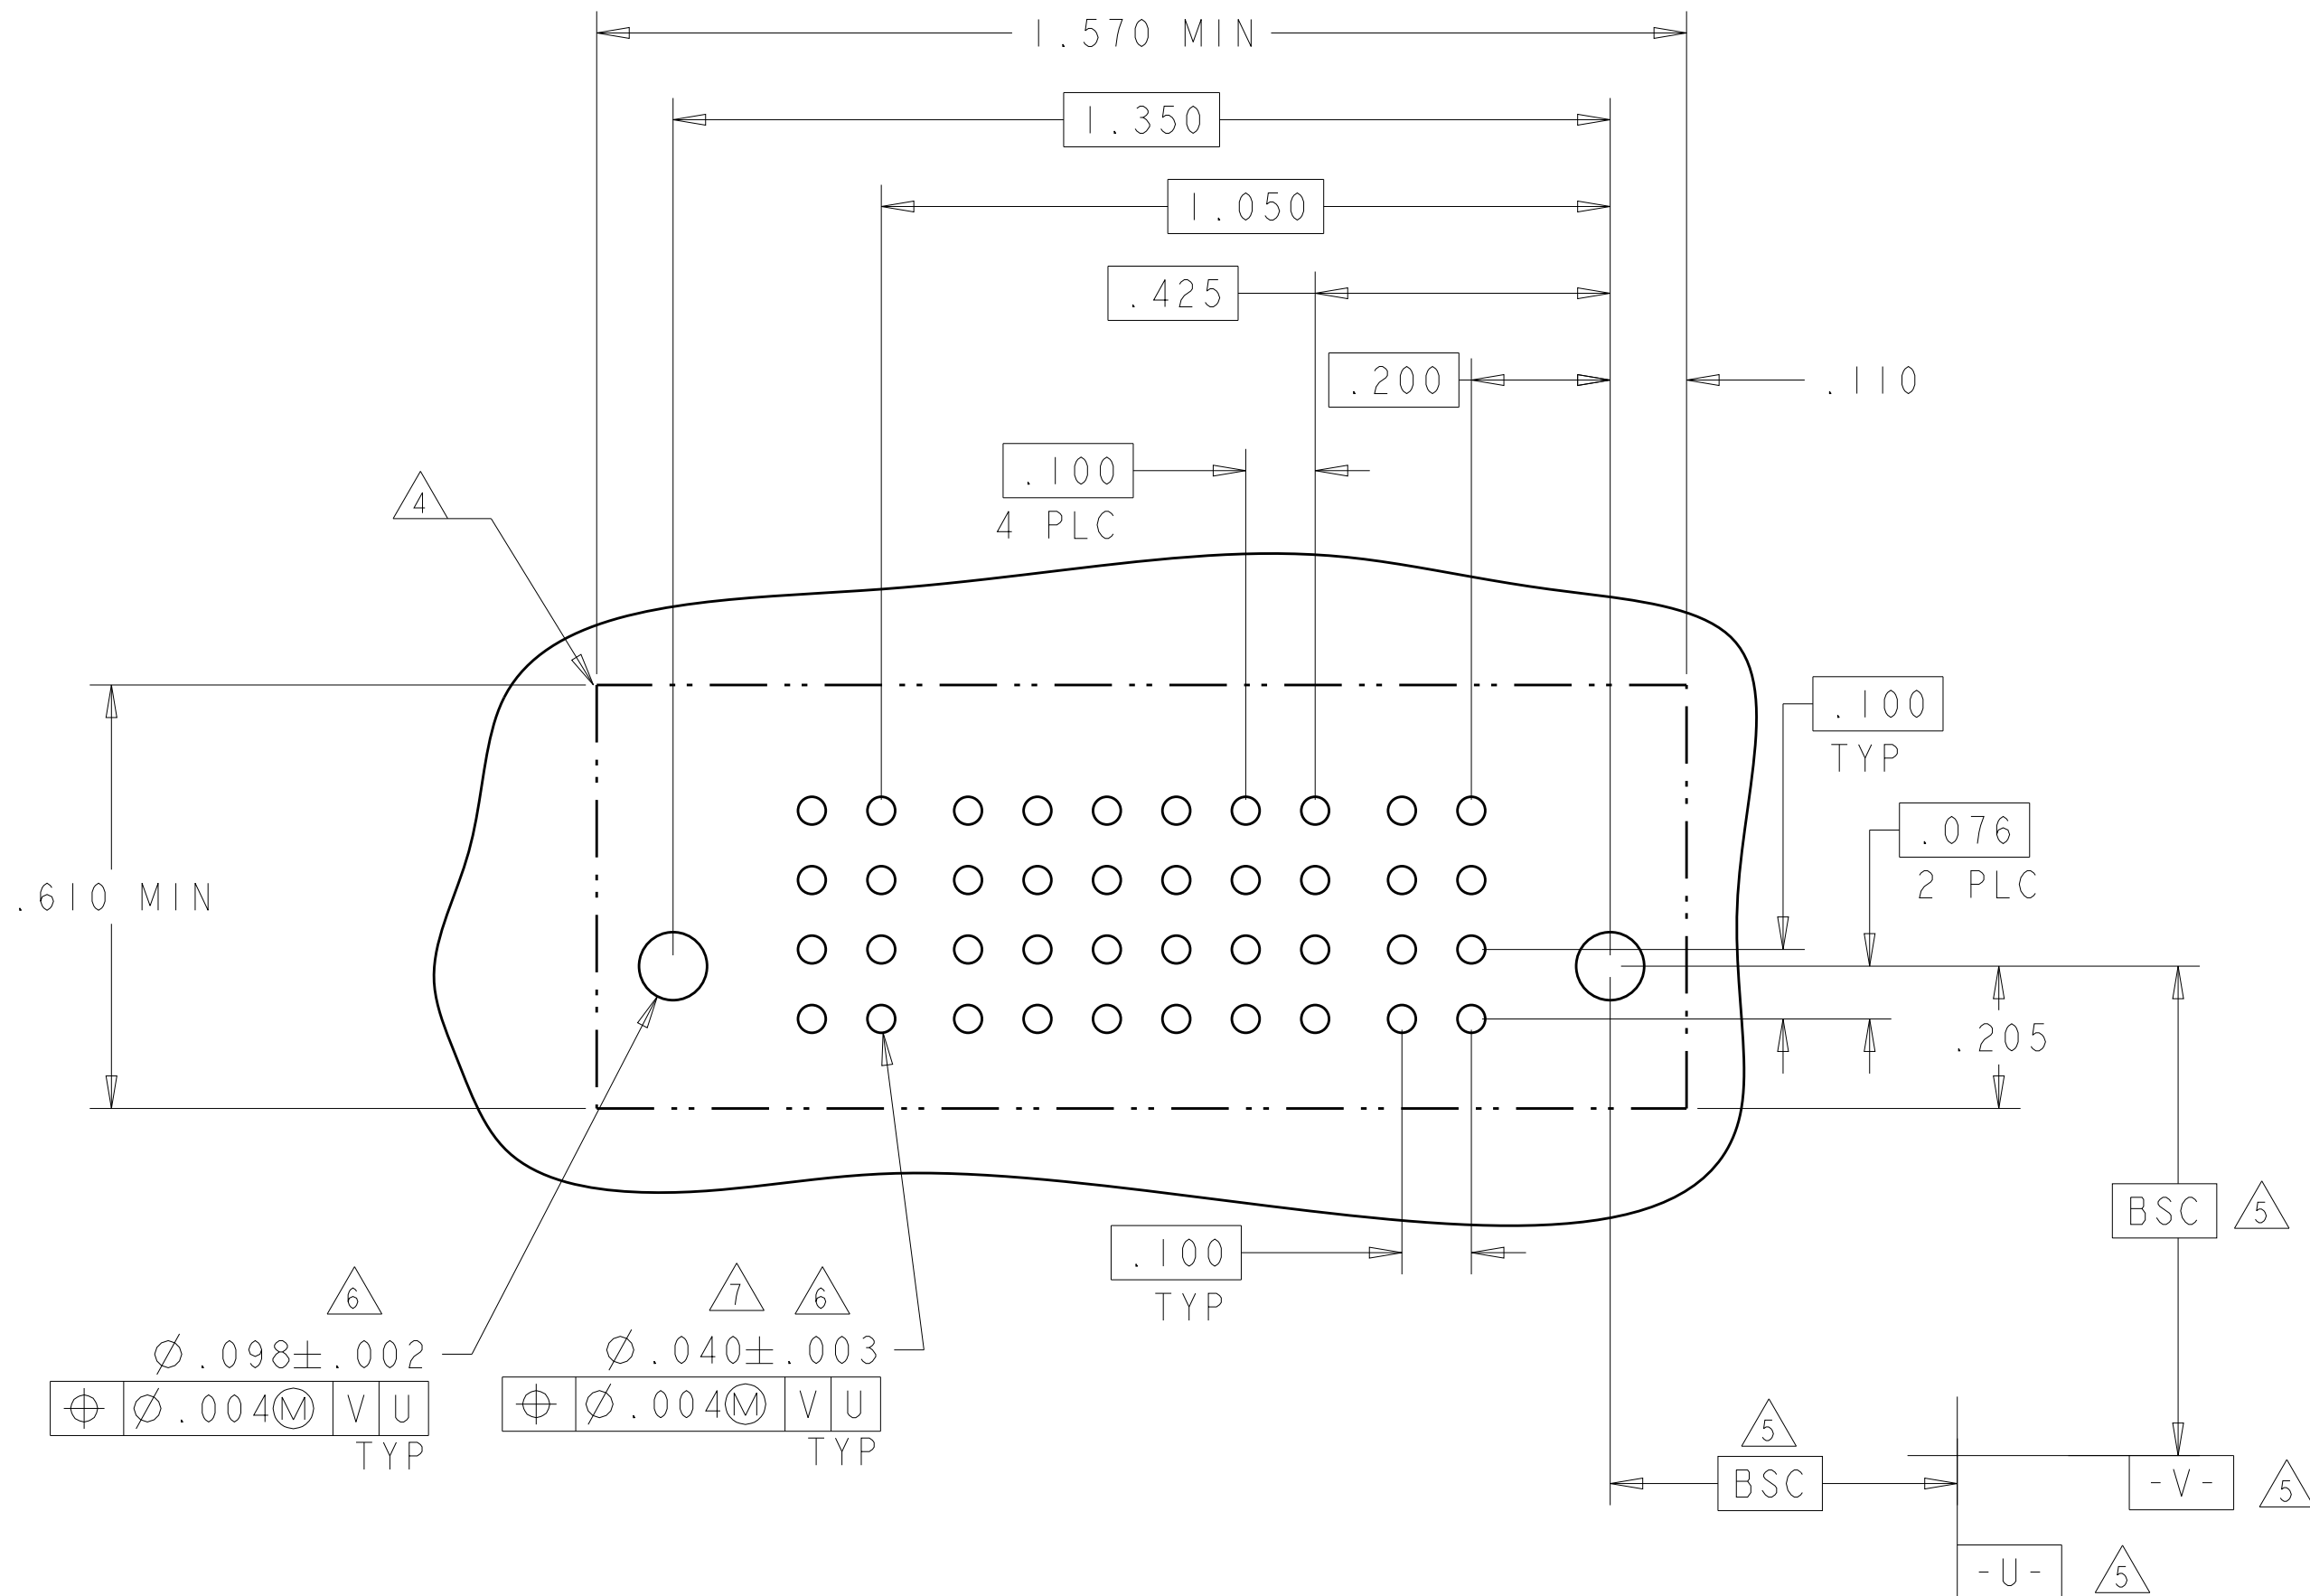
4805 (3/11)


PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P4	P3	2	1	P2	P1	
4-6450860-3	D C B A								
2P + 8S + 2P									

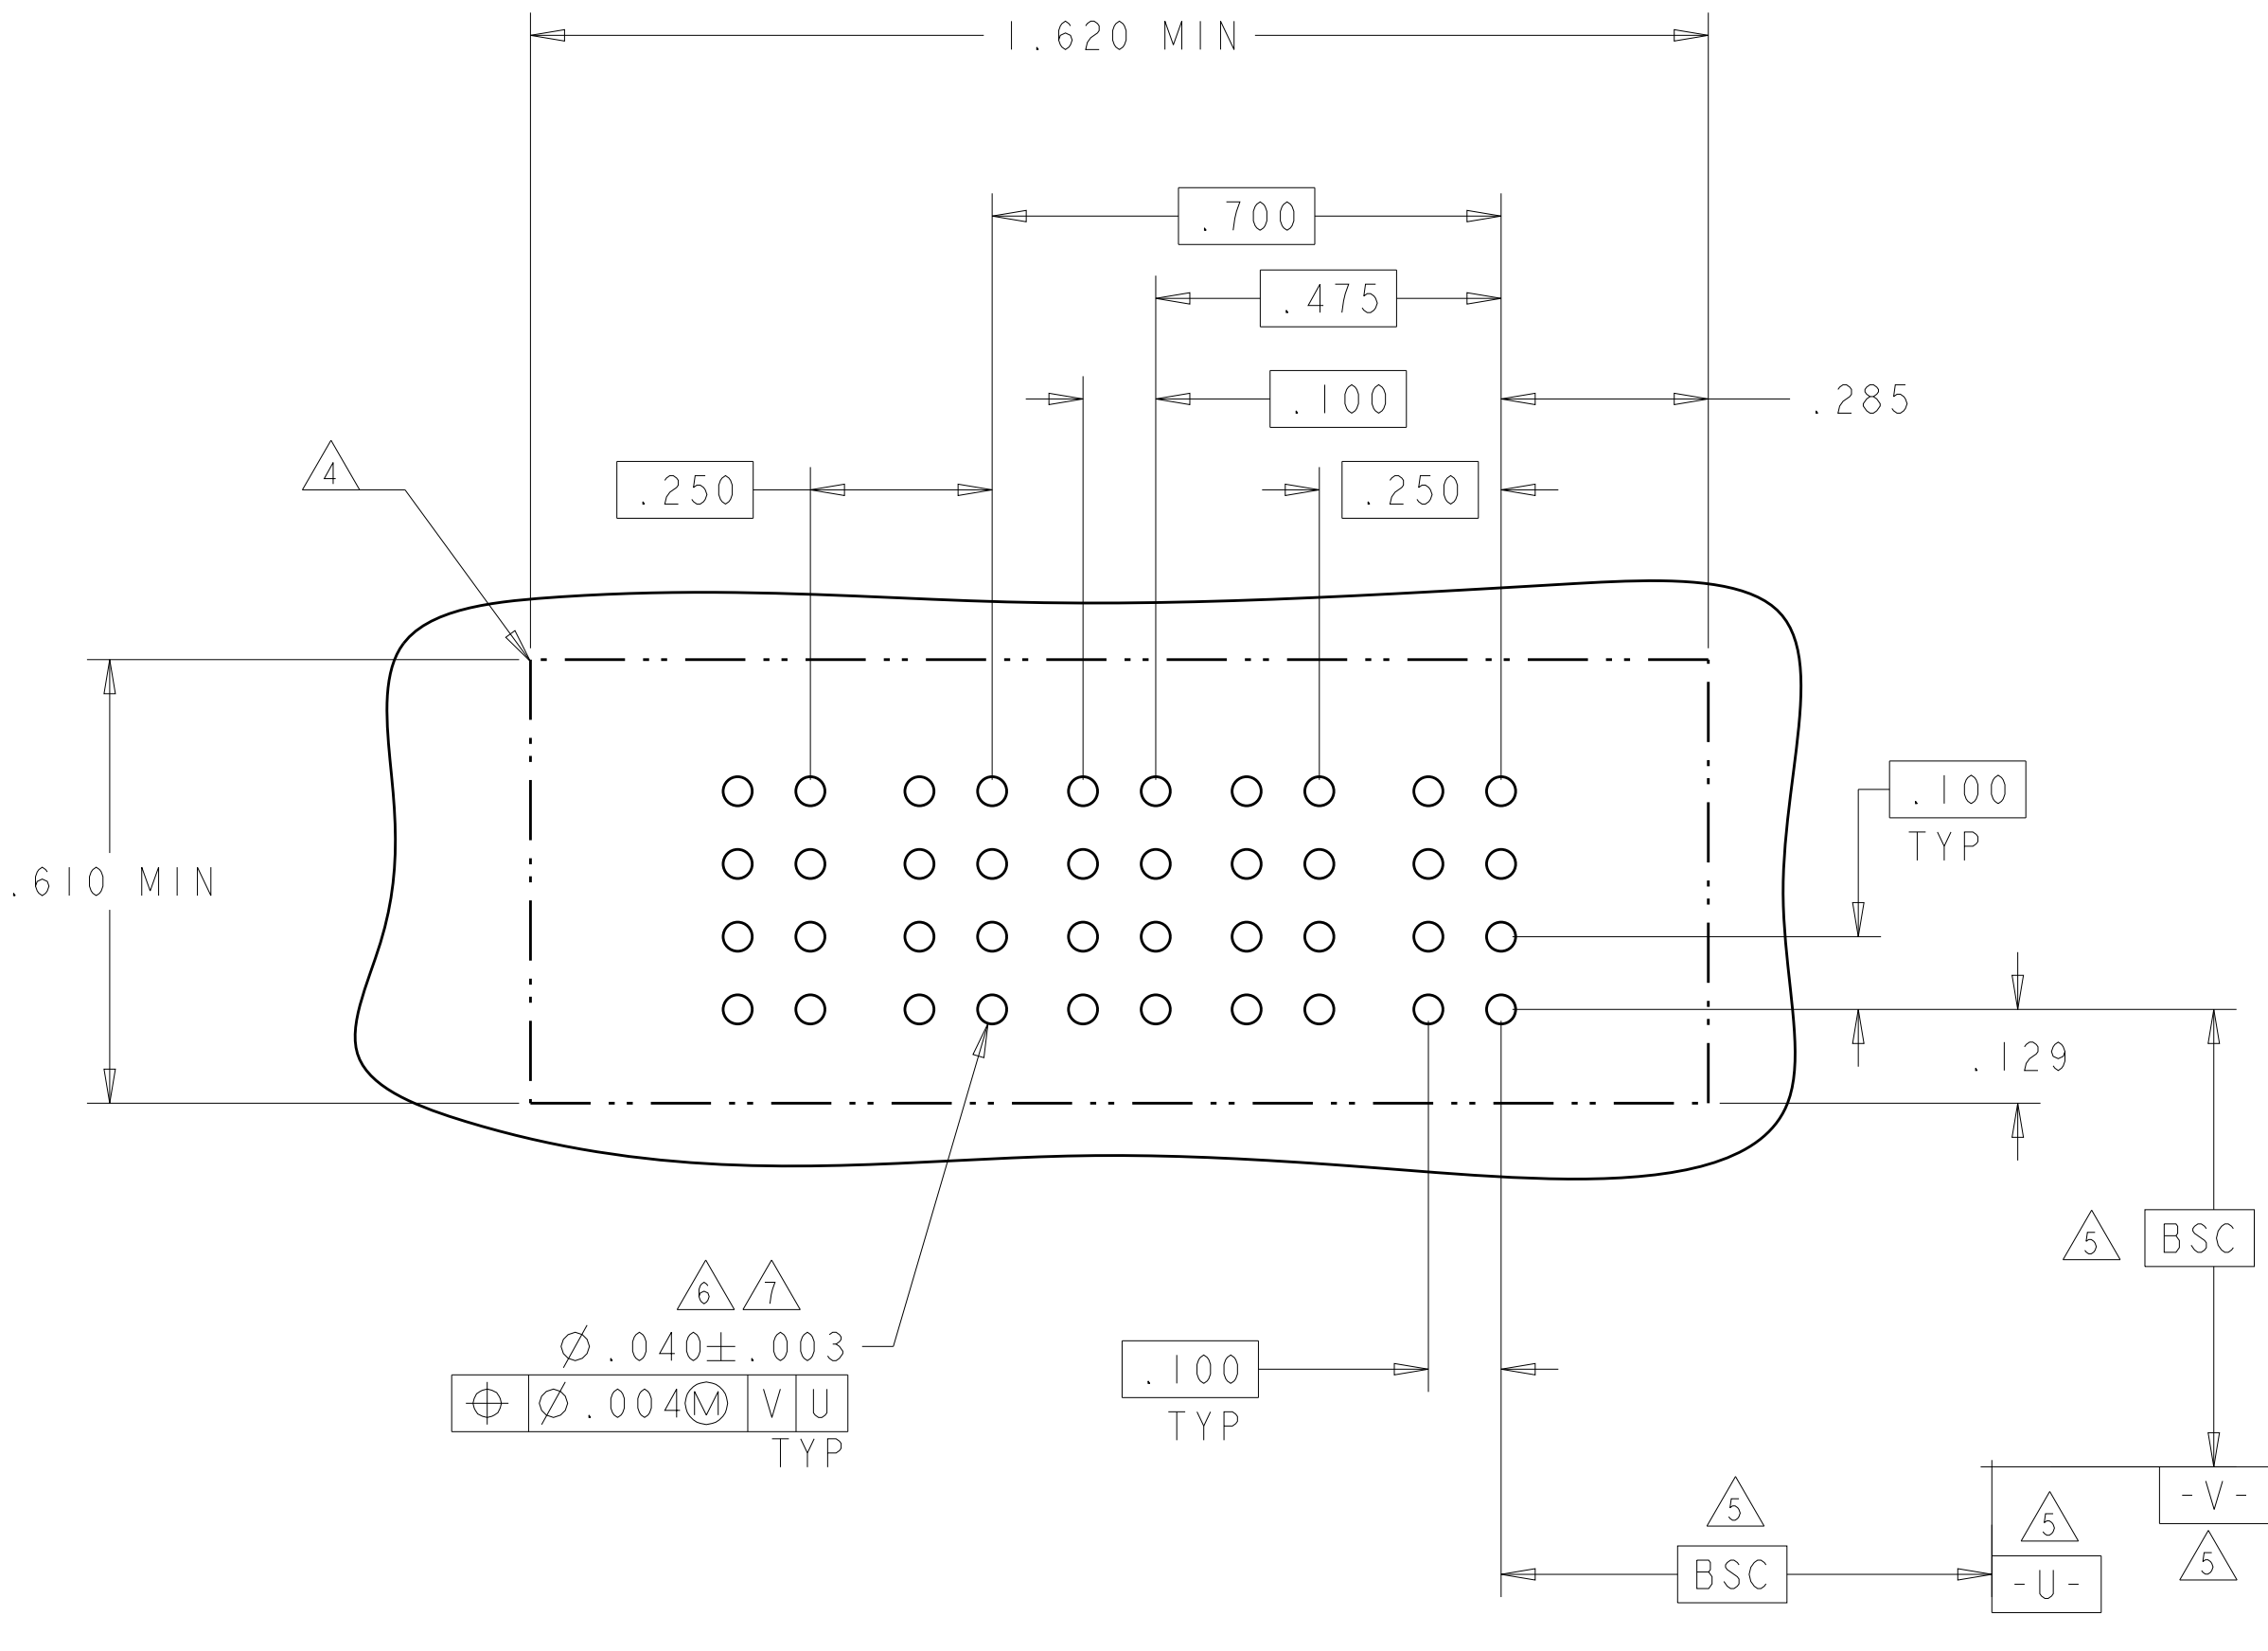4805 (3/11)



PART NUMBER	ROWS		POWER		SIGNAL		POWER		
			P4	P3	2	1	P2	P1	
4-6450860-2	D C B A								
2LP + 8S + 2P									




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D.ZHU	20DEC2007	 TE Connectivity			
		CWY S.ZHAO	20DEC2007				
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME				
 0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±?°		APVD S.ZHAO	VER RECEP ASSEMBLY SHORT GUIDES, PRESS FIT MULTI-BEAM XLE				
		PRODUCT SPEC					
		APPLICATION SPEC					
		114-13251	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
MATERIAL		FINISH	WEIGHT	A 00779	©=6450860	-	
CUSTOMER DRAWING			SCALE	N/A	SHEET	24 OF 28	REV K2

LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		-		SEE SHEET 1	-	-	-	

PART NUMBER	ROWS		POWER								SIGNAL		POWER																																																																																																																																																																																																																																																																																																																																																												
			P16	P15	P14	P13	P12	P11	P10	P9	2	1	P8	P7	P6	P5	P4	P3	P2	P1																																																																																																																																																																																																																																																																																																																																																					
4-6450860-4	D C B A																																																																																																																																																																																																																																																																																																																																																																								


J2



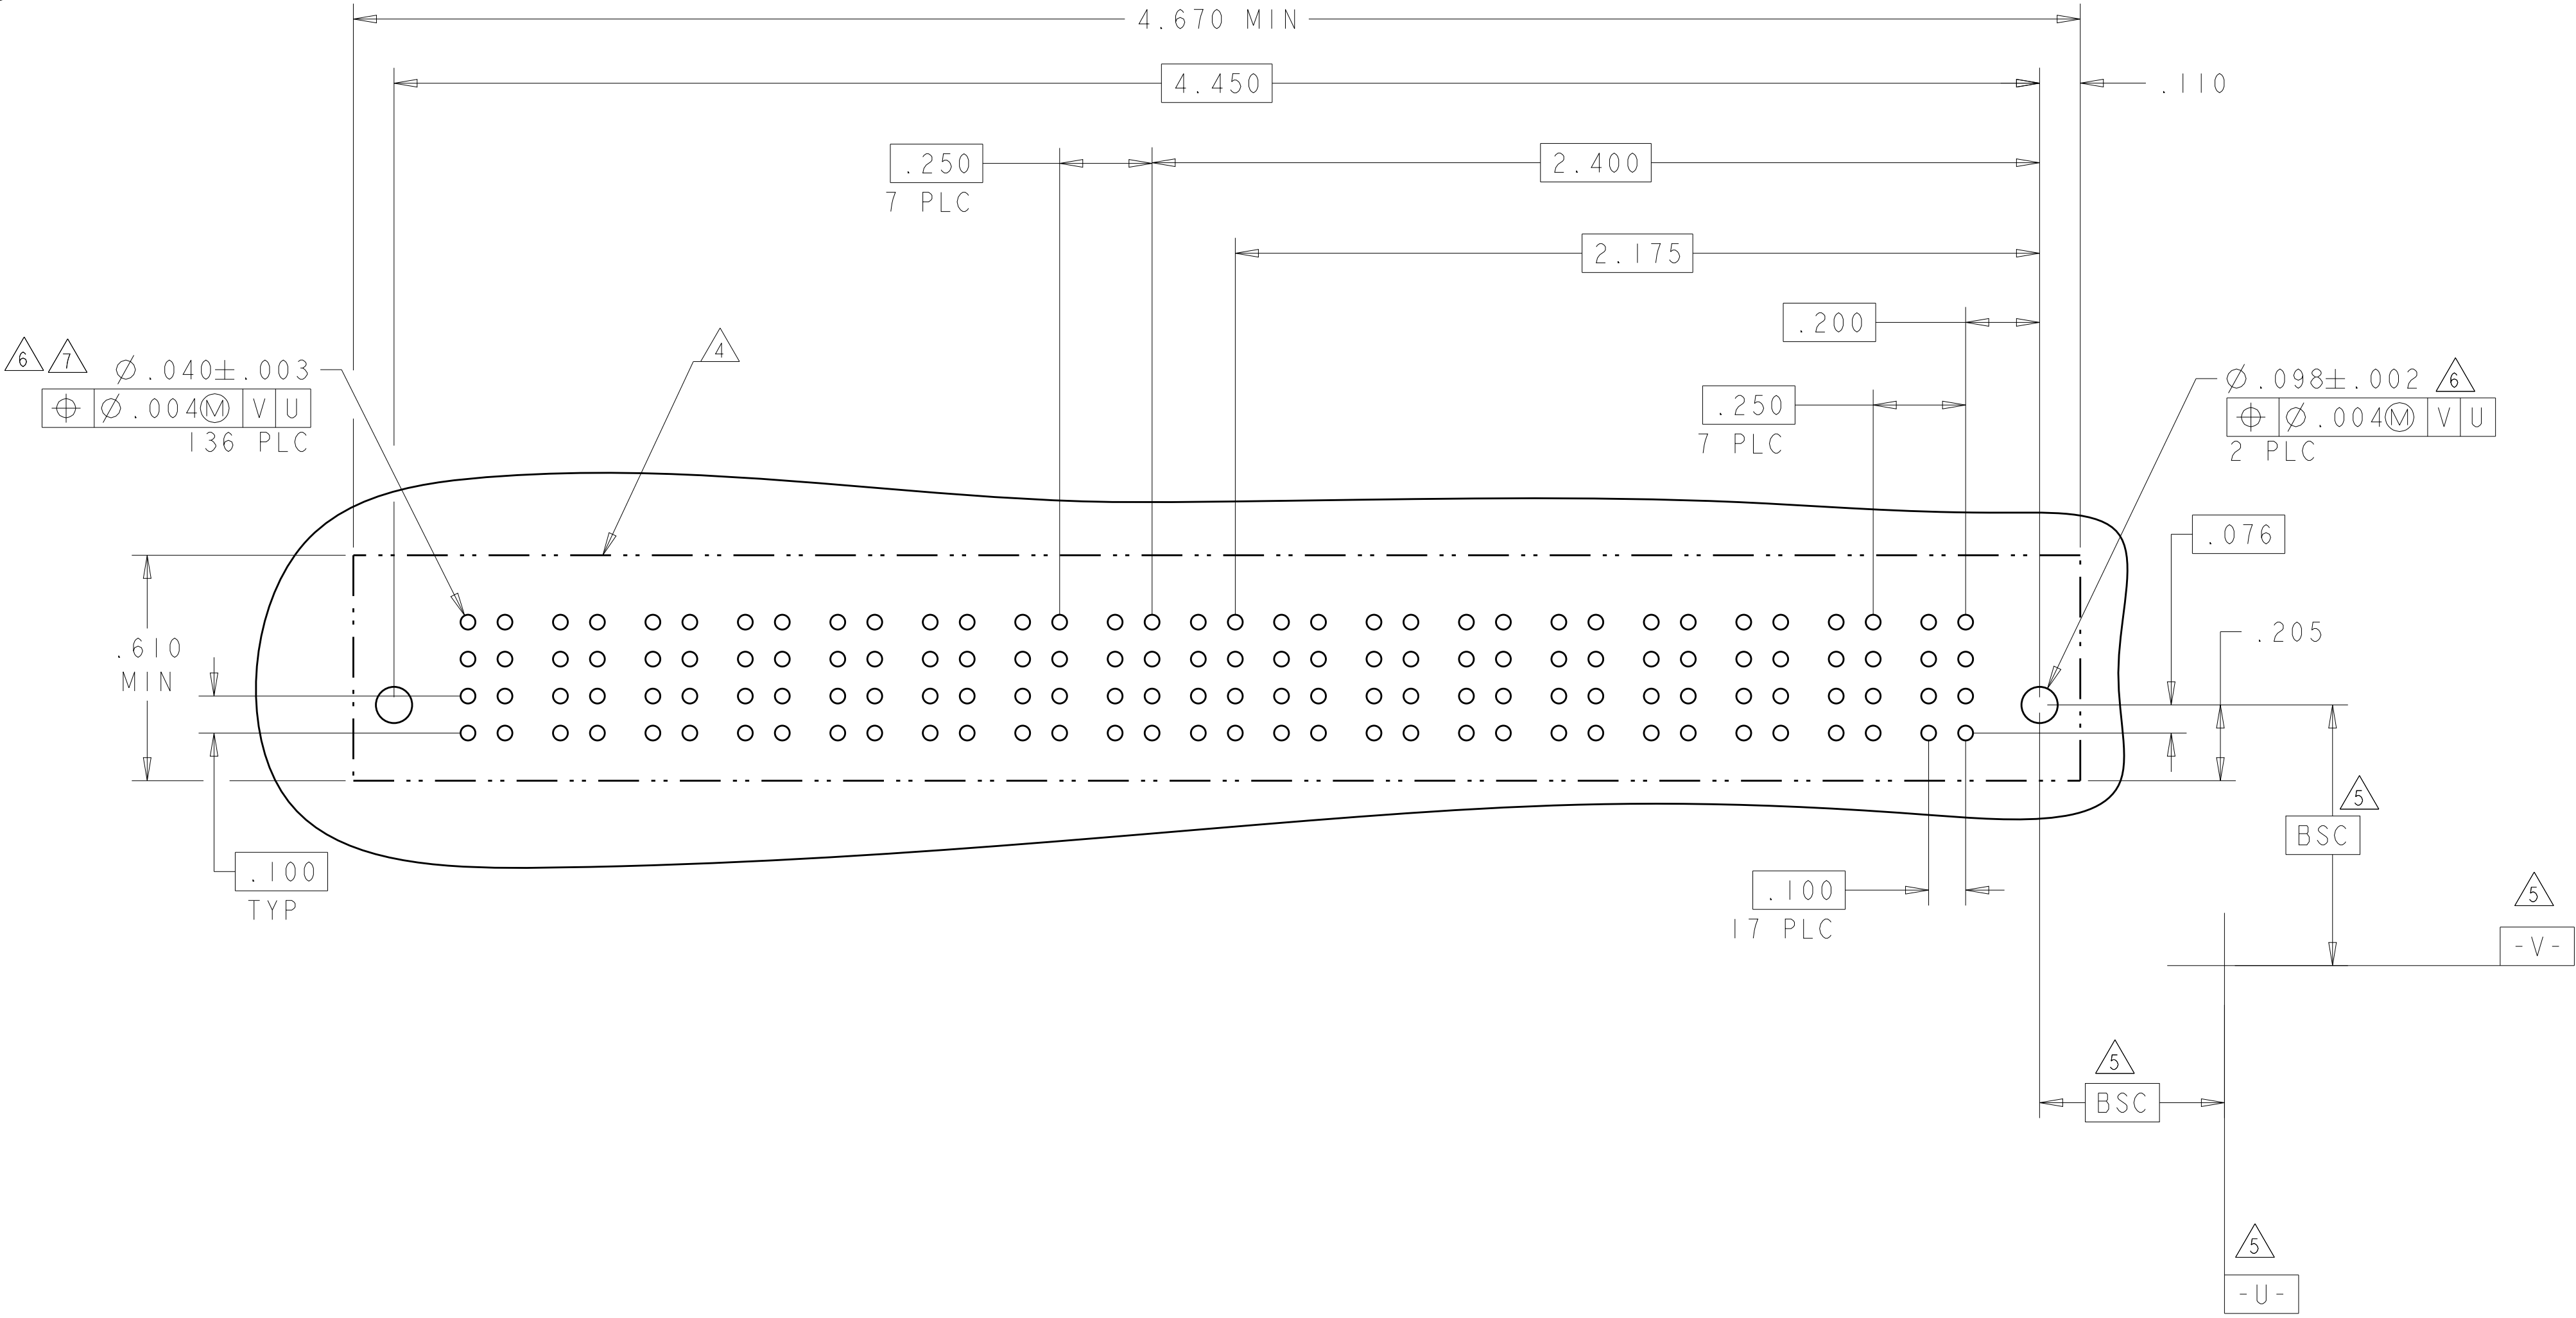




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	D. ZHU	20DEC2007	 TE Connectivity			
		CHK	S. ZHAO	20DEC2007				
DIMENSIONS:		APVD	S. ZHAO	-	NAME			
INCHES								
					VER RECP ASSEMBLY SHORT GUIDES, PRESS FIT MULTI-BEAM XLE			
					SIZE			
					CAGE CODE			
					DRAWING NO			
					RESTRICTED TO			
MATERIAL					A100779			
					C=6450860			
					SCALE			
					SHEET			
					25 of 28			
					REV			
					K2			
					CUSTOMER DRAWING			

LOC		DIST		REVISIONS				
P	LTR	DESCRIPTION			DATE	DWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL			POWER						
			P8	P7	3	2	1	P6	P5	P4	P3	P2	P1	
4-6450860-5	D		LSI	LSI	AP	AP	AP	GP	GS	GS	GS	GS	GS	
	C				AP	AP	AP							
	B				AP	AP	AP							
	A				AP	AP	AP							
3ACP + 3P + 12S + 2LP														HD

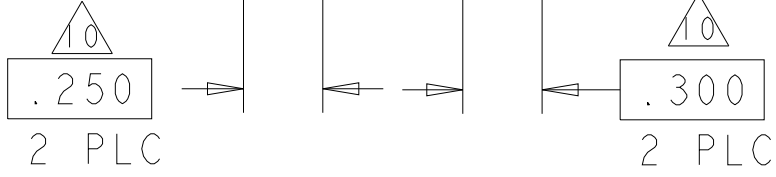

PART NUMBER	ROWS		POWER		SIGNAL								POWER																			
			P4	P3	8	7	6	5	4	3	2	1	P2	P1																		
4-6450860-6	D																															
	GS																GS	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	GS	GS			
	C																AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP
	B																AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP
A	HD																															
2P + 32S + 2P																																

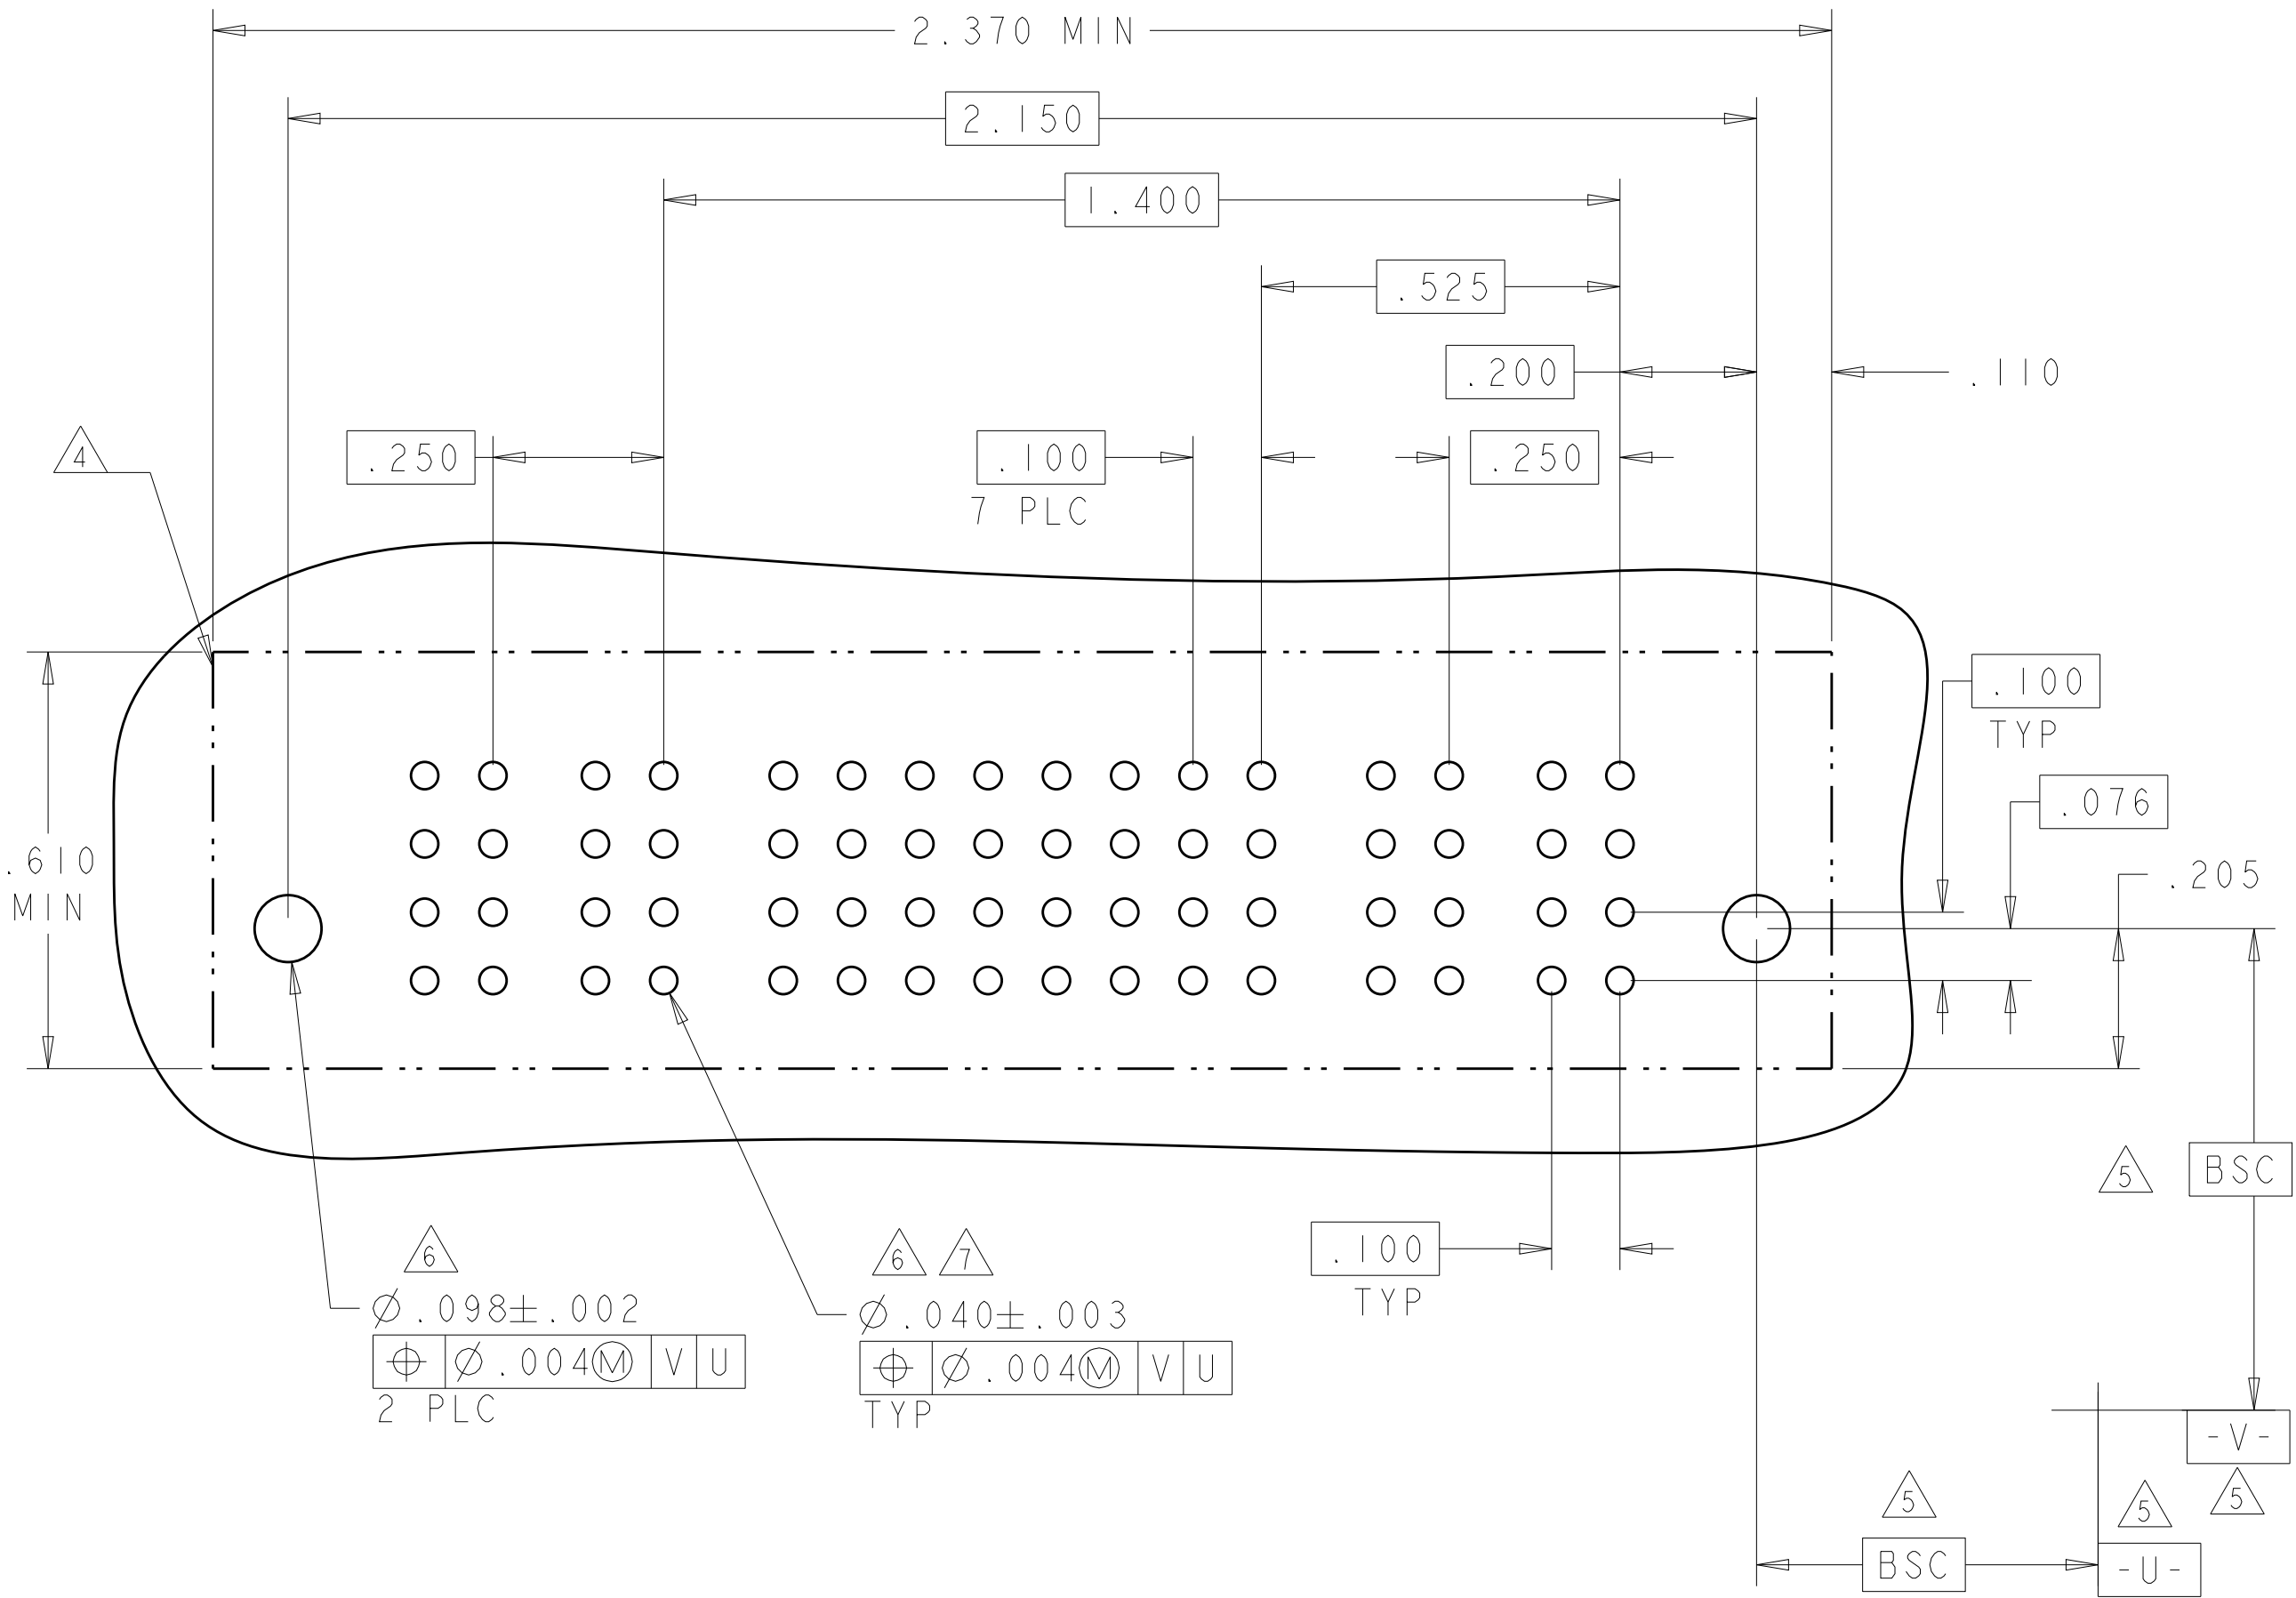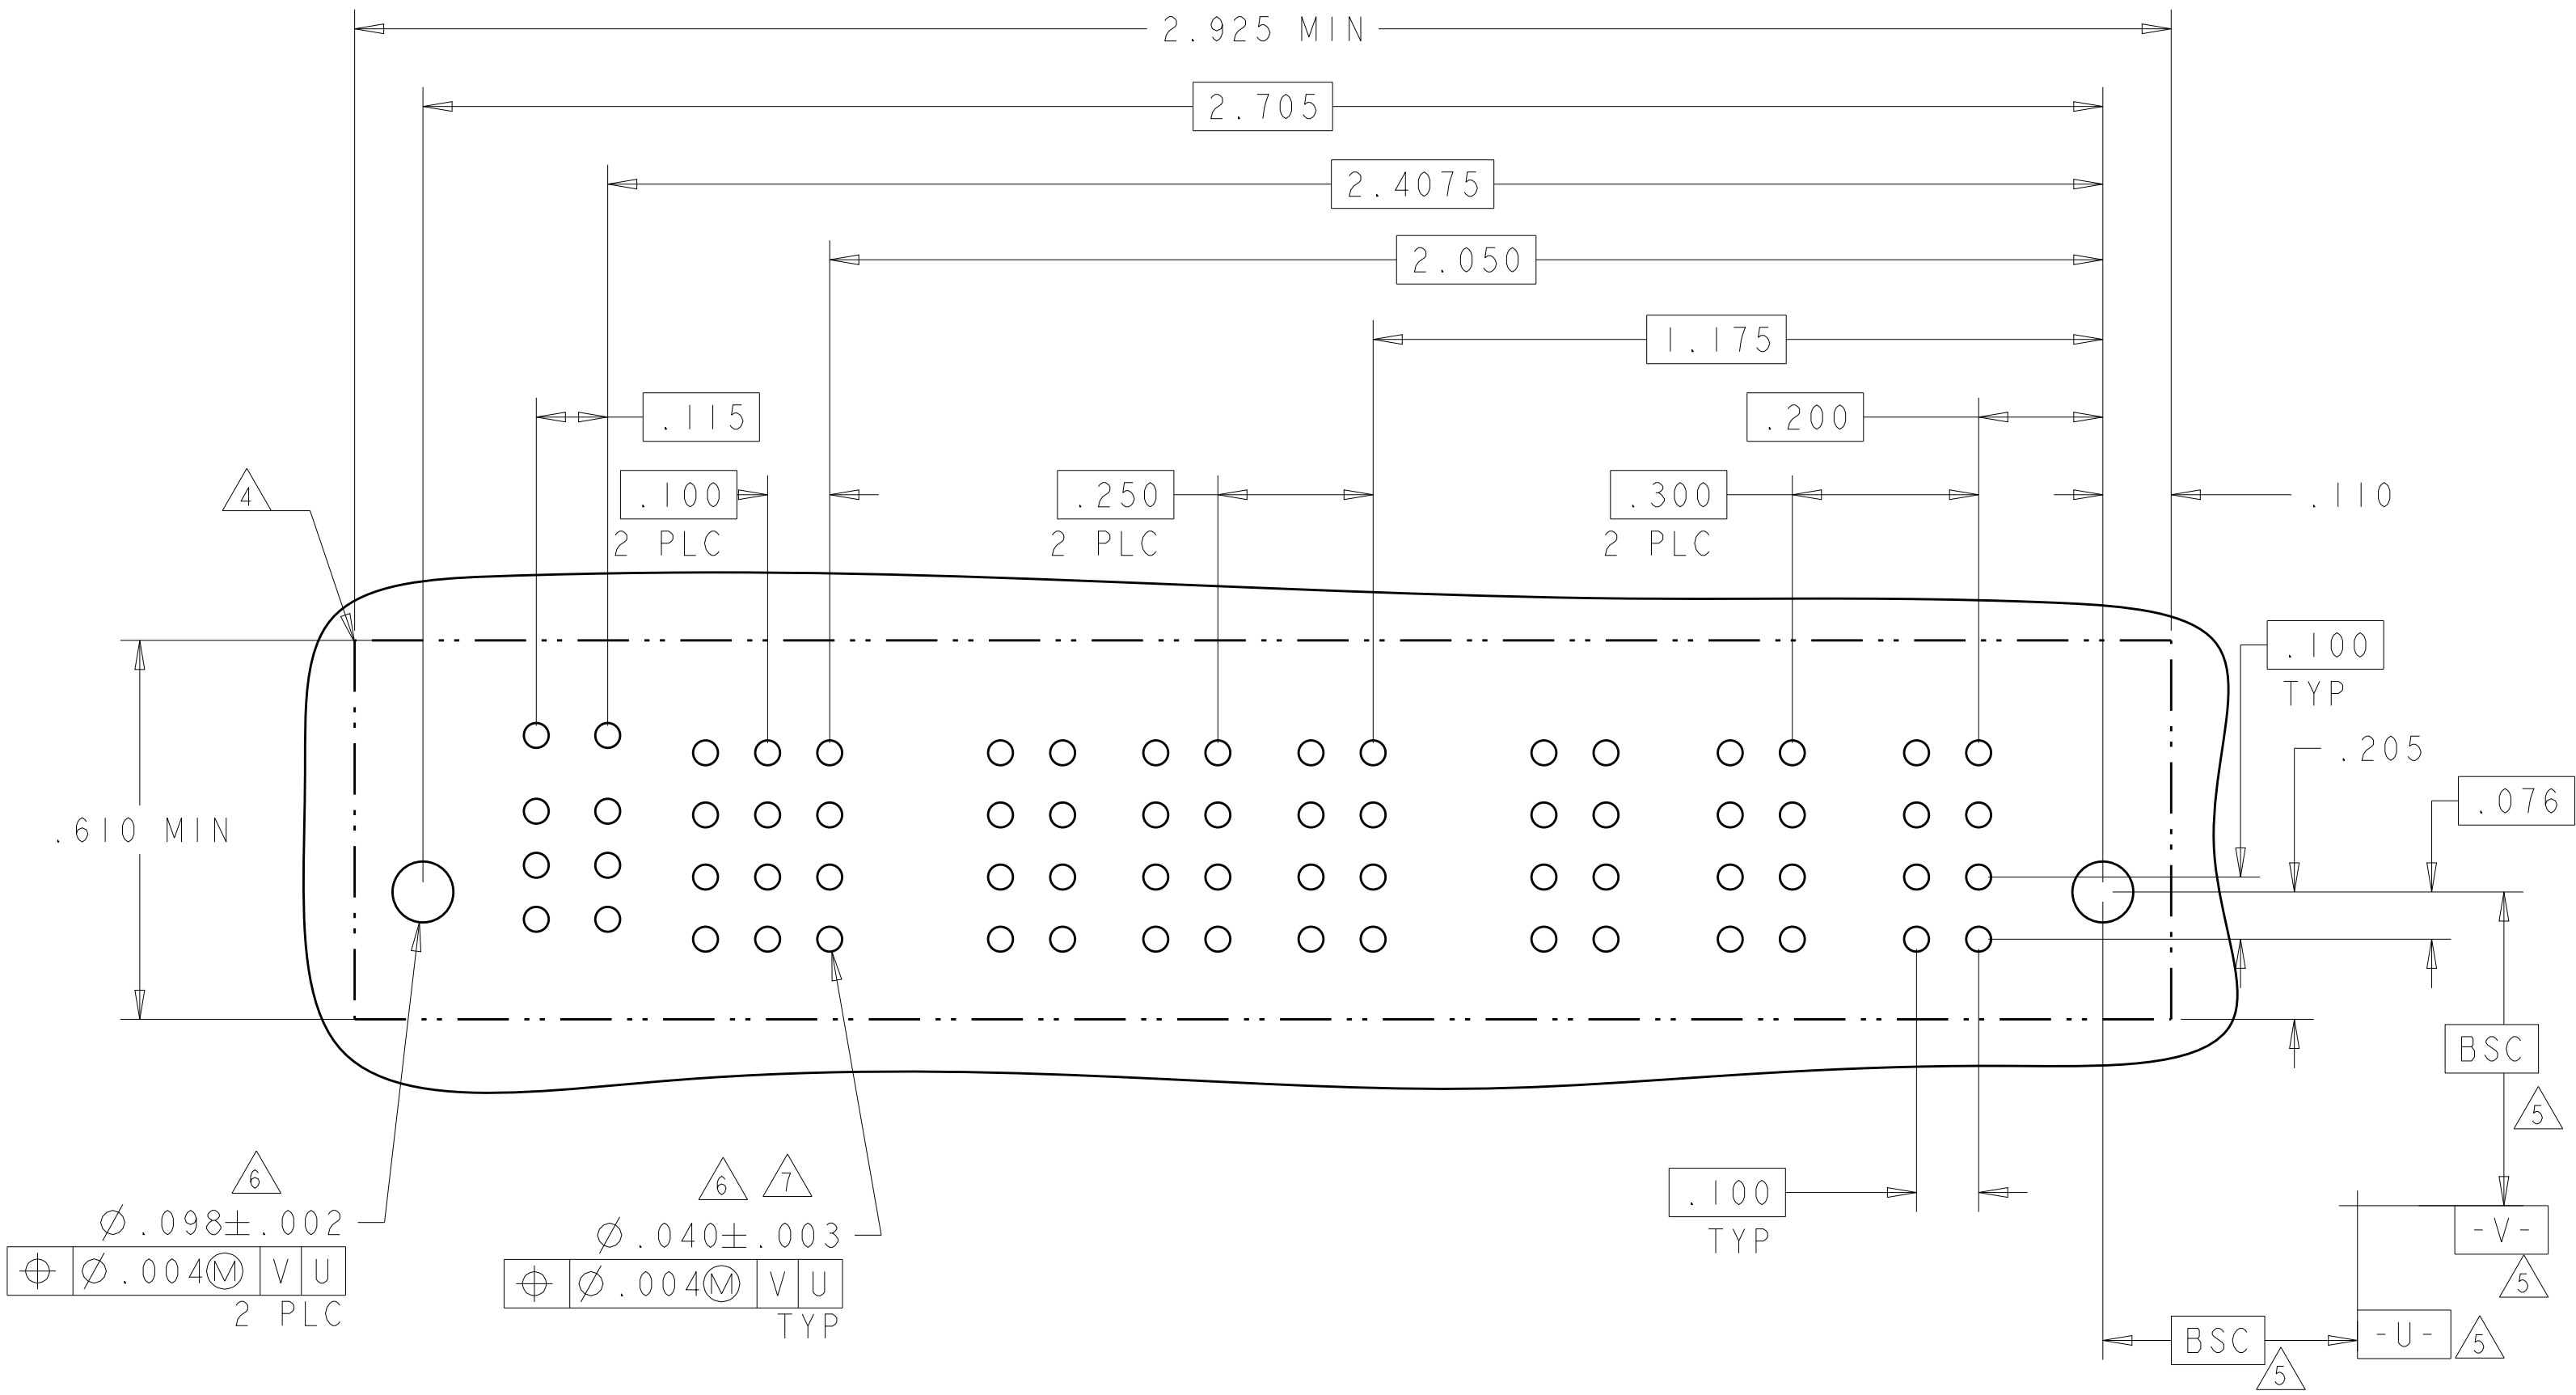

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
D. ZHU
20DEC2007

CHK
S. ZHAO
20DEC2007

APVD
S. ZHAO

DIMENSIONS:
INCHES

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±.0020
FINISH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

PRODUCT SPEC
108-2292
APPLICATION SPEC
114-13251
WEIGHT
CUSTOMER DRAWING

NAME
VER RECEP ASSEMBLY
SHORT GUIDES, PRESS FIT
MULTI-BEAM XLE

SIZE
A100779

CAGE CODE
C=6450860

DRAWING NO
114-13251

SCALE
N/A

SHEET
26


OF
28

REV
K2

TE Connectivity

RESTRICTED TO

PART NUMBER	ROWS	LOW POWER		SIGNAL				LOW POWER			
		P4	P3	4	3	2	1	P2	P1		
4-6450860-8	D		LSI	LSI	AP	AP	AP	AP	LSI	LSI	
	C				AP	AP	AP	AP			
	B				AP	AP	AP	AP			
	A				AP	AP	AP	AP			
2LP + 16S + 2LP											

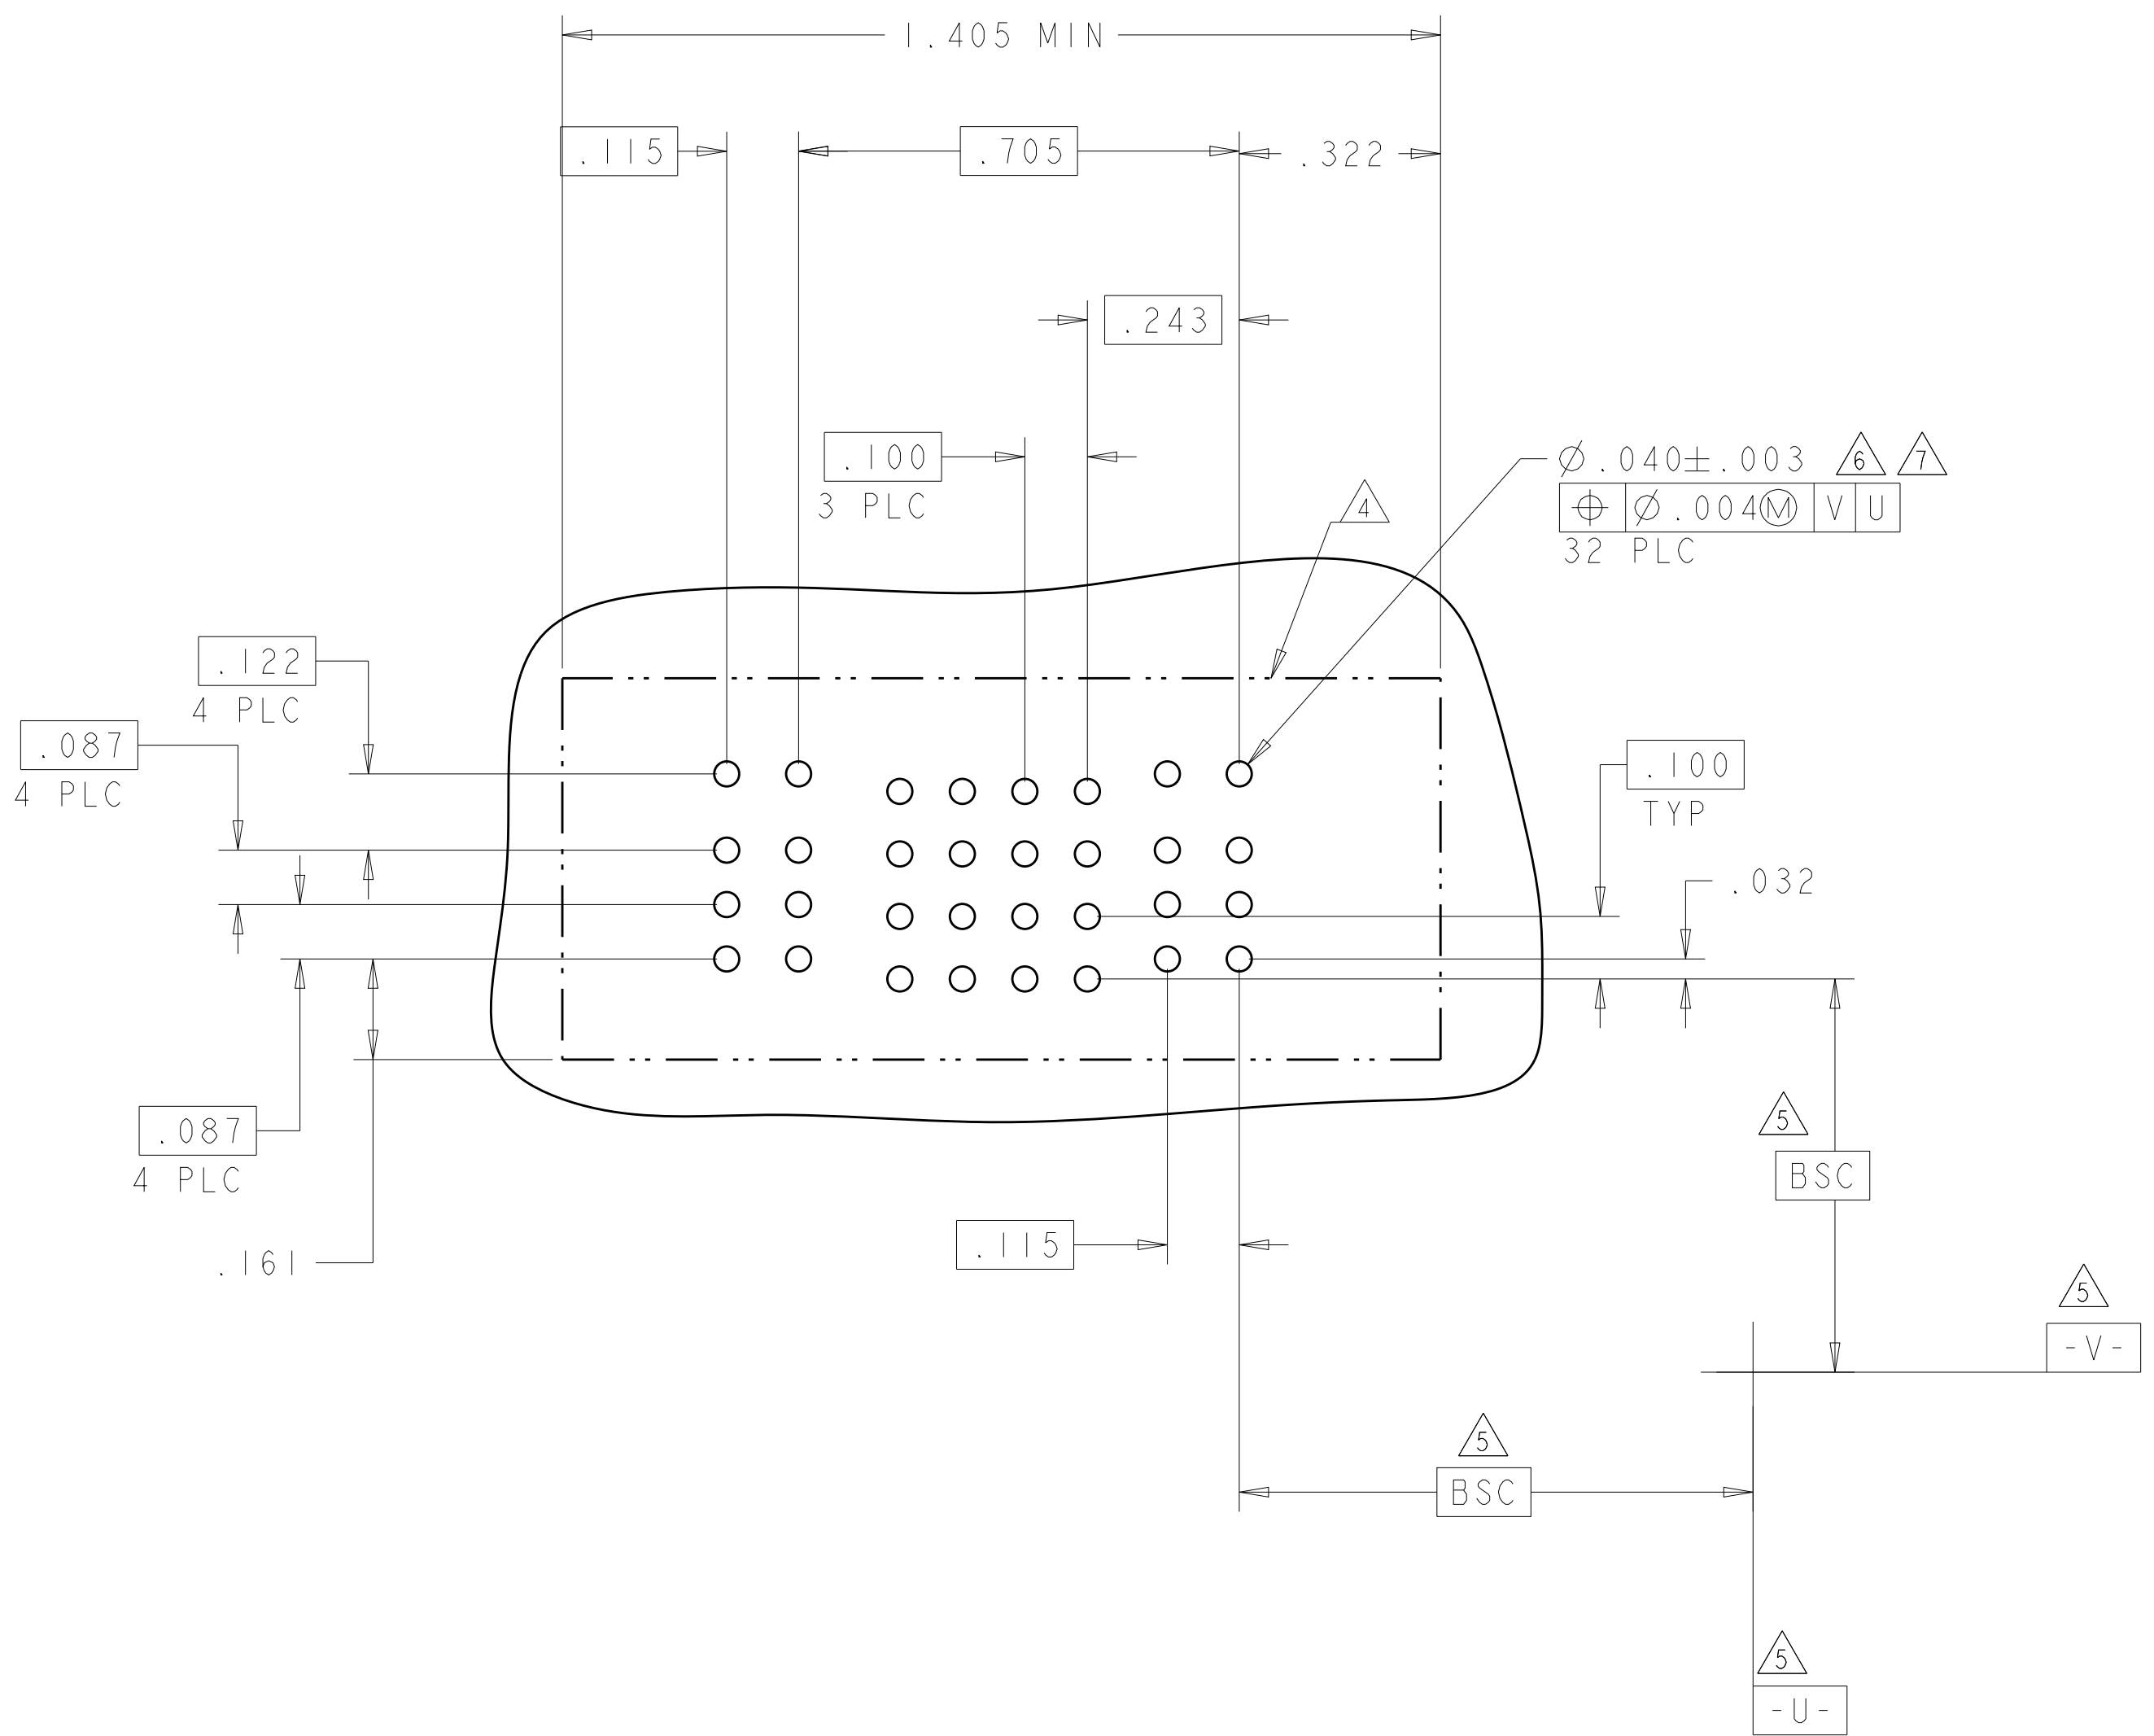4805 (3/11)

[illegible]4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9