



## Features

- Incremental encoder / quadrature output
- Exceptionally long operating life
- Sturdy construction
- Bushing mount
- Available with PC board mounting bracket (optional)
- RoHS compliant\*

## ECW - Digital Contacting Encoder

### Electrical Characteristics

|                                                                            |                                                                                              |
|----------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| Output.....                                                                | 2-bit quadrature code, Channel A leads Channel B by 90 ° electrically turning clockwise (CW) |
| Closed Circuit Resistance .....                                            | 5 ohms maximum                                                                               |
| Open Circuit Resistance .....                                              | 100 K ohms minimum                                                                           |
| Contact Rating .....                                                       | 10 milliamp @ 10 VDC or 0.1 watt maximum                                                     |
| Insulation Resistance (500 VDC) .....                                      | 1,000 megohms minimum                                                                        |
| Dielectric Withstanding Voltage (MIL-STD-202 Method 301)<br>Sea Level..... | 1,000 VAC minimum                                                                            |
| Electrical Travel.....                                                     | Continuous                                                                                   |
| Contact Bounce (15 RPM).....                                               | 5 milliseconds maximum                                                                       |
| RPM (Operating) .....                                                      | 120 maximum                                                                                  |
| Phase Tolerance (CH A to CH B).....                                        | 90 ° ± 72 °                                                                                  |


### Environmental Characteristics

|                                   |                                       |
|-----------------------------------|---------------------------------------|
| Operating Temperature Range ..... | -40 °C to +85 °C (-40 °F to 185 °F)   |
| Storage Temperature Range .....   | -40 °C to +85 °C (-40 °F to +185 °F)  |
| Humidity.....                     | MIL-STD-202, Method 103B, Condition B |
| Vibration .....                   | 15 G                                  |
| Contact Bounce .....              | 0.1 millisecond maximum               |
| Shock.....                        | 50 G                                  |
| Contact Bounce .....              | 0.1 millisecond maximum               |
| Rotational Life.....              | 200,000 shaft revolutions             |
| IP Rating.....                    | IP 40                                 |


### Mechanical Characteristics

|                                 |                                                                                                           |
|---------------------------------|-----------------------------------------------------------------------------------------------------------|
| Mechanical Angle .....          | Continuous                                                                                                |
| Running Torque (Detented) ..... | 0.5 to 1.5 N-cm (0.75 to 2.25 oz-in.)                                                                     |
| Undetented Torque .....         | 0.17 to 1.0 N-cm (0.25 to 1.50 oz-in.)                                                                    |
| Mounting Torque .....           | 79 N-cm (7 lb.-in.) maximum                                                                               |
| Shaft Side Load (Static).....   | 4.5 kg (10 lbs.) minimum                                                                                  |
| Weight .....                    | Approximately 21 gms. (0.75 oz.)                                                                          |
| Terminals .....                 | PC pin or solder lug                                                                                      |
| Soldering Condition             |                                                                                                           |
| Manual Soldering.....           | 96.5Sn/3.0Ag/0.5Cu solid wire or no-clean rosin cored wire<br>370 °C (700 °F) max. for 3 seconds          |
| Wave Soldering .....            | 96.5Sn/3.0Ag/0.5Cu solder with no-clean flux<br>260 °C (500 °F) max. for 5 seconds                        |
| Wash processes .....            | Not recommended                                                                                           |
| Marking.....                    | Manufacturer's name and trademark, part number, and date code.                                            |
| Hardware .....                  | One lockwasher and one mounting nut are shipped with each encoder, except where noted in the part number. |

**Quadrature Output Table** – This table is intended to show available outputs as currently defined.

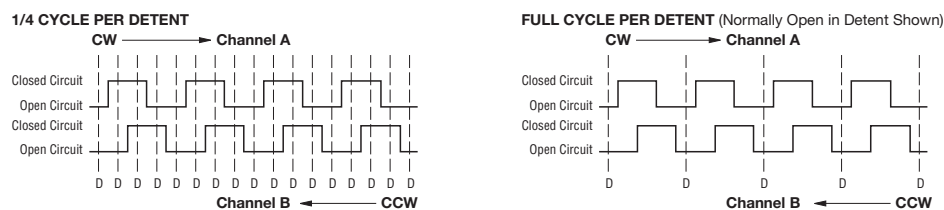

### RECOMMENDED INCREMENTAL CONTROL DIAGRAM FOR USE WITH A DEBOUNCE CIRCUIT

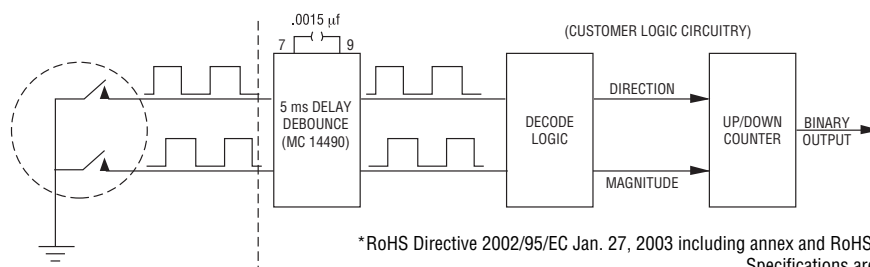

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.  
Specifications are subject to change without notice.


The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# ECW - Digital Contacting Encoder


**BOURNS®**

## Dimensional Drawings


### BUSHING MOUNTED - HOUSING A Rear-Facing Terminals

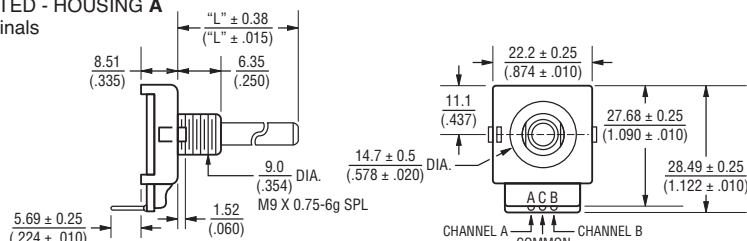


### PANEL HOLE DIMENSIONS Bushing Mounted




### PCB BRACKET MOUNTED - HOUSING B Dimensions not given are the same as Bushing Mounted.

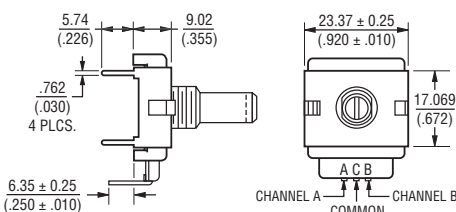


### PCB MOUNTING DIMENSIONS (Housing Styles B and E)




### SOLDER HOLES - HOUSING C Dimensions not given are the same as Bushing Mounted.

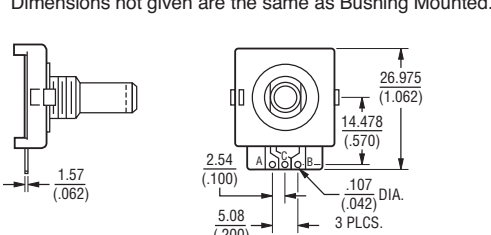


### SNAP-IN MOUNT - Housing G

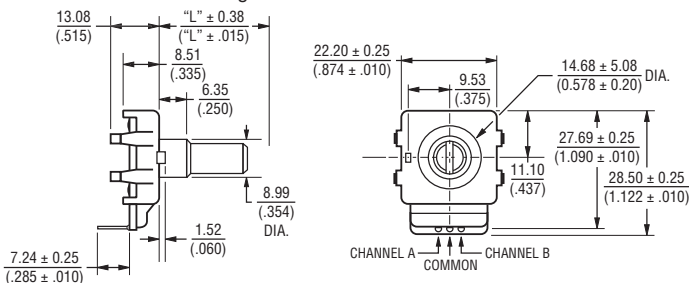


### PCB MOUNTING DIMENSIONS



### Shaft Style B




### Shaft Style C




"D" DIMENSION EXTENDS FROM SHAFT END TO BUSHING FACE  
"D" = (SHAFT LENGTH, FMS) - (BUSHING LENGTH)


### Shaft Style J





### Shaft Style R



### Shaft Style Y




### BUSHING MOUNTED - HOUSING H Front-Facing Terminals

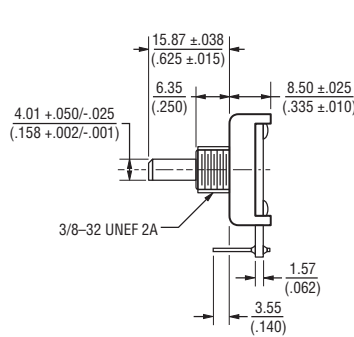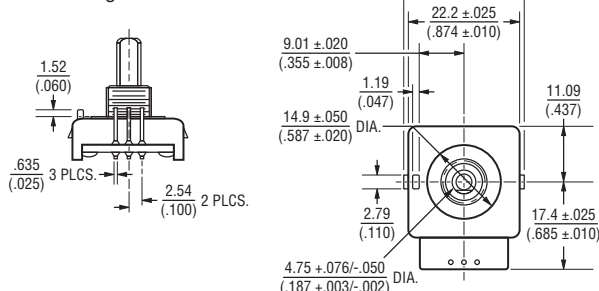

FOR TOLERANCES NOT SHOWN  
.XX = ± .25 (.010), .XXX = ± .13 (.005)  
SHAFT DIMENSIONS ± 1/32"

DIMENSIONS: MM (IN)



Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.

# ECW - Digital Contacting Encoder

**BOURNS®**

## How to Order

### PART NUMBERING SYSTEM

|          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |          |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|
| <b>E</b> | <b>C</b> | <b>W</b> | <b>1</b> | <b>J</b> | <b>-</b> | <b>B</b> | <b>2</b> | <b>4</b> | <b>-</b> | <b>B</b> | <b>C</b> | <b>0</b> | <b>0</b> | <b>2</b> | <b>4</b> | <b>L</b> |
|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|----------|

| Code     | Rotational Life            |
|----------|----------------------------|
| <b>C</b> | <b>200,000 Revolutions</b> |

| BUSHING CONFIGURATION |                                                           |
|-----------------------|-----------------------------------------------------------|
| Code                  | Description                                               |
| <b>W</b>              | <b>9 mm x 1/4 " Length. Threaded M9x0.75</b>              |
| L                     | 9 mm x 3/8 " Length. Threaded M9x0.75 (Use B shaft only.) |
| T                     | 9 mm x 1/4 ". No Thread.                                  |

**SWITCHING CONFIGURATION (In Detent Position)**  
Applies to performance codes B0012 and C0024 only, use code "0" for all other performance codes.

| Code     | Description          |
|----------|----------------------|
| 0        | Not Applicable       |
| <b>1</b> | <b>Normally Open</b> |

#### ANTI-ROTATION LUG POSITION

| Code     | Description          |
|----------|----------------------|
| <b>J</b> | <b>9:00 Position</b> |
| D        | None                 |

#### SHAFT STYLE (See Outline Drawing for Details)

| Code     | Description                                  |
|----------|----------------------------------------------|
| <b>B</b> | <b>Plain with Inserted Slot (1/4 " Dia.)</b> |
| C        | Single Flatted (1/4 " Dia.)                  |
| R        | Plain with Cross Slot (6 mm Dia.)            |
| Y        | Split Shaft Version (.185 " Dia.)            |
| J        | Flatted Shaft (3/16 " Dia.)                  |

| RoHS IDENTIFIER |                  |
|-----------------|------------------|
| Code            | Description      |
| <b>L</b>        | <b>Compliant</b> |

#### PERFORMANCE CODE

| Code         | Detents   | Cycles/Rev. |
|--------------|-----------|-------------|
| E0006        | 0         | 6           |
| E0009        | 0         | 9           |
| E0012        | 0         | 12          |
| E0024        | 0         | 24          |
| E0036        | 0         | 36          |
| B0012        | 12        | 12          |
| C0006        | <b>24</b> | 6           |
| <b>C0024</b> |           | <b>24</b>   |
| D0009        | 36        | 9           |

#### HOUSING TERMINAL CONFIGURATION (X indicates "Equipped With")

| Code                     |   |   |   |   |   |   |    |   |   |   |
|--------------------------|---|---|---|---|---|---|----|---|---|---|
| Features                 | A | B | C | D | E | F | G* | H | K |   |
| Terminal Cover           | X | X |   |   | X |   | X  |   |   |   |
| Rear-Facing Terminals    | X | X |   |   | X |   | X  |   |   |   |
| Solder Holes             |   |   | X | X |   | X |    |   |   |   |
| PCB Bracket              |   | X |   | X | X | X |    |   |   |   |
| Hardware Included        | X |   | X |   | X | X |    | X |   |   |
| Snap-In Mount            |   |   |   |   |   |   |    | X |   |   |
| Forward-Facing Terminals |   |   |   |   |   |   |    |   | X | X |

\*Bushing code T only.

#### SHAFT LENGTH (FMS)

| Code      | Description                 | Available Shaft Styles |
|-----------|-----------------------------|------------------------|
| 16        | 1/2 " Length                | B                      |
| 20        | 5/8 " (15.9 mm) Length      | J                      |
| <b>24</b> | <b>3/4 " (19 mm) Length</b> | <b>B, C, J, Y</b>      |
| 28        | 7/8 " (22.2 mm) Length      | B, C, J, Y             |
| 32        | 1 " (25.4 mm) Length        | B, C, J, Y             |
| 36        | 1-1/8 " (28.6 mm) Length    | B, C, J, Y             |
| Metric    |                             |                        |
| 19        | 19 mm Length                | R                      |
| 22        | 22 mm Length                | R                      |
| 24        | 24 mm Length                | R                      |

The sample part number demonstrates the identification code for Bourns contacting encoders.

Boldface features are Bourns standard options. All others are available with higher minimum order quantities.

REV. 02/13

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9