

## Stripline PIN Diode Switch Modules

V1

### Features

- Broadband 50 Ohms Design Through X Band
- High Power Capacity
- Voltage Ratings to 1000V
- Fast Switching Speeds
- Hermetically Sealed Package
- RoHS Compliant

### Description

This series of M/A-COM semiconductor products is hermetically sealed strip-line package PIN diode designed to drop into a 50 ohm strip-line circuit without external matching. The MA4P504-144 can be used as SPST reflective switches and are useful in applications from VHF through X Band. Several modules are provided with different power and switching speed capability.

This series of strip-line switch modules consist of shunt mounted passivated PIN diodes in hermetic strip-line packages. These modules are optimized for 50 ohm micro-strip and strip-line circuits. The MA4P504-144 series modules maybe operated as a switch by applying the appropriate forward and reverse DC excitation. They can also be used as attenuators by varying the forward DC current.

### Applications


The MA4P504-144 broadband shunt-mounted PIN diode features a shunt-mounted PIN chip with an appropriate series inductance to produce a matched low pass filter structure at zero or reverse bias condition. By applying +10mA to +100mA to center conductor the diode's impedance changes to a low-impedance inductive short causing the diode to reflect RF power. The forward bias current (+10mA to +100mA) must be applied in order to achieve high isolation.

### Absolute Maximum Ratings<sup>1</sup> @ T<sub>A</sub> = +25°C (unless otherwise specified)

Parameter	Absolution Max.
Voltage	Voltage Rating
Operating Temperature	- 65°C to +150°C
Storage Temperature	-65°C to +175°C
Power Dissipation	Pdiss= $\frac{150^{\circ}\text{C}-T_{\text{ambient}}}{\text{Thermal Resistance}}$


1. Operation of this device above any one of these parameters may cause permanent damage.

### Stripline Packages

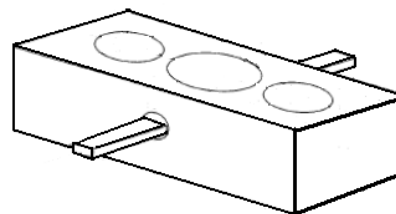

ODS-144

### Internal Wiring Diagram



Specifications subject to change without prior notification.

1

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266

• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300

• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## Stripline PIN Diode Switch Modules

V1

### Specifications @ Tambient = + 25°C

Part Number <sup>1</sup>	Typical Frequency (GHz)	Typical Insertion <sup>2</sup> Loss @ V <sub>R</sub> (dB)	Typical Isolation @ I <sub>F</sub> (dB)	Minimum Reverse Voltage <sup>4</sup> V <sub>R</sub> (Volts)	Maximum Thermal Resistance (°C/W)	Nominal Switching Speed (nS)	
						RF Off to RF On	RF On to RF Off
MA4P504-144	4-8 <sup>2</sup>	0.50dB @0V	20dB @ 100mA	500	20	150	30

1. All models have cathode heatsink
2. Maximum SWR is 1.5:1 at specified insertion loss condition.
3. Maximum reverse current is 10µA at specified voltage rating.


### Outline Drawing

### Environmental Ratings (Per MIL-STD 750)

The following table is recommended for Group B and C testing for TX, TXV level screening.

Inspection	Method	Condition
Storage Temperature	1031	See Maximum Ratings
Operating Temperature	—	See Maximum Ratings
Temperature Cycling	1051	5 cycles - 65° to + 150°C
Shock	2016	500 g's
Vibration	2056	15 g's
Constant Acceleration	2006	20,000 g's
Humidity	1021	10 days

144

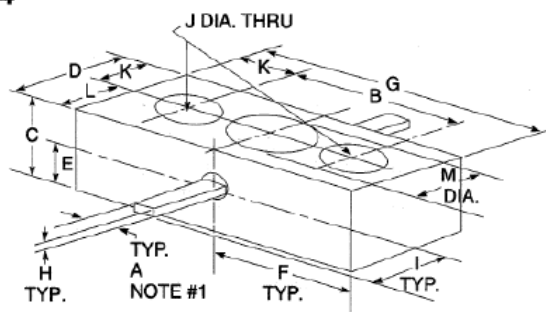

DIM.	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	0.022 NOMINAL	0.022 NOMINAL	0.590 NOMINAL	0.590 NOMINAL
B	0.250 NOMINAL	0.250 NOMINAL	6.350 NOMINAL	6.350 NOMINAL
C	0.125 NOMINAL	0.125 NOMINAL	3.180 NOMINAL	3.180 NOMINAL
D	0.155	0.165	3.940	4.190
E	0.065 NOMINAL	0.065 NOMINAL	1.65 NOMINAL	1.65 NOMINAL
F	0.195	0.215	4.950	5.460
G	0.405	0.415	10.290	10.540
H	0.003	—	0.070	—
I	0.120	—	3.040	—
J	0.096 NOMINAL	0.096 NOMINAL	2.440 NOMINAL	2.440 NOMINAL
K	0.075	0.085	1.910	2.160
L	0.080 NOMINAL	0.080 NOMINAL	2.030 NOMINAL	2.030 NOMINAL
M	0.125 NOMINAL	0.125 NOMINAL	3.180 NOMINAL	3.180 NOMINAL

Specifications subject to change without prior notification.

2

**ADVANCED:** Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

**PRELIMINARY:** Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266

• **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300

• **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit [www.macomtech.com](http://www.macomtech.com) for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9