

2N3811
2N3811A

**SILICON
DUAL PNP TRANSISTORS**



TO-78 CASE



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR 2N3811 and 2N3811A are dual silicon PNP transistors manufactured by the epitaxial planar process utilizing two individual chips mounted in a hermetically sealed metal case designed for differential amplifier applications.

MARKING: FULL PART NUMBER

MAXIMUM RATINGS: ($T_A=25^{\circ}\text{C}$)

Collector-Base Voltage
Collector-Emitter Voltage
Emitter-Base Voltage
Continuous Collector Current
Power Dissipation (One Die)
Power Dissipation (Both Dice)
Operating and Storage Junction Temperature

SYMBOL

V_{CB0} 60
 V_{CEO} 60
 V_{EBO} 5.0
 I_C 50
 P_D 500
 P_D 600
 T_J, T_{stg} -65 to +200

UNITS

V
V
V
mA
mW
mW
 $^{\circ}\text{C}$

ELECTRICAL CHARACTERISTICS PER TRANSISTOR: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
I_{CBO}	$V_{CB}=50\text{V}$		10	nA
I_{EBO}	$V_{EB}=4.0\text{V}$		20	nA
BV_{CBO}	$I_C=10\mu\text{A}$	60		V
BV_{CEO}	$I_C=10\text{mA}$	60		V
BV_{EBO}	$I_E=10\mu\text{A}$	5.0		V
$V_{CE(SAT)}$	$I_C=100\mu\text{A}, I_B=10\mu\text{A}$		0.20	V
$V_{CE(SAT)}$	$I_C=1.0\text{mA}, I_B=100\mu\text{A}$		0.25	V
$V_{BE(SAT)}$	$I_C=100\mu\text{A}, I_B=10\mu\text{A}$		0.70	V
$V_{BE(SAT)}$	$I_C=1.0\text{mA}, I_B=100\mu\text{A}$		0.80	V
$V_{BE(ON)}$	$V_{CE}=5.0\text{V}, I_C=100\mu\text{A}$		0.70	V
h_{FE}	$V_{CE}=5.0\text{V}, I_C=1.0\mu\text{A}$	75		
h_{FE}	$V_{CE}=5.0\text{V}, I_C=10\mu\text{A}$	225		
h_{FE}	$V_{CE}=5.0\text{V}, I_C=100\mu\text{A}$	300	900	
h_{FE}	$V_{CE}=5.0\text{V}, I_C=500\mu\text{A}$	300	900	
h_{FE}	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}$	300	900	
h_{FE}	$V_{CE}=5.0\text{V}, I_C=10\text{mA}$	250		
f_T	$V_{CE}=5.0\text{V}, I_C=500\mu\text{A}, f=30\text{MHz}$	30		MHz
f_T	$V_{CE}=5.0\text{V}, I_C=1.0\text{mA}, f=100\text{MHz}$	100	500	MHz
C_{ob}	$V_{CB}=5.0\text{V}, I_E=0, f=100\text{kHz}$		4.0	pF
C_{ib}	$V_{BE}=0.5\text{V}, I_C=0, f=100\text{kHz}$		8.0	pF
h_{ie}	$V_{CE}=10\text{V}, I_C=1.0\text{mA}, f=1.0\text{kHz}$	10	40	k Ω
h_{re}	$V_{CE}=10\text{V}, I_C=1.0\text{mA}, f=1.0\text{kHz}$		25	$\times 10^{-4}$
h_{fe}	$V_{CE}=10\text{V}, I_C=1.0\text{mA}, f=1.0\text{kHz}$	300	900	
h_{oe}	$V_{CE}=10\text{V}, I_C=1.0\text{mA}, f=1.0\text{kHz}$	5.0	60	μS
NF	$V_{CE}=10\text{V}, I_C=100\mu\text{A}, R_G=3.0\text{k}\Omega, f=100\text{Hz}, BW=20\text{Hz}$		4.0	dB

R1 (10-October 2016)

2N3811
2N3811A

SILICON
DUAL PNP TRANSISTORS




MATCHING CHARACTERISTICS: ($T_A=25^{\circ}\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNITS
h_{FE1}/h_{FE2} (Note 1)	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$ (2N3811)	0.90	1.0	
h_{FE1}/h_{FE2} (Note 1)	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$ (2N3811A)	0.95	1.0	
$ V_{BE1}-V_{BE2} $	$V_{CE}=5.0\text{V}$, $I_C=10\mu\text{A}$ to 10mA		5.0	mV
$ V_{BE1}-V_{BE2} $	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$ (2N3811)		3.0	mV
$ V_{BE1}-V_{BE2} $	$V_{CE}=5.0\text{V}$, $I_C=100\mu\text{A}$ (2N3811A)		1.5	mV


Note 1: The lowest reading is taken as h_{FE1} .

TO-78 CASE - MECHANICAL OUTLINE

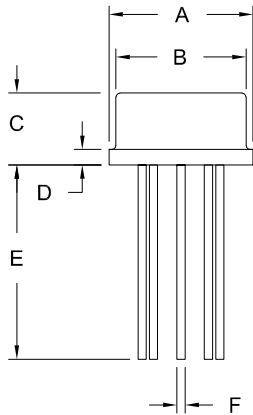

DIMENSIONS				
SYMBOL	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A (DIA)	0.335	0.370	8.51	9.40
B (DIA)	0.305	0.335	7.75	8.51
C	0.150	0.185	3.81	4.70
D	-	0.040	-	1.02
E	0.500	-	12.70	-
F (DIA)	0.016	0.021	0.41	0.53
G	0.200		5.08	
H	0.100		2.54	
J	0.028	0.034	0.71	0.86
K	0.029	0.045	0.74	1.14

TO-78 (REV: R1)

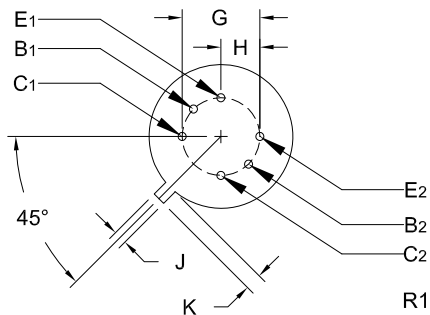

MARKING: FULL PART NUMBER





R1 (10-October 2016)

2N3811
2N3811A

SILICON
DUAL PNP TRANSISTORS



TYPICAL ELECTRICAL CHARACTERISTICS

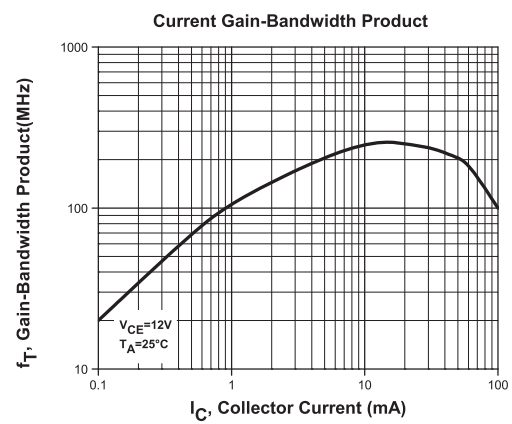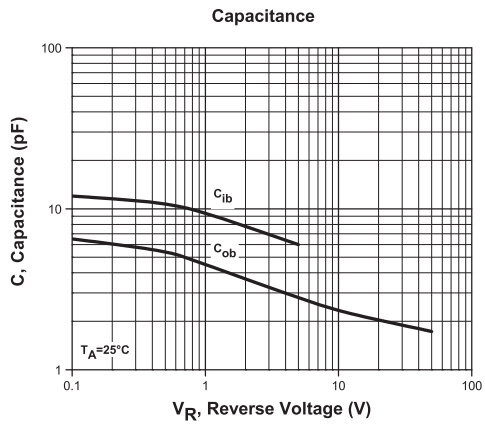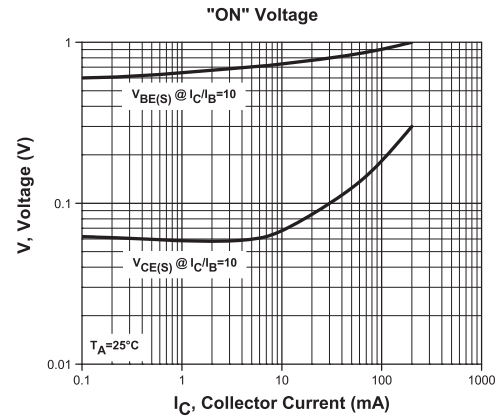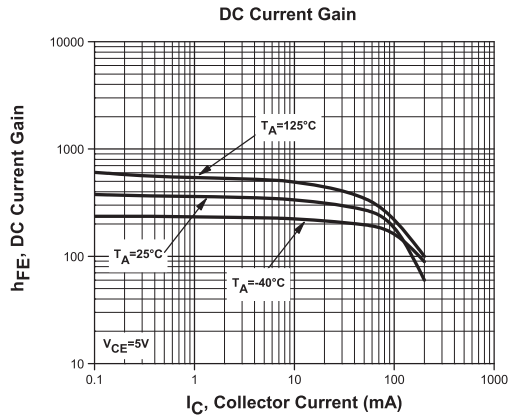



R1 (10-October 2016)

2N3811
2N3811A

SILICON
DUAL PNP TRANSISTORS



TYPICAL ELECTRICAL CHARACTERISTICS

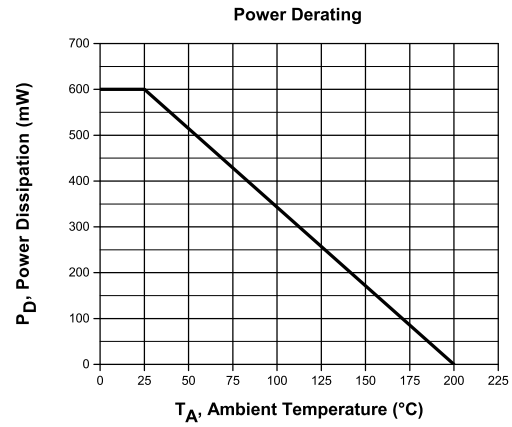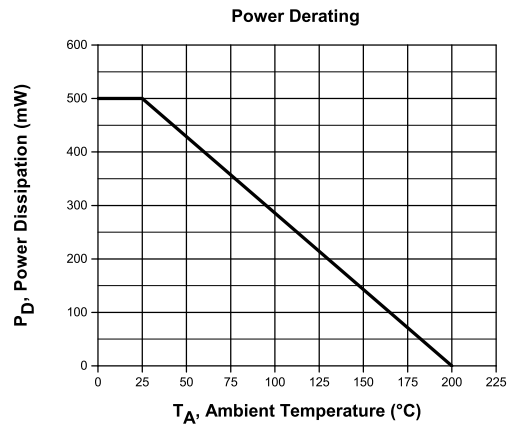

R1 (10-October 2016)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix "TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix "PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Product End of Life Notification

PDN ID:	PDN01061
Notification Date:	1/17/17
Last Buy Date:	7/17/17
Last Shipment Date	1/17/18

Summary: All transistors manufactured in the TO-78 package are discontinued and now classified as End of Life (EOL).

Although Central Semiconductor Corp. makes every effort to continue to produce devices that have been proclaimed EOL (End of Life) by various manufacturers, it is an accepted industry practice to discontinue certain devices when customer demand falls below a minimum level of sustainability. Accordingly, the following product(s) have been transitioned to End of Life status as part of Central's Product Management Process. Any replacement product will be noted below. The effective date for placing the last purchase order will be six(6) months from the date of this notice and twelve(12) months from the notice date for final shipments; this may be extended if inventory is available.

<u>Central Part Number</u>	<u>Replacement</u>
CEN876	N/A
CEN894	N/A
CEN895	N/A
CEN896	N/A
CEN911	N/A
CEN947	N/A
CEN955 W/DATA	N/A
MD2219A	N/A
MD2369	N/A
MD2369A	N/A
MD2369B	N/A
MD2905	N/A
MD2905A	N/A
MD5179	N/A
MD7000	N/A
MD7001	N/A
MD7003	N/A
MD7003A	N/A
MD7003B	N/A
MD8002	N/A
MD8003	N/A
MD918	N/A
MD918A	N/A
MD918B	N/A
MD984	N/A
2N2060	N/A
2N2060A	N/A
2N2060M	N/A
2N2223	N/A
2N2223A	N/A
2N2453	N/A
2N2453A	N/A
2N2480	N/A
2N2480A	N/A
2N2639	N/A
2N2640	N/A
2N2641	N/A
2N2642	N/A

*** CONTINUED ***

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



<http://www.centrasemi.com>

Product End of Life Notification

PDN ID:	PDN01061
Notification Date:	1/17/17
Last Buy Date:	7/17/17
Last Shipment Date	1/17/18

*** CONTINUED FROM PRIOR PAGE ***

<u>Central Part Number</u>	<u>Replacement</u>
2N2643	N/A
2N2644	N/A
2N2652	N/A
2N2652A	N/A
2N2720	N/A
2N2721	N/A
2N2722	N/A
2N2903	N/A
2N2903A	N/A
2N2913	N/A
2N2914	N/A
2N2915	N/A
2N2915A	N/A
2N2916	N/A
2N2916A	N/A
2N2917	N/A
2N2918	N/A
2N2919	N/A
2N2919A	N/A
2N2920	N/A
2N2920A	N/A
2N3726	N/A
2N3727	N/A
2N3806	N/A
2N3807	N/A
2N3808	N/A
2N3809	N/A
2N3810	N/A
2N3810A	N/A
2N3811	N/A
2N3811A	N/A
2N4015	N/A
2N4016	N/A
2N4854	N/A
2N4937	N/A
2N4938	N/A
2N4939	N/A
2N5793	N/A
2N5794	N/A
2N5796	N/A
2N5912	N/A
2N6502	N/A

*** CONTINUED ***

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.



<http://www.centrasemi.com>

Product End of Life Notification

PDN ID:	PDN01061
Notification Date:	1/17/17
Last Buy Date:	7/17/17
Last Shipment Date	1/17/18

*** CONTINUED FROM PRIOR PAGE ***

Central Part Number Replacement

Central would be happy to assist you by providing additional information or technical data to help locate an alternate source if we have no replacement available. Please email your requests to engineering@centrasemi.com.

DISCLAIMER: This End of Life (EOL) notification is in accordance with JEDEC standard JESD48 - Product Discontinuance. Central Semiconductor Corp. will make every effort to offer life-time buy (LTB) opportunities and/or offer replacement devices to existing customers for discontinued devices, however, one or both may not be possible for all devices. Please contact your local Central Semiconductor sales representative for LTB opportunities/additional information.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9