



***ACT series*** Normes MIL-DTL 38999 Série III

Composite

|       |                                |
|-------|--------------------------------|
| 1     | Introduction                   |
| 2     | Synoptic                       |
| 3     | Technical characteristics      |
| 4     | Part-numbering system          |
| 5     | Arrangements                   |
| 6     | Receptacles                    |
| 7     | Plug / Panel seal              |
| 8     | Mating and unmating dimensions |
| 9     | Mounting cutouts               |
| 10-11 | Contacts and Tools             |

The Deutsch ACT is a high performance composite connector qualified to MIL-DTL-38999. What Deutsch Defense/Aerospace does better than anyone else is make wire termination devices for demanding applications.

Deutsch utilized its unprecedented achievements in the area of defense/aerospace composite technology enabling us to design and produce the latest version of MIL-DTL-38999 connectors.


The superior design of the ACT deliberately took into consideration the connector, its contacts, and the respective strain reliefs to favorably influence intra-system life-cycle performance and costs.

## ■ Performance

The total performance of the ACT connector is matched by individual components within the system. For example, the use of composite materials has increased the durability of the connector housing and coupling mechanism to 1500 cycles. Deutsch developed an extended life MIL-C-39029 contact to meet the increased performance requirements of today's systems.

## ■ Superior corrosion resistance

The ACT eliminates the largest contributing factor in advanced systems malfunction... corrosion, which is the main cause of mechanical, electrical, and electromagnetic connector degradation. Electromotive force differentials between many dissimilar metals found in connectors and accessories produce galvanic action. The ACT eliminates these dissimilar metals resulting in an interconnection system that withstands over 2000 hours of salt spray.

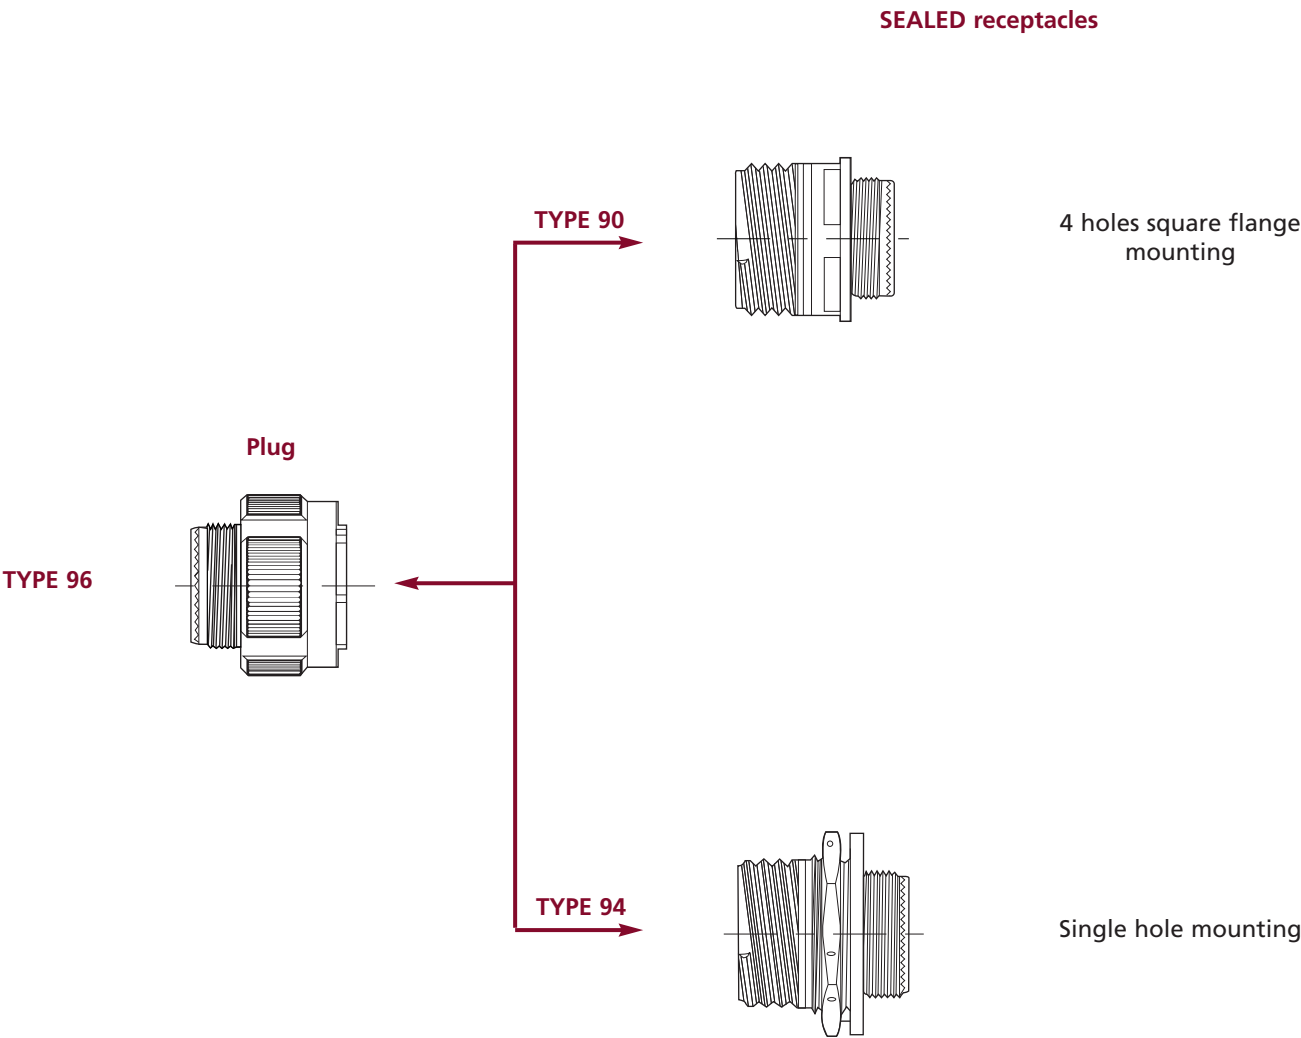

## Mechanical

|                        |                             |                                                                                             |
|------------------------|-----------------------------|---------------------------------------------------------------------------------------------|
| Shell                  | Material<br>Plating         | : Composite<br>: W - Olive drab cadmium,<br>M - Nickel coating                              |
| Insert                 | Material                    | : Thermoplastic and fluorinated silicone elastomer                                          |
| Flat gasket and o'ring | Material                    | : fluoronited silicone elastomer                                                            |
| Contact                | Material<br>Plating<br>Type | : Copper alloy<br>: Gold<br>: Crimp type or printed circuit pin (consult us)                |
| Retention              |                             | : Size 22 D: 44 N<br>Size 20 : 67 N<br>Size 16 : 111 N<br>Size 12 : 111 N<br>Size 8 : 111 N |
| Vibrations             |                             | : As per MIL-DTL-38999                                                                      |
| Physical shocks        |                             | : 300 g, 3 ms in the 3 axes                                                                 |
| Durability             |                             | : 1500 coupling and uncoupling cycles                                                       |

## Climatics

|                       |                                                                                        |
|-----------------------|----------------------------------------------------------------------------------------|
| Service temperature   | : Cadmium plating - 65° C to + 175° C<br>: Nickel plating - 65° C to + 200° c          |
| Thermal shocks        | : As per MIL-DTL-38999                                                                 |
| Sealing               | : Leakage ≤ 16 cm <sup>3</sup> /h on mated connecting under 2,1 bars                   |
| Salt spray resistance | : 2000 hours, class W as per MIL-DTL-38999<br>2000 hours class M, as per MIL-DTL-38999 |


## Electrical

|                                             |                     |                                                                                                                                                                                                                                                         |
|---------------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Withstanding voltage                        | at sea level        | : Service M : 1300 V<br>Service I : 1800 V<br>Service II : 2300 V                                                                                                                                                                                       |
|                                             | at 21000 m altitude | : Mated connector      Unmated connector<br>Service M : 800 V      Service M : 350 V<br>Service I : 1000 V      Service I : 400 V<br>Service II : 1000 V      Service II : 500 V                                                                        |
| Insulation resistance (Ambiant temperature) |                     | : 5000 MΩ to 25° C and 65 % HR max.                                                                                                                                                                                                                     |
| Voltage drop                                |                     | : size 22 : test to 5 Amp. = 73 millivolts max.<br>Size 20 : test to 7,5 Amp. = 55 millivolts max.<br>Size 16 : test to 12 Amp. = 49 millivolts max.<br>Size 12 : test to 23 Amp. = 42 millivolts max.<br>Size 8 : test to 46 Amp. = 26 millivolts max. |
| Shielding                                   |                     | : As per MIL-DTL-38999                                                                                                                                                                                                                                  |

| Size | Contacts current<br>Sealed<br>version | Diameter over<br>Insulation sheath<br>in mm | Permitted wire<br>Sizes<br>section in mm <sup>2</sup> |
|------|---------------------------------------|---------------------------------------------|-------------------------------------------------------|
| 22   | 5 A                                   | 0,76 to 1,37                                | 0,095 to 0,38                                         |
| 20   | 7,5 A                                 | 1,01 to 2,10                                | 0,21 to 0,60                                          |
| 16   | 13 A.                                 | 1,65 to 2,77                                | 0,60 to 1,34                                          |
| 12   | 23 A.                                 | 2,46 to 3,61                                | 1,91 to 3,18                                          |
| 8    | 46 A.                                 | 4,50 to 5,80                                | 5,30 to 8,98                                          |


For more information, see MIL-DTL-38999 series III

## DEUTSCH System

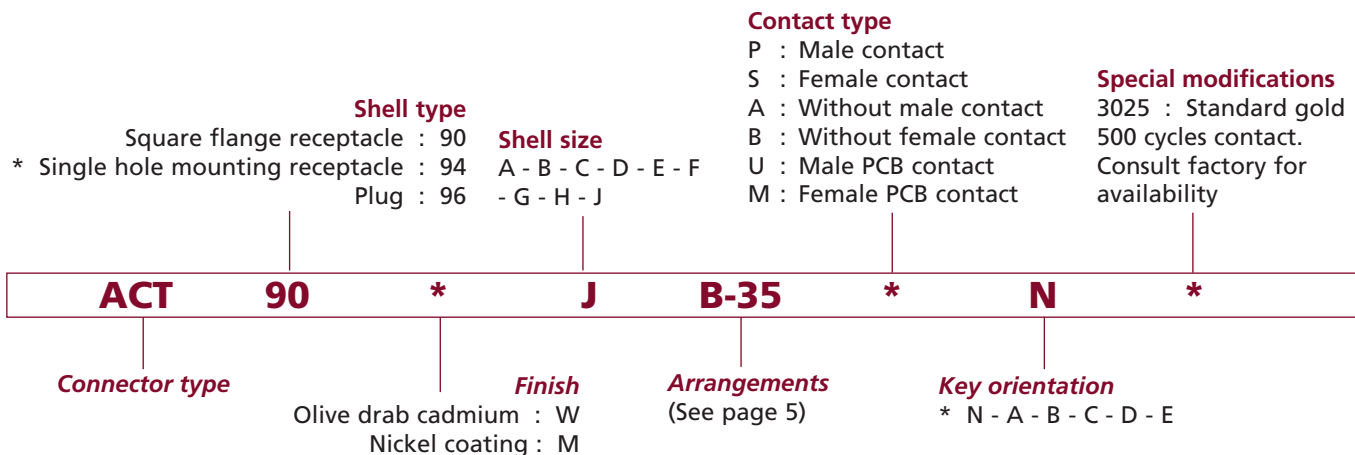


The square flange receptacle is never delivered with panel seal. For ordering panel seals see page 9.  
 For standard contacts delivered with the connector, see page 10.

## MIL-DTL-38999 SYSTEM

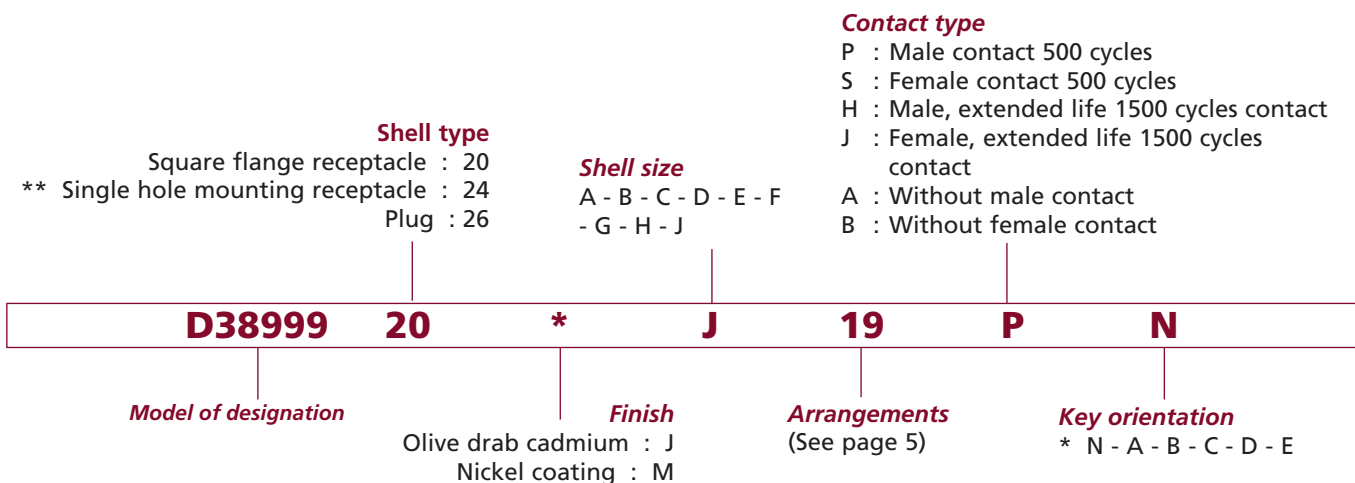


\* Consult factory for availability  
 \*\* Consult factory for current QPL listing.

Male insert viewed from front face.

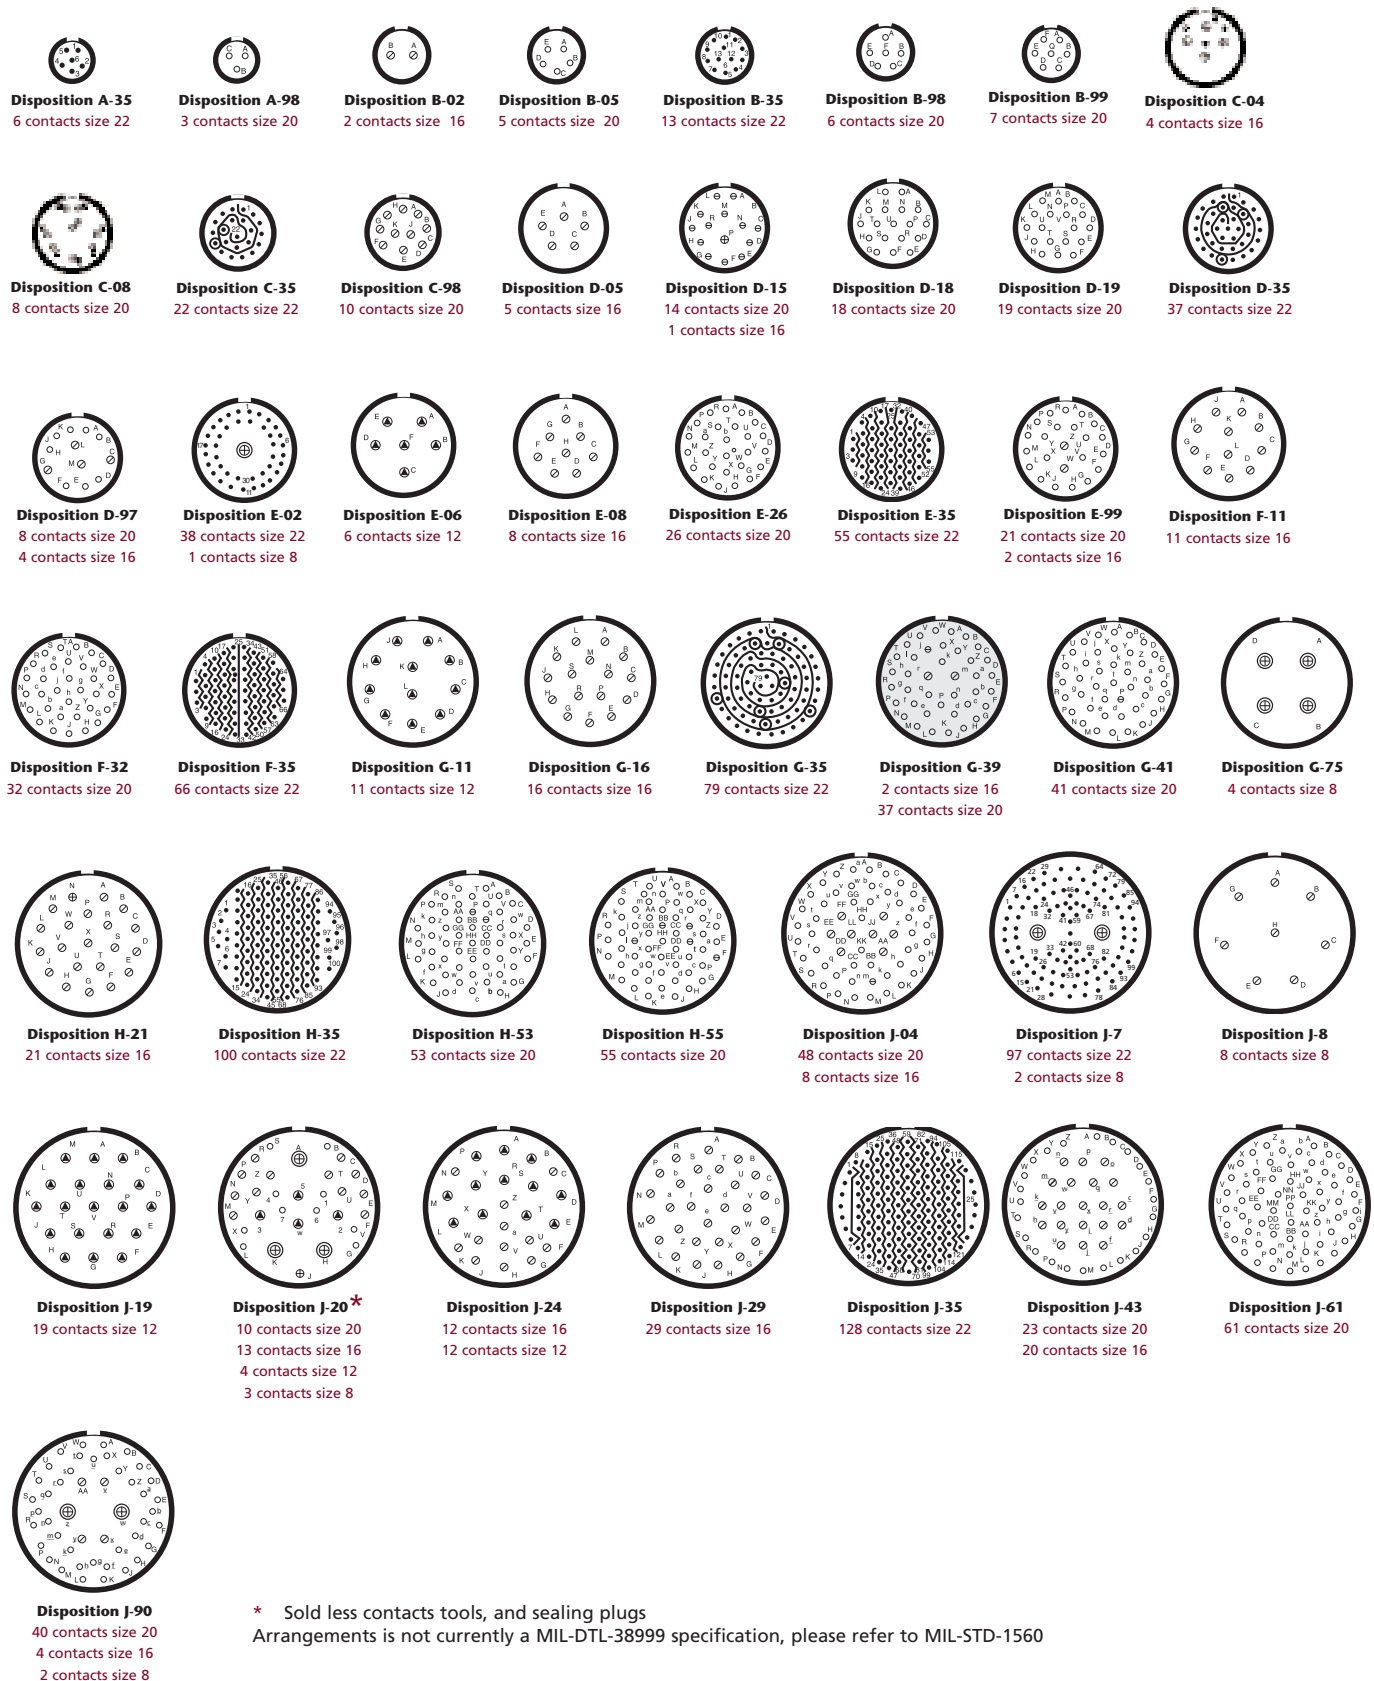

\* Sold less contacts tools, and sealing plugs  
Arrangements is not currently a MIL-DTL-38999 specification, please refer to MIL-STD-1560

## ■ Square flange - TYPE 90

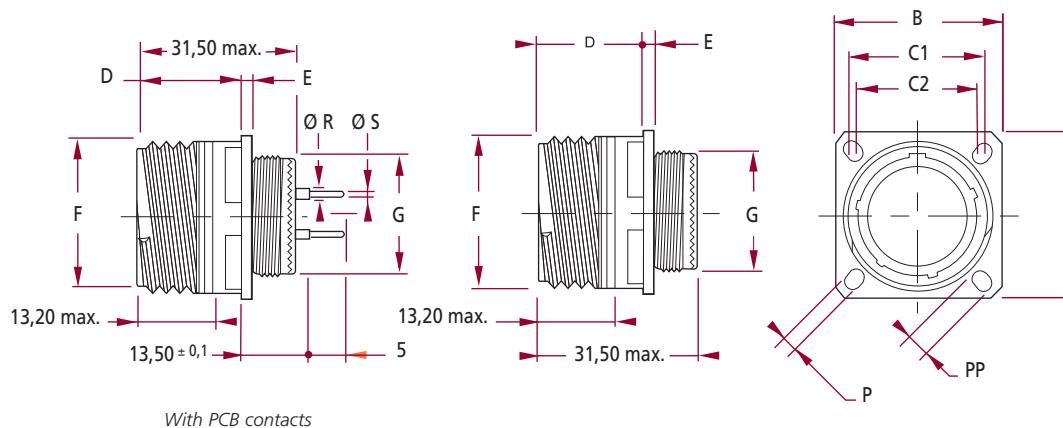


| Contact Size | R<br>+ 0<br>- 0,05 | S<br>± 0,05 |
|--------------|--------------------|-------------|
| 22           | 10,5               |             |
| 20           | 1,5                | 0,7         |
| 16           | 2,6                | 1,15        |

P/N PCB contacts, page 11

| Size | B<br>± 0,3 | C1<br>max. | C2<br>max. | D<br>max. | E<br>max. | F<br>± 0,1 | G<br>± 0,1 | P<br>± 0,2 | PP<br>± 0,2 | Mass<br>max. |
|------|------------|------------|------------|-----------|-----------|------------|------------|------------|-------------|--------------|
| A    | 23,80      | 18,26      | 15,09      | 19,50     | 3,65      | 15,75      | 11,90      | 3,25       | 5,49        | 8,00         |
| B    | 26,20      | 20,62      | 18,26      | 19,50     | 3,65      | 18,90      | 14,90      | 3,25       | 4,93        | 11,00        |
| C    | 28,60      | 23,01      | 20,62      | 19,50     | 3,65      | 22,10      | 17,90      | 3,25       | 4,93        | 14,00        |
| D    | 31,00      | 24,61      | 23,01      | 19,50     | 3,65      | 25,25      | 21,90      | 3,25       | 4,93        | 18,00        |
| E    | 33,30      | 26,97      | 24,61      | 19,50     | 3,65      | 29,95      | 24,90      | 3,25       | 4,93        | 23,00        |
| F    | 36,50      | 29,36      | 26,97      | 19,50     | 3,65      | 31,55      | 27,90      | 3,25       | 4,93        | 26,00        |
| G    | 39,70      | 31,75      | 29,36      | 18,70     | 4,35      | 34,70      | 30,90      | 3,25       | 4,93        | 31,00        |
| H    | 42,90      | 34,93      | 31,75      | 18,70     | 4,35      | 37,90      | 33,90      | 3,91       | 6,15        | 36,00        |
| J    | 46,00      | 38,10      | 34,93      | 18,70     | 4,35      | 41,10      | 36,90      | 3,91       | 6,15        | 43,00        |

## ■ Single hole mounting - TYPE 94

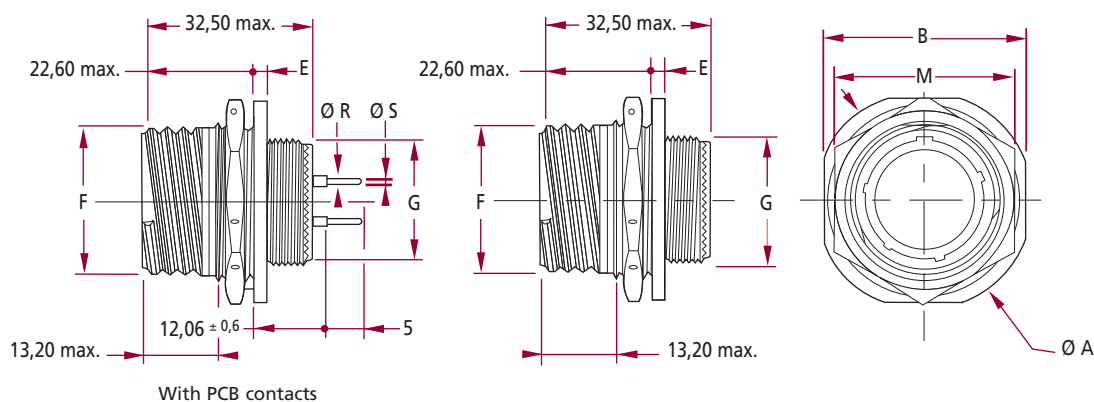


| Contact Size | R<br>+ 0<br>- 0,05 | S<br>± 0,05 |
|--------------|--------------------|-------------|
| 22           | 10,5               |             |
| 20           | 1,5                | 0,7         |
| 16           | 2,6                | 1,15        |

P/N PCB contacts, page 11

| Size | A<br>± 0,3 | B<br>± 0,4 | E<br>+ 0,7<br>- 0,1 | F<br>± 0,1 | G<br>± 0,1 | M<br>max. | Mass<br>max. |
|------|------------|------------|---------------------|------------|------------|-----------|--------------|
| A    | 30,20      | 27,00      | 3,00                | 15,75      | 11,90      | 21,82     | 11,00        |
| B    | 34,90      | 31,80      | 3,00                | 18,90      | 14,90      | 24,99     | 14,00        |
| C    | 38,10      | 34,90      | 3,00                | 22,10      | 17,90      | 29,77     | 18,00        |
| D    | 41,30      | 38,10      | 3,00                | 25,25      | 21,90      | 32,91     | 23,00        |
| E    | 44,50      | 41,30      | 3,00                | 29,95      | 24,90      | 36,12     | 29,00        |
| F    | 49,20      | 46,00      | 3,70                | 31,55      | 27,90      | 39,25     | 35,00        |
| G    | 52,40      | 49,20      | 3,70                | 34,70      | 30,90      | 42,47     | 38,00        |
| H    | 55,60      | 52,40      | 3,70                | 37,90      | 33,90      | 45,61     | 46,00        |
| J    | 58,70      | 55,60      | 3,70                | 41,10      | 36,90      | 49,25     | 55,00        |



## TYPE 96

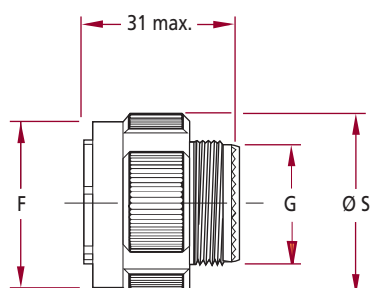


| Size | F max. | G max. | S max. | Mass max. |
|------|--------|--------|--------|-----------|
| A    | 18,40  | 11,90  | 21,80  | 9,00      |
| B    | 21,10  | 14,90  | 25,00  | 13,00     |
| C    | 25,40  | 17,90  | 29,40  | 18,00     |
| D    | 28,70  | 21,90  | 32,50  | 23,00     |
| E    | 32,20  | 24,90  | 35,70  | 25,00     |
| F    | 34,90  | 27,90  | 38,50  | 32,00     |
| G    | 38,10  | 30,90  | 41,70  | 35,00     |
| H    | 41,10  | 33,90  | 44,90  | 41,00     |
| J    | 44,30  | 36,90  | 48,00  | 48,00     |

## Panel seal

### For square flange receptacle



Sealed version

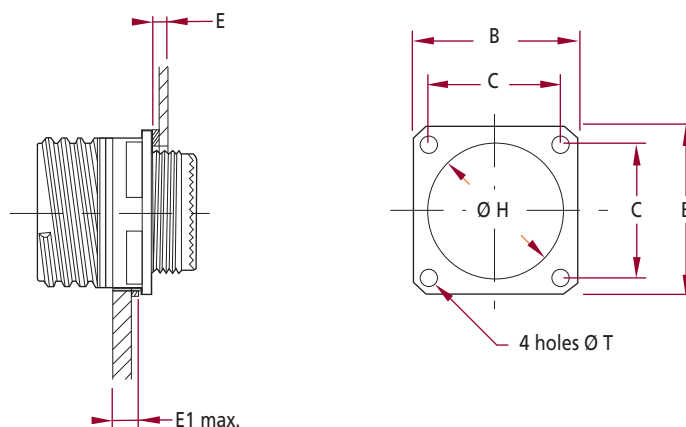

| Front flange mounting |             |        |        |          |        |         |        | Rear flange mounting |             |      |
|-----------------------|-------------|--------|--------|----------|--------|---------|--------|----------------------|-------------|------|
| Size                  | Part-Number | H max. | B max. | C ± 0,10 | E max. | E1 max. | T max. | H max.               | Part-Number | Size |
| A                     | 108-0003-10 | 15,40  | 24,30  | 18,30    | 3,00   | 5,92    | 3,30   | 14,10                | 108-0004-10 | A    |
| B                     | 108-0001-12 | 18,40  | 26,70  | 20,60    | 3,00   | 5,92    | 3,30   | 17,20                | 108-0004-12 | B    |
| C                     | 108-0001-14 | 22,70  | 29,10  | 23,00    | 3,00   | 5,92    | 3,30   | 20,40                | 108-0004-14 | C    |
| D                     | 108-0001-16 | 25,90  | 31,30  | 24,60    | 3,00   | 5,92    | 3,30   | 23,60                | 108-0004-16 | D    |
| E                     | 108-0003-18 | 29,10  | 33,70  | 27,00    | 3,00   | 5,92    | 3,30   | 26,80                | 108-0004-18 | E    |
| F                     | 108-0003-20 | 32,30  | 36,90  | 29,40    | 3,00   | 5,92    | 3,30   | 30,60                | 108-0001-20 | F    |
| G                     | 108-0003-22 | 35,40  | 40,10  | 31,75    | 3,00   | 5,16    | 3,30   | 33,50                | 108-0001-22 | G    |
| H                     | 108-0003-24 | 38,60  | 43,30  | 34,90    | 3,00   | 5,16    | 4,30   | 36,30                | 108-0004-24 | H    |
| J                     | 108-0001-25 | 41,10  | 46,00  | 38,10    | 3,00   | 4,87    | 3,90   | 37,70                | 108-0012-25 | J    |


Nota : The panel seal is never delivered with receptacle. To be ordered separatly.

## ■ Square flange - TYPES 90 - 96

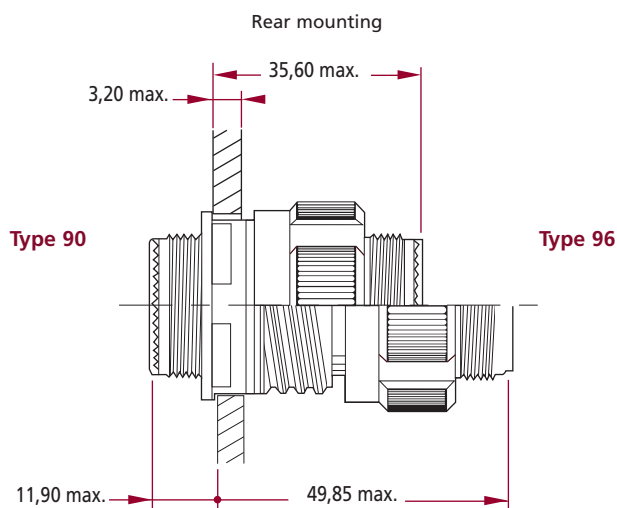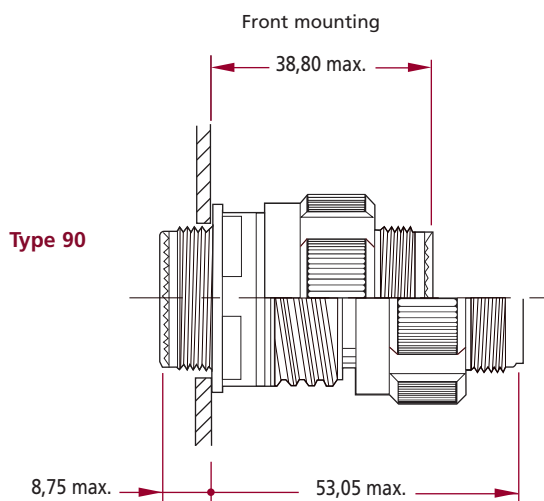

| Size | Coupling torque   |                     |
|------|-------------------|---------------------|
|      | Mating<br>Nm mini | Unmating<br>Nm max. |
| A    | 0,2               | 0,9                 |
| B    | 0,2               | 1,4                 |
| C    | 0,2               | 1,8                 |
| D    | 0,3               | 2,3                 |
| E    | 0,3               | 2,7                 |
| F    | 0,3               | 3,2                 |
| G    | 0,6               | 3,6                 |
| H    | 0,6               | 4,1                 |
| J    | 0,6               | 4,6                 |

## ■ TYPE 94 - 96

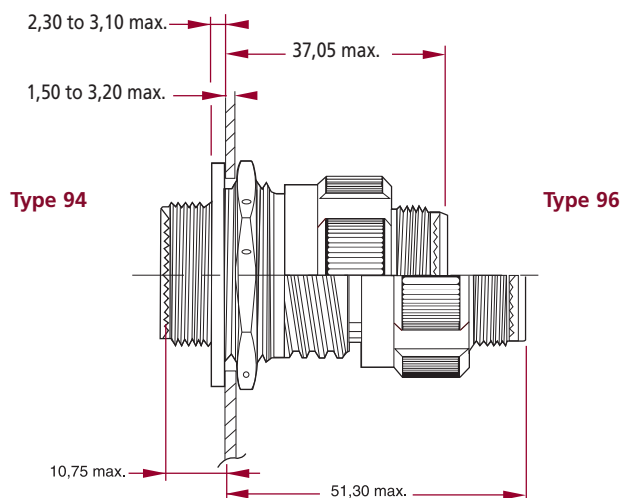


| Size | Coupling torque   |                     |
|------|-------------------|---------------------|
|      | Mating<br>Nm mini | Unmating<br>Nm max. |
| A    | 0,2               | 0,9                 |
| B    | 0,2               | 1,4                 |
| C    | 0,2               | 1,8                 |
| D    | 0,3               | 2,3                 |
| E    | 0,3               | 2,7                 |
| F    | 0,3               | 3,2                 |
| G    | 0,6               | 3,6                 |
| H    | 0,6               | 4,1                 |
| J    | 0,6               | 4,6                 |


## ■ For sealed receptacles - TYPE 90 - 94

**Type 90**



Front panel mounting



**Type 94**

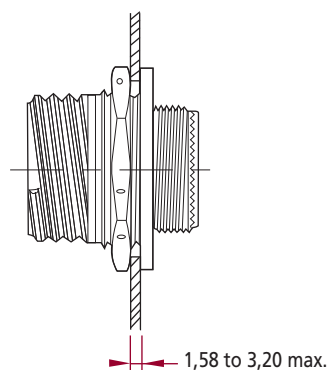




Panel cutout

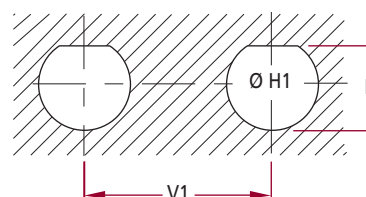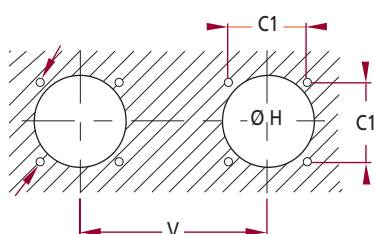

| Size | C1    | H mini |       | H1            | K             | V     | V1    | Coupling torque |       |
|------|-------|--------|-------|---------------|---------------|-------|-------|-----------------|-------|
|      |       | Front  | Rear  | + 0.25<br>- 0 | + 0.25<br>- 0 | mini. | mini. | Nm mini         | Nm ma |
| A    | 18,26 | 13,11  | 16,66 | 17,70         | 16,99         | 24,60 | 27,80 | 3,40            | 4,00  |
| B    | 20,62 | 15,08  | 22,22 | 20,88         | 19,53         | 27,00 | 32,60 | 4,50            | 5,20  |
| C    | 23,01 | 19,05  | 23,42 | 25,58         | 24,26         | 30,20 | 36,00 | 6,20            | 6,80  |
| D    | 24,61 | 23,01  | 26,59 | 28,80         | 27,53         | 33,30 | 39,60 | 7,90            | 8,50  |
| E    | 26,97 | 25,81  | 30,96 | 31,98         | 30,68         | 36,50 | 43,30 | 9,00            | 9,60  |
| F    | 29,36 | 28,98  | 32,94 | 35,15         | 33,86         | 39,30 | 47,00 | 10,20           | 10,70 |
| G    | 31,75 | 32,16  | 36,12 | 38,28         | 37,06         | 42,50 | 50,60 | 11,30           | 12,40 |
| H    | 34,93 | 34,93  | 39,29 | 41,50         | 40,01         | 45,70 | 54,20 | 12,40           | 13,50 |
| J    | 38,10 | 37,69  | 42,47 | 44,68         | 43,41         | 48,80 | 59,70 | 13,60           | 14,70 |

## Standard gold 500 cycles contact (3025)

color code  
For contact P as per MIL-DTL 38999



Sealing plug




| CONTACTS               |      |      |            |        |        |                  | CABLES       |          |               | SEALING PLUG |             |            |
|------------------------|------|------|------------|--------|--------|------------------|--------------|----------|---------------|--------------|-------------|------------|
| Commercial Part-number | Type | Size | Color code |        |        | Observations     | Section mm²  | AWG wire | Ø over sheath | L            | P/N         | Color code |
| 724-0001-22            | P    | 22   | Orange     | Blue   | Black  | Standard contact | 0,10 to 0,38 | 22 - 28  | 0,76 to 1,37  | 5,00 to 5,80 | 028-0102-22 | Yellow     |
| 724-0007-22            | S    | 22   | Orange     | Yellow | Grey   | Standard contact | 0,10 to 0,38 | 22 - 28  | 0,76 to 1,37  | 5,00 to 5,80 | 028-0102-22 | Yellow     |
| 724-0001-20            | P    | 20   | Orange     | Blue   | Orange | Standard contact | 0,21 to 0,60 | 20 - 24  | 1,02 to 2,11  | 5,80 to 6,60 | 006-0893-20 | Red        |
| 724-0007-20            | S    | 20   | Orange     | Green  | Brown  | Standard contact | 0,21 to 0,60 | 20 - 24  | 1,02 to 2,11  | 5,80 to 6,60 | 006-0893-20 | Red        |
| 724-0001-16            | P    | 16   | Orange     | Blue   | Yellow | Standard contact | 0,60 to 1,34 | 16 - 20  | 1,65 to 2,77  | 5,80 to 6,60 | 006-0893-16 | Bleu       |
| 724-0007-16            | S    | 16   | Orange     | Green  | Red    | Standard contact | 0,60 to 1,34 | 16 - 20  | 1,65 to 2,77  | 5,80 to 6,60 | 006-0893-16 | Bleu       |
| 724-0001-12            | P    | 12   | Orange     | Blue   | Green  | Standard contact | 1,93 to 3,18 | 12 - 14  | 2,46 to 3,61  | 5,80 to 6,60 | 006-0892-12 | Yellow     |
| 724-0007-12            | S    | 12   | Orange     | Green  | Orange | Standard contact | 1,93 to 3,18 | 12 - 14  | 2,46 to 3,61  | 5,80 to 6,60 | 006-0892-12 | Yellow     |
| 182-0001-08            | P    | 8    | -          | -      | -      | Power contact    | 5,30 to 8,98 | 8        | 4,50 to 5,80  | 9,20 to 9,80 | 182-0061-08 | -          |
| 182-0003-08            | S    | 8    | -          | -      | -      | Power contact    | 5,30 to 8,98 | 8        | 4,50 to 5,80  | 9,20 to 9,80 | 182-0061-08 | -          |
| 182-0068-20            | P    | 20   | Yellow     | Purple | Green  | Alumel contact   | 0,21 to 0,60 | 20 - 24  | 1,02 to 2,11  | 5,80 to 6,60 | 006-0893-20 | Red        |
| 182-0009-20            | S    | 20   | Yellow     | Grey   | Purple | Alumel contact   | 0,21 to 0,60 | 20 - 24  | 1,02 to 2,11  | 5,80 to 6,60 | 006-0893-20 | Red        |
| 182-0069-20            | P    | 20   | Yellow     | Purple | Blue   | Chromel contact  | 0,21 to 0,60 | 20 - 24  | 1,02 to 2,11  | 5,80 to 6,60 | 006-0893-20 | Red        |
| 182-0010-20            | S    | 20   | Yellow     | Grey   | Grey   | Chromel contact  | 0,21 to 0,60 | 20 - 24  | 1,02 to 2,11  | 5,80 to 6,60 | 006-0893-20 | Red        |
| 182-0068-22            | P    | 22   | Yellow     | Purple | Brown  | Alumel contact   | 0,10 to 0,38 | 22 - 28  | 0,76 to 1,37  | 5,00 to 5,80 | 028-0102-22 | Yellow     |
| 182-0009-22            | S    | 22   | Yellow     | White  | Green  | Alumel contact   | 0,10 to 0,38 | 22 - 28  | 0,76 to 1,37  | 5,00 to 5,80 | 028-0102-22 | Yellow     |
| 182-0069-22            | P    | 22   | Yellow     | Purple | Red    | Chromel contact  | 0,10 to 0,38 | 22 - 28  | 0,76 to 1,37  | 5,00 to 5,80 | 028-0102-22 | Yellow     |
| 182-0010-22            | S    | 22   | Yellow     | White  | Blue   | Chromel contact  | 0,10 to 0,38 | 22 - 28  | 0,76 to 1,37  | 5,00 to 5,80 | 028-0102-22 | Yellow     |

| DATABUS CONTACTS SIZE 8 (TWISTED PAIR) AS PER MIL-C 38999 SERIES I, III AND IV STANDARD |      |      |            |                             |                       |              |                            |                         |                   |                          |
|-----------------------------------------------------------------------------------------|------|------|------------|-----------------------------|-----------------------|--------------|----------------------------|-------------------------|-------------------|--------------------------|
| CONTACTS                                                                                |      |      |            | CABLES                      |                       |              | SLEEVE                     | TOOLS                   |                   |                          |
| Part-number                                                                             | Type | Size | Color code | Types                       | Conduct. max. section | Braid Ø max. | Types                      | Crimping tool Conductor | Ferrule           | Tool Extraction          |
| 182-0034-03                                                                             | P    | 8    | Brown-red  | braid simple                | 0,86 mm²              | 3,48         | Thermosetting and silicone | TDB-CT-08               | TDB-CT-HEX Mark C | 114-008 or M 81969/14-06 |
| 182-0035-03                                                                             | S    | 8    | Brown-red  | braid simple                | 0,86 mm²              | 3,48         | Thermosetting and silicone | TDB-CT-08               | TDB-CT-HEX Mark C | 114-008 or M 81969/14-06 |
| 182-0034-04                                                                             | P    | 8    | Red-red    | Hight immunity double braid | 0,86 mm²              | 3,91         | Thermosetting and silicone | TDB-CT-08               | TDB-CT-HEX Mark D | 114-008 or M 81969/14-06 |
| 182-0035-04                                                                             | S    | 8    | Red-red    | Hight immunity double braid | 0,86 mm²              | 3,91         | Thermosetting and silicone | TDB-CT-08               | TDB-CT-HEX Mark D | 114-008 or M 81969/14-06 |

Nota : Standard contacts delivered with connector.  
Size 8 and Bus contacts are delivered with protect sleeve.

## Contact 1500 cycles contact

| DEUTSCH EXTENDED LIFE FINISH |      |      |            |       |        |  |
|------------------------------|------|------|------------|-------|--------|--|
| Part number                  | Type | Size | Color code |       |        |  |
|                              |      |      | 1          | 2     | 3      |  |
| M39029/107-620               | P    | 22   | Blue       | Red   | Black  |  |
| M39029/106-614               | S    | 22   | Blue       | Brown | Yellow |  |
| M39029/107-621               | P    | 20   | Blue       | Red   | Brown  |  |
| M39029/106-615               | S    | 20   | Blue       | Brown | Green  |  |
| M39029/107-622               | P    | 16   | Blue       | Red   | Red    |  |
| M39029/106-616               | S    | 16   | Blue       | Brown | Blue   |  |
| M39029/107-623               | P    | 12   | Blue       | Red   | Orange |  |
| M39029/106-617               | S    | 12   | Blue       | Brown | Violet |  |

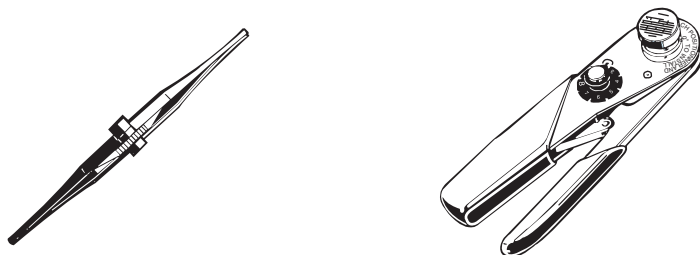

| TOOLS         |                    |               |                                 | CONTACTS STANDARDISATION                 |
|---------------|--------------------|---------------|---------------------------------|------------------------------------------|
| Insertion     | Tool<br>Extraction | Crimping tool | Pilot stop for<br>crimping tool | MIL-C                                    |
| M 81969/14-01 |                    | M 22520/2-01  | M 22520/2-09<br>M 22520/2-07    | MIL-C 39029/58-360<br>MIL-C 39029/56-348 |
| M 15570-20    |                    | M 22520/1-01  | M 22520/1-04                    | MIL-C 39029/58-363<br>MIL-C 39029/56-351 |
| M 15570-16    |                    | M 22520/1-01  | M 22520/1-04                    | MIL-C 39029/58-364<br>MIL-C 39029/56-352 |
| M 15570-12    |                    | M 22520/1-01  | M 22520/1-04                    | MIL-C 39029/58-365<br>MIL-C 39029/56-353 |
| Manual        | M 81969/14-06      | M 22520/5-01  | SP 593                          | -                                        |
| M 15570-20    |                    | M 22520/1-01  | M 22520/1-04                    | MIL-C 39029/87-475<br>MIL-C 39029/88-487 |
| M 15570-20    |                    | M 22520/1-01  | M 22520/1-04                    | MIL-C 39029/87-476<br>MIL-C 39029/88-488 |
| M 81969/14-01 |                    | M 22520/2-01  | M 22520/2-09<br>M 22520/2-07    | MIL-C 39029/87-471<br>MIL-C 39029/89-495 |
| M 81969/14-01 |                    | M 22520/2-01  | M 22520/2-09<br>M 22520/2-07    | MIL-C 39029/87-472<br>MIL-C 39029/89-496 |

| PCB Contacts |      |      |
|--------------|------|------|
| Part-number  | Type | Size |
| 724-0902-22  | P    | 22   |
| 724-0902-20  |      | 20   |
| 724-0902-16  |      | 16   |
| 724-0902-12  |      | 12   |
| 724-0904-22  | S    | 22   |
| 724-0904-20  |      | 20   |
| 724-0904-16  |      | 16   |
| 724-0904-12  |      | 12   |

| COAXIAL Contacts |      |      |             |
|------------------|------|------|-------------|
| Part-number      | Type | Size | MIL-C 39029 |
| 724-0004-16      | P    | 16   | 76          |
| 182-0013-16      | S    |      | 77          |
| 182-0100-12      | P    |      | 102         |
| 182-0101-12      | S    | 8    | 103         |
| 182-0127-68      | P    |      | 59          |
| 182-0128-68      | S    |      | 60          |

| SHIELDED CONTACTS |      |      |             |
|-------------------|------|------|-------------|
| Part-number       | Type | Size | MIL-C 39029 |
| 182-0098-12       | P    | 12   | 28          |
| 182-0099-12       | S    |      | 52          |





CONNECTEURS ELECTRIQUES DEUTSCH

17, rue Lavoisier z.i. n° 2 B.P. 117 27091 EVREUX CEDEX 09 (FRANCE) - Tél.: +33 (0)2 32 23 57 00 - Fax : +33 (0)2 32 23 58 00  
E-mail : [ced@deutsch.net](mailto:ced@deutsch.net) - Web : [www.deutsch.net](http://www.deutsch.net) - Réf.: CC 024-21 A Edition Mars 2008

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9