

|                             |       |
|-----------------------------|-------|
| $V_{CES}$                   | 650V  |
| $I_C (100^\circ\text{C})$   | 30A   |
| $V_{CE(sat)} (\text{Typ.})$ | 1.65V |
| $P_D$                       | 223W  |


### ●Features

- 1) Low Collector - Emitter Saturation Voltage
- 2) Short Circuit Withstand Time 8 $\mu$ s
- 3) Qualified to AEC-Q101
- 4) Pb - free Lead Plating ; RoHS Compliant


### ●Application

Heater for Automotive

### ●Outline

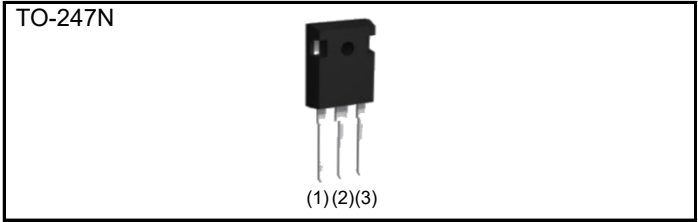

### ●Inner Circuit

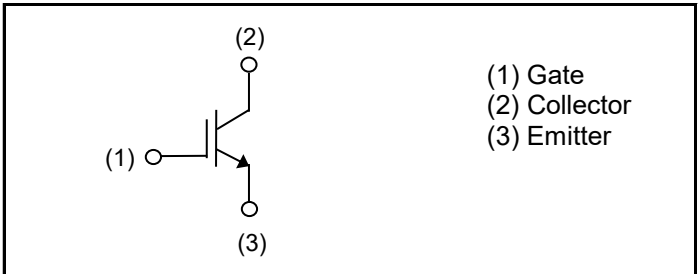

### ●Packaging Specifications

|      |                           |           |
|------|---------------------------|-----------|
| Type | Packaging                 | Tube      |
|      | Reel Size (mm)            | -         |
|      | Tape Width (mm)           | -         |
|      | Basic Ordering Unit (pcs) | 450       |
|      | Packing Code              | C11       |
|      | Marking                   | RGS60TS65 |

### ●Absolute Maximum Ratings (at $T_C = 25^\circ\text{C}$ unless otherwise specified)

| Parameter                      | Symbol                    | Value       | Unit             |   |
|--------------------------------|---------------------------|-------------|------------------|---|
| Collector - Emitter Voltage    | $V_{CES}$                 | 650         | V                |   |
| Gate - Emitter Voltage         | $V_{GES}$                 | $\pm 30$    | V                |   |
| Collector Current              | $T_C = 25^\circ\text{C}$  | $I_C$       | 56               | A |
|                                | $T_C = 100^\circ\text{C}$ | $I_C$       | 30               | A |
| Pulsed Collector Current       | $I_{CP}^{*1}$             | 90          | A                |   |
| Power Dissipation              | $T_C = 25^\circ\text{C}$  | $P_D$       | 223              | W |
|                                | $T_C = 100^\circ\text{C}$ | $P_D$       | 111              | W |
| Operating Junction Temperature | $T_j$                     | -40 to +175 | $^\circ\text{C}$ |   |
| Storage Temperature            | $T_{stg}$                 | -55 to +175 | $^\circ\text{C}$ |   |

\*1 Pulse width limited by  $T_{jmax}$ .

### ●Thermal Resistance

| Parameter                               | Symbol            | Values |      |      | Unit |
|---|-------------------|--------|------|------|------|
|   |                   | Min.   | Typ. | Max. |      |
| Thermal Resistance IGBT Junction - Case | $R_{\theta(j-c)}$ | -      | -    | 0.67 | °C/W |

### ●IGBT Electrical Characteristics (at $T_j = 25^\circ\text{C}$ unless otherwise specified)

| Parameter                              | Symbol        | Conditions  | Values |      |           | Unit          |
|--|---------------|---|--------|------|-----------|---------------|
|  |               |   | Min.   | Typ. | Max.      |               |
| Collector - Emitter Breakdown Voltage  | $BV_{CES}$    | $I_C = 10\mu\text{A}, V_{GE} = 0\text{V}$   | 650    | -    | -         | V             |
| Collector Cut - off Current            | $I_{CES}$     | $V_{CE} = 650\text{V}, V_{GE} = 0\text{V},$<br>$T_j = 25^\circ\text{C}$<br>$T_j = 175^\circ\text{C}^{*2}$ | -      | -    | 10        | $\mu\text{A}$ |
|  |               |   | -      | -    | 5         | mA            |
| Gate - Emitter Leakage Current         | $I_{GES}$     | $V_{GE} = \pm 30\text{V}, V_{CE} = 0\text{V}$   | -      | -    | $\pm 200$ | nA            |
| Gate - Emitter Threshold Voltage       | $V_{GE(th)}$  | $V_{CE} = 5\text{V}, I_C = 1.5\text{mA}$  | 5.0    | 6.0  | 7.0       | V             |
| Collector - Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C = 30\text{A}, V_{GE} = 15\text{V},$<br>$T_j = 25^\circ\text{C}$<br>$T_j = 175^\circ\text{C}$         | -      | 1.65 | 2.10      | V             |
|  |               |   | -      | 2.15 | -         | V             |

**●IGBT Electrical Characteristics (at  $T_j = 25^\circ\text{C}$  unless otherwise specified)**

| Parameter                        | Symbol        | Conditions   | Values      |      |      | Unit          |
|----------------------------------|---------------|--|-------------|------|------|---------------|
|                                  |               |  | Min.        | Typ. | Max. |               |
| Input Capacitance                | $C_{ies}$     | $V_{CE} = 30\text{V}$ ,  | -           | 980  | -    | pF            |
| Output Capacitance               | $C_{oes}$     | $V_{GE} = 0\text{V}$ ,   | -           | 80   | -    |               |
| Reverse transfer Capacitance     | $C_{res}$     | $f = 1\text{MHz}$  | -           | 13   | -    |               |
| Total Gate Charge                | $Q_g$         | $V_{CE} = 300\text{V}$ ,   | -           | 36   | -    | nC            |
| Gate - Emitter Charge            | $Q_{ge}$      | $I_C = 30\text{A}$ ,   | -           | 10   | -    |               |
| Gate - Collector Charge          | $Q_{gc}$      | $V_{GE} = 15\text{V}$  | -           | 15   | -    |               |
| Turn - on Delay Time             | $t_{d(on)}$   | $I_C = 30\text{A}$ , $V_{CC} = 400\text{V}$ ,<br>$V_{GE} = 15\text{V}$ , $R_G = 10\Omega$ ,<br>$T_j = 25^\circ\text{C}$<br>Inductive Load<br>* $E_{on}$ include diode<br>reverse recovery  | -           | 28   | -    | ns            |
| Rise Time                        | $t_r$         |  | -           | 12   | -    |               |
| Turn - off Delay Time            | $t_{d(off)}$  |  | -           | 104  | -    |               |
| Fall Time                        | $t_f$         |  | -           | 101  | -    |               |
| Turn - on Switching Loss         | $E_{on}$      |  | -           | 0.66 | -    | mJ            |
| Turn - off Switching Loss        | $E_{off}$     |  | -           | 0.81 | -    |               |
| Turn - on Delay Time             | $t_{d(on)}$   | $I_C = 30\text{A}$ , $V_{CC} = 400\text{V}$ ,<br>$V_{GE} = 15\text{V}$ , $R_G = 10\Omega$ ,<br>$T_j = 175^\circ\text{C}$<br>Inductive Load<br>* $E_{on}$ include diode<br>reverse recovery | -           | 29   | -    | ns            |
| Rise Time                        | $t_r$         |  | -           | 17   | -    |               |
| Turn - off Delay Time            | $t_{d(off)}$  |  | -           | 131  | -    |               |
| Fall Time                        | $t_f$         |  | -           | 159  | -    |               |
| Turn - on Switching Loss         | $E_{on}$      |  | -           | 0.88 | -    | mJ            |
| Turn - off Switching Loss        | $E_{off}$     |  | -           | 1.13 | -    |               |
| Reverse Bias Safe Operating Area | RBSOA         | $I_C = 90\text{A}$ , $V_{CC} = 520\text{V}$ ,<br>$V_P = 650\text{V}$ , $V_{GE} = 15\text{V}$ ,<br>$R_G = 50\Omega$ , $T_j = 175^\circ\text{C}$   | FULL SQUARE |      |      | -             |
| Short Circuit Withstand Time     | $t_{sc}$      | $V_{CC} \leq 360\text{V}$ ,<br>$V_{GE} = 15\text{V}$ , $T_j = 25^\circ\text{C}$  | 8           | -    | -    | $\mu\text{s}$ |
| Short Circuit Withstand Time     | $t_{sc}^{*2}$ | $V_{CC} \leq 360\text{V}$ ,<br>$V_{GE} = 15\text{V}$ , $T_j = 150^\circ\text{C}$   | 6           | -    | -    | $\mu\text{s}$ |

\*2 Design assurance without measurement

●Electrical Characteristic Curves

Fig.1 Power Dissipation vs. Case Temperature

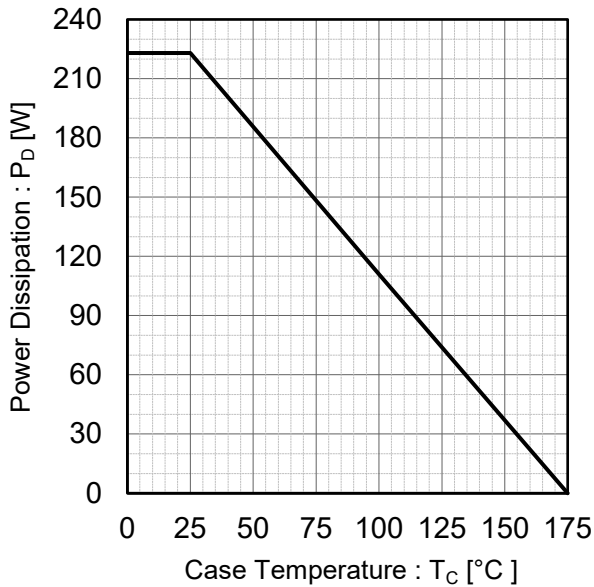


Fig.2 Collector Current vs. Case Temperature

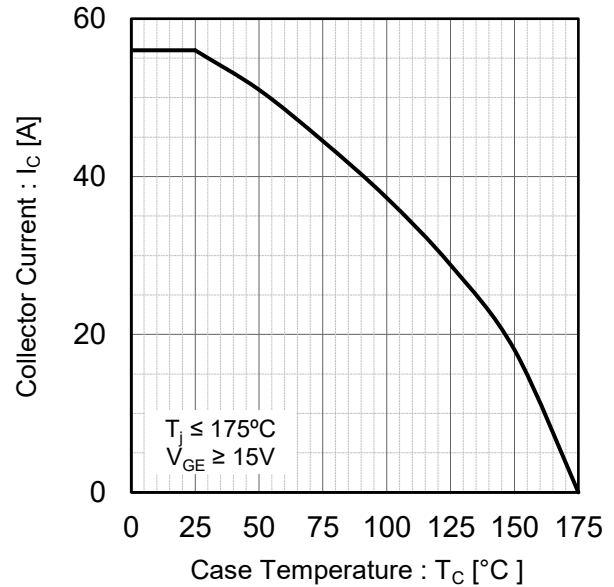


Fig.3 Forward Bias Safe Operating Area


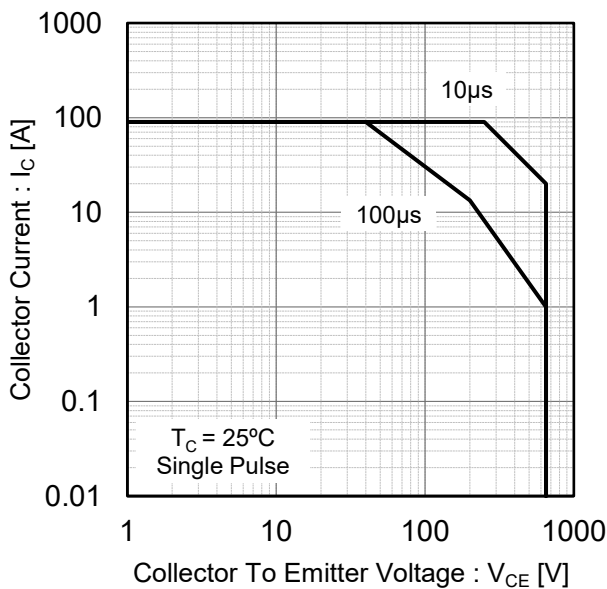


Fig.4 Reverse Bias Safe Operating Area

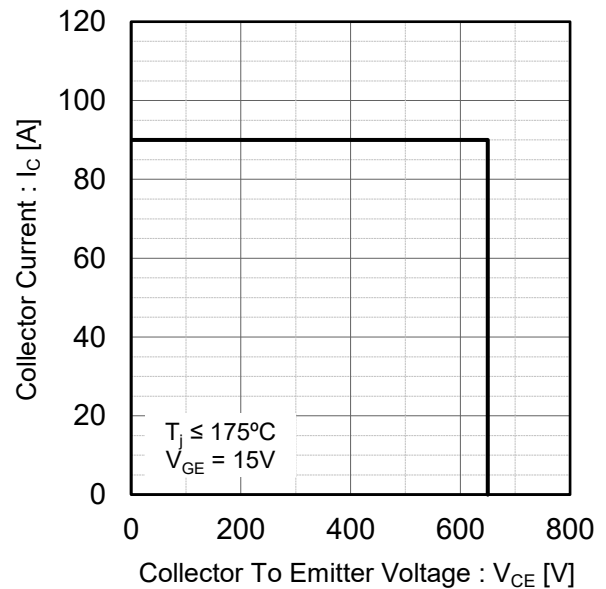

●Electrical Characteristic Curves

Fig.5 Typical Output Characteristics

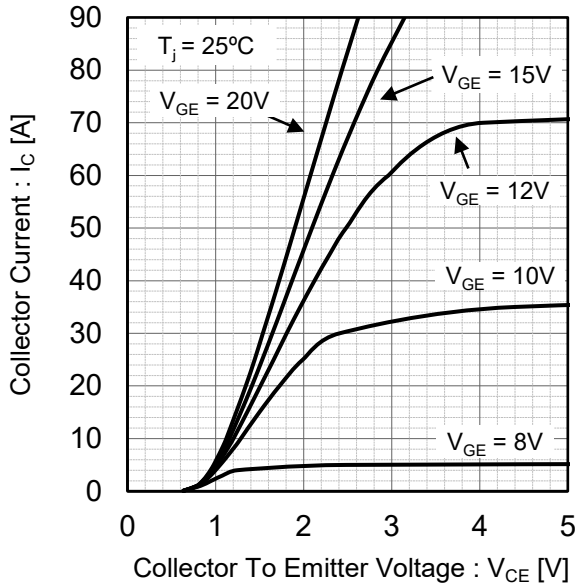


Fig.6 Typical Output Characteristics

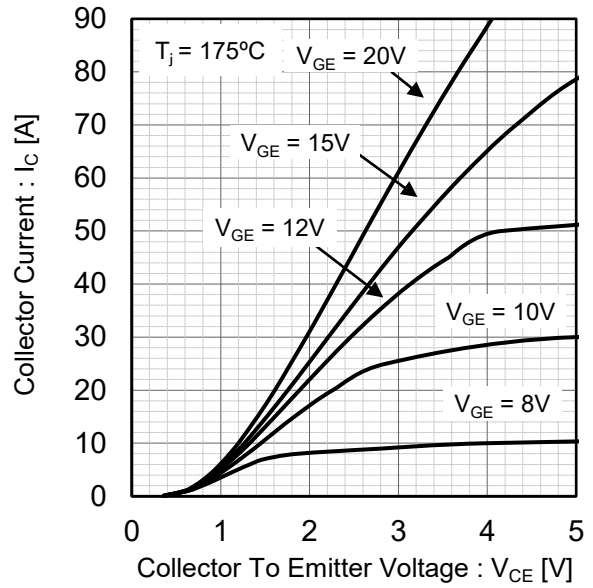


Fig.7 Typical Transfer Characteristics


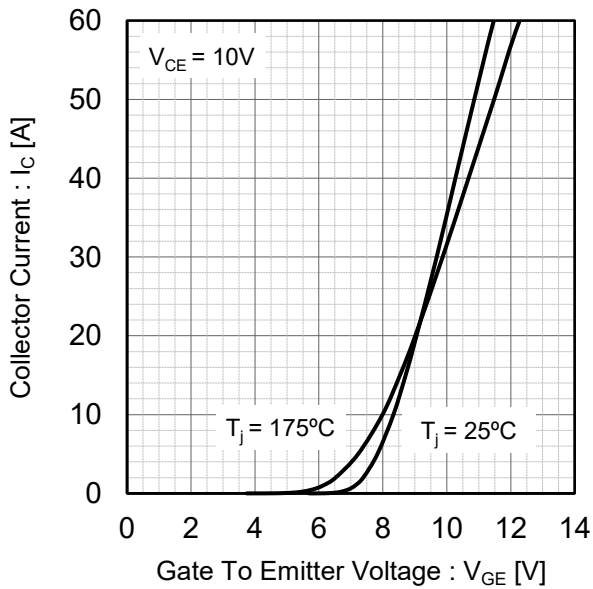


Fig.8 Typical Collector To Emitter Saturation Voltage vs. Junction Temperature

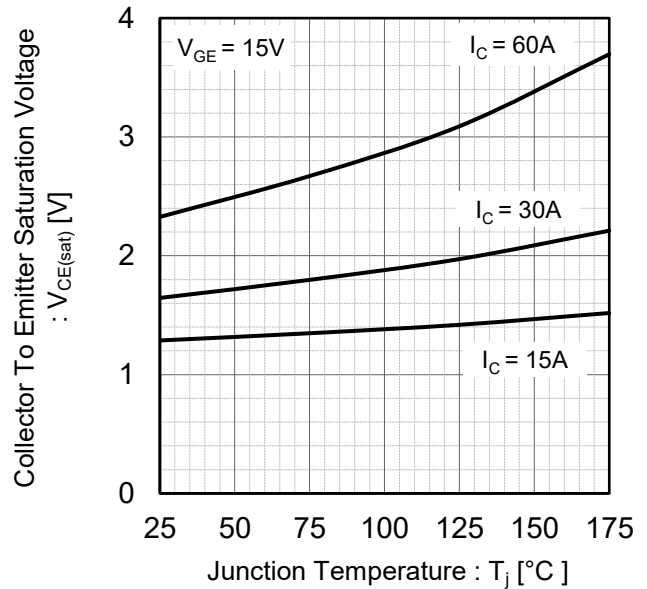

●Electrical Characteristic Curves

Fig.9 Typical Collector To Emitter Saturation Voltage vs. Gate To Emitter Voltage

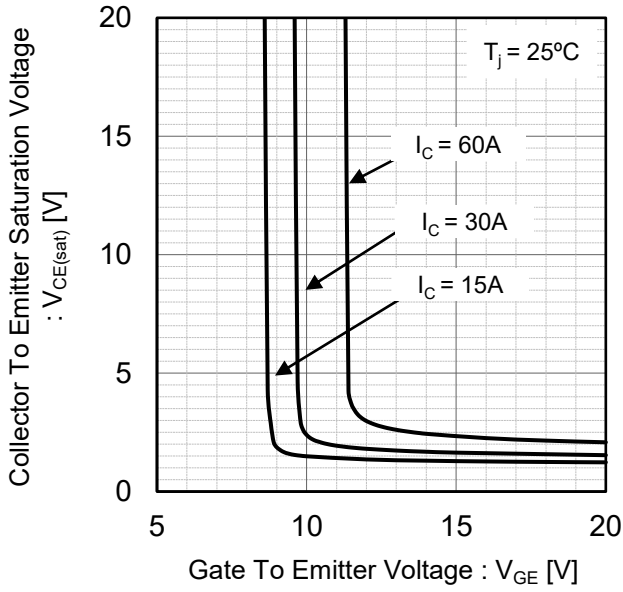


Fig.10 Typical Collector To Emitter Saturation Voltage vs. Gate To Emitter Voltage

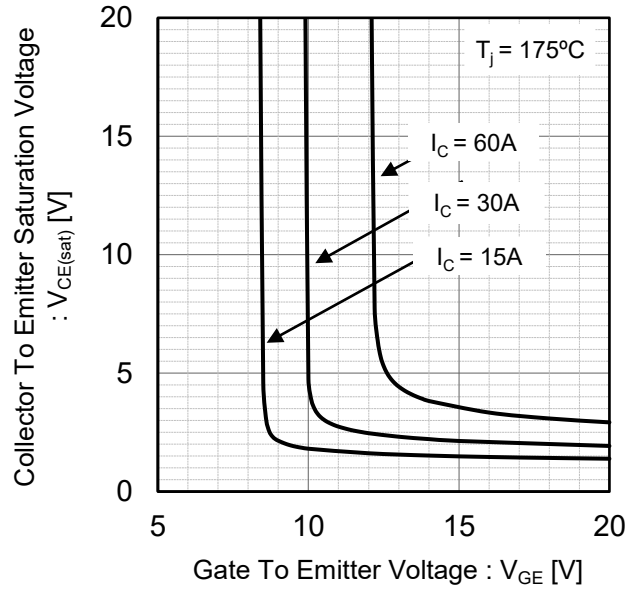


Fig.11 Typical Switching Time vs. Collector Current


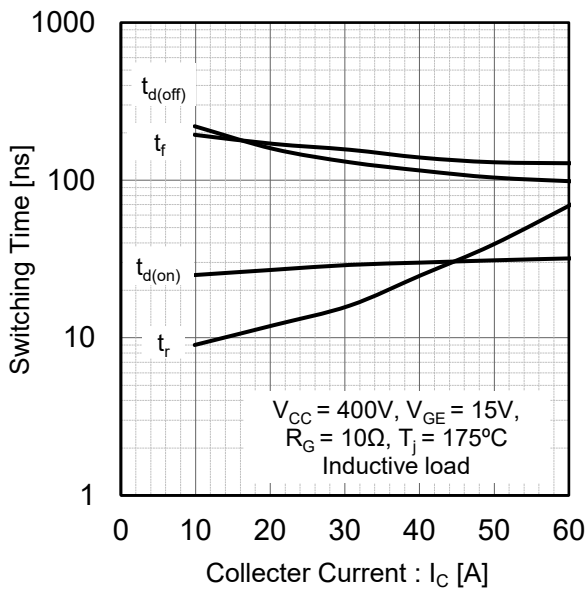


Fig.12 Typical Switching Time vs. Gate Resistance

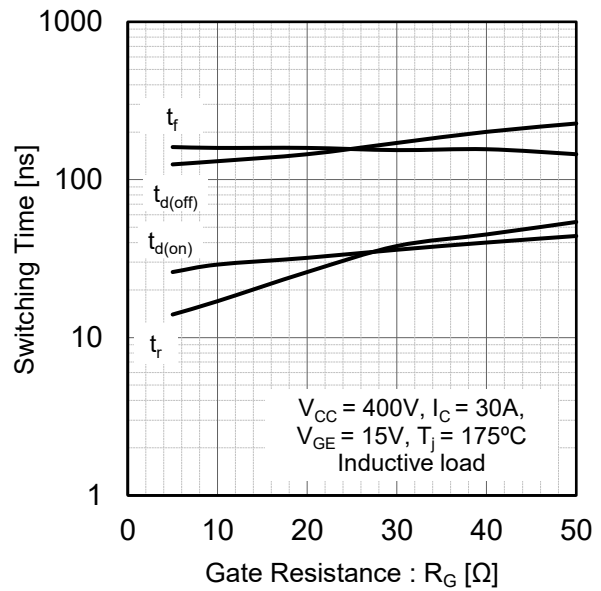

●Electrical Characteristic Curves

Fig.13 Typical Switching Energy Losses vs. Collector Current

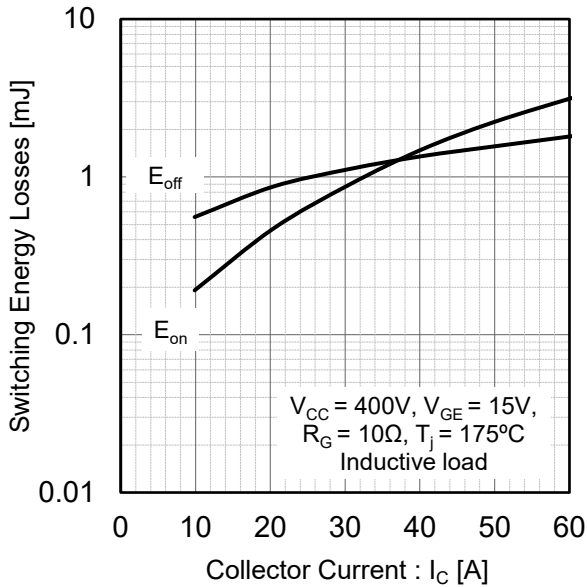


Fig.14 Typical Switching Energy Losses vs. Gate Resistance

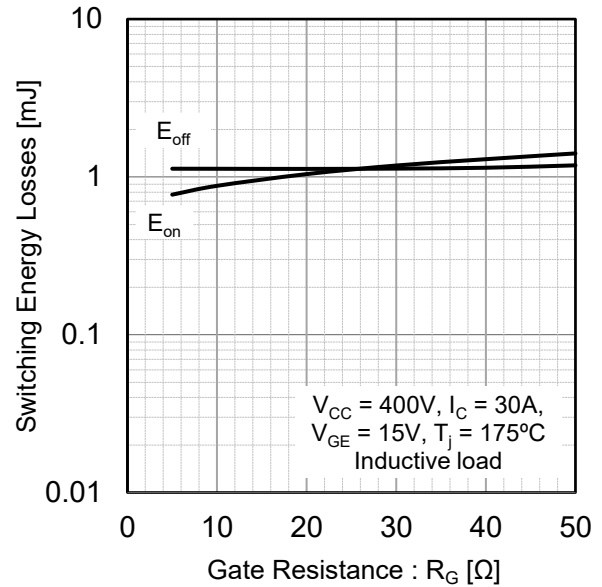


Fig.15 Typical Capacitance vs. Collector To Emitter Voltage



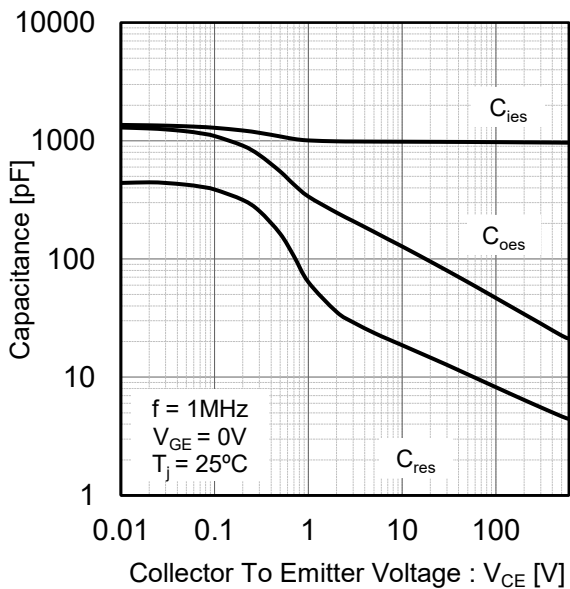


Fig.16 Typical Gate Charge

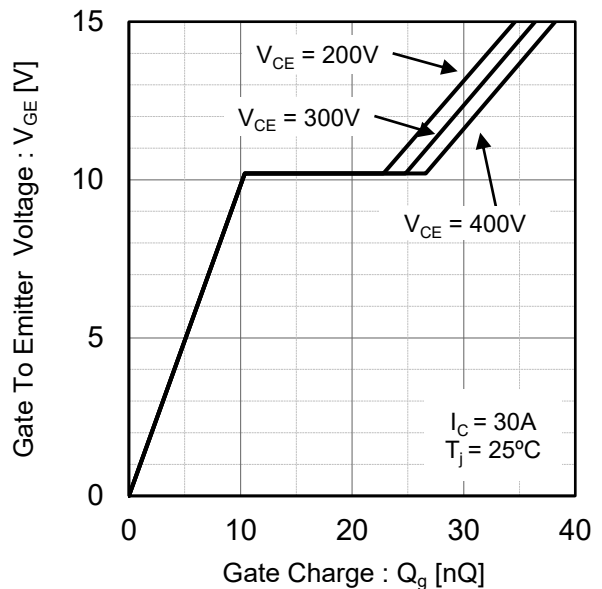

●Electrical Characteristic Curves

Fig.17 IGBT Transient Thermal Impedance

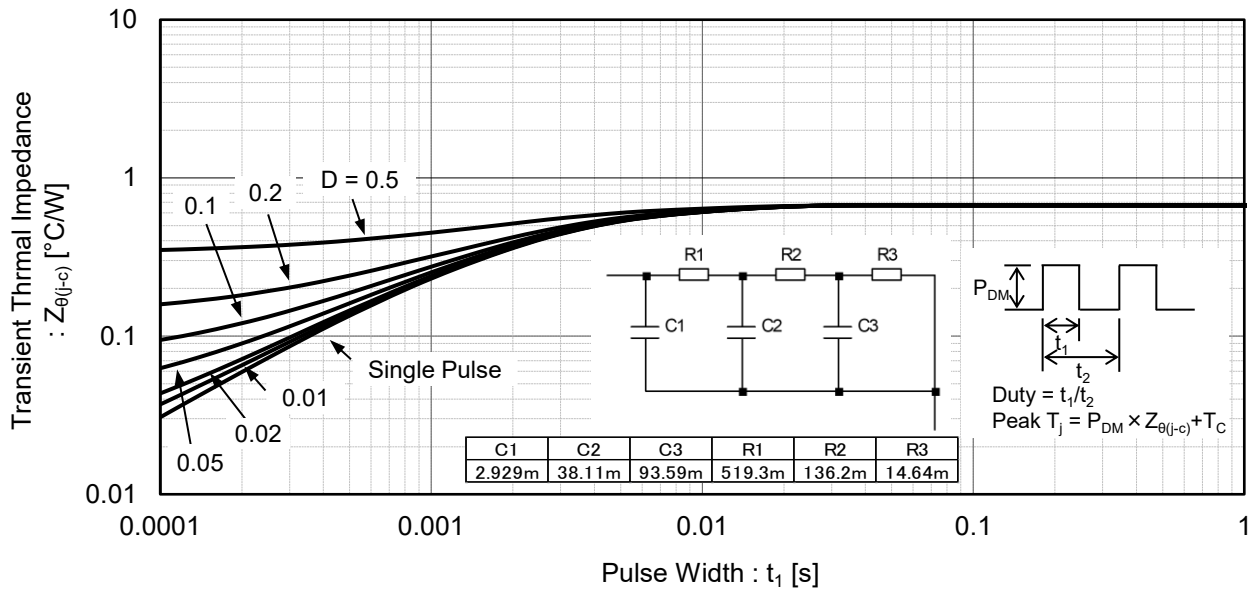



● Inductive Load Switching Circuit and Waveform

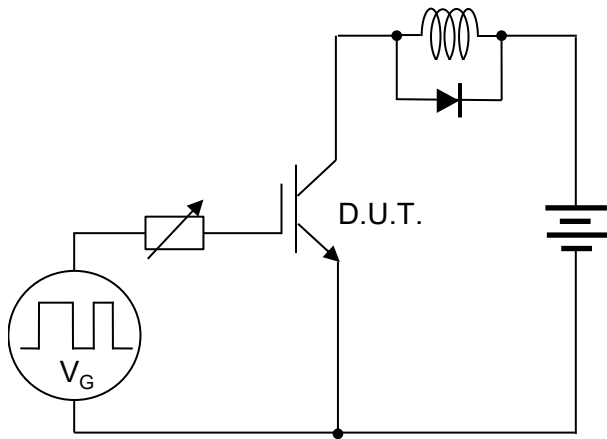


Fig.18 Inductive Load Circuit

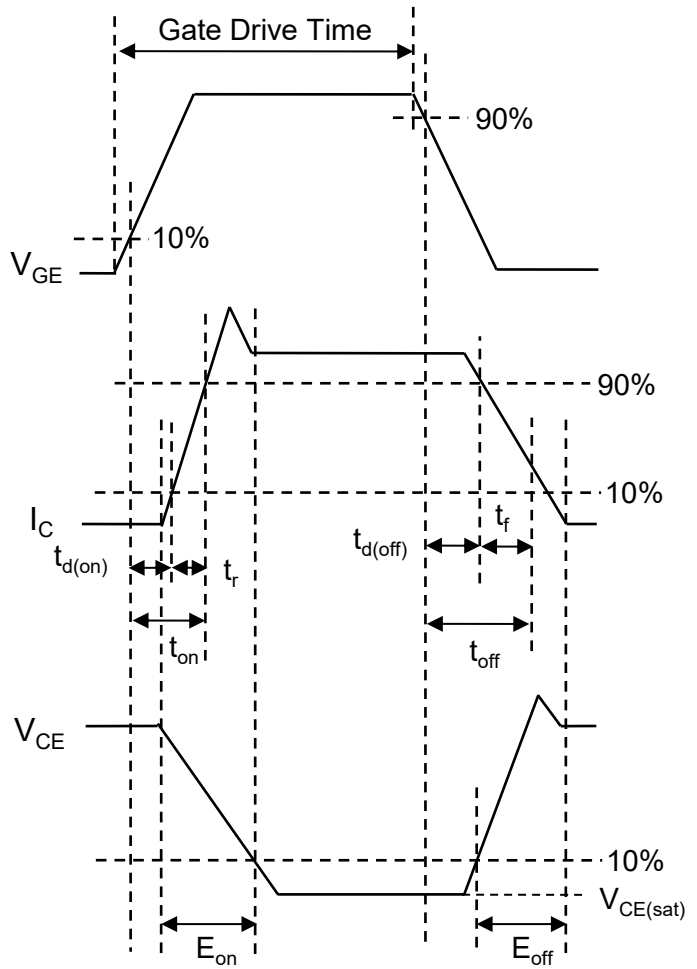


Fig.19 Inductive Load Waveform

## Notes

- 1) The information contained herein is subject to change without notice.
- 2) Before you use our Products, please contact our sales representative and verify the latest specifications :
- 3) Although ROHM is continuously working to improve product reliability and quality, semiconductors can break down and malfunction due to various factors.  
Therefore, in order to prevent personal injury or fire arising from failure, please take safety measures such as complying with the derating characteristics, implementing redundant and fire prevention designs, and utilizing backups and fail-safe procedures. ROHM shall have no responsibility for any damages arising out of the use of our Products beyond the rating specified by ROHM.
- 4) Examples of application circuits, circuit constants and any other information contained herein are provided only to illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.
- 5) The technical information specified herein is intended only to show the typical functions of and examples of application circuits for the Products. ROHM does not grant you, explicitly or implicitly, any license to use or exercise intellectual property or other rights held by ROHM or any other parties. ROHM shall have no responsibility whatsoever for any dispute arising out of the use of such technical information.
- 6) The Products specified in this document are not designed to be radiation tolerant.
- 7) For use of our Products in applications requiring a high degree of reliability (as exemplified below), please contact and consult with a ROHM representative : transportation equipment (i.e. cars, ships, trains), primary communication equipment, traffic lights, fire/crime prevention, safety equipment, medical systems, and power transmission systems.
- 8) Do not use our Products in applications requiring extremely high reliability, such as aerospace equipment, nuclear power control systems, and submarine repeaters.
- 9) ROHM shall have no responsibility for any damages or injury arising from non-compliance with the recommended usage conditions and specifications contained herein.
- 10) ROHM has used reasonable care to ensure the accuracy of the information contained in this document. However, ROHM does not warrant that such information is error-free, and ROHM shall have no responsibility for any damages arising from any inaccuracy or misprint of such information.
- 11) Please use the Products in accordance with any applicable environmental laws and regulations, such as the RoHS Directive. For more details, including RoHS compatibility, please contact a ROHM sales office. ROHM shall have no responsibility for any damages or losses resulting from non-compliance with any applicable laws or regulations.
- 12) When providing our Products and technologies contained in this document to other countries, you must abide by the procedures and provisions stipulated in all applicable export laws and regulations, including without limitation the US Export Administration Regulations and the Foreign Exchange and Foreign Trade Act.
- 13) This document, in part or in whole, may not be reprinted or reproduced without prior consent of ROHM.



Thank you for your accessing to ROHM product informations.  
More detail product informations and catalogs are available, please contact us.

## ROHM Customer Support System

<http://www.rohm.com/contact/>

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ROHM Semiconductor:](#)

[RGS60TS65HRC11](#)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9