


PLG Radial Lead Type, Higher Capacitance



- Higher Capacitance, Low ESR, High ripple current.
- Load life of 2000 hours at 105°C.
- Radial lead type :
Lead free flow soldering condition correspondence
- Compliant to the RoHS directive (2011/65/EU,(EU)2015/863).

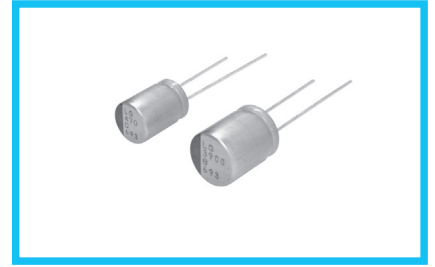


■ Specifications

| Item | Performance Characteristics | | |
|---------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-----------------------------------------------------|
| Category Temperature Range | -55 to +105°C | | |
| Rated Voltage Range | 2.5 to 16V | | |
| Rated Capacitance Range | 330 to 3900µF | | |
| Capacitance Tolerance | ±20% at 120Hz, 20°C | | |
| Tangent of loss angle (tan δ) | Less than or equal to the specified value at 120Hz, 20°C | | |
| ESR (※ 1) | Less than or equal to the specified value at 100kHz, 20°C | | |
| Leakage Current (※ 2) | Less than or equal to the specified value. After 2 minutes' application of rated voltage at 20°C | | |
| Temperature Characteristics (Max.Impedance Ratio) | Z+105°C / Z+20°C ≤ 1.25 (100kHz) Z-55°C / Z+20°C ≤ 1.25 | | |
| Endurance | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 2000 hours at 105°C. | Capacitance change | Within ± 20% of the initial capacitance value (※ 3) |
| | | tan δ | 150% or less than the initial specified value |
| | | ESR (※ 1) | 150% or less than the initial specified value |
| | | Leakage current (※ 2) | Less than or equal to the initial specified value |
| Damp Heat (Steady State) | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 60°C, 90% RH. | Capacitance change | Within ± 20% of the initial capacitance value (※ 3) |
| | | tan δ | 150% or less than the initial specified value |
| | | ESR (※ 1) | 150% or less than the initial specified value |
| | | Leakage current (※ 2) | Less than or equal to the initial specified value |
| Resistance to Soldering Heat | After soldering the capacitor under the soldering conditions prescribed here as preheat at 150 to 200°C for 60 to 180 seconds and peak temperature at 265°C for 10 seconds or less, the capacitor shall meet the specifications listed at right, provided that its temperature profile is measured at both of terminal ends facing the soldering side. | Capacitance change | Within ± 10% of the initial capacitance value (※ 3) |
| | | tan δ | 130% or less than the initial specified value |
| | | ESR (※ 1) | 130% or less than the initial specified value |
| | | Leakage current (※ 2) | Less than or equal to the initial specified value |
| Marking | Navy blue print on the case top | | |

- ※ 1 ESR should be measured at both of the terminal ends closest to the capacitor body.
- ※ 2 Conditioning : If any doubt arises, measure the leakage current after the voltage treatment of applying DC rated voltage continuously to the capacitor for 120 minutes at 105°C.
- ※ 3 Initial value : The value before test of examination of resistance to soldering.


■ Dimensions

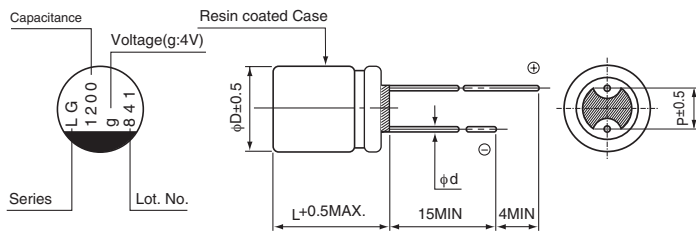

| (mm) | | | |
|------|---------|----------|-----------|
| Size | φ8 × 9L | φ8 × 12L | φ10 × 13L |
| φD | 8.0 | 8.0 | 10.0 |
| L | 8.5 | 11.5 | 12.5 |
| p | 3.5 | 3.5 | 5.0 |
| φd | 0.6 | 0.6 | 0.6 |

| Voltage | | | | | |
|---------|-----|---|-----|----|----|
| V | 2.5 | 4 | 6.3 | 10 | 16 |
| Code | e | g | j | A | C |

Type numbering system (Example : 4V 1200µF)

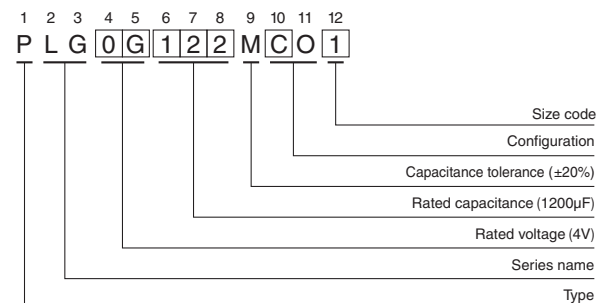

● Frequency coefficient of rated ripple current

| Frequency | 120Hz | 1kHz | 10kHz | 100kHz or more |
|-------------|-------|------|-------|----------------|
| Coefficient | 0.05 | 0.30 | 0.70 | 1.00 |

Please refer to page 20 about the end seal configuration.

● Dimension table in next page.

PLG

■ Dimensions

| Rated Voltage (V) Code | Surge Voltage (V) | Rated Capacitance (μF) | Case Size φD × L (mm) | tan δ | Leakage Current (μA) | ESR (mΩ) (at 100kHz 20°C) | Rated Ripple (mA _{rms}) (105°C/100kHz) | Part Number |
|------------------------|-------------------|------------------------|-----------------------|-------|----------------------|---------------------------|--------------------------------------------------|--------------|
| 2.5 (0E) | 2.8 | 1800 | 8 × 9 | 0.08 | 900 | 9 | 6000 | PLG0E182MCO1 |
| | | 2200 | 8 × 12 | 0.08 | 1100 | 8 | 6700 | PLG0E222MDO1 |
| | | 2700 | 10 × 13 | 0.08 | 1350 | 8 | 5560 | PLG0E272MDO1 |
| | | 3900 | 10 × 13 | 0.08 | 1950 | 8 | 7000 | PLG0E392MDO1 |
| 4 (0G) | 4.6 | 1200 | 8 × 9 | 0.08 | 960 | 9 | 5900 | PLG0G122MCO1 |
| | | 1800 | 8 × 12 | 0.08 | 1440 | 9 | 6500 | PLG0G182MDO1 |
| | | 2700 | 10 × 13 | 0.08 | 2160 | 8 | 6900 | PLG0G272MDO1 |
| 6.3 (0J) | 7.2 | 820 | 8 × 9 | 0.08 | 1033 | 9 | 5700 | PLG0J821MCO1 |
| | | 1200 | 8 × 12 | 0.08 | 1512 | 9 | 6100 | PLG0J122MDO1 |
| | | 1500 | 10 × 13 | 0.08 | 1890 | 9 | 6300 | PLG0J152MDO1 |
| | | 1800 | 10 × 13 | 0.08 | 2268 | 8 | 6600 | PLG0J182MDO1 |
| 10 (1A) | 11.5 | 560 | 8 × 9 | 0.08 | 1120 | 11 | 5100 | PLG1A561MCO1 |
| | | 820 | 8 × 12 | 0.08 | 1640 | 10 | 5800 | PLG1A821MDO1 |
| | | 1200 | 10 × 13 | 0.08 | 2400 | 9 | 6200 | PLG1A122MDO1 |
| 16 (1C) | 18.4 | 330 | 8 × 9 | 0.08 | 1056 | 13 | 4700 | PLG1C331MCO1 |
| | | 470 | 8 × 12 | 0.08 | 1504 | 11 | 5400 | PLG1C471MDO1 |
| | | 820 | 10 × 13 | 0.08 | 2624 | 11 | 5600 | PLG1C821MDO1 |

Rated ripple current (mA_{rms}) at 105°C 100kHz

- Please refer to page 20, 21, 22 about the formed or taped product spec.
- Please refer to page 3 for the minimum order quantity.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9