



Main

| | |
|------------------------------------|--|
| Range of product | Harmony XVC6 |
| Product or component type | Complete pre-wired monolithic tower light |
| Beacon or indicator bank unit type | 5 illuminated units |
| Sound signalling | Buzzer |
| Mounting diameter | 2.36 in (60 mm) |
| Component name | XVC |
| Light source | Blue LED steady or flashing Clear LED steady or flashing Green LED steady or flashing Orange LED steady or flashing Red LED steady or flashing |
| [Us] rated supply voltage | 100...240 V |
| Supply circuit type | AC |
| Noise level | 70...85 dB (continuous or intermittent tone) at 1 m |

Complementary

| | |
|--|--|
| Material | Polycarbonate (illuminated unit) ABS (acrylonitrile butadiene-styrene) (base unit) PBT + ABS (UL94-V0) (top cover) |
| Product mounting | On support tube, 22 mm |
| Cable cross section | 0 in ² (0.33 mm ²) 0 in ² (0.83 mm ²) |
| AWG gauge | AWG 18 AWG 22 |
| Cable length | 17.72 in (450 mm) |
| Marking | CE |
| [Uimp] rated impulse withstand voltage | 4 kV |
| Current consumption | 115 mA |
| Fundamental frequency | 2.23 kHz |
| Flashing frequency | 1 Hz |
| Product weight | 2.71 lb(US) (1.23 kg) |
| Height | 29.91 in (759.8 mm) |

Environment

| | |
|---------------------------------------|--|
| standards | EN/IEC 60947-1 EN/IEC 60947-5-1 |
| product certifications | UL |
| protective treatment | TC |
| ambient air temperature for storage | -31...158 °F (-35...70 °C) |
| ambient air temperature for operation | 14...122 °F (-10...50 °C) |
| electrical shock protection class | Class I conforming to EN/IEC 61140 |
| IP degree of protection | IP23 in vertical surface installation conforming to EN/IEC 60529 IP54 in flat surface installation conforming to EN/IEC 60529 |

Offer Sustainability

| | |
|---|---|
| Green Premium product | Green Premium product |
| Compliant - since 0808 - Schneider Electric declaration of conformity | Compliant - since 0808 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold | Reference not containing SVHC above the threshold |

| | |
|--|--|
| Available | Available |
| Need no specific recycling operations | Need no specific recycling operations |
| WARNING: This product can expose you to chemicals including: | WARNING: This product can expose you to chemicals including: |
| Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| For more information go to www.p65warnings.ca.gov | For more information go to www.p65warnings.ca.gov |


Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|

Pre-assembled and Pre-wired Tower Light with Support Tube Mounting

Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get **b1** dimension.

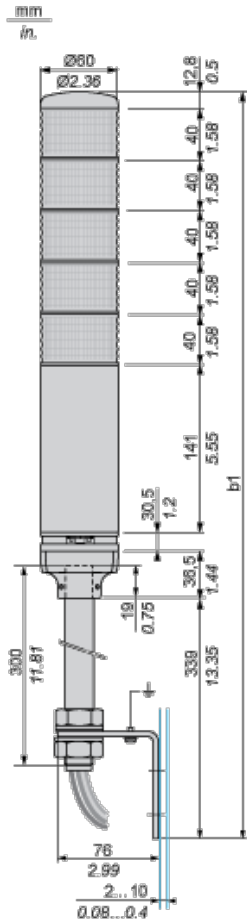

| No. of illuminated units | b1 With buzzer (mm) | b1 With buzzer (in.) |
|--------------------------|---------------------|----------------------|
| 1 stage | 599.8 | 23.61 |
| 2 stages | 639.8 | 25.19 |
| 3 stages | 679.8 | 26.76 |
| 4 stages | 719.8 | 28.34 |
| 5 stages | 759.8 | 29.91 |

Pre-assembled and Pre-wired Tower Light

Support Tube Mounting



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9