



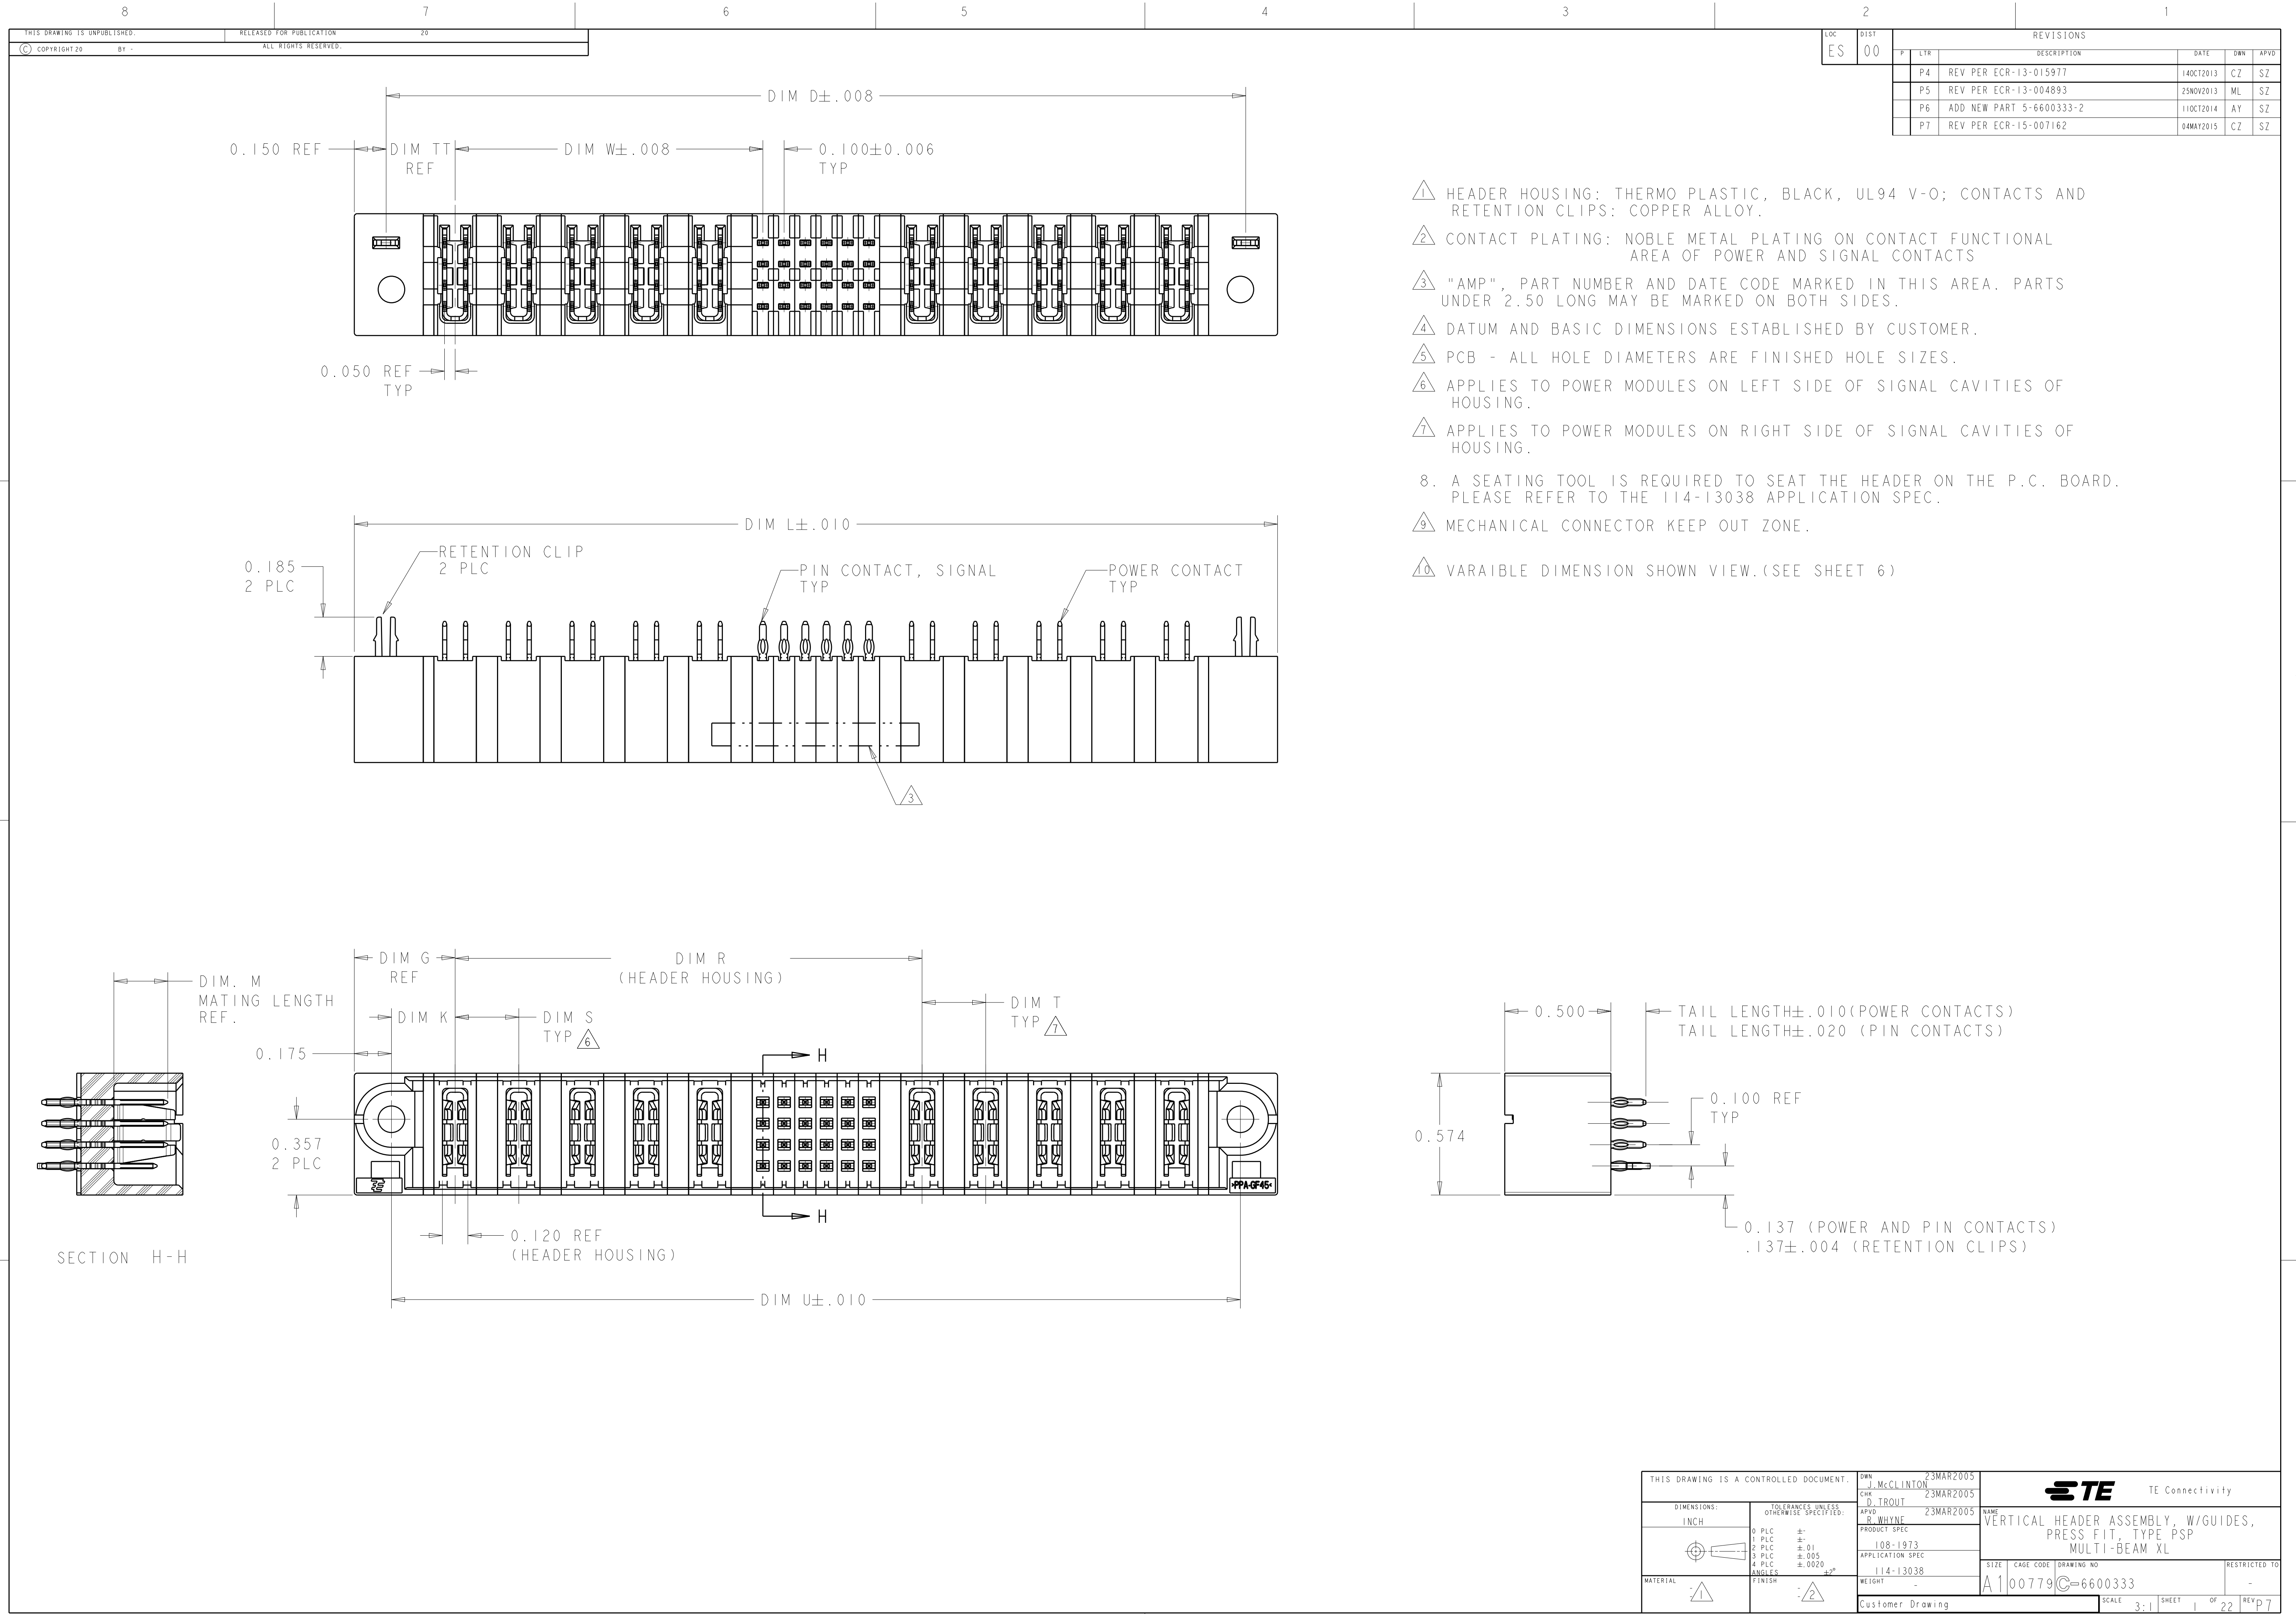

LOC	DIST	REVISIONS						
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		P4	REV PER ECR-13-015977	14OCT2013	CZ	SZ		
		P5	REV PER ECR-13-004893	25NOV2013	ML	SZ		
		P6	ADD NEW PART 5-6600333-2	11OCT2014	AY	SZ		
		P7	REV PER ECR-15-007162	04MAY2015	CZ	SZ		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	
DIMENSIONS: INCH		CHK D. TROUT 23MAR2005		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. WHYNE 23MAR2005	NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
0 PLC $\pm .$		PRODUCT SPEC	SIZE	
1 PLC $\pm .01$		108-1973	CAGE CODE	
2 PLC $\pm .01$		APPLICATION SPEC	DRAWING NO	
3 PLC $\pm .005$		114-13038	RESTRICTED TO	
4 PLC $\pm .0020$		WEIGHT	A100779C=6600333	
ANGLES $\neq 2^\circ$		Customer Drawing	SCALE 3:1 SHEET 1 OF 22 REV P7	
FINISH $\triangle 2$				

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

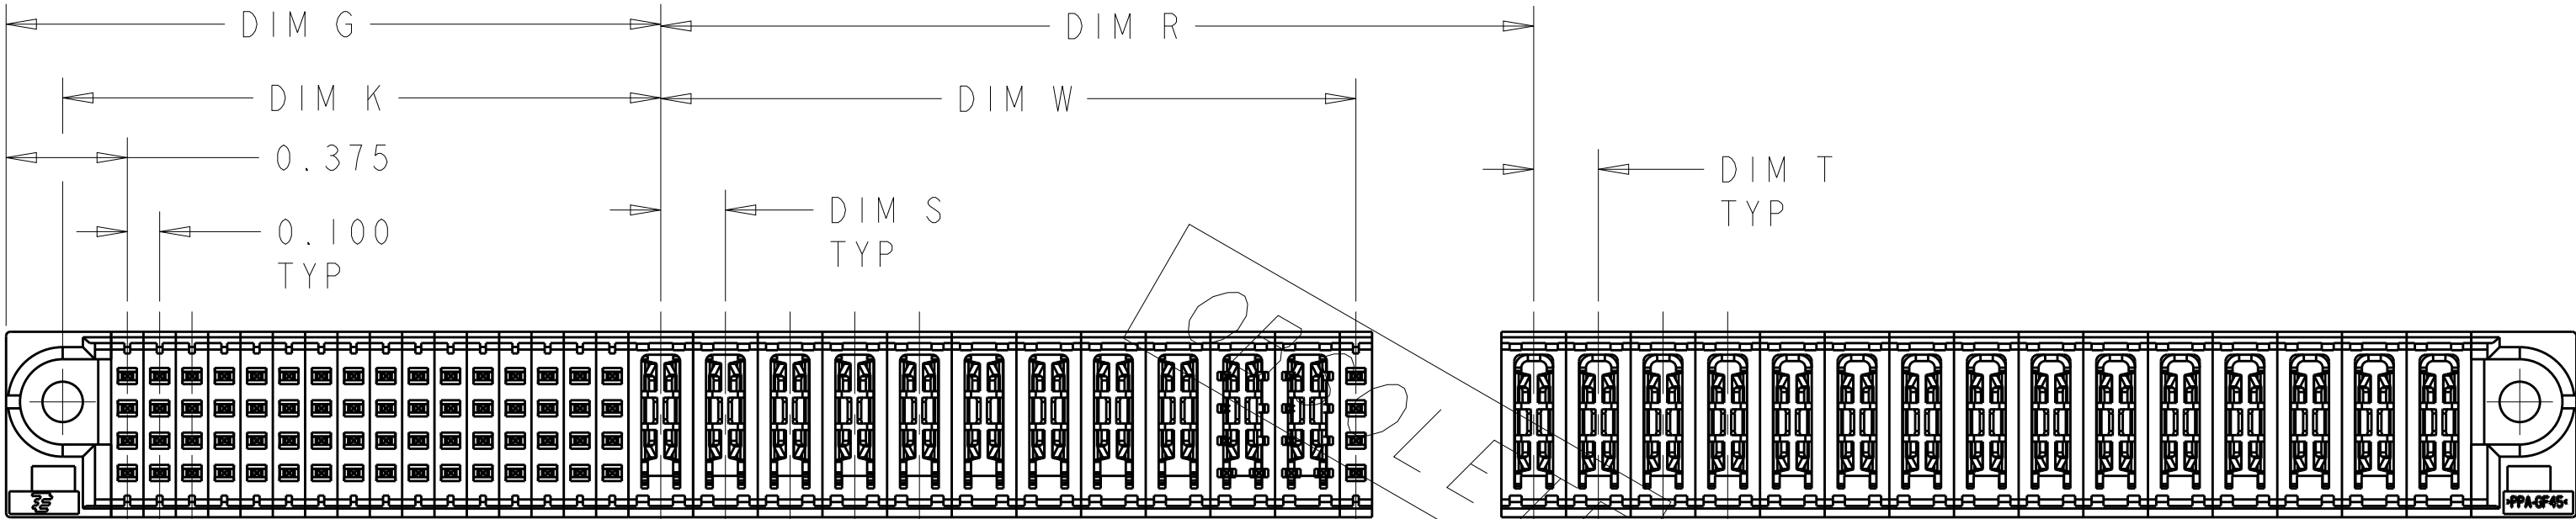

PART NUMBER 2-6600333-3
UNSPECIFIED REFER TO TEH SHEET 1

P6	.300	.425	2.500	.250	.250	1.700	2.850	.275	.450	2.550	NO	2P + 48S + 2P	5-6600333-2
	.300	1.425	4.250	.250	.250	2.700	4.600	.275	.450	4.300	NO	6P + 48S + 5P	5-6600333-1
P1	.300	.425	2.400	.250	.250	1.100	2.750	.275	.450	2.450	NO	2P + 24S + 4P	5-6600333-0
	.300	.175	1.100	-	-	.550	1.450	.275	.450	1.150	YES	1P + 12S + 1P	4-6600333-9
N7	.300	1.225	4.000	.250	.250	2.200	4.350	.275	.450	4.057	NO	5P + 24S + 6P	4-6600333-8
N3	.300	.925	2.600	.250	.250	1.300	2.950	.275	.450	2.650	YES	4P + 12S + 4P	4-6600333-6
N5	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S+ 2ACP	4-6600333-5
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	4-6600333-4
N4	.325	.550	2.200	.300	.300	1.300	2.550	.300	.475	2.250	YES	2ACP + 24S + 2ACP	4-6600333-3
	.300	1.925	4.700	.250	.250	2.400	5.050	.275	.450	4.750	YES	8P + 16S + 8P	4-6600333-2
	.300	.425	1.600	.250	.250	.800	1.950	.275	.450	1.650	YES	2P + 12S + 2P	4-6600333-1
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	3-6600333-9
	.300	1.425	3.500	.250	.250	1.700	3.850	.275	.450	3.550	YES	6P + 8S + 6P	3-6600333-8
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	3-6600333-7
	.300	.925	3.700	.250	.250	2.400	4.050	.275	.450	3.750	NO	4P + 56S + 4P	3-6600333-6
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	3-6600333-5
	.300	.925	2.500	.250	.250	1.200	2.850	.275	.450	2.550	YES	4P + 8S + 4P	3-6600333-4
	.300	.925	2.700	.250	.250	1.400	3.050	.275	.450	2.750	NO	4P + 16S + 4P	3-6600333-3
	.300	.925	2.900	.250	.250	1.600	3.250	.275	.450	2.950	NO	4P + 24S + 4P	3-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	3-6600333-1
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	3-6600333-0
	.300	.425	2.100	-	.250	1.300	2.450	.275	.450	2.150	YES	2P + 32S + 2P	2-6600333-9
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-8
	.300	.975	3.250	.250	.250	1.700	3.600	.275	.450	3.300	YES	4P + 24S + 5P	2-6600333-7
	.300	.675	2.400	.250	.250	1.350	2.750	.275	.450	2.450	YES	3P + 24S + 3P	2-6600333-6
	.300	.925	2.450	.250	.250	1.400	2.800	.275	.450	2.500	YES	4P + 16S + 3P	2-6600333-5
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-4
	1.875	2.150	7.600	.200	.200	2.700	7.950	1.850	2.025	7.650	YES	64S+11P+20S+15P	2-6600333-3
	.275	2.000	5.450			2.650	5.800	.250	.425	5.500	YES	10P + 24S + 12P	2-6600333-2
	.325	1.750	4.800	.250	.300	2.475	5.150	.300	.475	4.850	YES	6ACP + 24S + 8P	2-6600333-1
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	1-6600333-6
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-5
	.300	.975	3.200	.250	.250	1.900	3.550	.275	.450	3.250	YES	4P + 32S + 4P	1-6600333-4
	.300	1.425	3.900	.250	.250	2.100	4.250	.275	.450	3.950	YES	6P + 24S + 6P	1-6600333-3
	.300	.425	1.900	.250	.250	1.100	2.250	.275	.450	1.950	YES	2P + 24S + 2P	1-6600333-2
	.325	.850	2.800	.300	.300	1.600	3.150	.300	.475	2.850	YES	3ACP + 24S + 3ACP	1-6600333-1
	.300	.475	1.800	.250	.250	1.000	2.150	.275	.450	1.850	YES	2P + 16S + 2P	1-6600333-0
	.300	.225	1.300	-	-	.750	1.650	.275	.450	1.350	YES	1P + 16S + 1P	6600333-9
	.300	.425	3.250	-	.250	2.700	3.600	.275	.450	3.300	YES	2P + 88S + 1P	6600333-8
	.300	.725	2.300	.250	.250	1.250	2.650	.275	.450	2.350	YES	3P + 16S + 3P	6600333-7
	.300	.975	3.000	.250	.250	1.700	3.350	.275	.450	3.050	YES	4P + 24S + 4P	6600333-6
	.300	.475	2.000	.250	.250	1.200	2.350	.275	.450	2.050	YES	2P + 24S + 2P	6600333-5
	.300	.425	1.700	.250	.250	.900	2.050	.275	.450	1.750	YES	2P + 16S + 2P	6600333-4
	.325	1.450	4.000	.300	.300	2.200	4.350	.300	.475	4.050	YES	5ACP + 24S + 5ACP	6600333-1
DIM "TT"	DIM "W"	DIM "U"	DIM "T"	DIM "S"	DIM "R"	DIM "L"	DIM "K"	DIM "G"	DIM "D"	RETENTION CLIP		DESCRIPTION	PART NO

OBSOLETE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.010
1 PLC ±.010
2 PLC ±.010
3 PLC ±.010
4 PLC ±.010
ANGLES ±.0020
FINISH

MATERIAL

-

DWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

SCALE 3:1

SHEET 2 OF 22


REV P7

TE Connectivity


NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE A100779C=6600333

RESTRICTED TO -

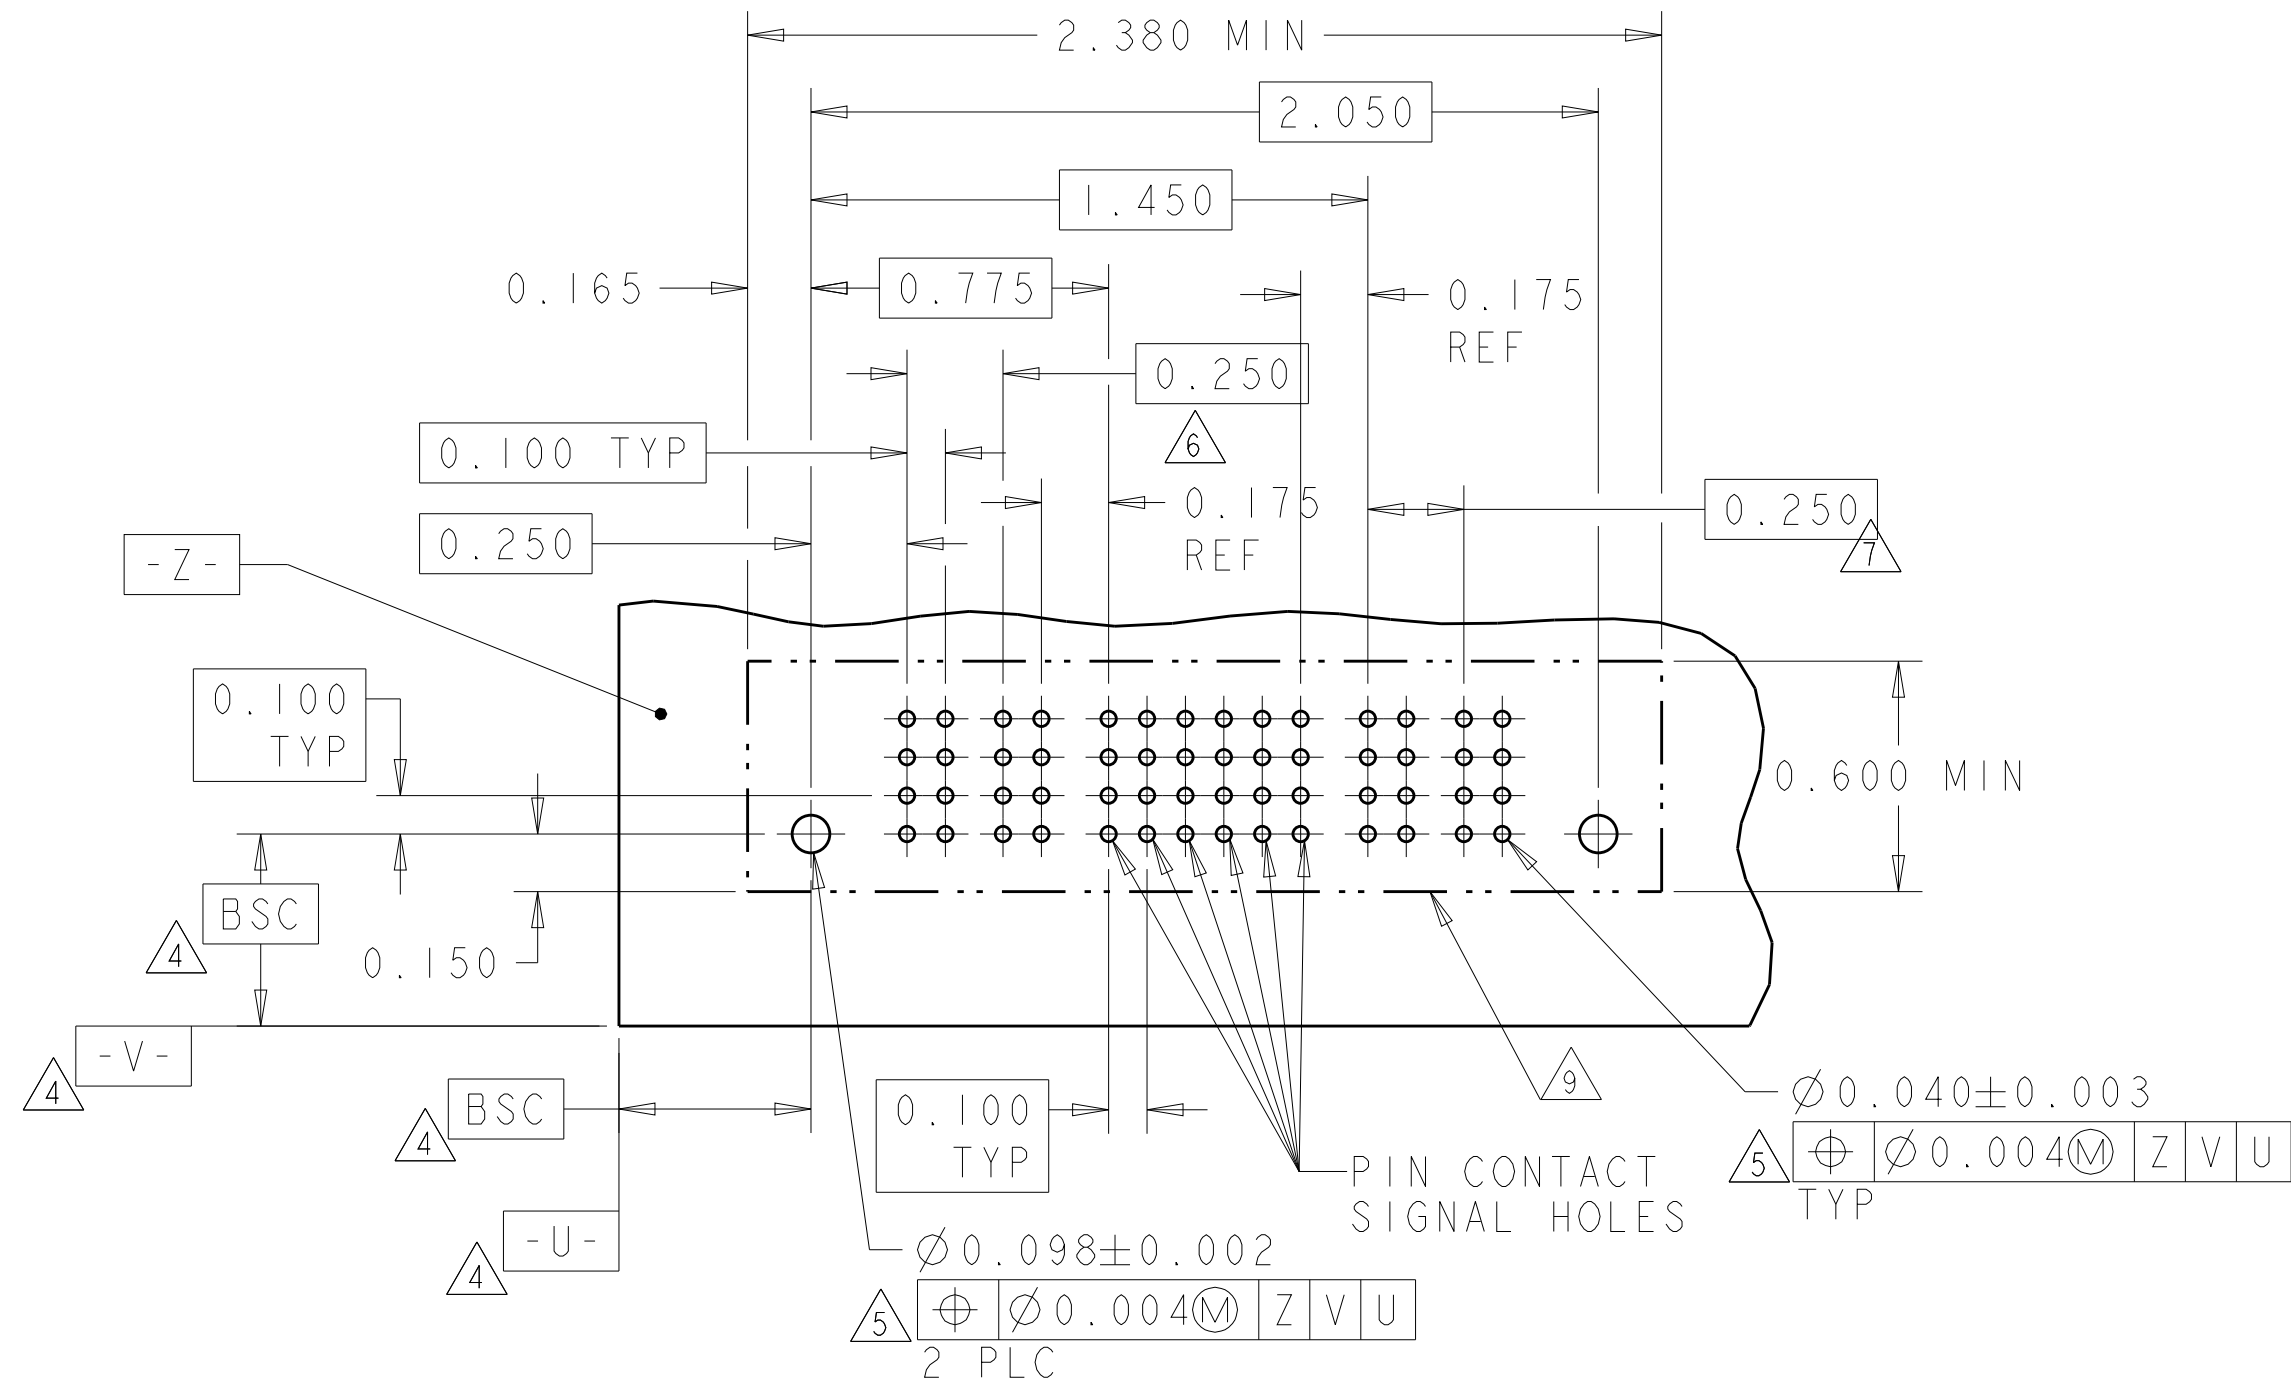[illegible]

RECOMMENDED PCB LAYOUT 6600333-5
SCALE 2:1

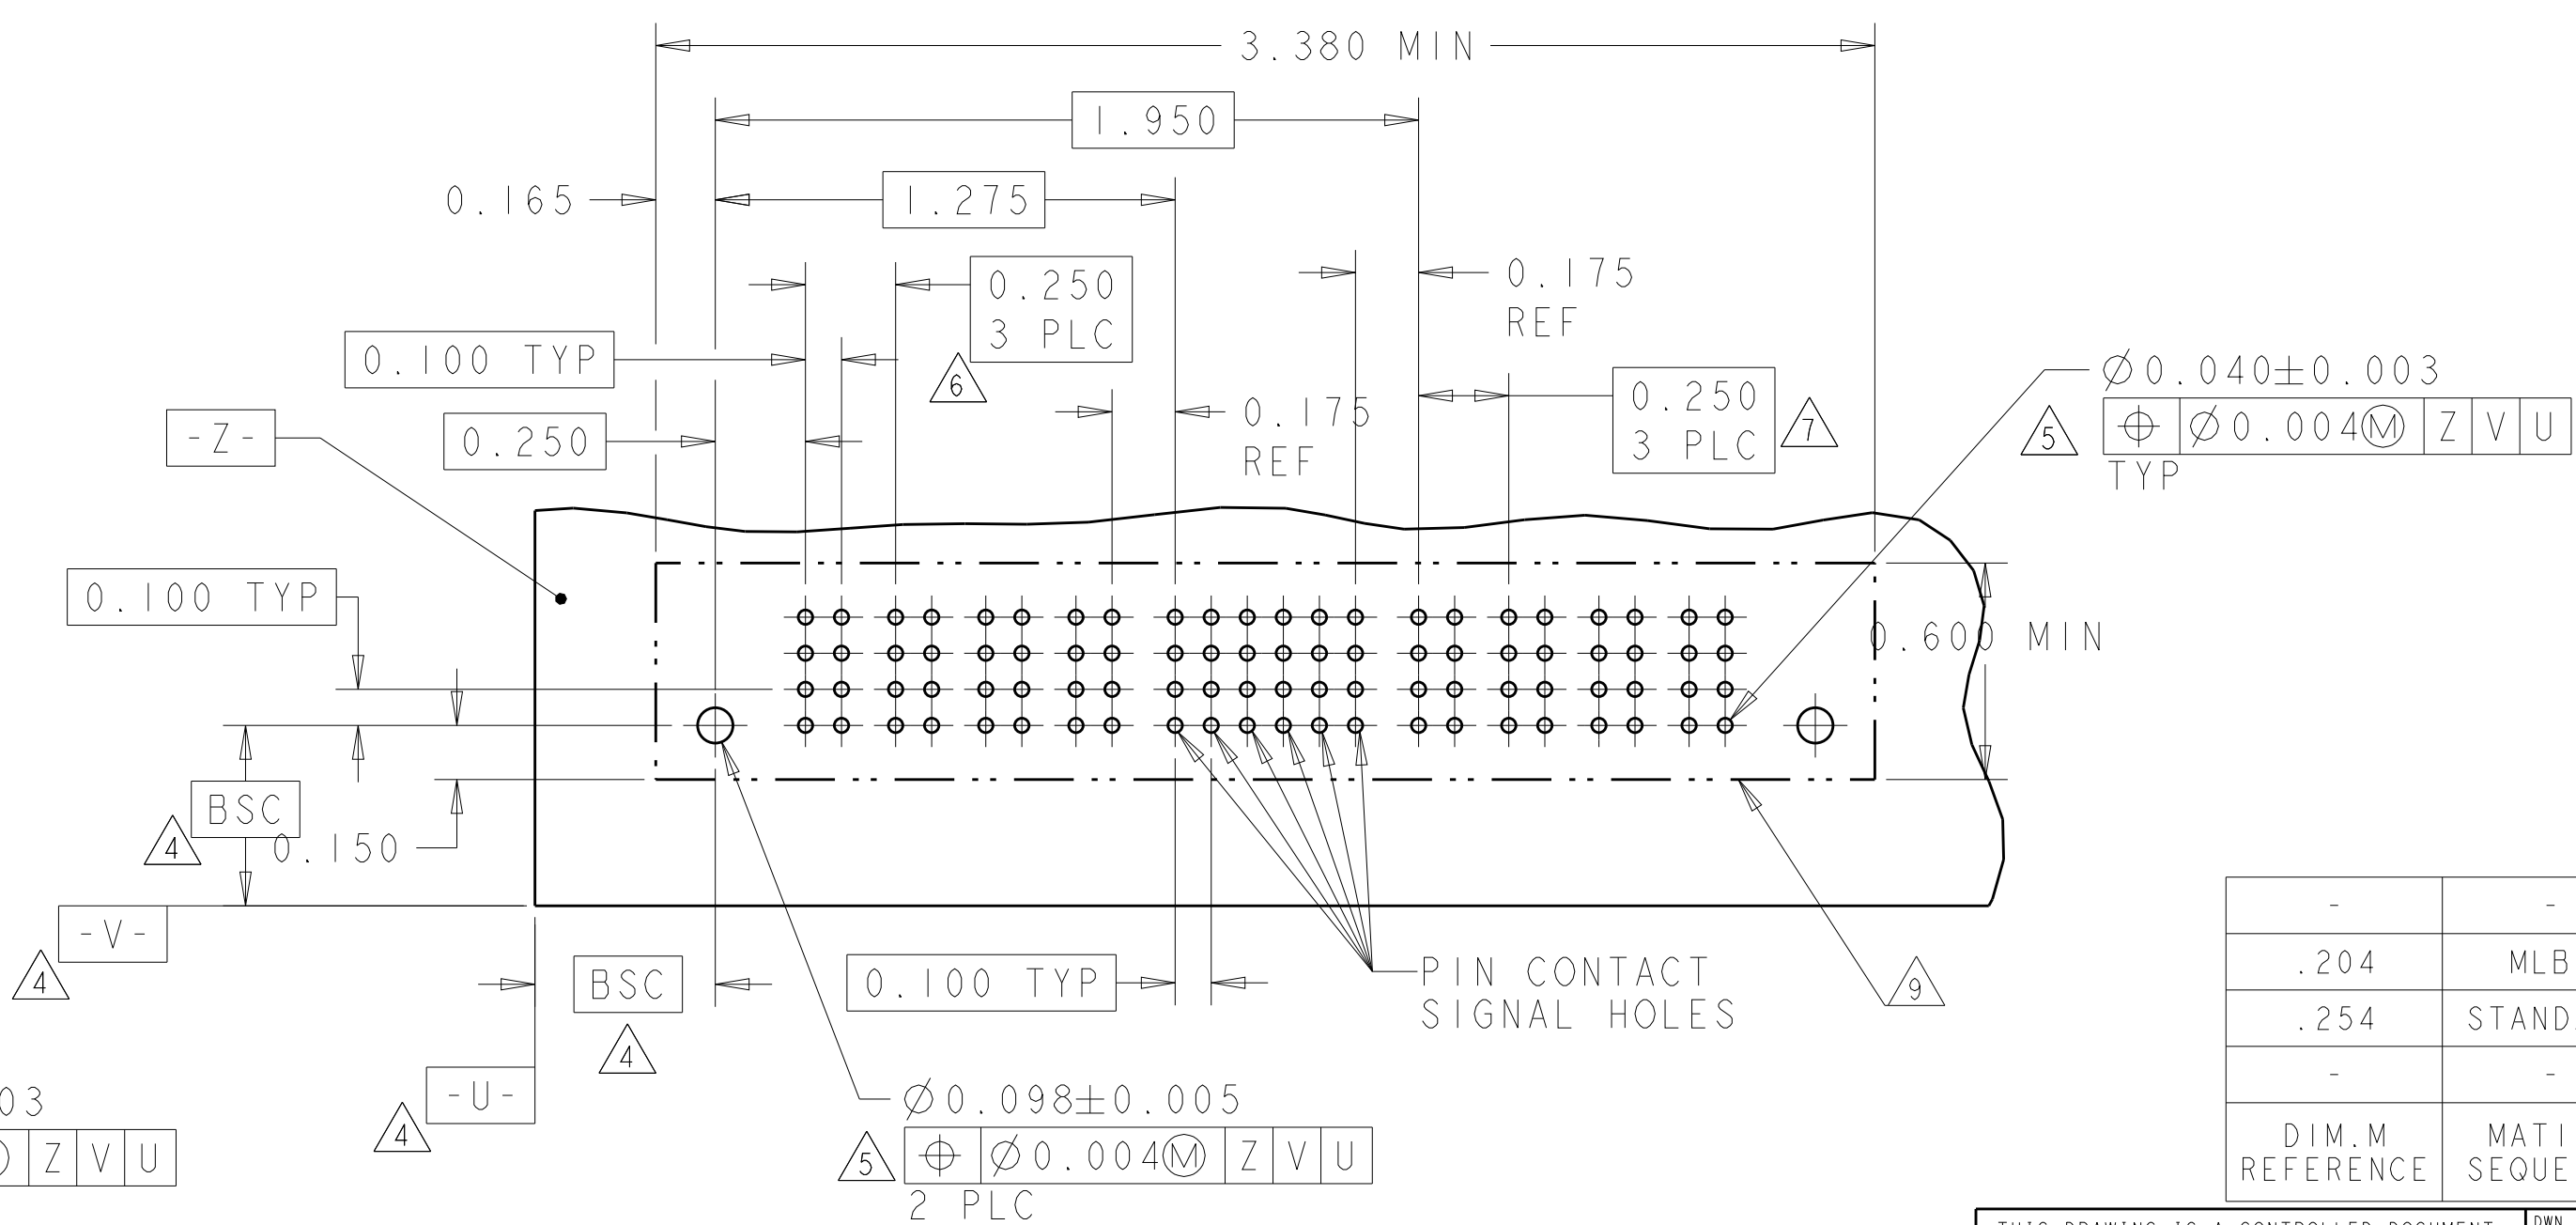
[illegible]

RECOMMENDED PCB LAYOUT 6600333-6
SCALE 2:1

-	-	RETENTION CLIP	HD
.204	MLBF	SIGNAL CONTACT .165 TAIL LENGTH	ES
.254	STANDARD	SIGNAL CONTACT .165 TAIL LENGTH	EV
-	-	POWER CONTACT .165 TAIL LENGTH	VM
DIM.M REFERENCE	MATING SEQUENCE	DESCRIPTION	IDENTIFIER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J McCLINTON CHK 23MAR2005 D TROUT APVD 23MAR2005 R WHYNE		 TE Connectivity	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES 2°		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038		SIZE A1	
MATERIAL -		FINISH -		CAGE CODE 6600333	
		WEIGHT -		DRAWING NO 6600333	
		Customer Drawing		SCALE 3:1 SHEET 3 OF 22 REV P7	


PART NUMBER	ROWS		POWER	SIGNAL					POWER	
			P1	1	2	3	4	P2		
6600333-9	D		VM	ES	EV	ES	EV	VM		
	C			EV	EV	EV	EV			
	B			ES	EV	ES	EV			
	A			ES	EV	ES	EV			
IP+16S+IP		HD								HD

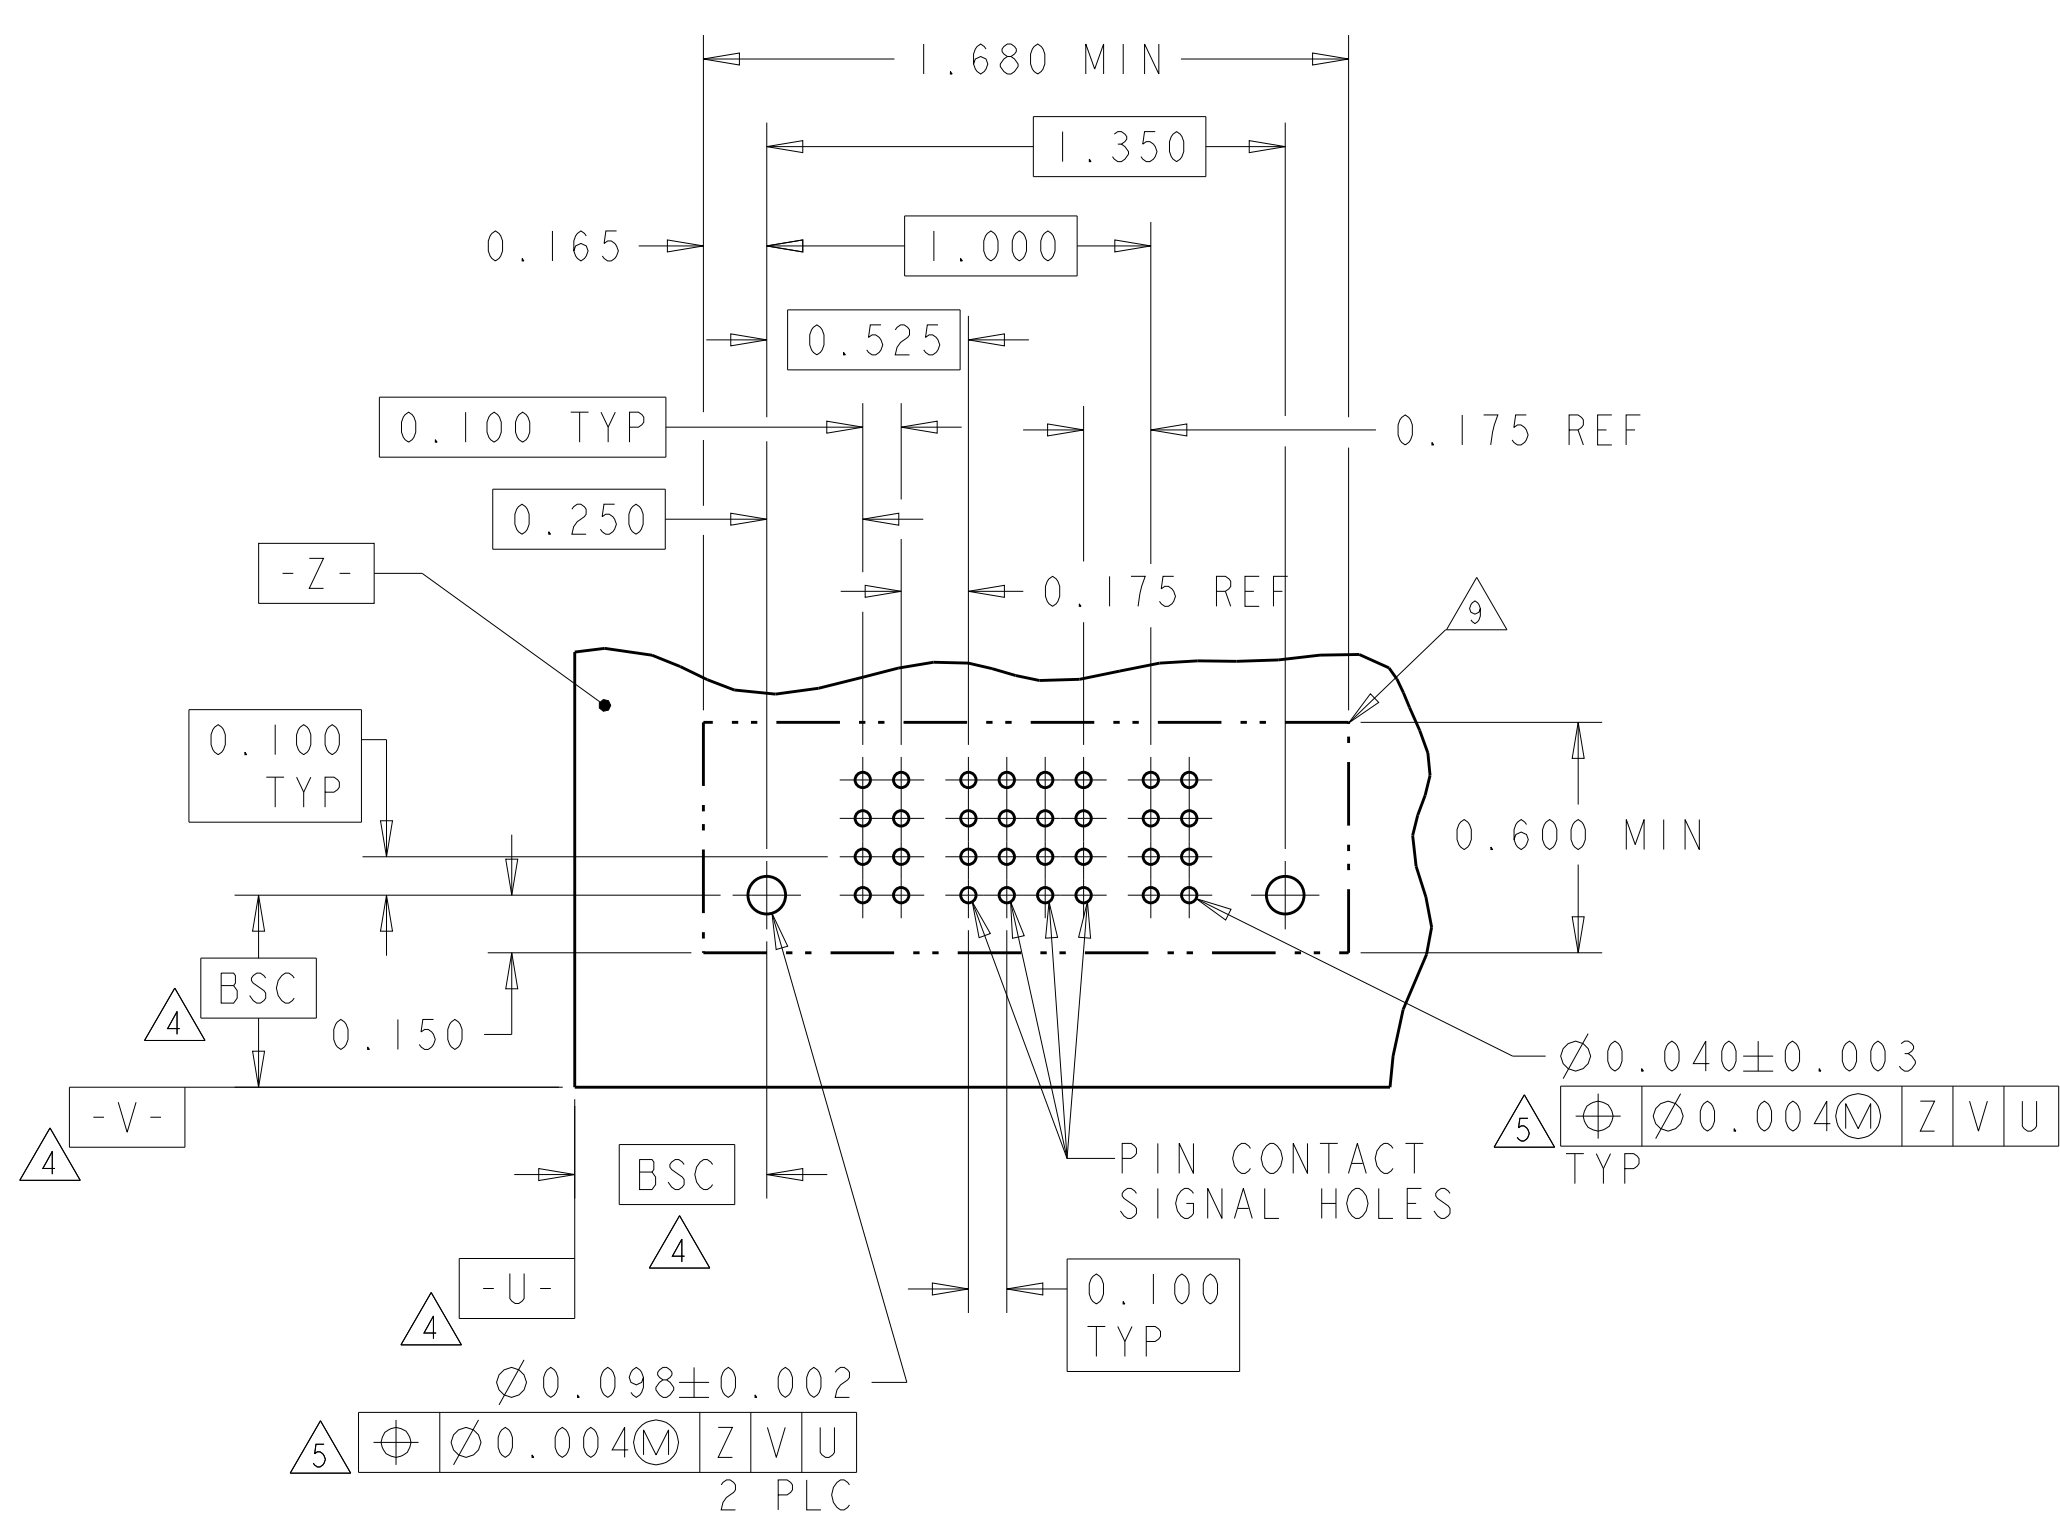

RECOMMENDED PCB LAYOUT 6600333-9
SCALE 2:1

PART NUMBER	ROWS		POWER	SIGNAL				POWER	
			P1	1	2	3	4	P2	
3-6600333-0	D		VM	ES	EV	EV	ES	VM	
	C			EV	EV	EV	EV		
	B			EV	EV	EV	EV		
	A			EV	EV	EV	EV		
IP+16S+IP		HD							HD




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J. McCLINTON CHK 23MAR2005 D. TROUT KAYR 23MAR2005		 TE Connectivity	
DIMENSIONS: INCH 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0.010 ±.010 0.005 ±.005 0.002 ±.002 ANGLES ±.0°		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	
MATERIAL - FINISH -		WEIGHT - Customer Drawing		SIZE CAGE CODE DRAWING NO A100779 C6600333 RESTRICTED TO -	
				SCALE 3:1 SHEET 4 of 22 REV P	


[illegible]

Figure 1: Recommended PCB layout for 1-6600333-6. The drawing shows a top view of the PCB with dimensions and features. Key dimensions include a total width of 2.380 MIN, a central width of 1.450, and a height of 0.600 MIN. It features a central array of 48 pin contact signal holes (6x8 grid) with a pitch of 0.098. Various mounting features are labeled, including -Z-, -V-, -U-, BSC, and -Z- with dimensions like 0.100 TYP, 0.150, 0.165, 0.175 REF, and 0.250. Surface finish requirements are specified as 0.004 M Z V U. A note indicates "PIN CONTACT SIGNAL HOLES".




RECOMMENDED PCB LAYOUT 1-6600333-6
SCALE 2:1

PART NUMBER	ROWS		POWER						SIGNAL						POWER								
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	P13	P14	
2-6600333-1	D C B A							EV	EV	EV	EV	EV	EV										
			VM	VM	VM	VM		VM	EV	EV	EV	EV	EV	EV			VM	VM			VM	VM	
									EV	EV	EV	EV	EV	EV									
									ES	ES	EV	EV	EV	EV									
6ACP + 24S + 8P																							

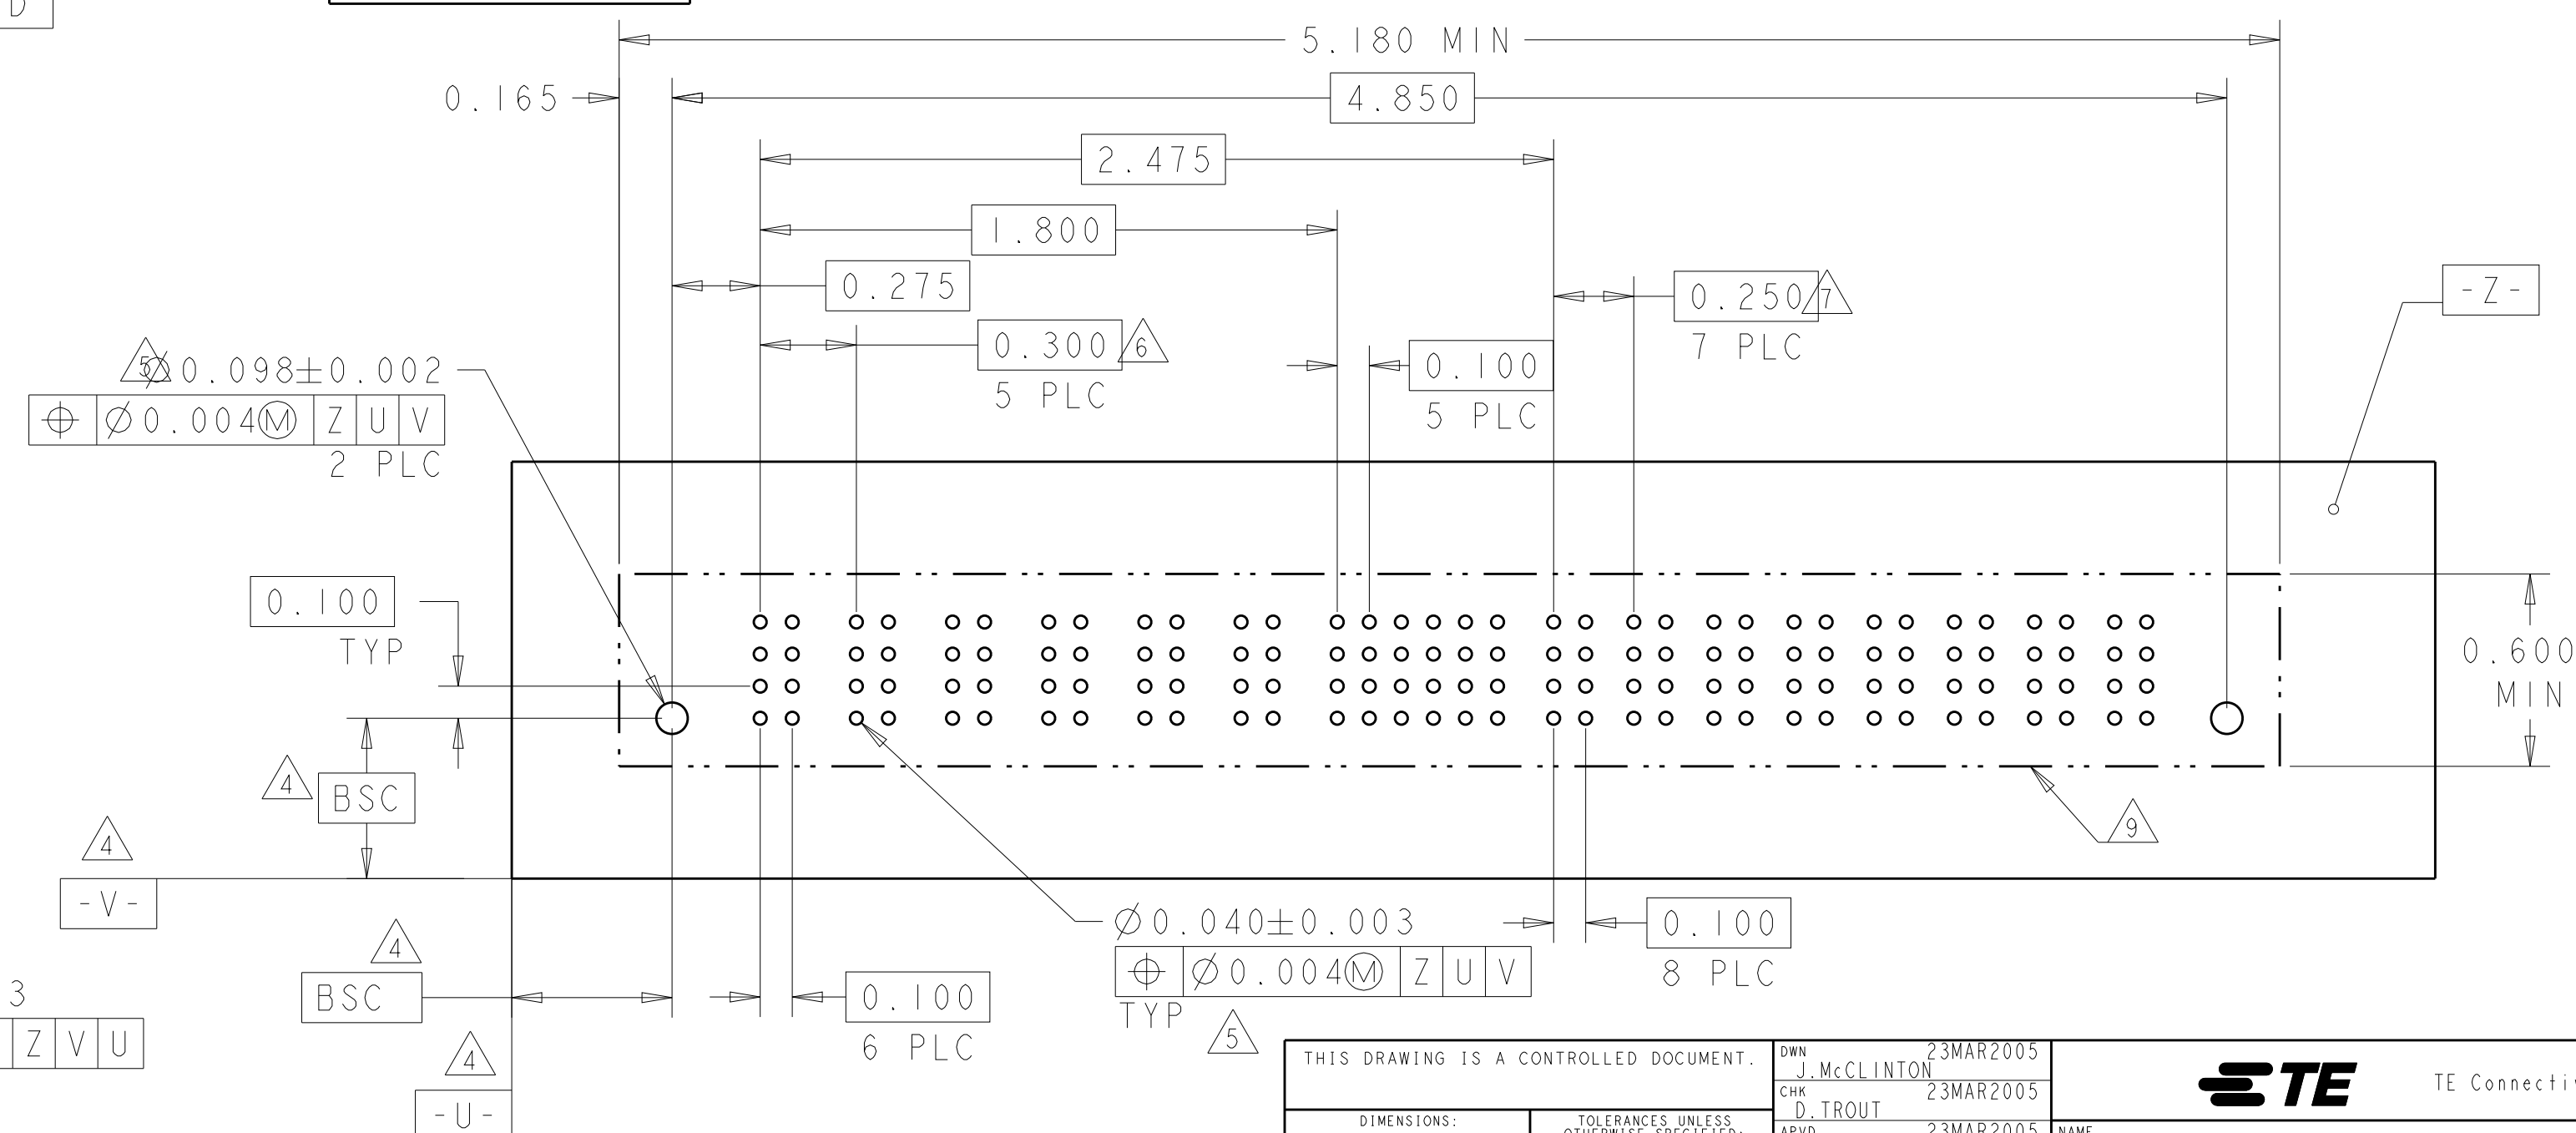

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 23MAR2005 J. McCLINTON CHK D. TROUT APVD 23MAR2005 B. WHYNE		 TE Connectivity	
DIMENSIONS: INCH		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		0 PLC ±.1 1 PLC ±.01 2 PLC ±.005 4 PLC ±.002 ANGLES ±.020°		PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	
MATERIAL -		FINISH -		SIZE CASE CODE DRAWING NO A100779 C-6600333	
		WEIGHT -		RESTRICTED TO -	
Customer Drawing				SCALE 3:1 SHEET 6 of 22 REV P	

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	OWN
ES	00	-	-	SEE SHEET 1	-	-

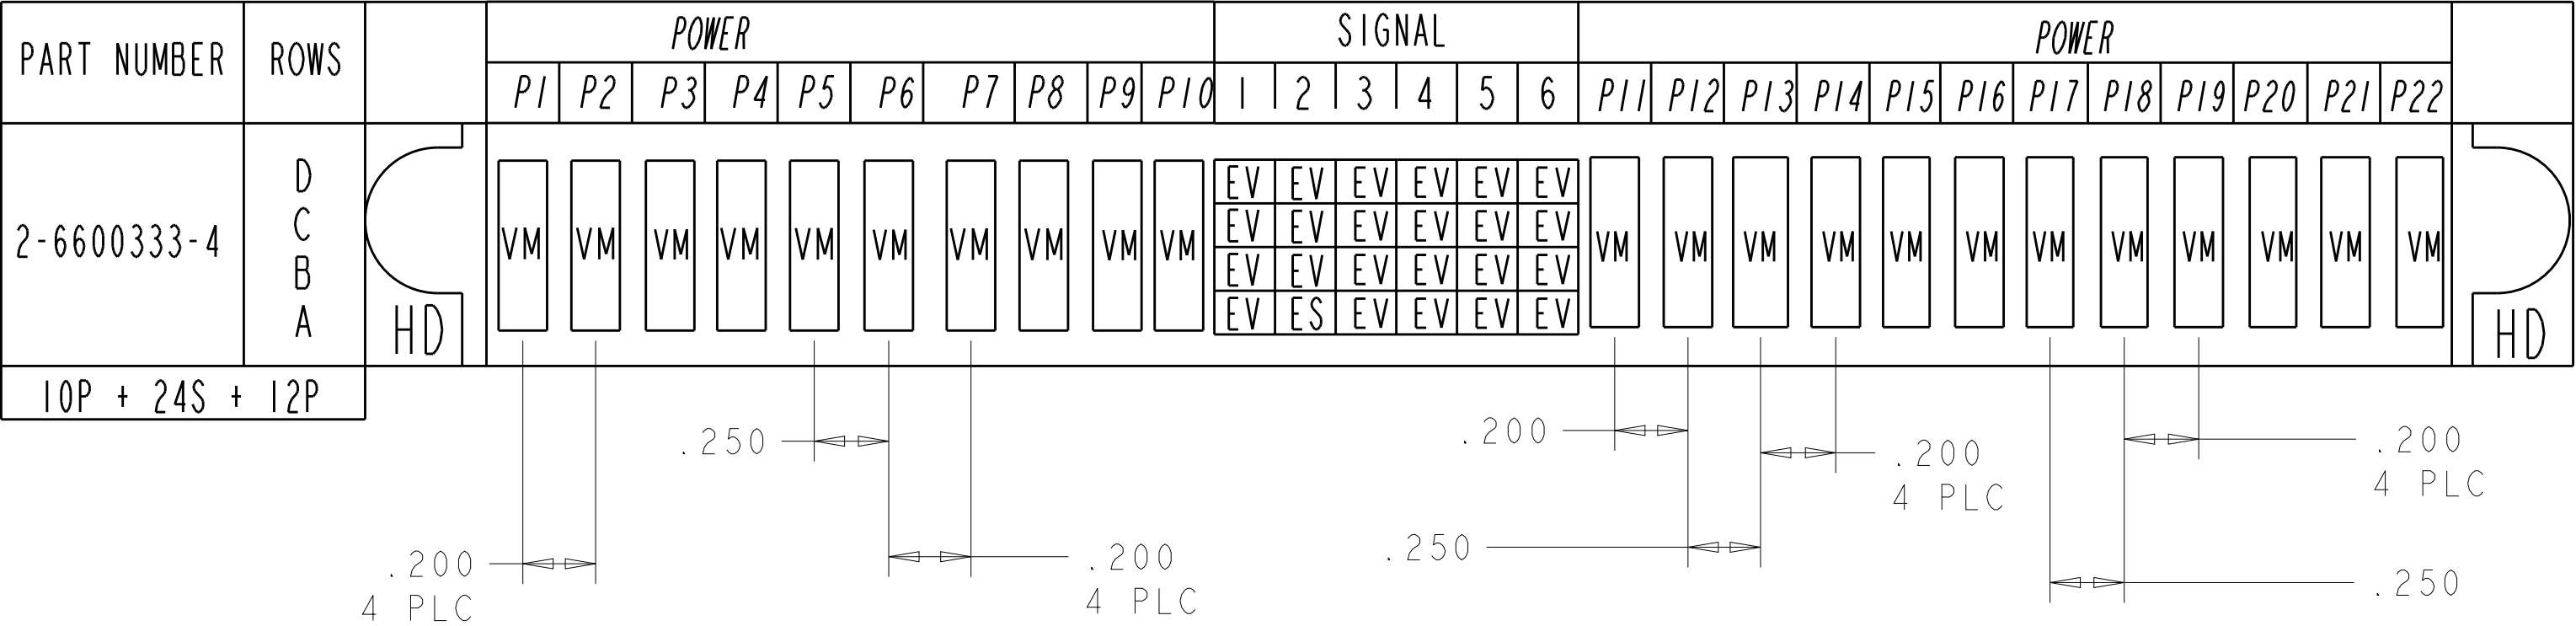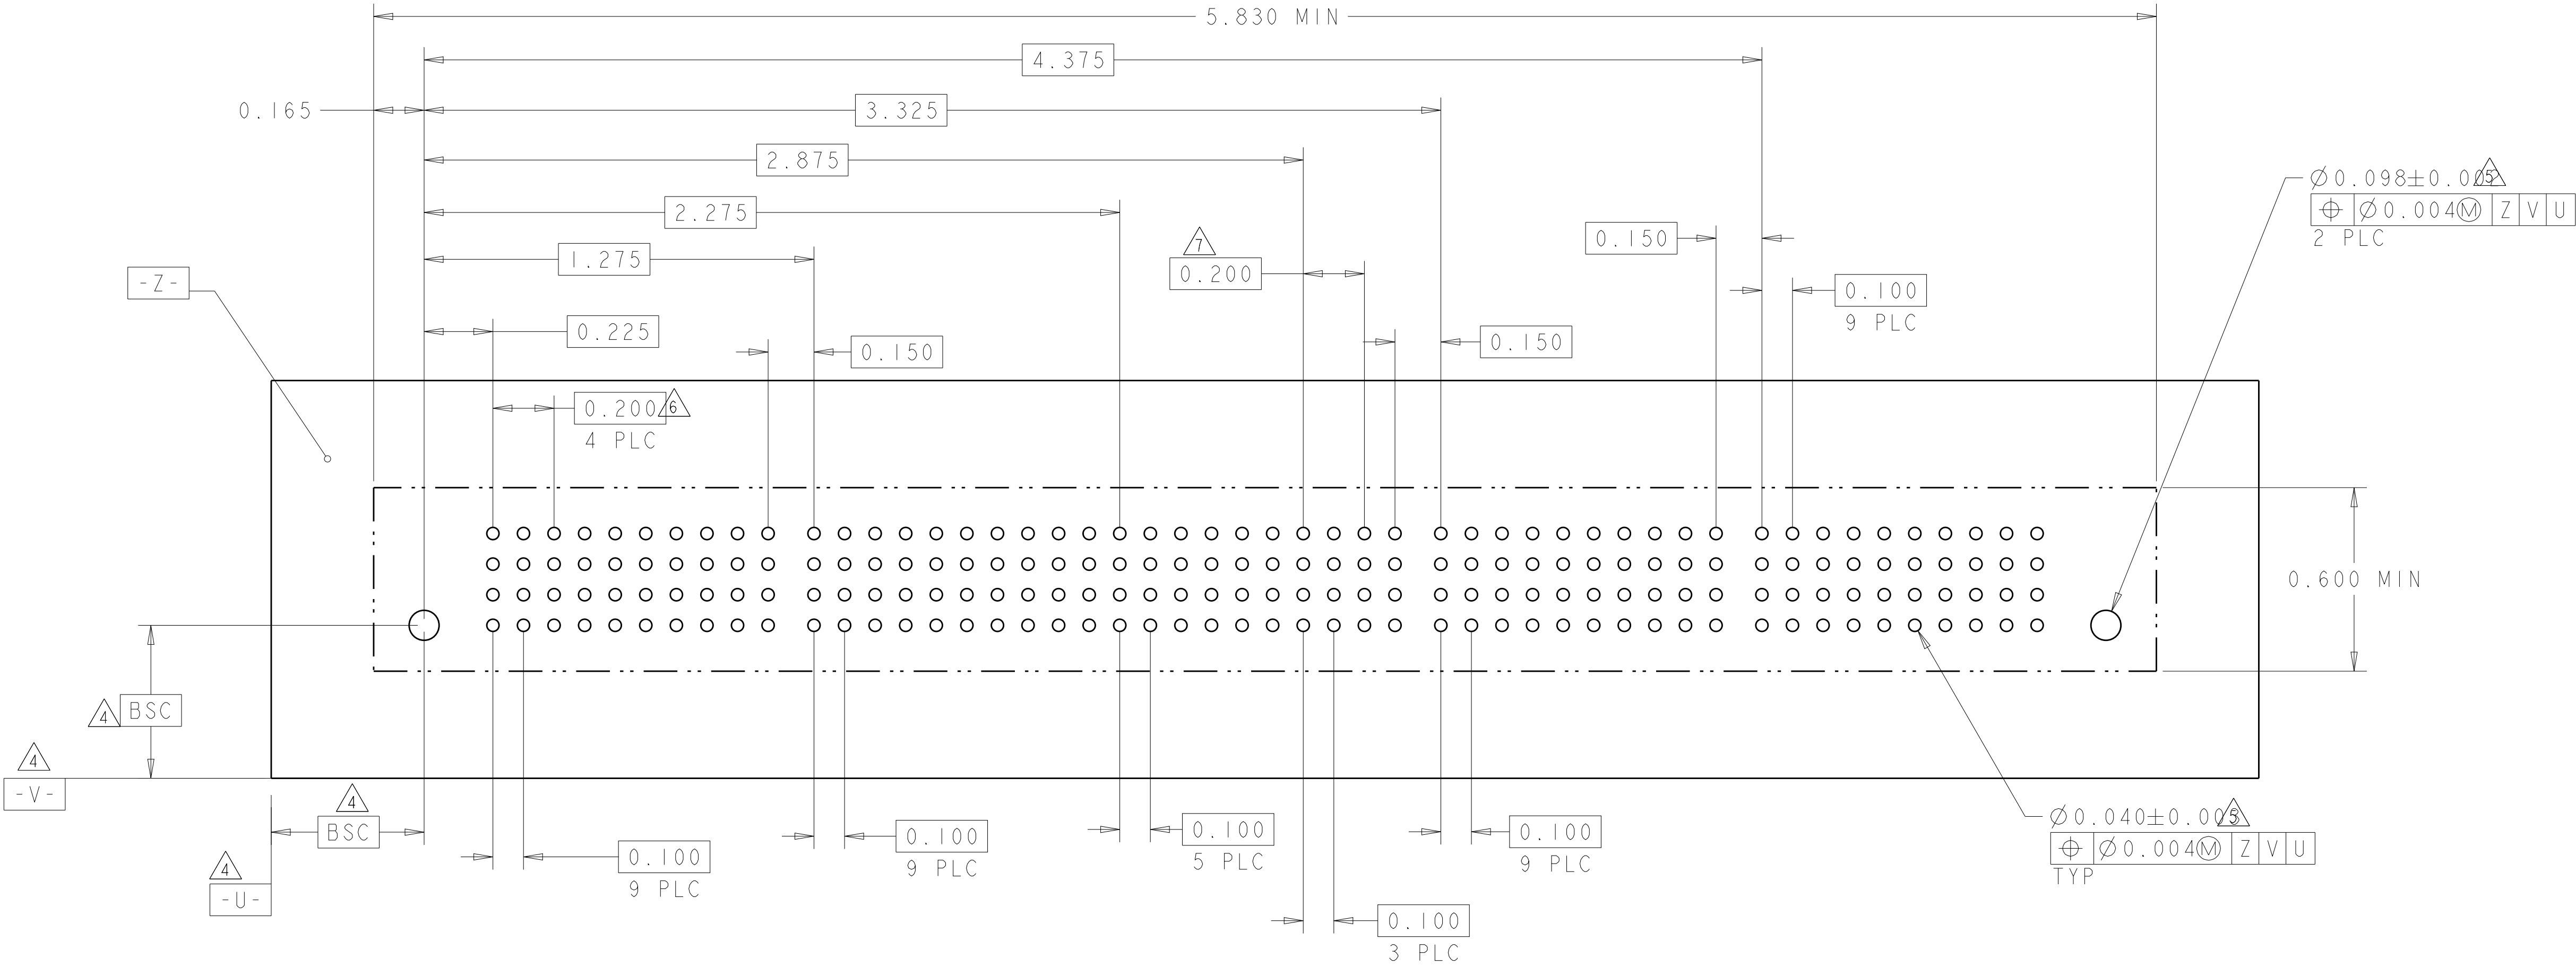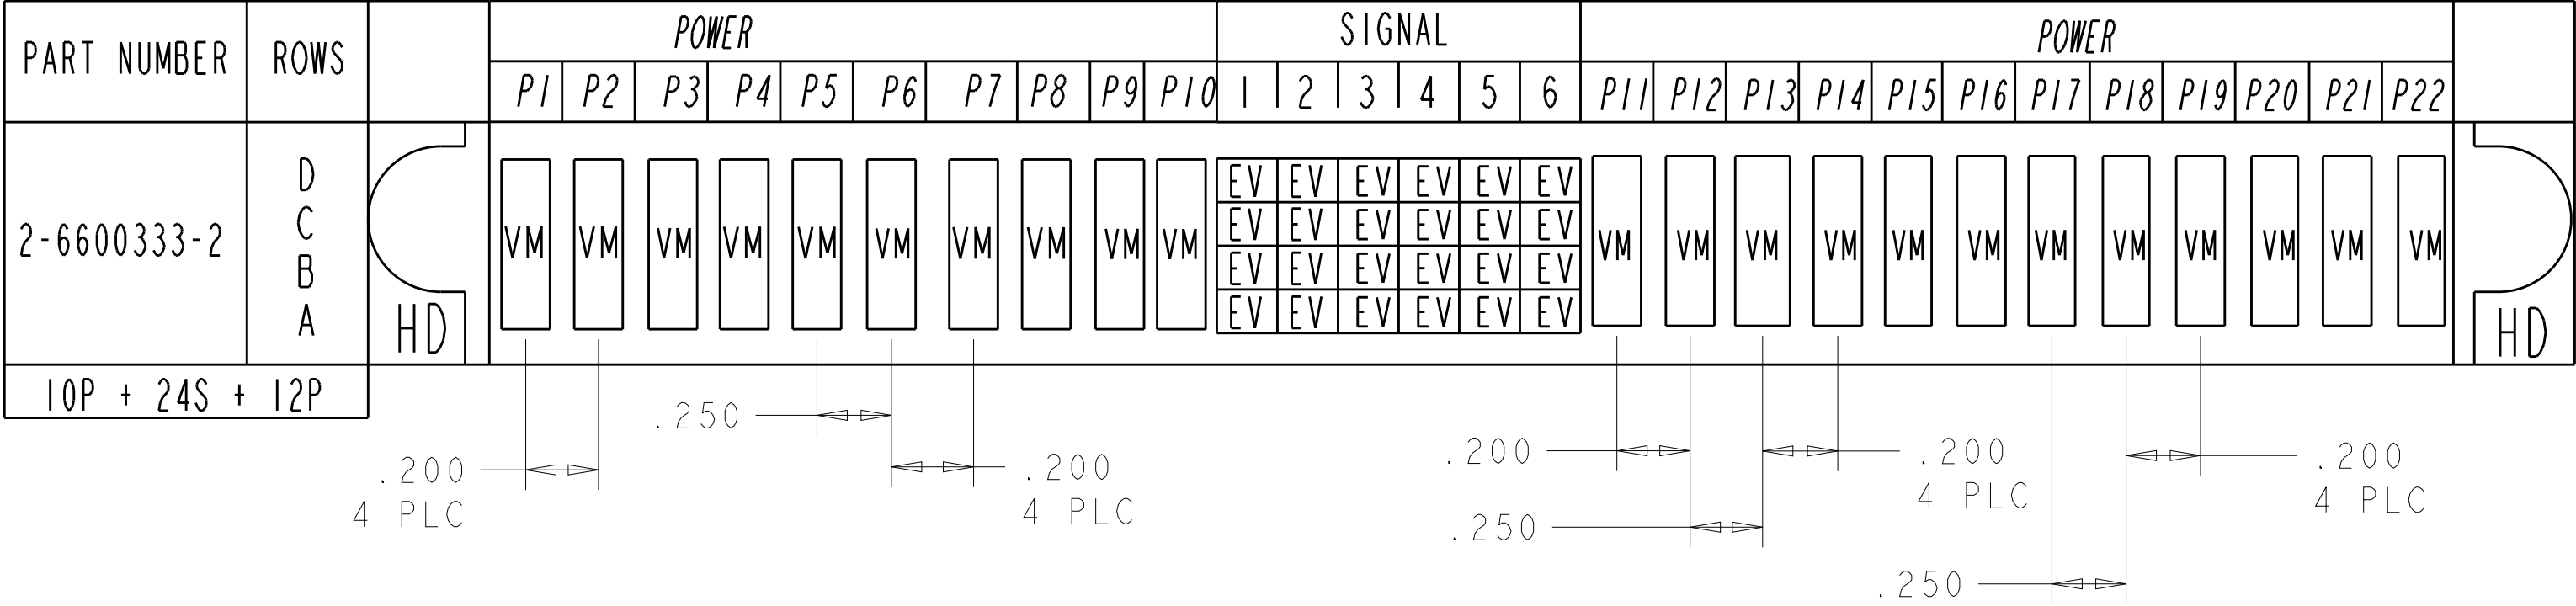

THE PART NUMBER 2-6600333-4 PCB LAYOUT IS SAME AS 2-6600333-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.002
ANGLES ±2°
FINISH

MATERIAL

-

PRODUCT SPEC

108-1973

APPLICATION SPEC

114-13038

WEIGHT

-

Customer Drawing

SCALE 3:1

NAME

VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO

6600333

RESTRICTED TO

-


SHEET 7 OF 22

REV P7

TE Connectivity


LOC		DIST		REVISIONS			
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		SIGNAL																POWER											SIGNAL					POWER															
			1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	17	18	19	20	21	P12	P13	P14	P15	P16	P17	P18	P19	P20	P21	P22	P23	P24	P25		P26
2-6600333-3	D		EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	
	C		EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM				
	B		EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	
	A		EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM	VM	EV	EV	EV	EV	EV	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	
64S+11P+20S+15P		HD																																															HD	

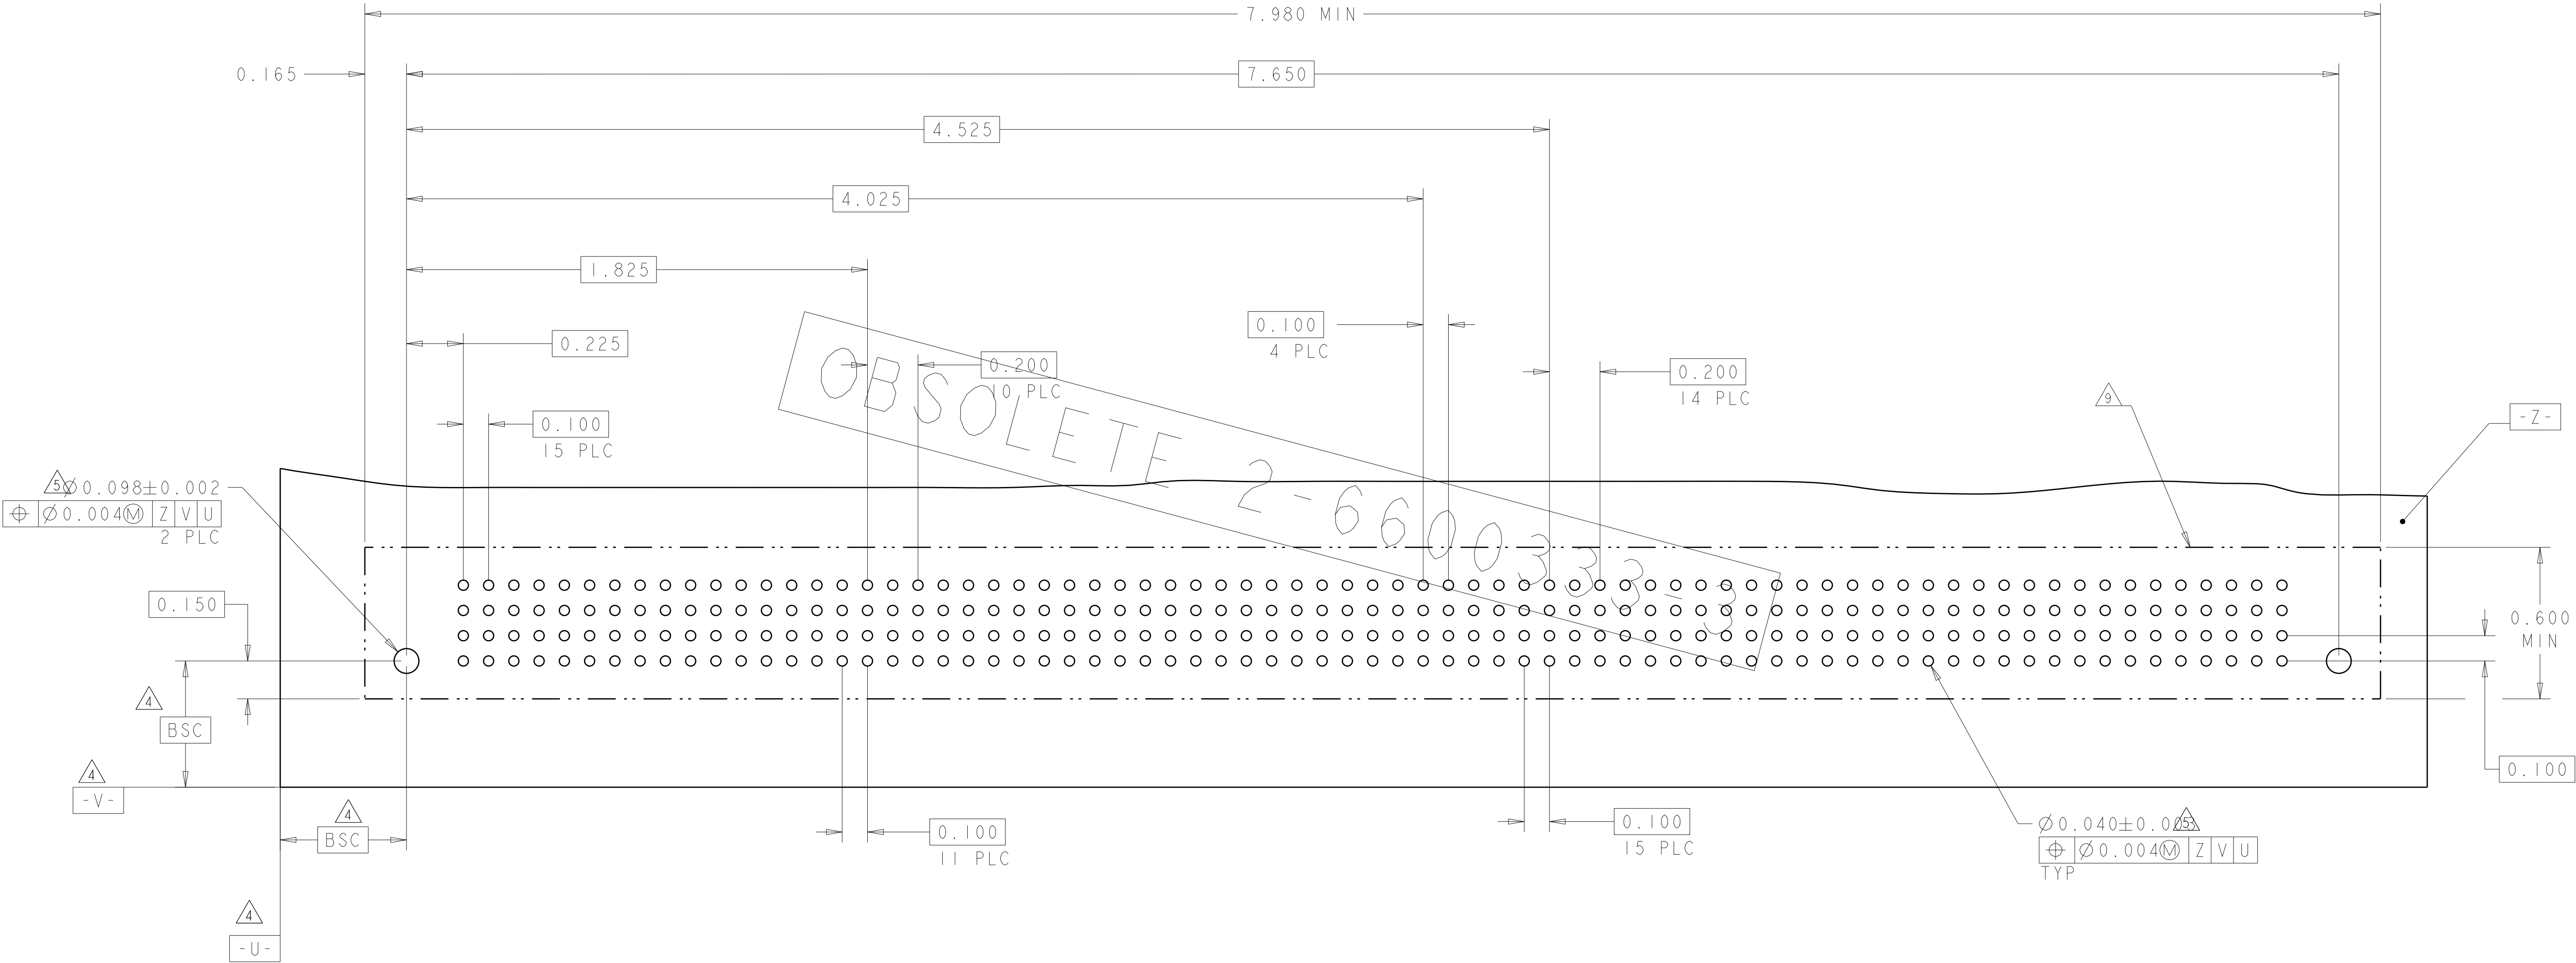


LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER				SIGNAL				POWER			
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	
2-6600333-5	D		VM	VM	VM	VM	EV	EV	EV	EV	VM	VM	VM	
	C						EV	EV	EV	EV				
	B						EV	EV	EV	EV				
	A						ES	EV	EV	EV				
4P+16S+3P		HD												HD

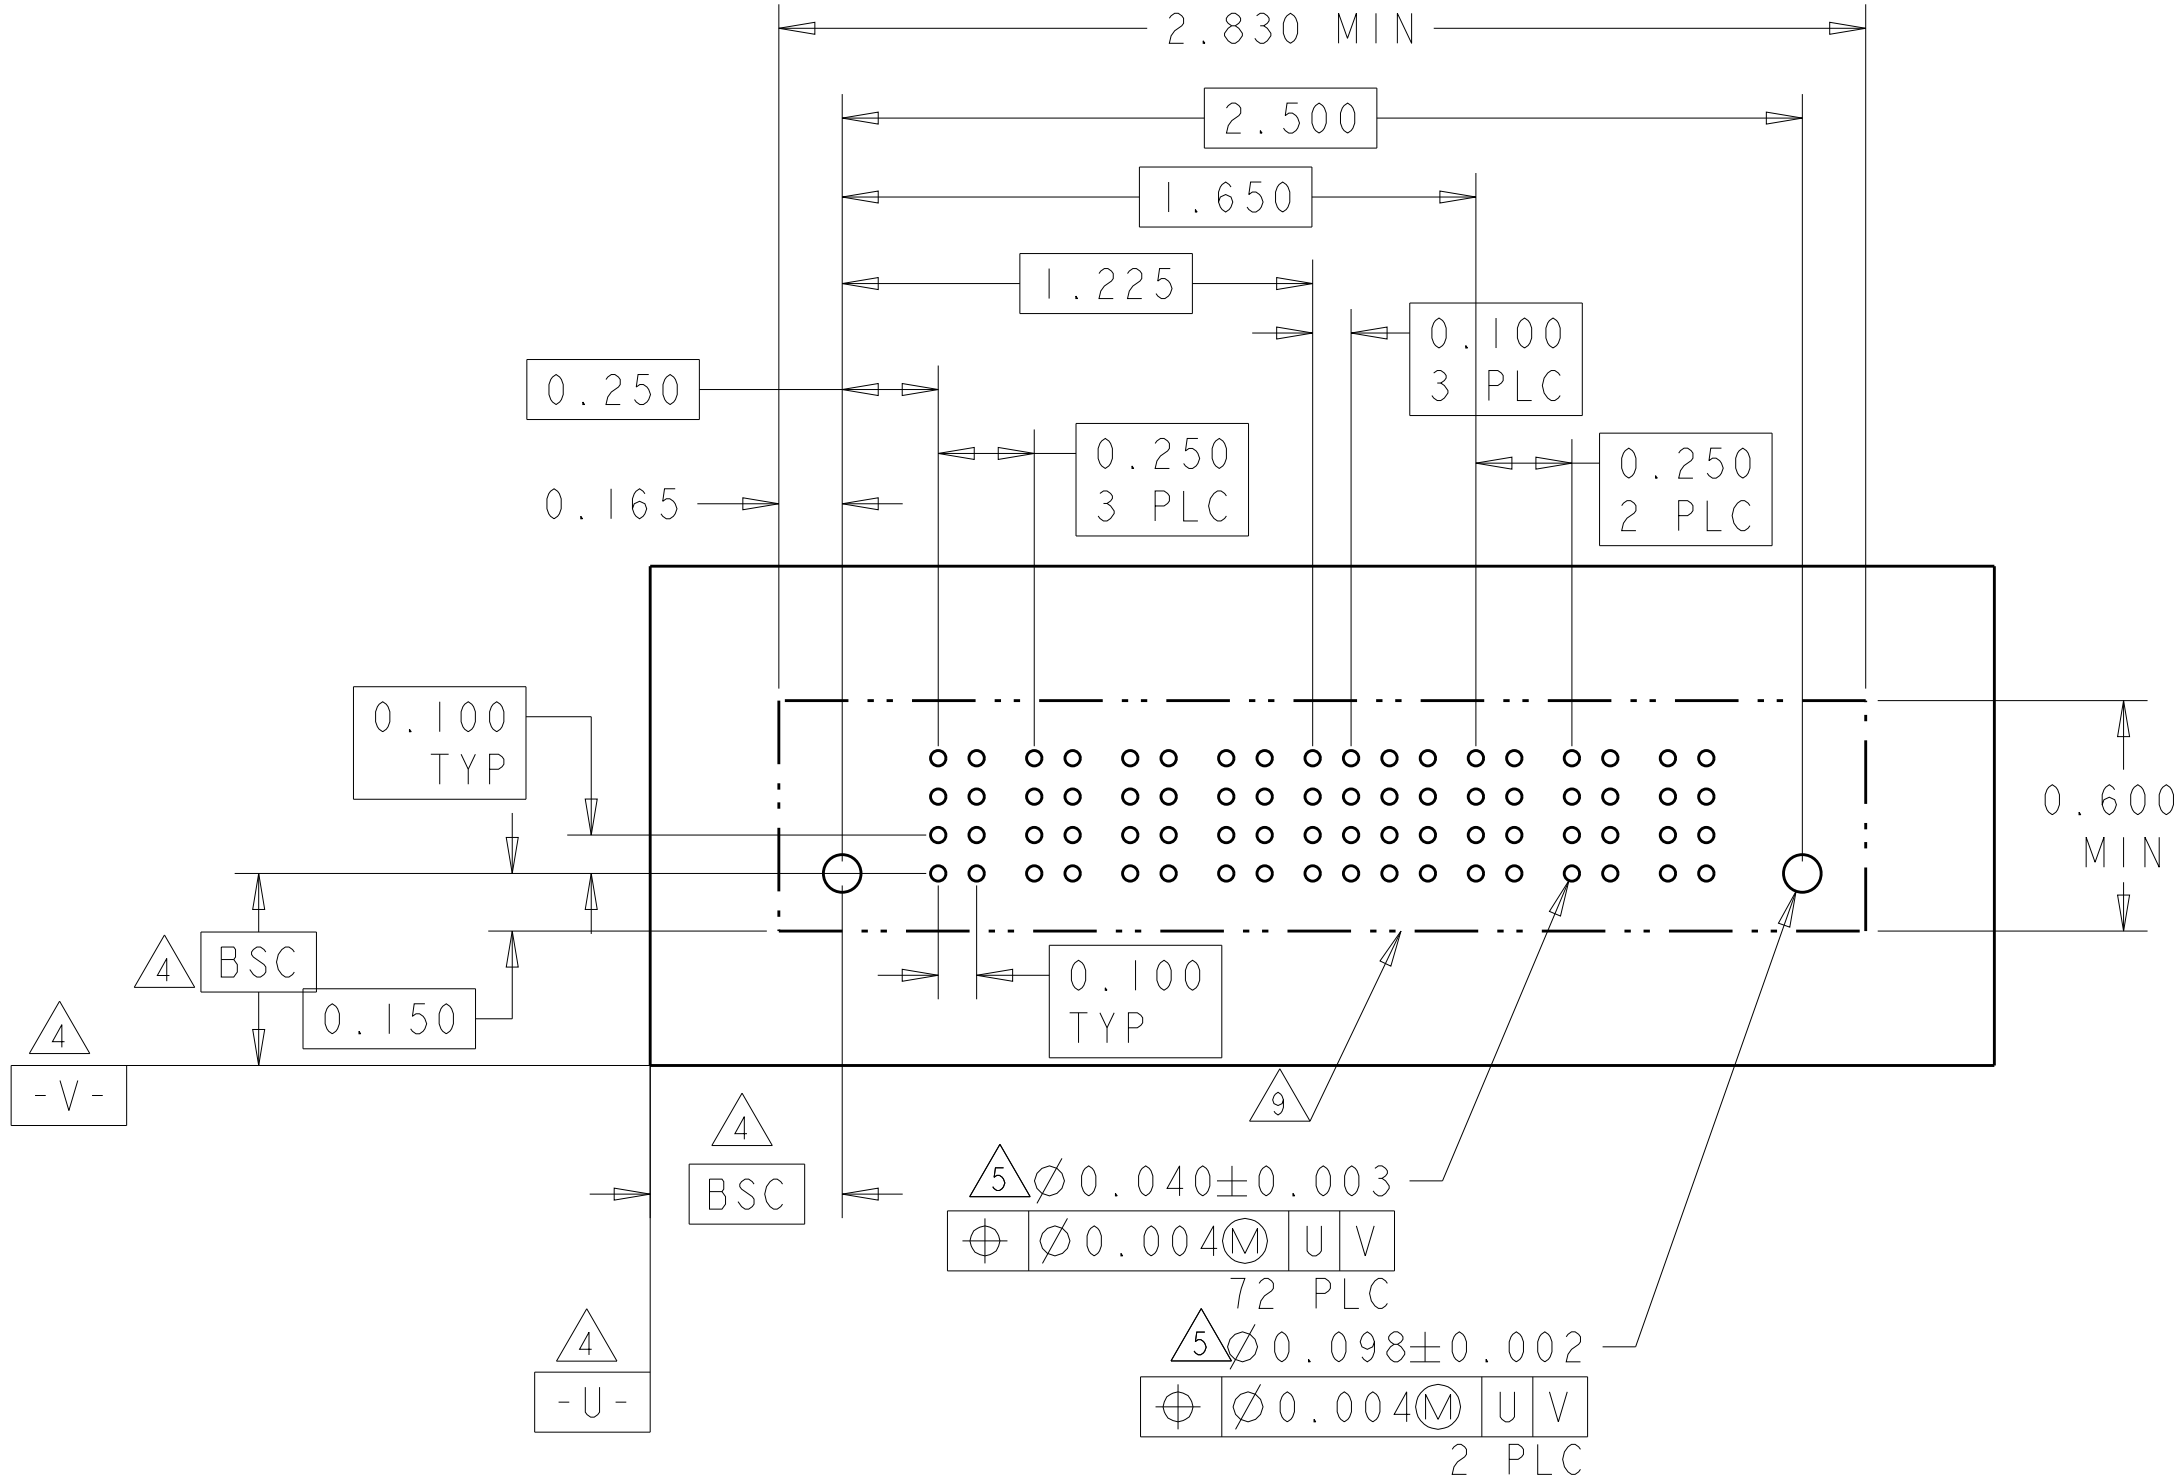

PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
2-6600333-6	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3P+24S+3P		HD													HD

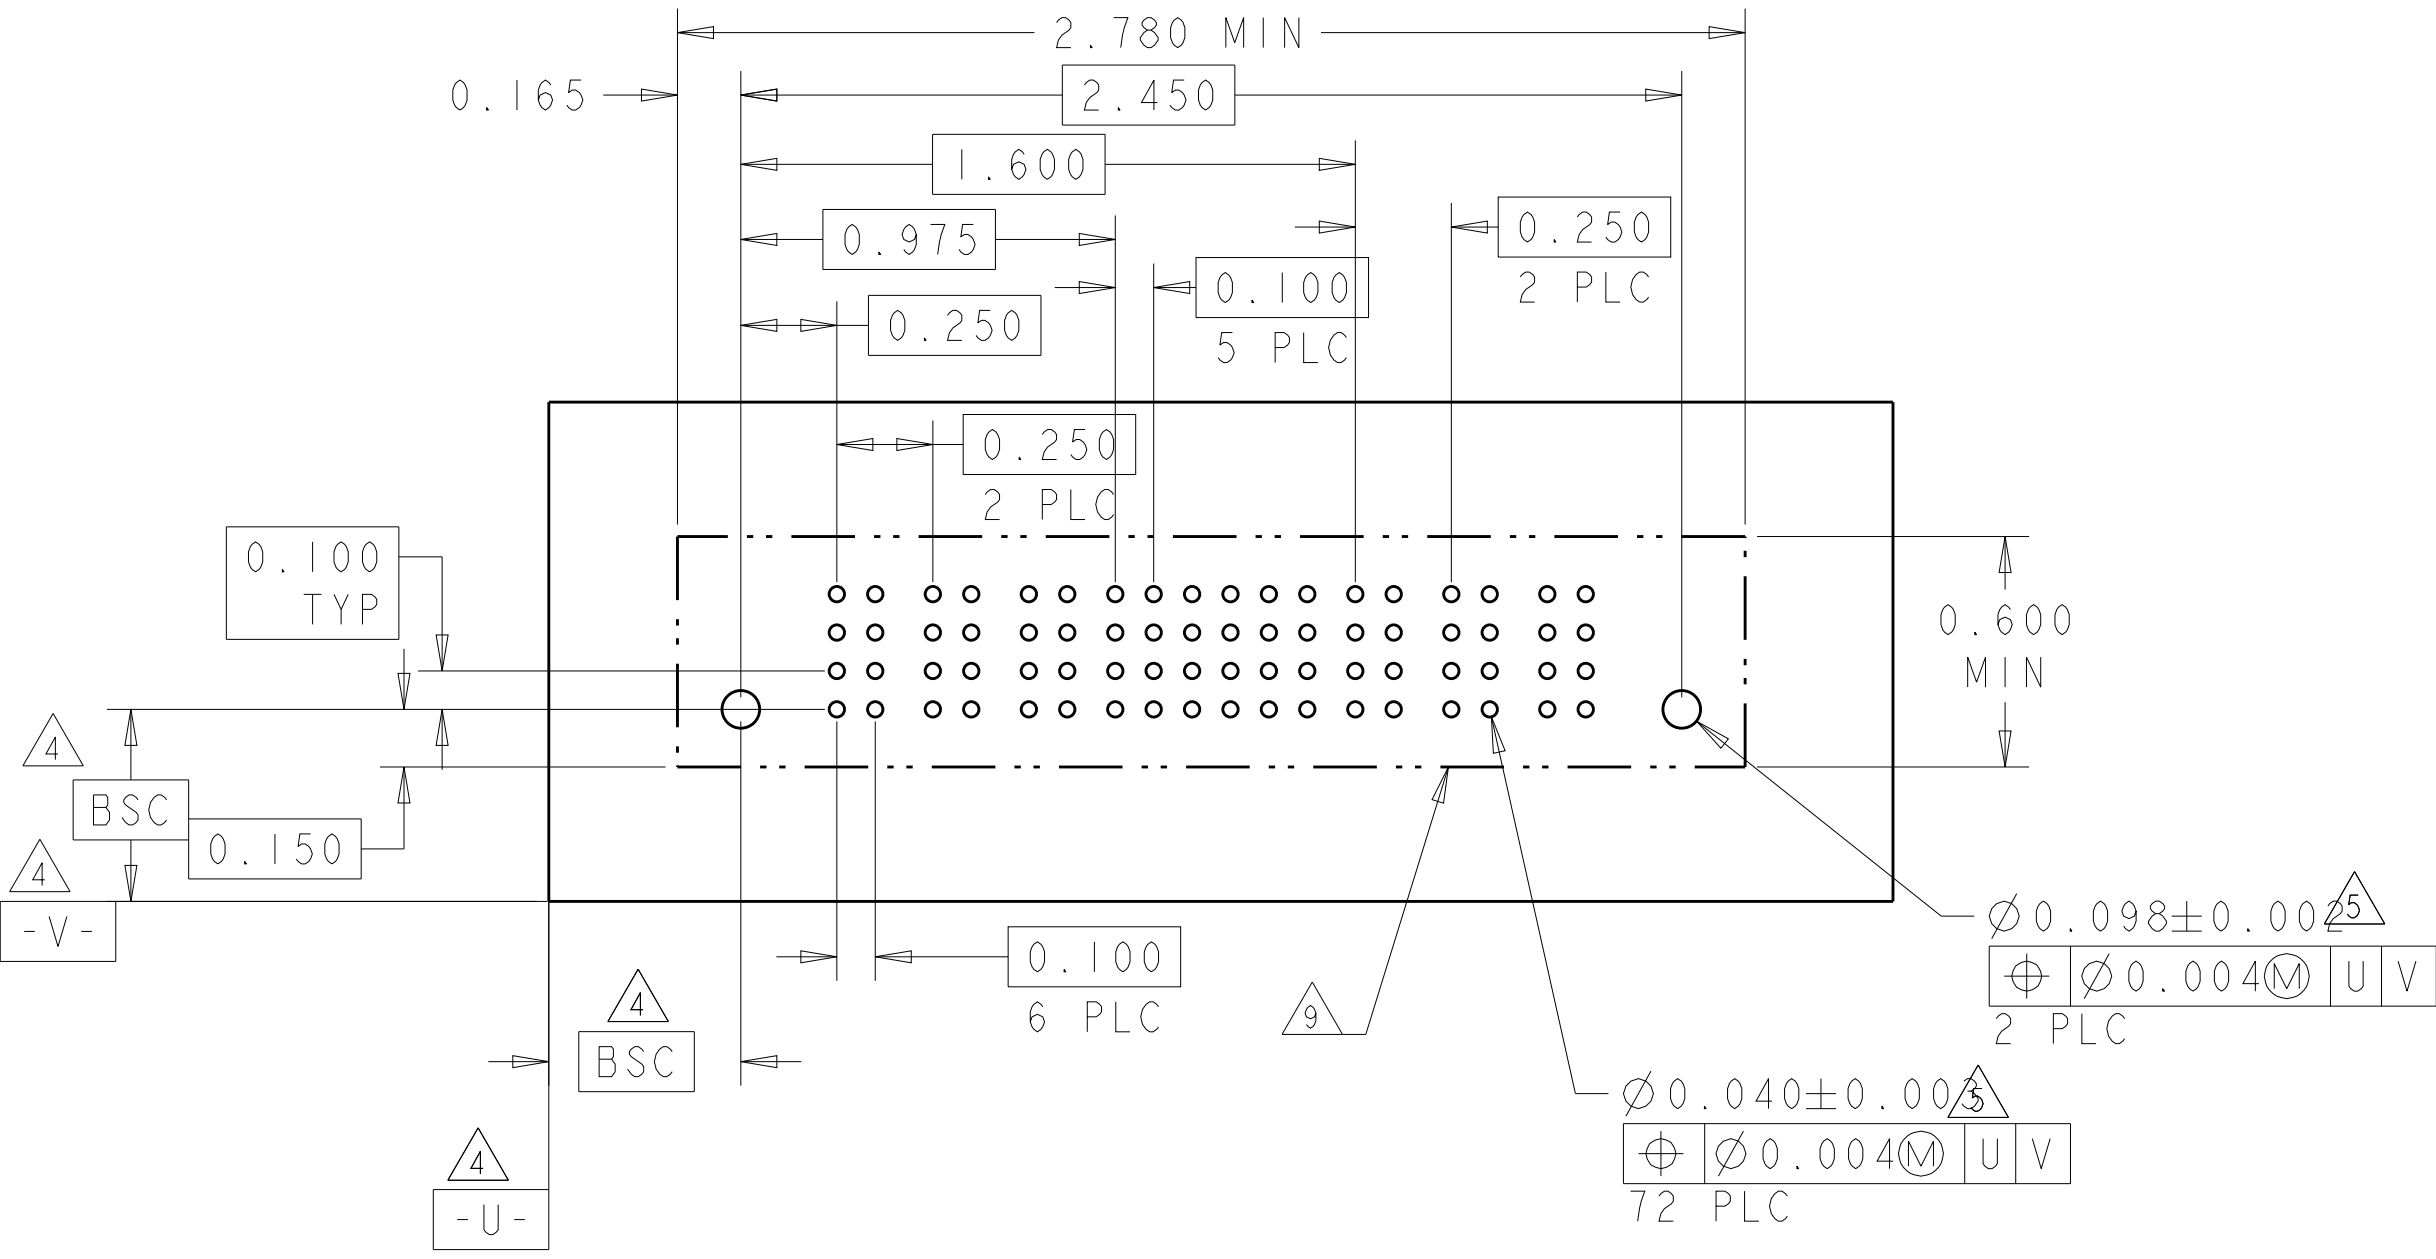

PART NUMBER	ROWS		POWER				SIGNAL						POWER					
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	P9	
2-6600333-7	D		VM	VM	VM	VM	ES	EV	ES	EV	EV		VM	VM	VM	VM	VM	
	C						EV	EV	EV	ES	EV							
	B						EV	ES	EV	EV	EV							
	A						ES	ES	EV	EV	ES							
4P+24S+5P		HD																HD

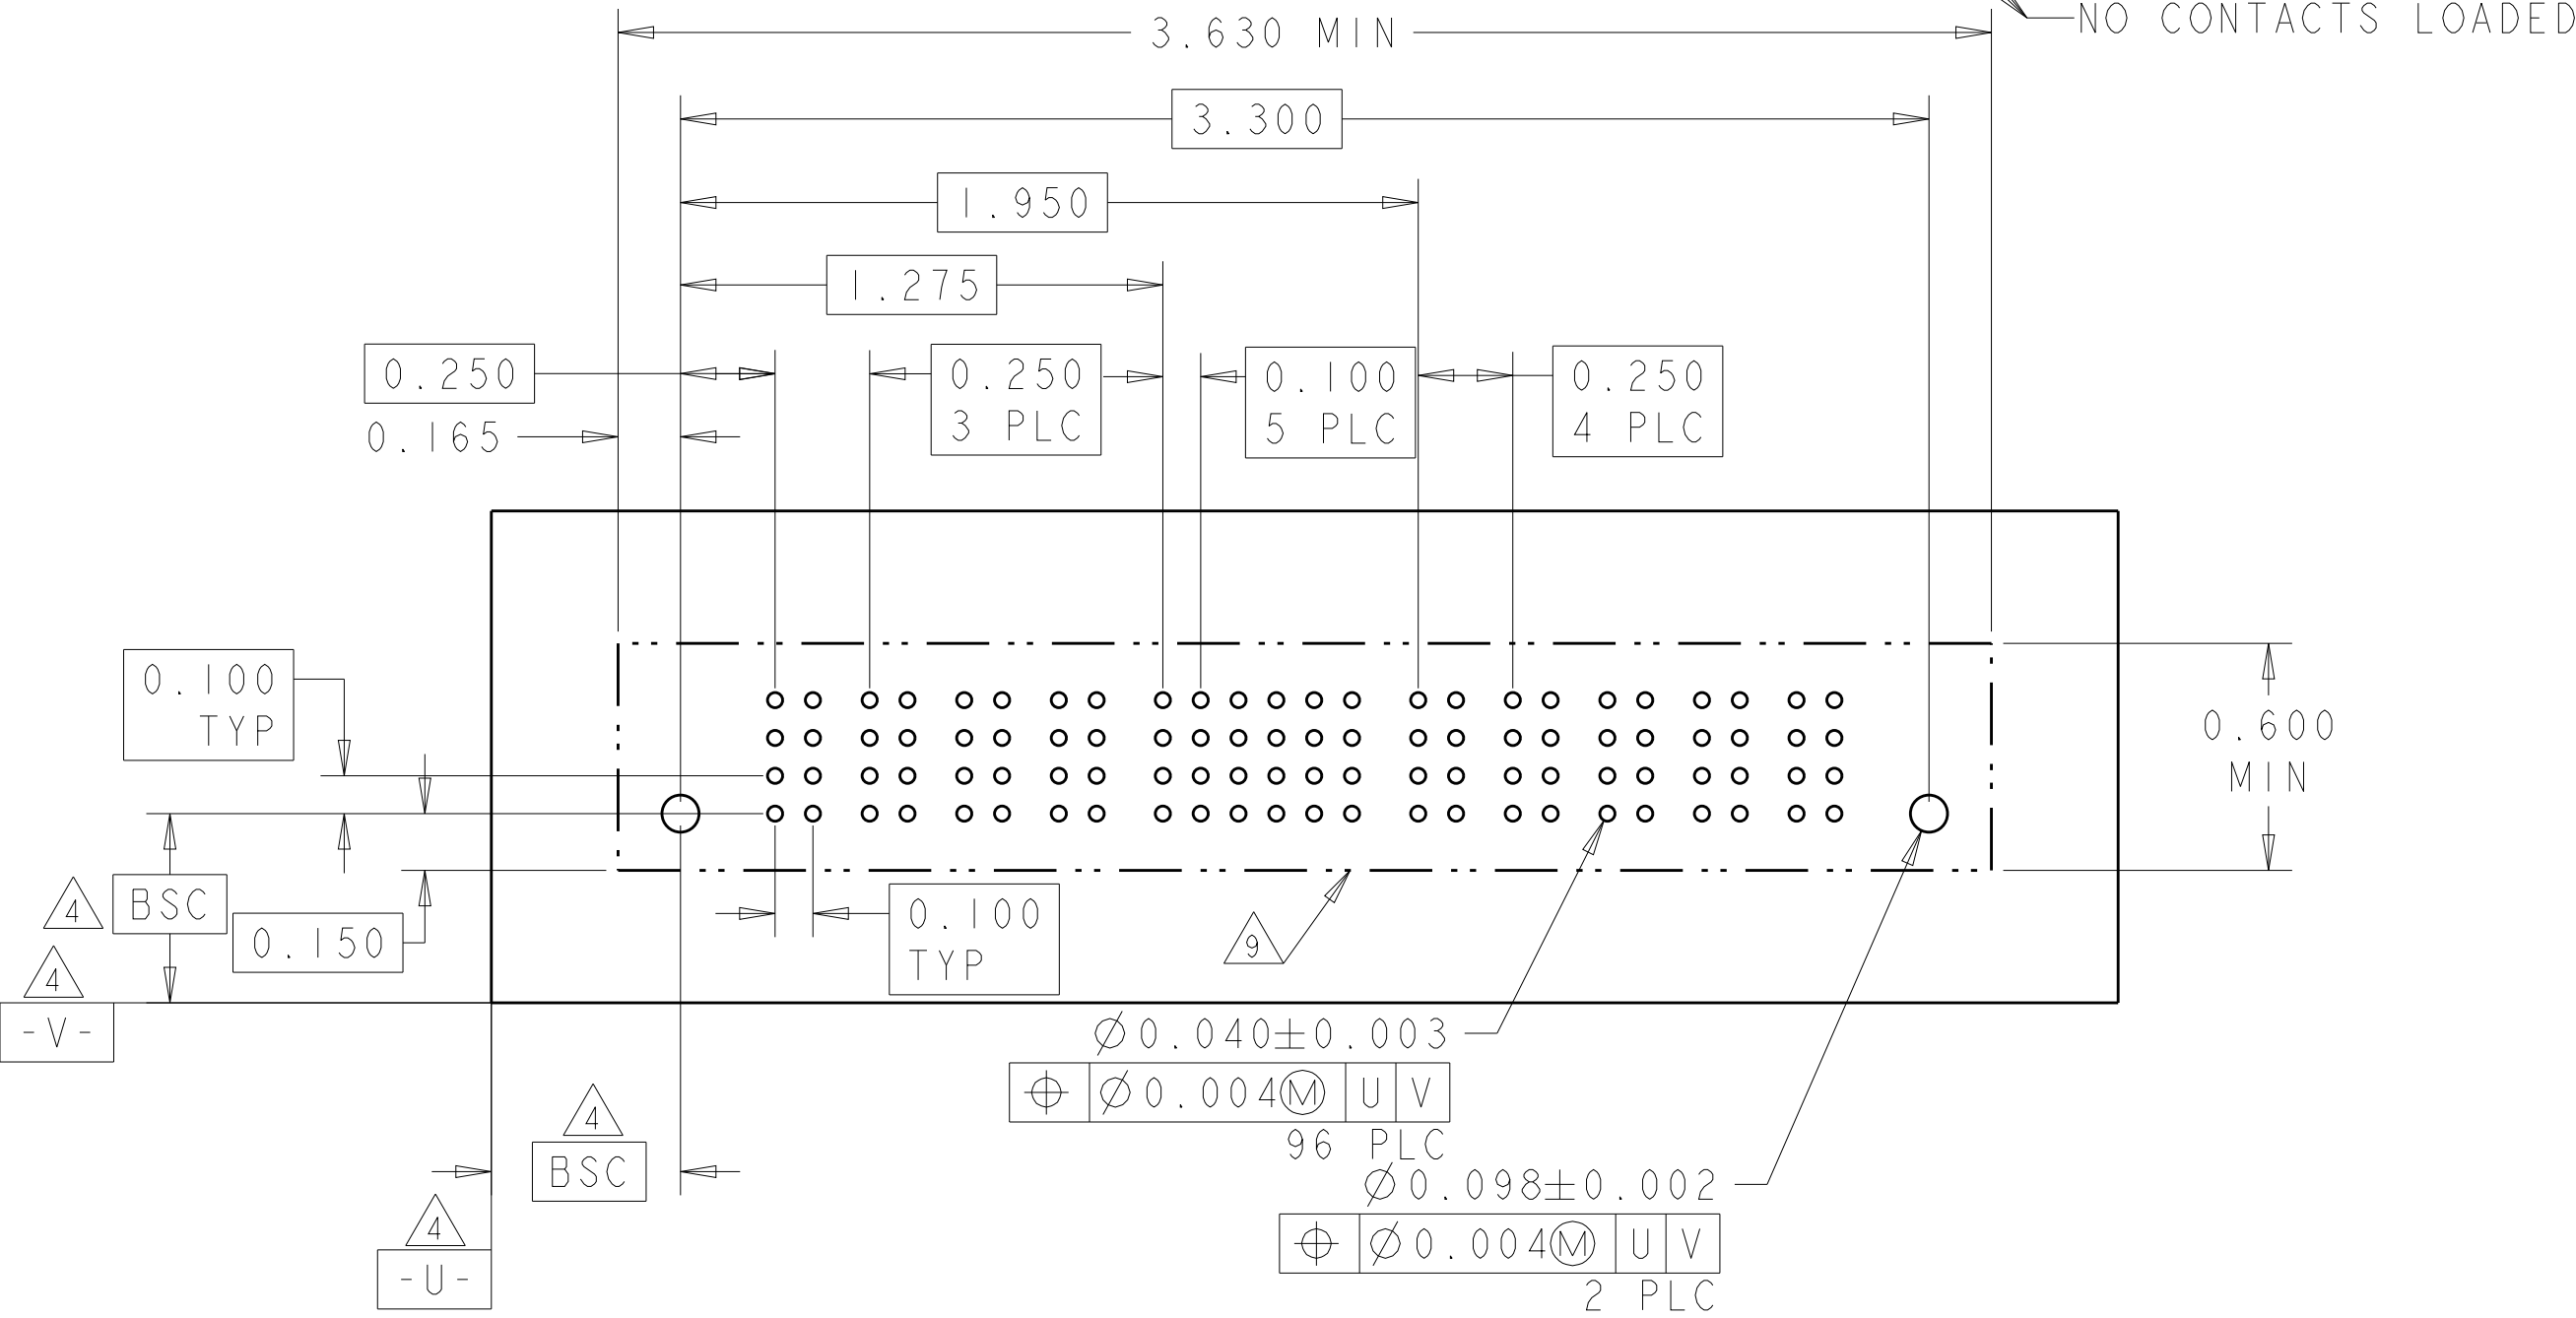

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN J. McCLINTON 23MAR2005
CHK D. TROUT 23MAR2005
APVD R. WHYNE 23MAR2005

DIMENSIONS:
INCH

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

WEIGHT

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038

Customer Drawing

NAME
VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL

SIZE
A1

CAGE CODE
00779


DRAWING NO.
6600333

RESTRICTED TO

SCALE 3:1
SHEET 9 of 22
REV P7

TE Connectivity



PART NUMBER	ROWS		POWER		SIGNAL								POWER		
			P1	P2	1	2	3	4	5	6	7	8	P3	P4	
2-6600333-9	D		VM	VM	ES	EV	EV	EV	EV	EV	EV	EV		VM	
	C				EV	EV	EV	EV	EV	EV	EV	EV			
	B				EV	EV	EV	EV	EV	EV	EV	EV			
	A				ES	EV	EV	EV	EV	EV	EV	ES			
2P+32S+2P		HD												HD	

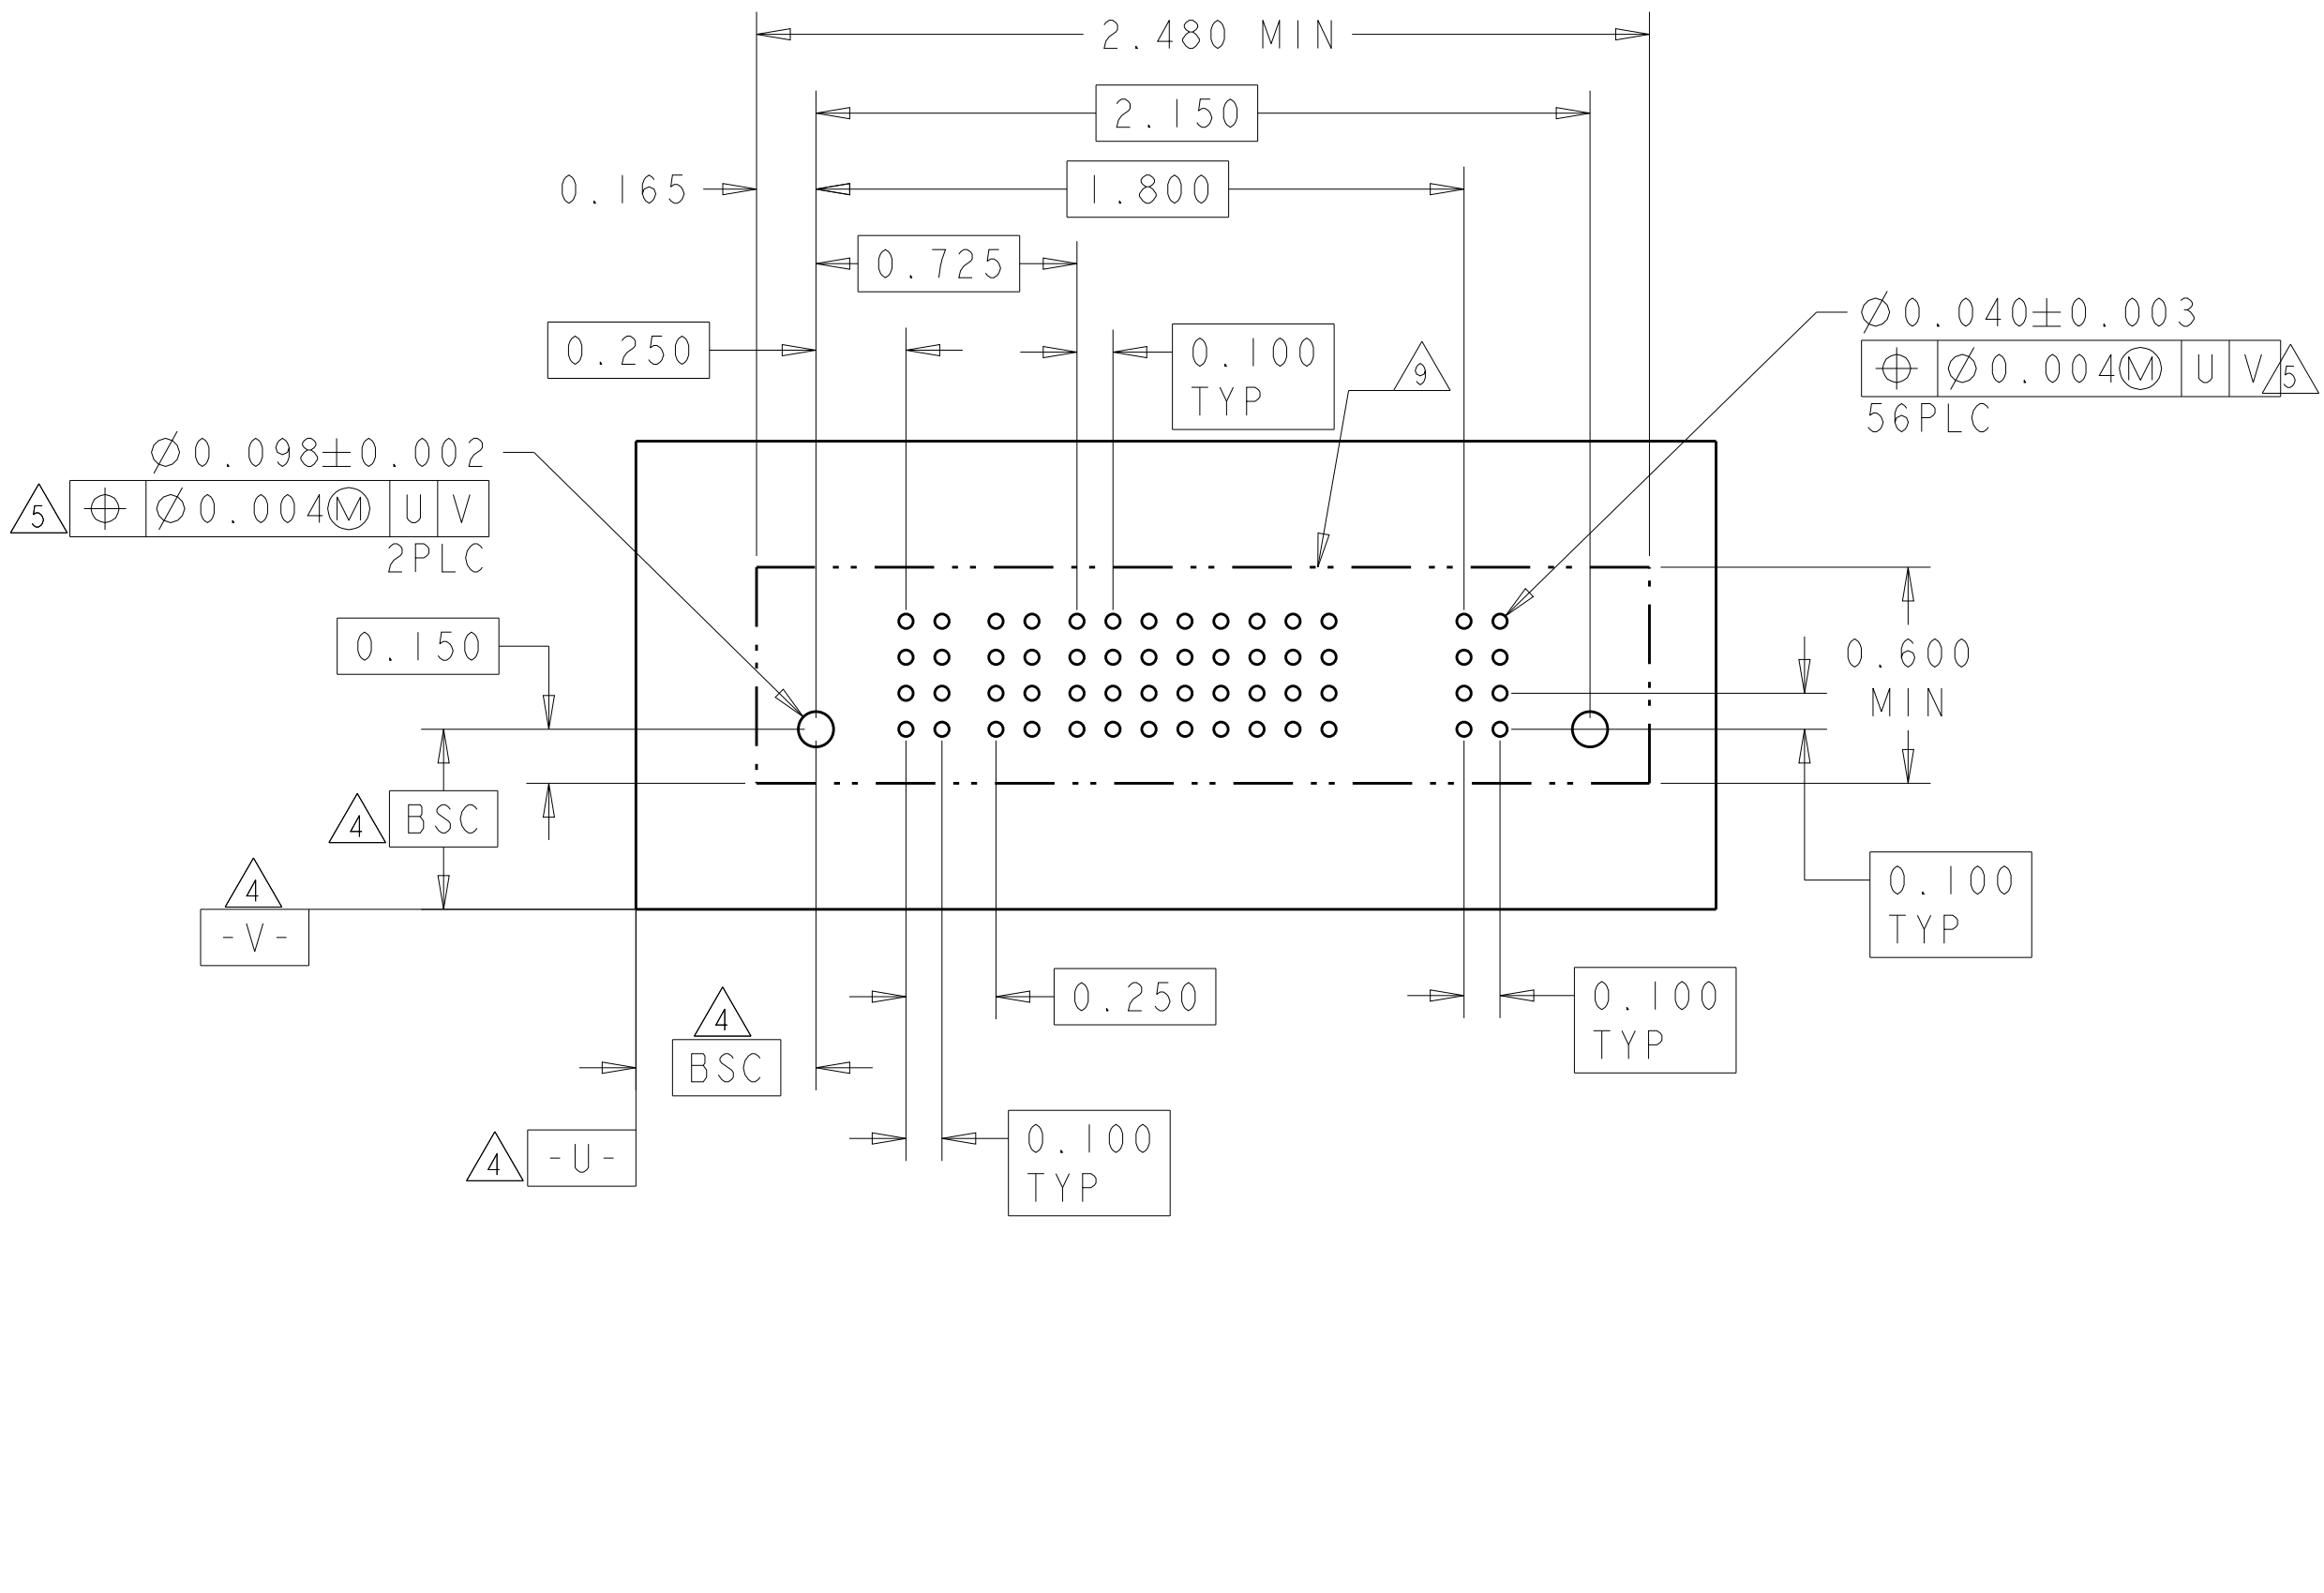4805 (3/11)

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER						SIGNAL						POWER								
			P1	P2	P3	P4	P5	P6	1	2	3	4	5	6	P7	P8	P9	P10	P11	P12	P13	P14	
3-6600333-1	D	HD	VM	VM	VM	VM		VM	EV	EV	EV	EV	EV	EV			VM	VM			VM	VM	HD
	EV								EV	EV	EV	EV	EV										
	EV								EV	EV	EV	EV	EV										
	ES								ES	EV		EV	EV										
6ACP + 24S + 8P																							


PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P1	P2	P3	P4	1	2	3	4	5	6	P5	P6	P7	P8	
3-6600333-2	D		VM	VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	VM	
	C						EV	EV	EV	EV	EV	EV					
	B						EV	EV	EV	EV	EV	EV					
	A						EV	EV	EV	EV	EV	EV					
4P+24S+4P																	

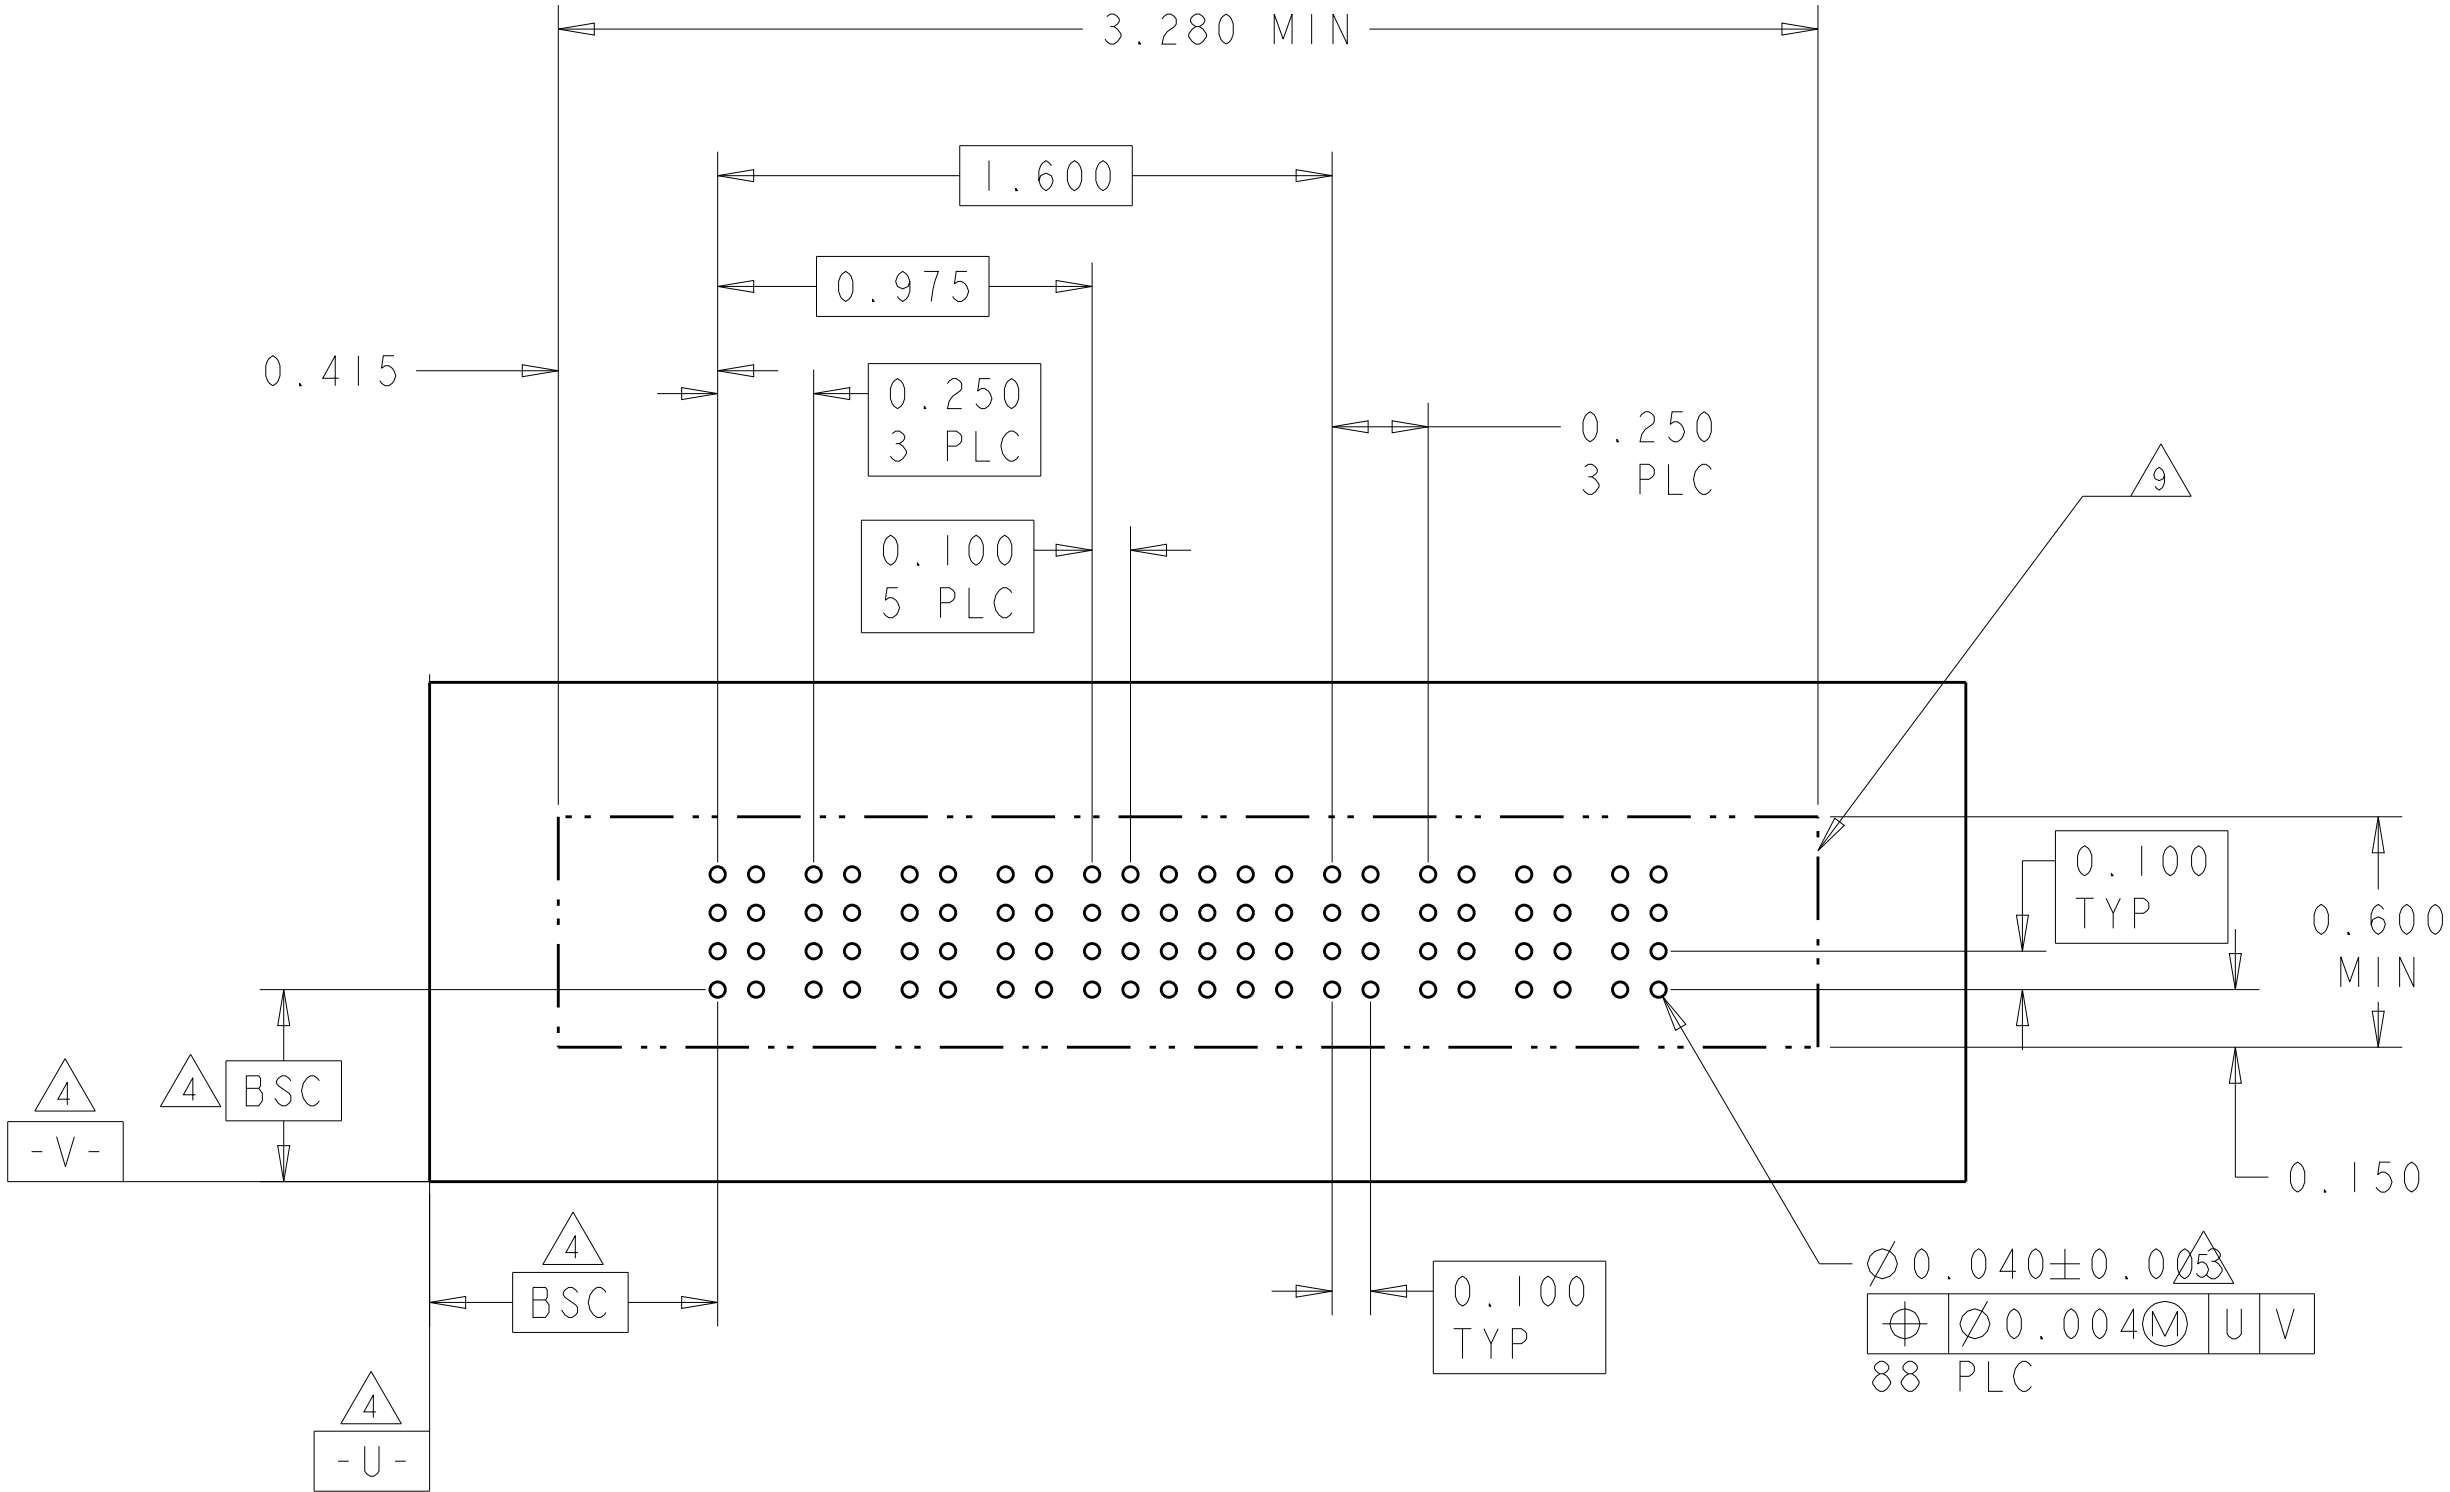
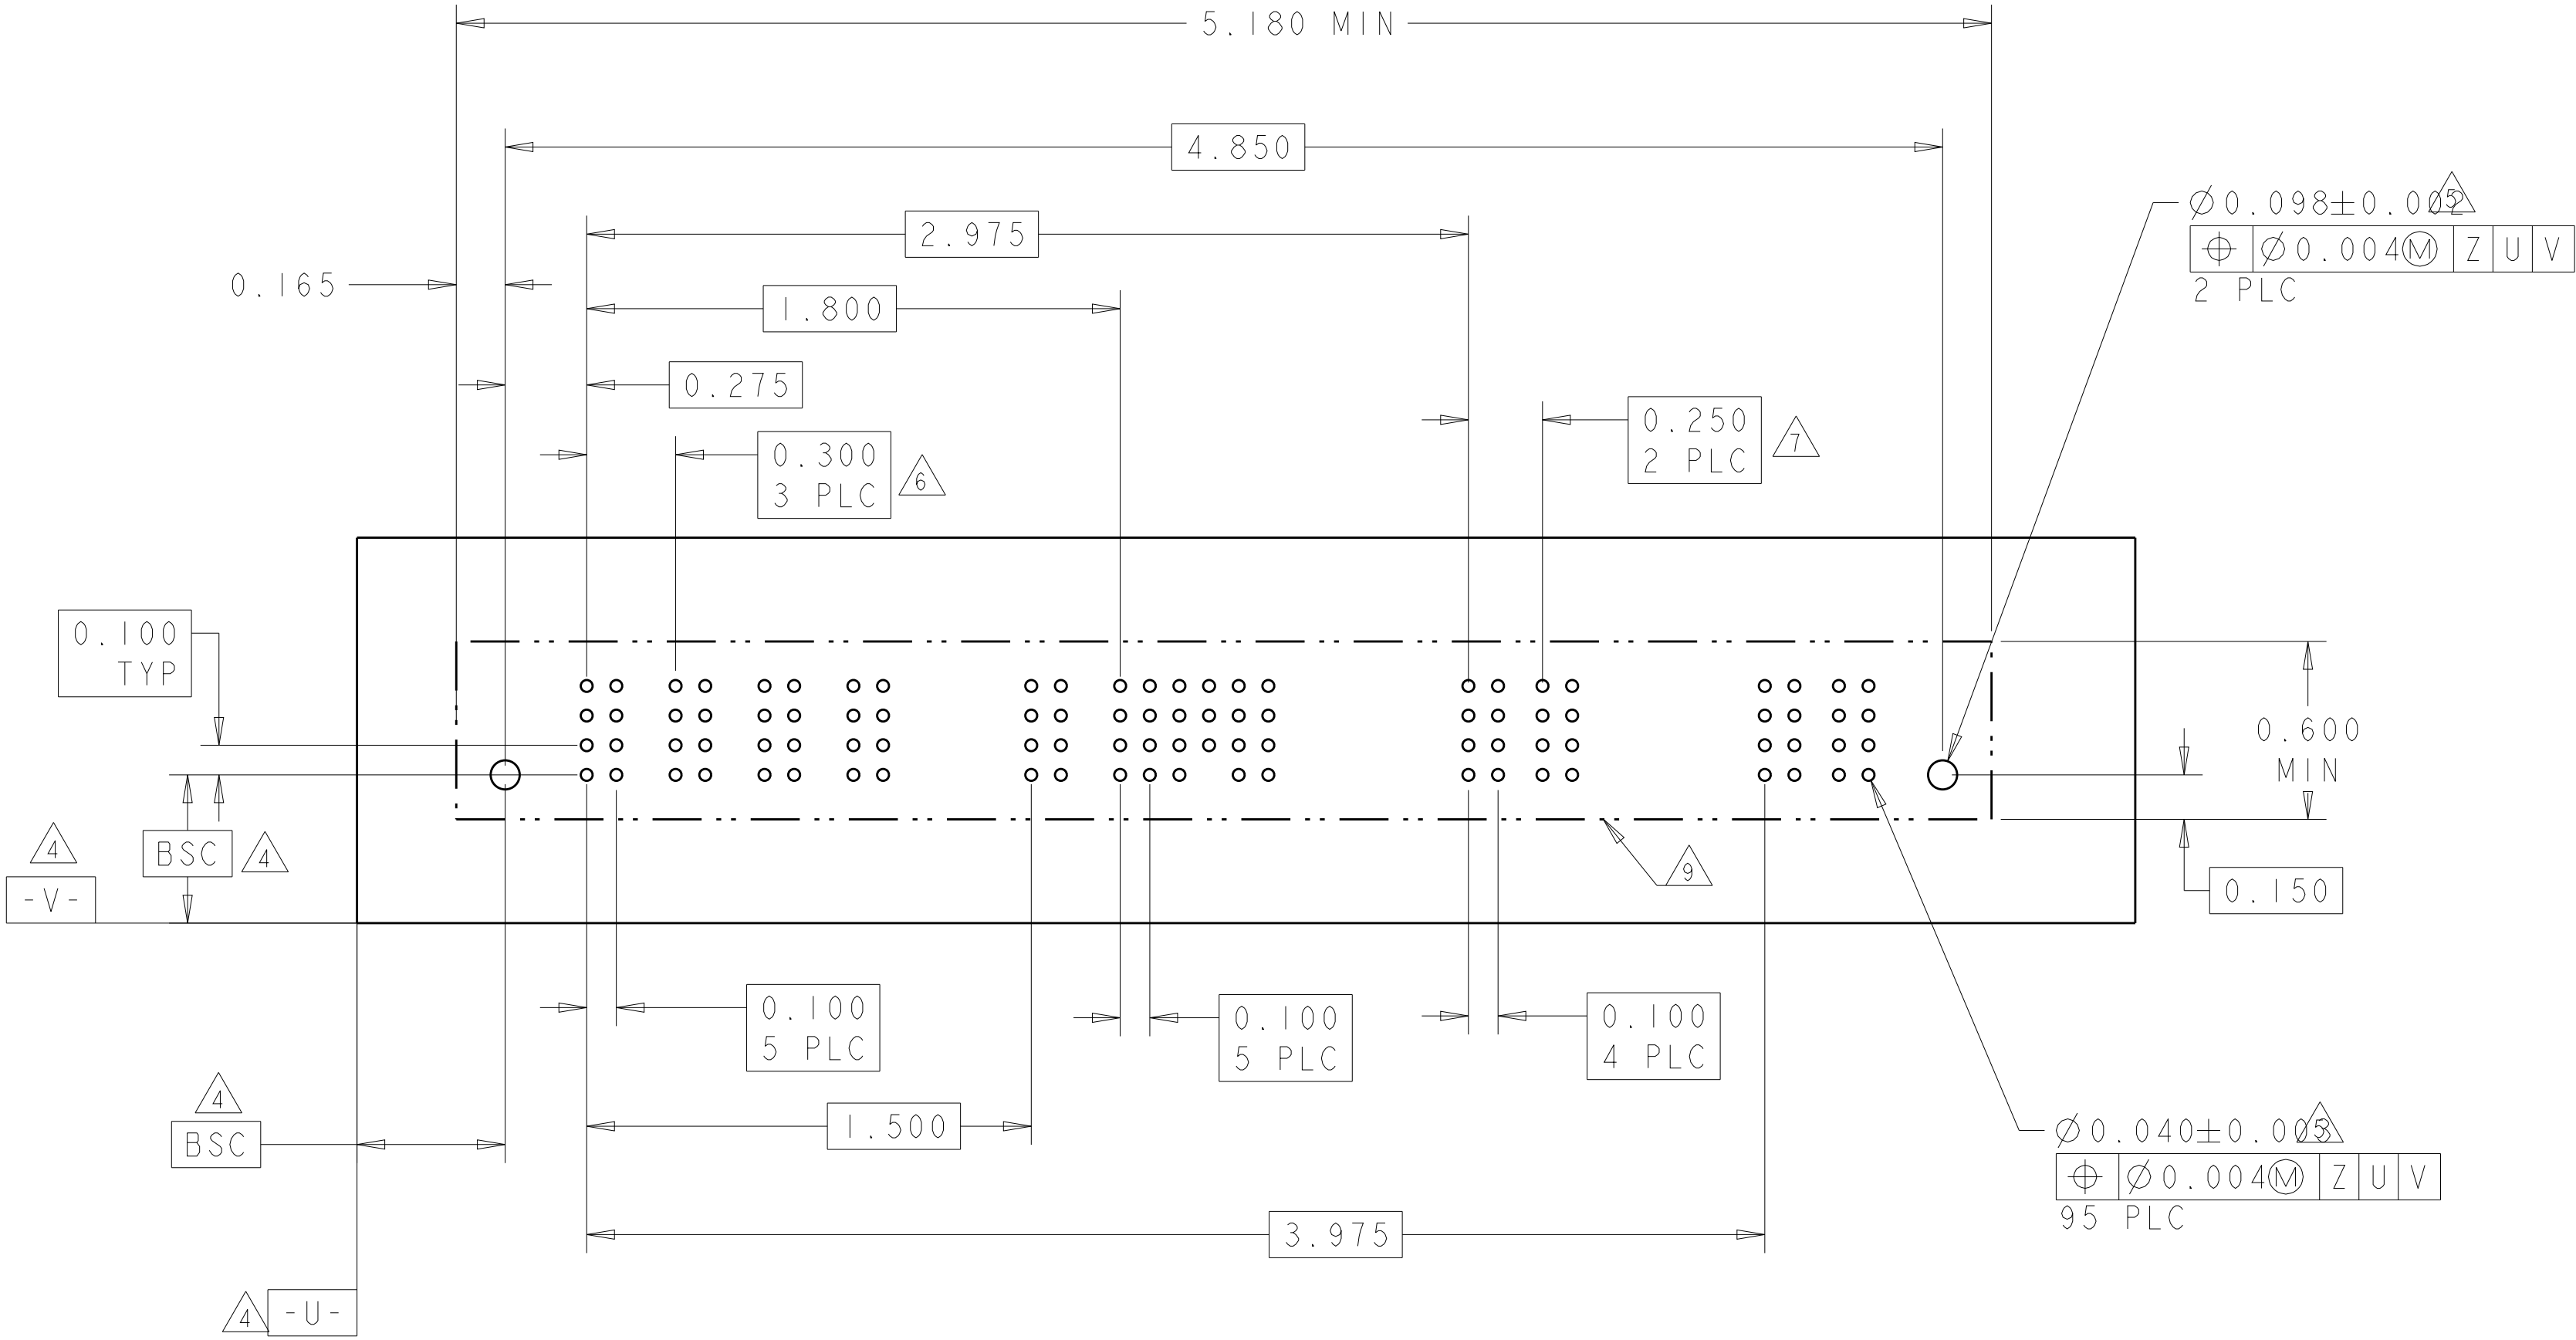



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. McCLINTON 23MAR2005	TE Connectivity	
		CHK D. TROUT 23MAR2005		
DIMENSIONS:		APVD R. WHYNE 23MAR2005	NAME	
INCH		PRODUCT SPEC	VERTICAL HEADER ASSEMBLY, W/GUIDES, PRESS FIT, TYPE PSP MULTI-BEAM XL	
		108-1973	SIZE	
		APPLICATION SPEC	CAGE CODE	
		114-13038	DRAWING NO	
		WEIGHT	RESTRICTED TO	
		-	A100779C=6600333	
		Customer Drawing	SCALE 3:1	
			SHEET 11 OF 22	
			REV P7	

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER				SIGNAL		POWER				
			P1	P2	P3	P4	1	2	P5	P6	P7	P8	
3-6600333-4	D C B A	 HD	 VM	 VM	 VM	 VM	EV	EV	 VM	 VM	 VM	 VM	 HD
							EV	EV					
							EV	EV					
							EV	EV					
4P + 8S + 4P													

PART NUMBER	ROWS		POWER				SIGNAL				POWER				
			P1	P2	P3	P4	1	2	3	4	P5	P6	P7	P8	
3-6600333-3	D C B A						EV	EV	EV	EV					
							EV	EV	EV	EV					
							EV	EV	EV	EV					
							EV	EV	EV	EV					
4P + 16S + 4P															

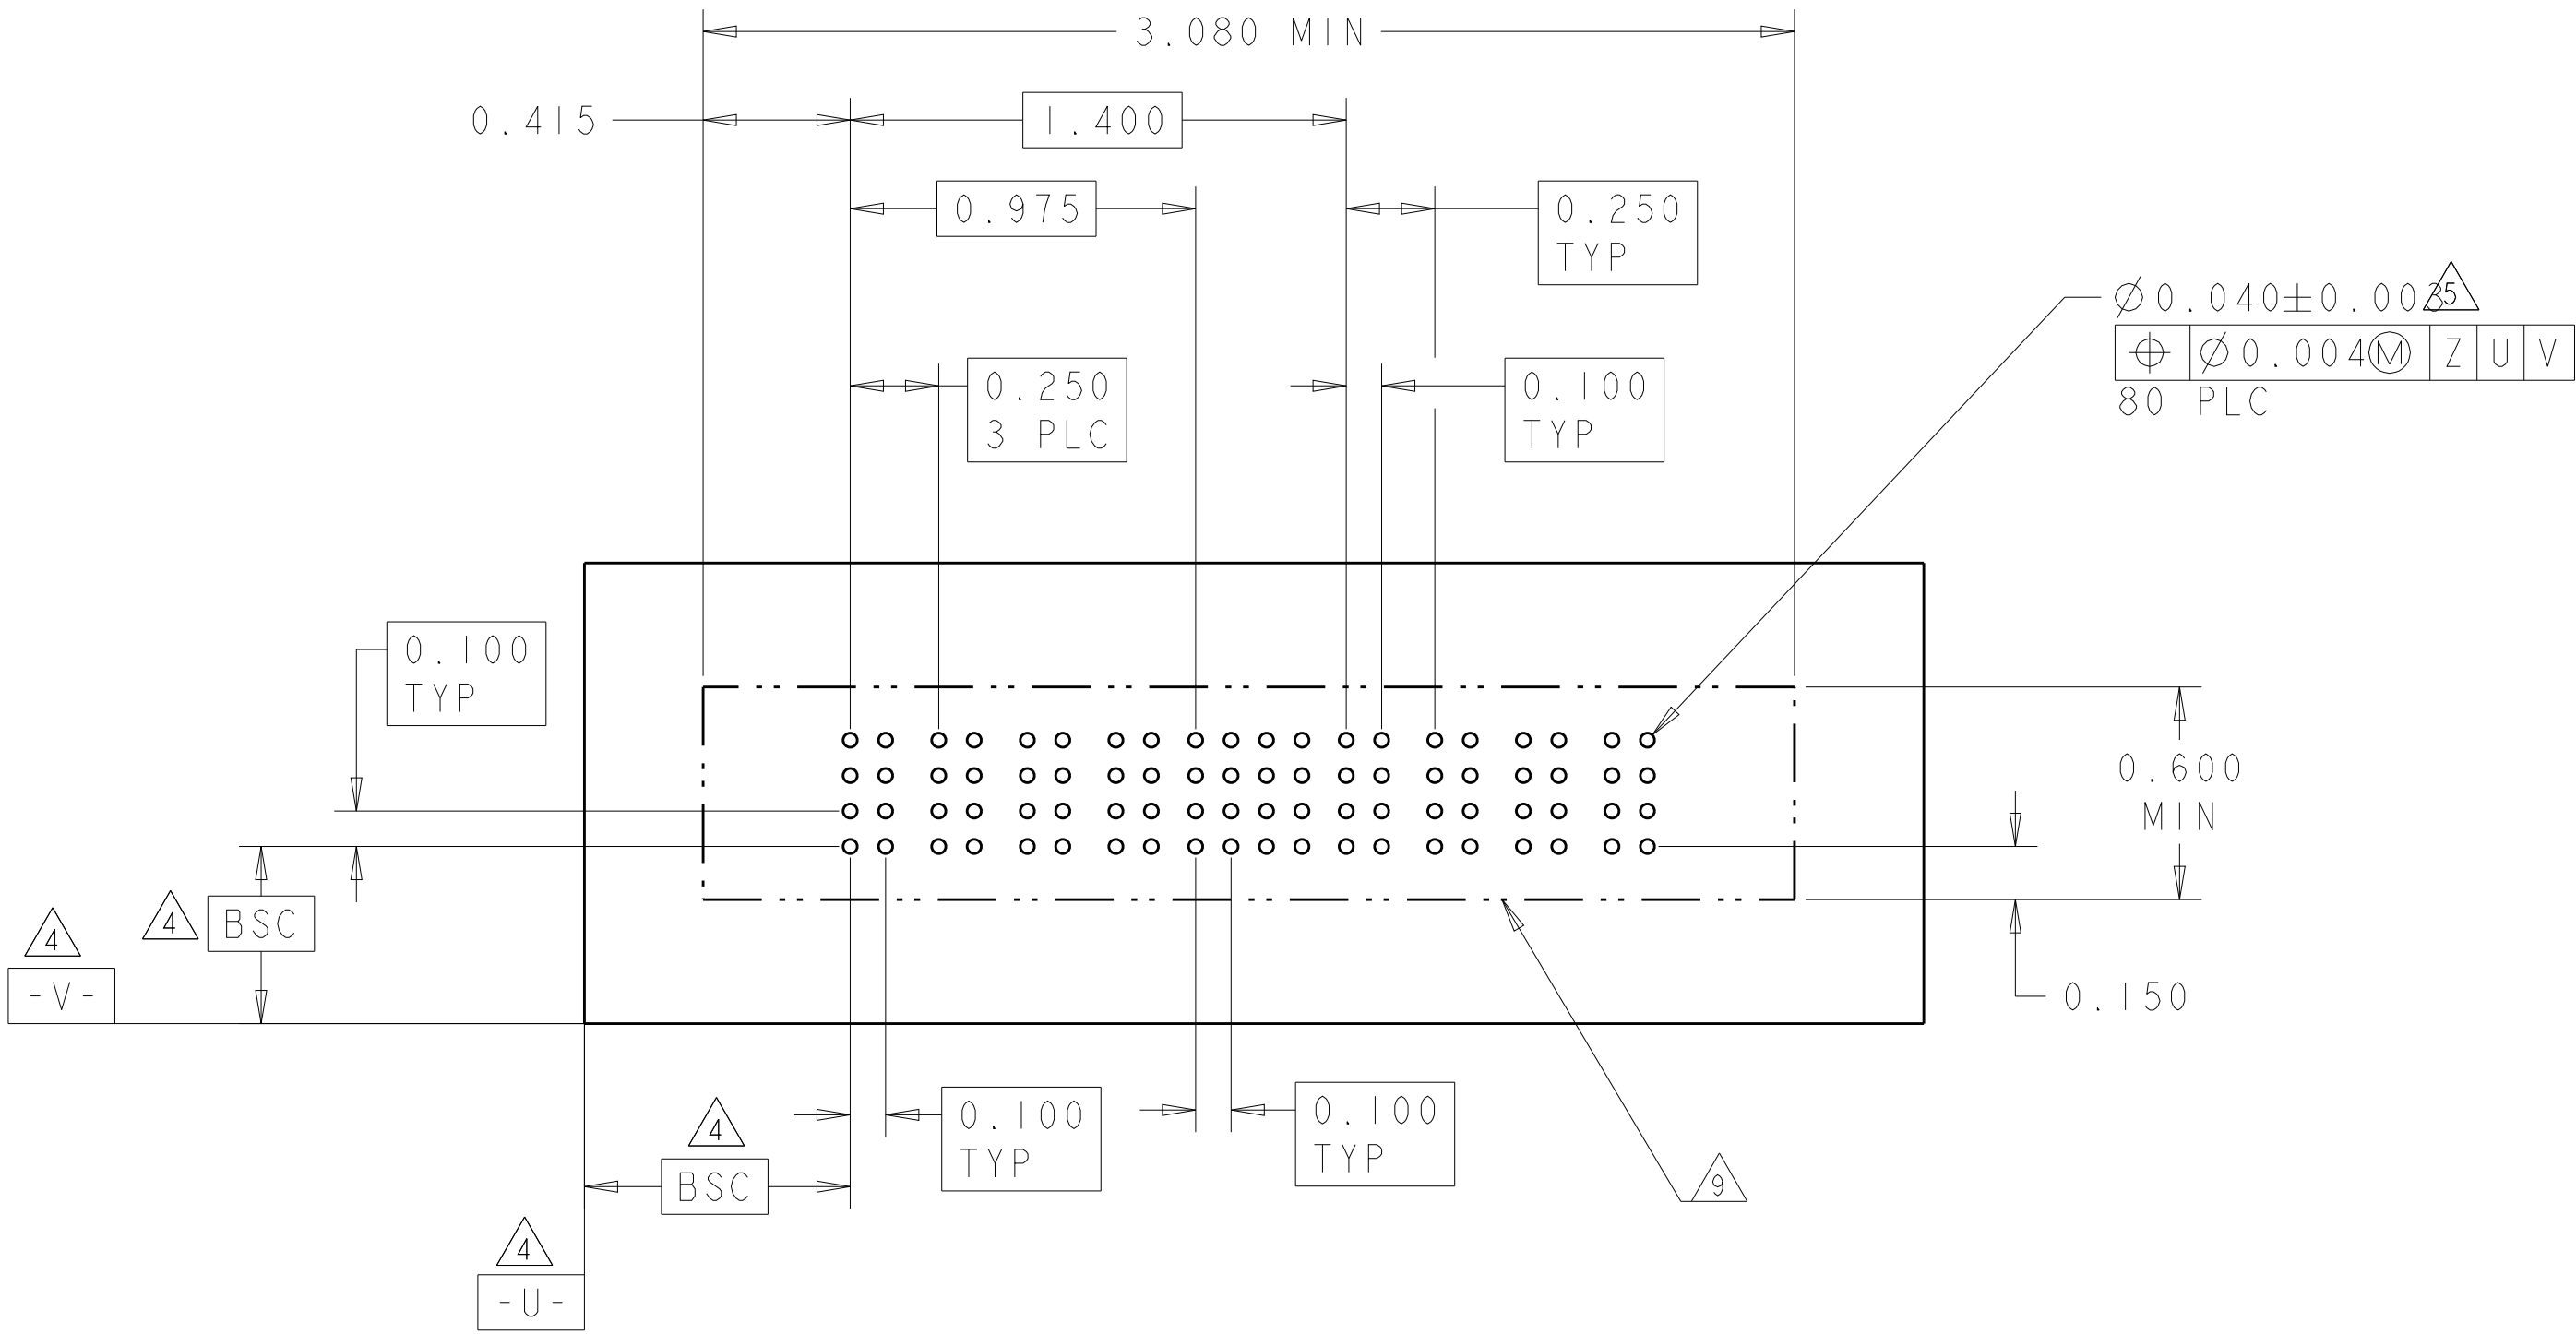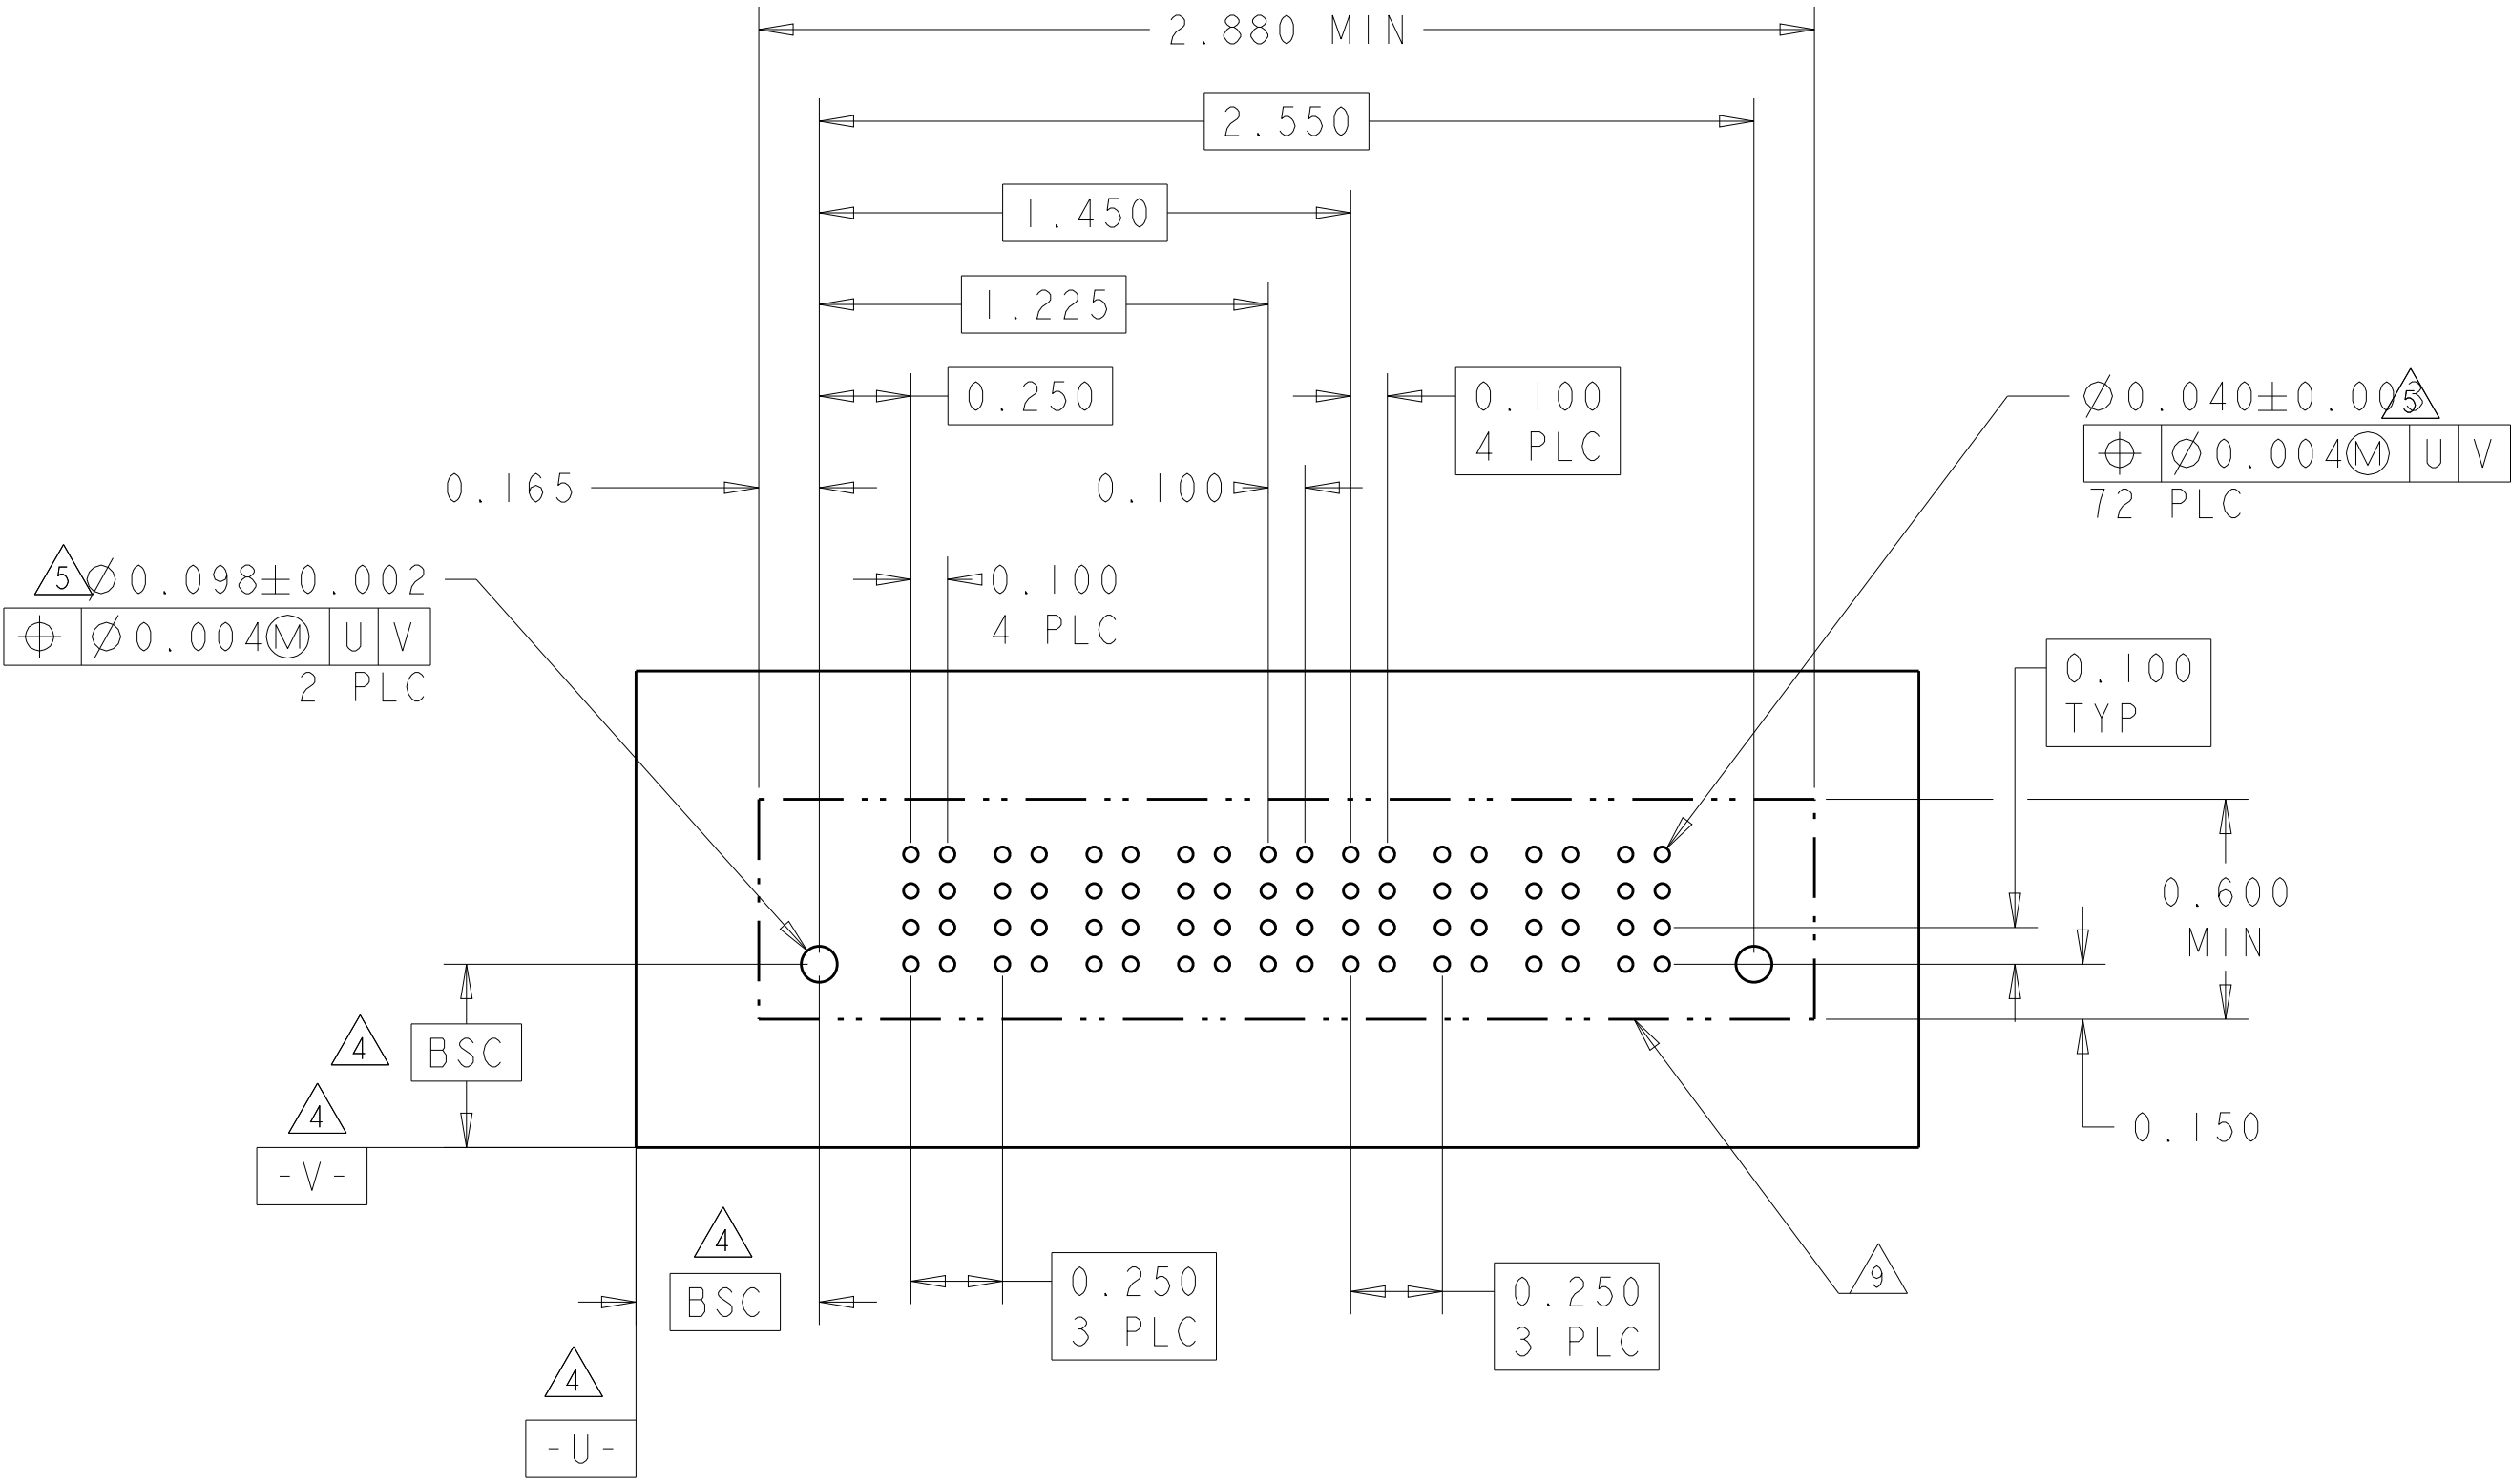

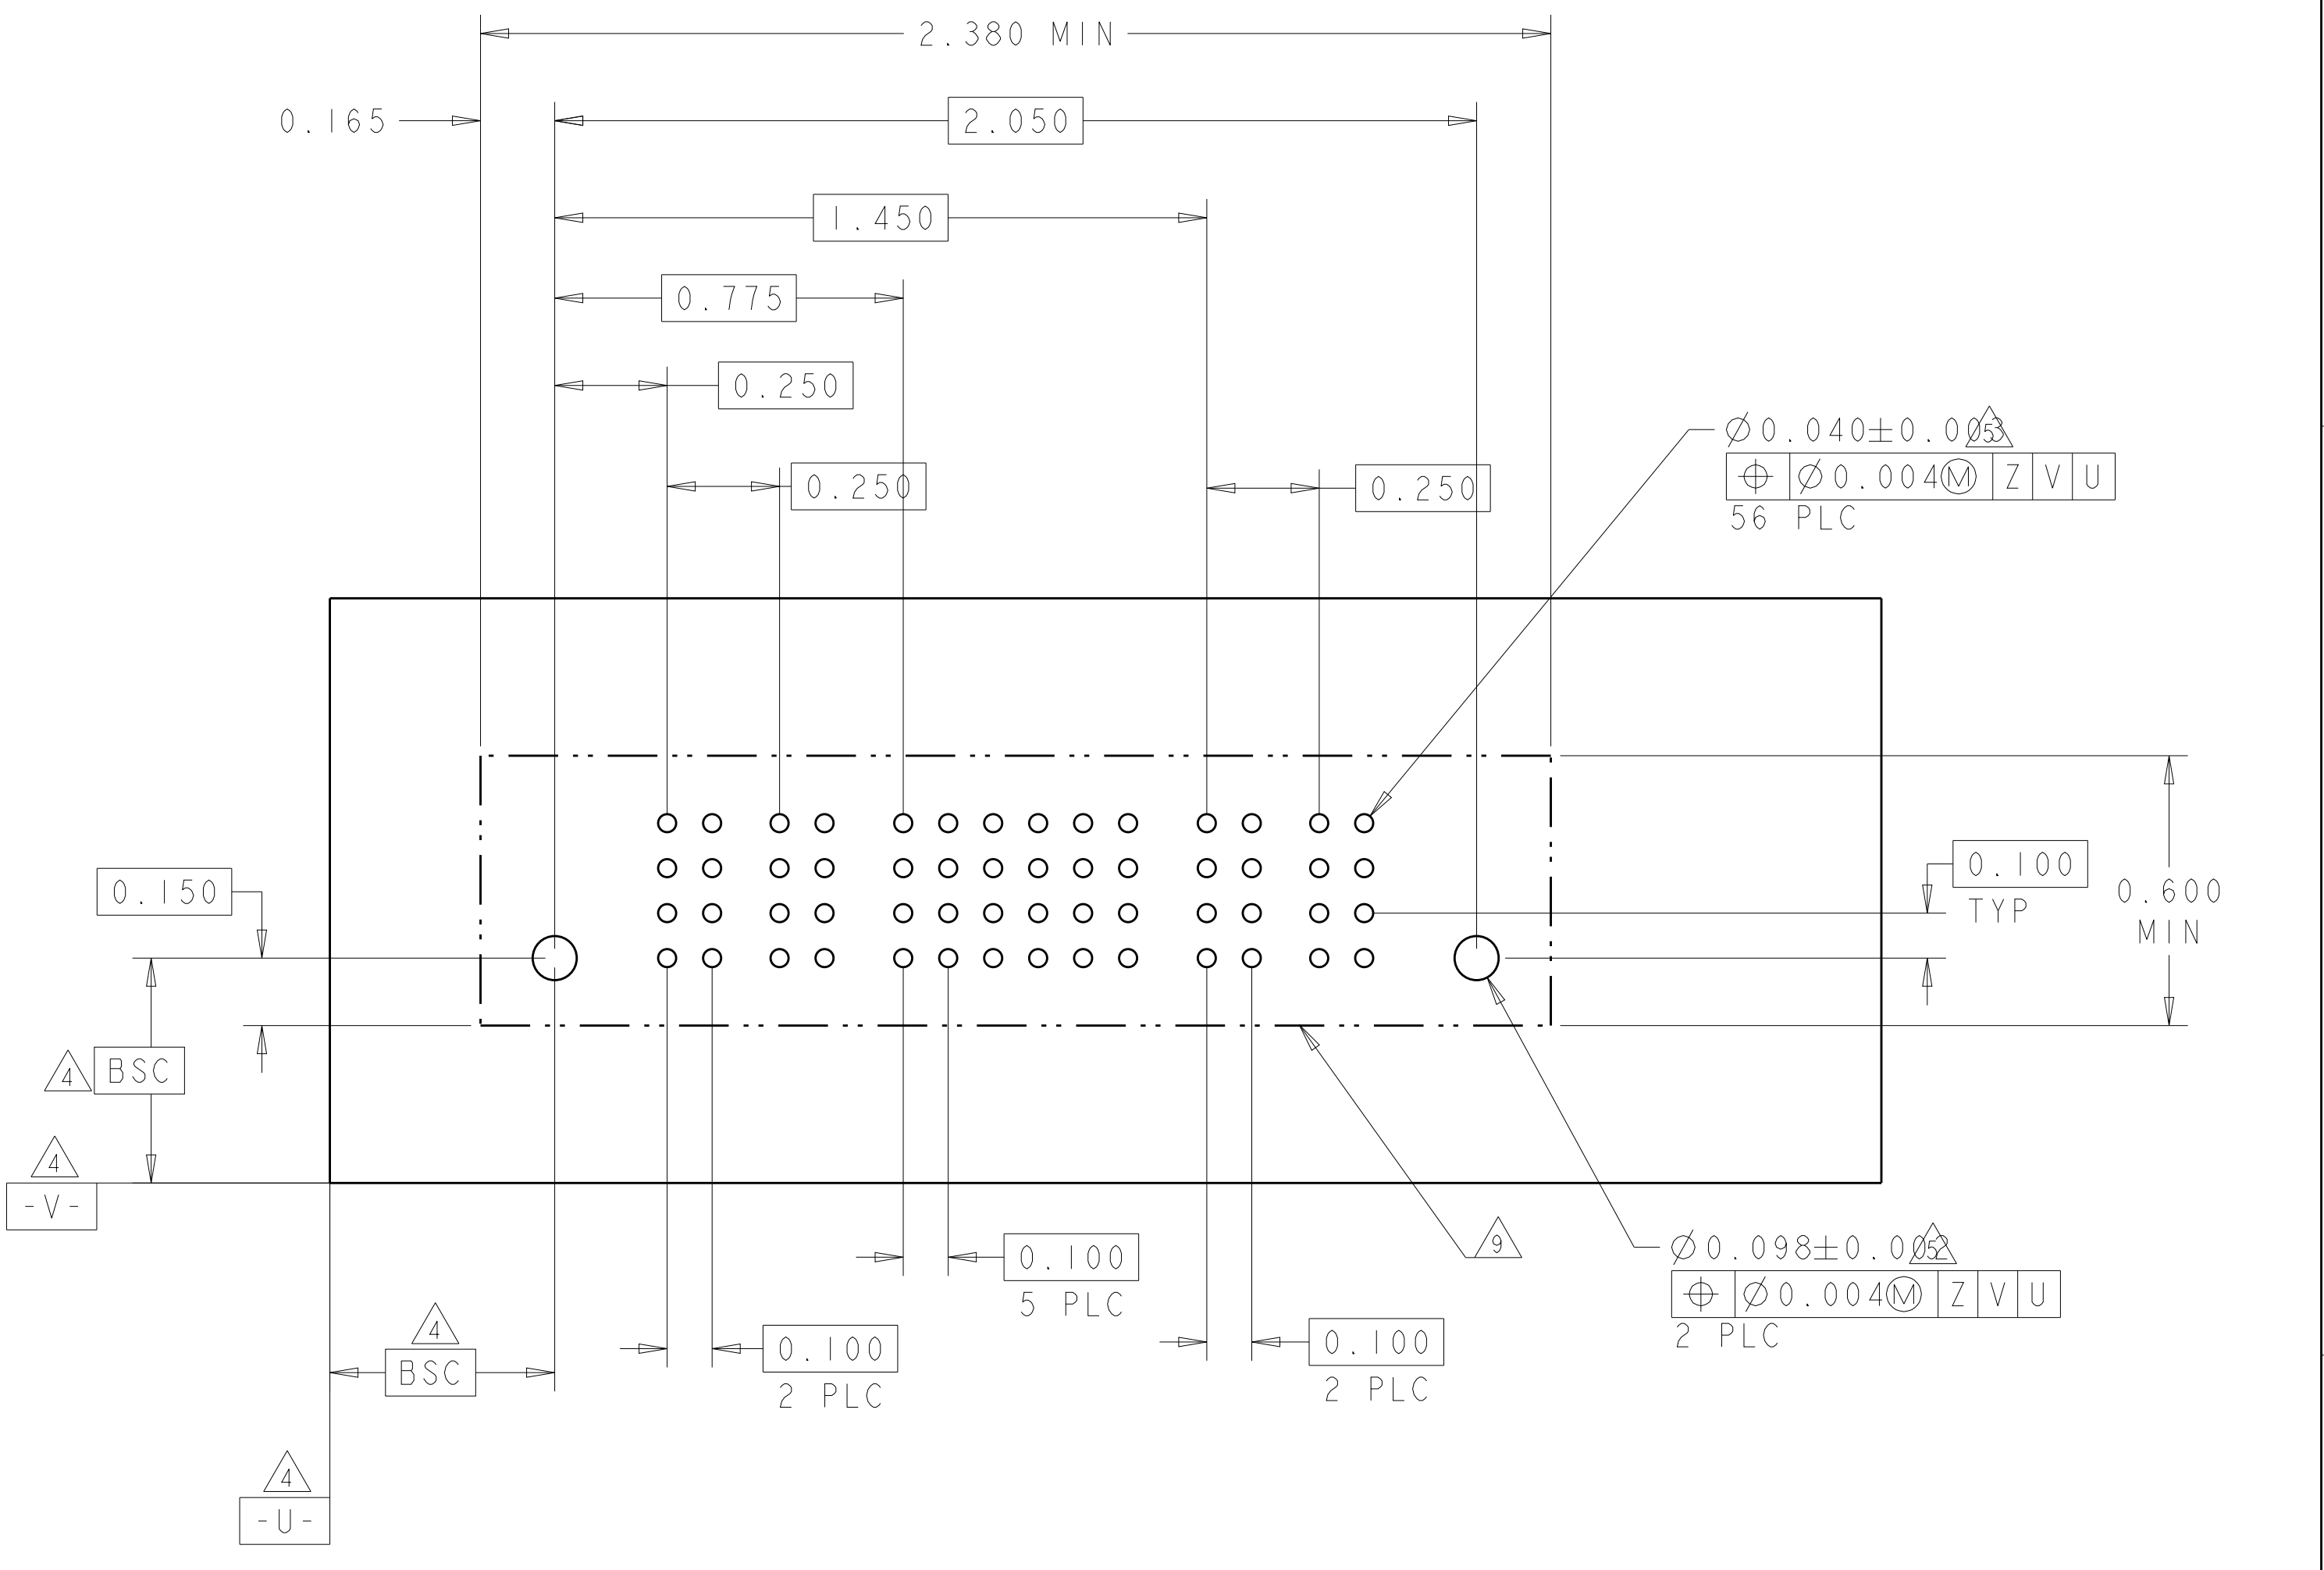[illegible]

0.415

4.080 MIN

2.400

0.975

0.250
3 PLC

0.250
3 PLC

$\varnothing 0.040 \pm 0.0053$
 $\varnothing 0.004 \text{ M}$ U V
120 PLC

0.100
TYP

0.150

0.600 MIN

4 BSC

-V-

4 BSC

0.100
4 PLC

0.100
13 PLC


0.100
4 PLC

9

4 -U-

4805 (3/11)



PART NUMBER	ROWS		POWER			SIGNAL						POWER			
			P1	P2	P3	1	2	3	4	5	6	P4	P5	P6	
3-6600333-9	D		VM	VM	VM	EV	EV	EV	EV	EV	EV	VM	VM	VM	
	C					EV	EV	EV	EV	EV	EV				
	B					EV	EV	EV	EV	EV	EV				
	A					ES	EV	EV	EV	EV	EV				
3ACP+24S+3ACP		HD													HD

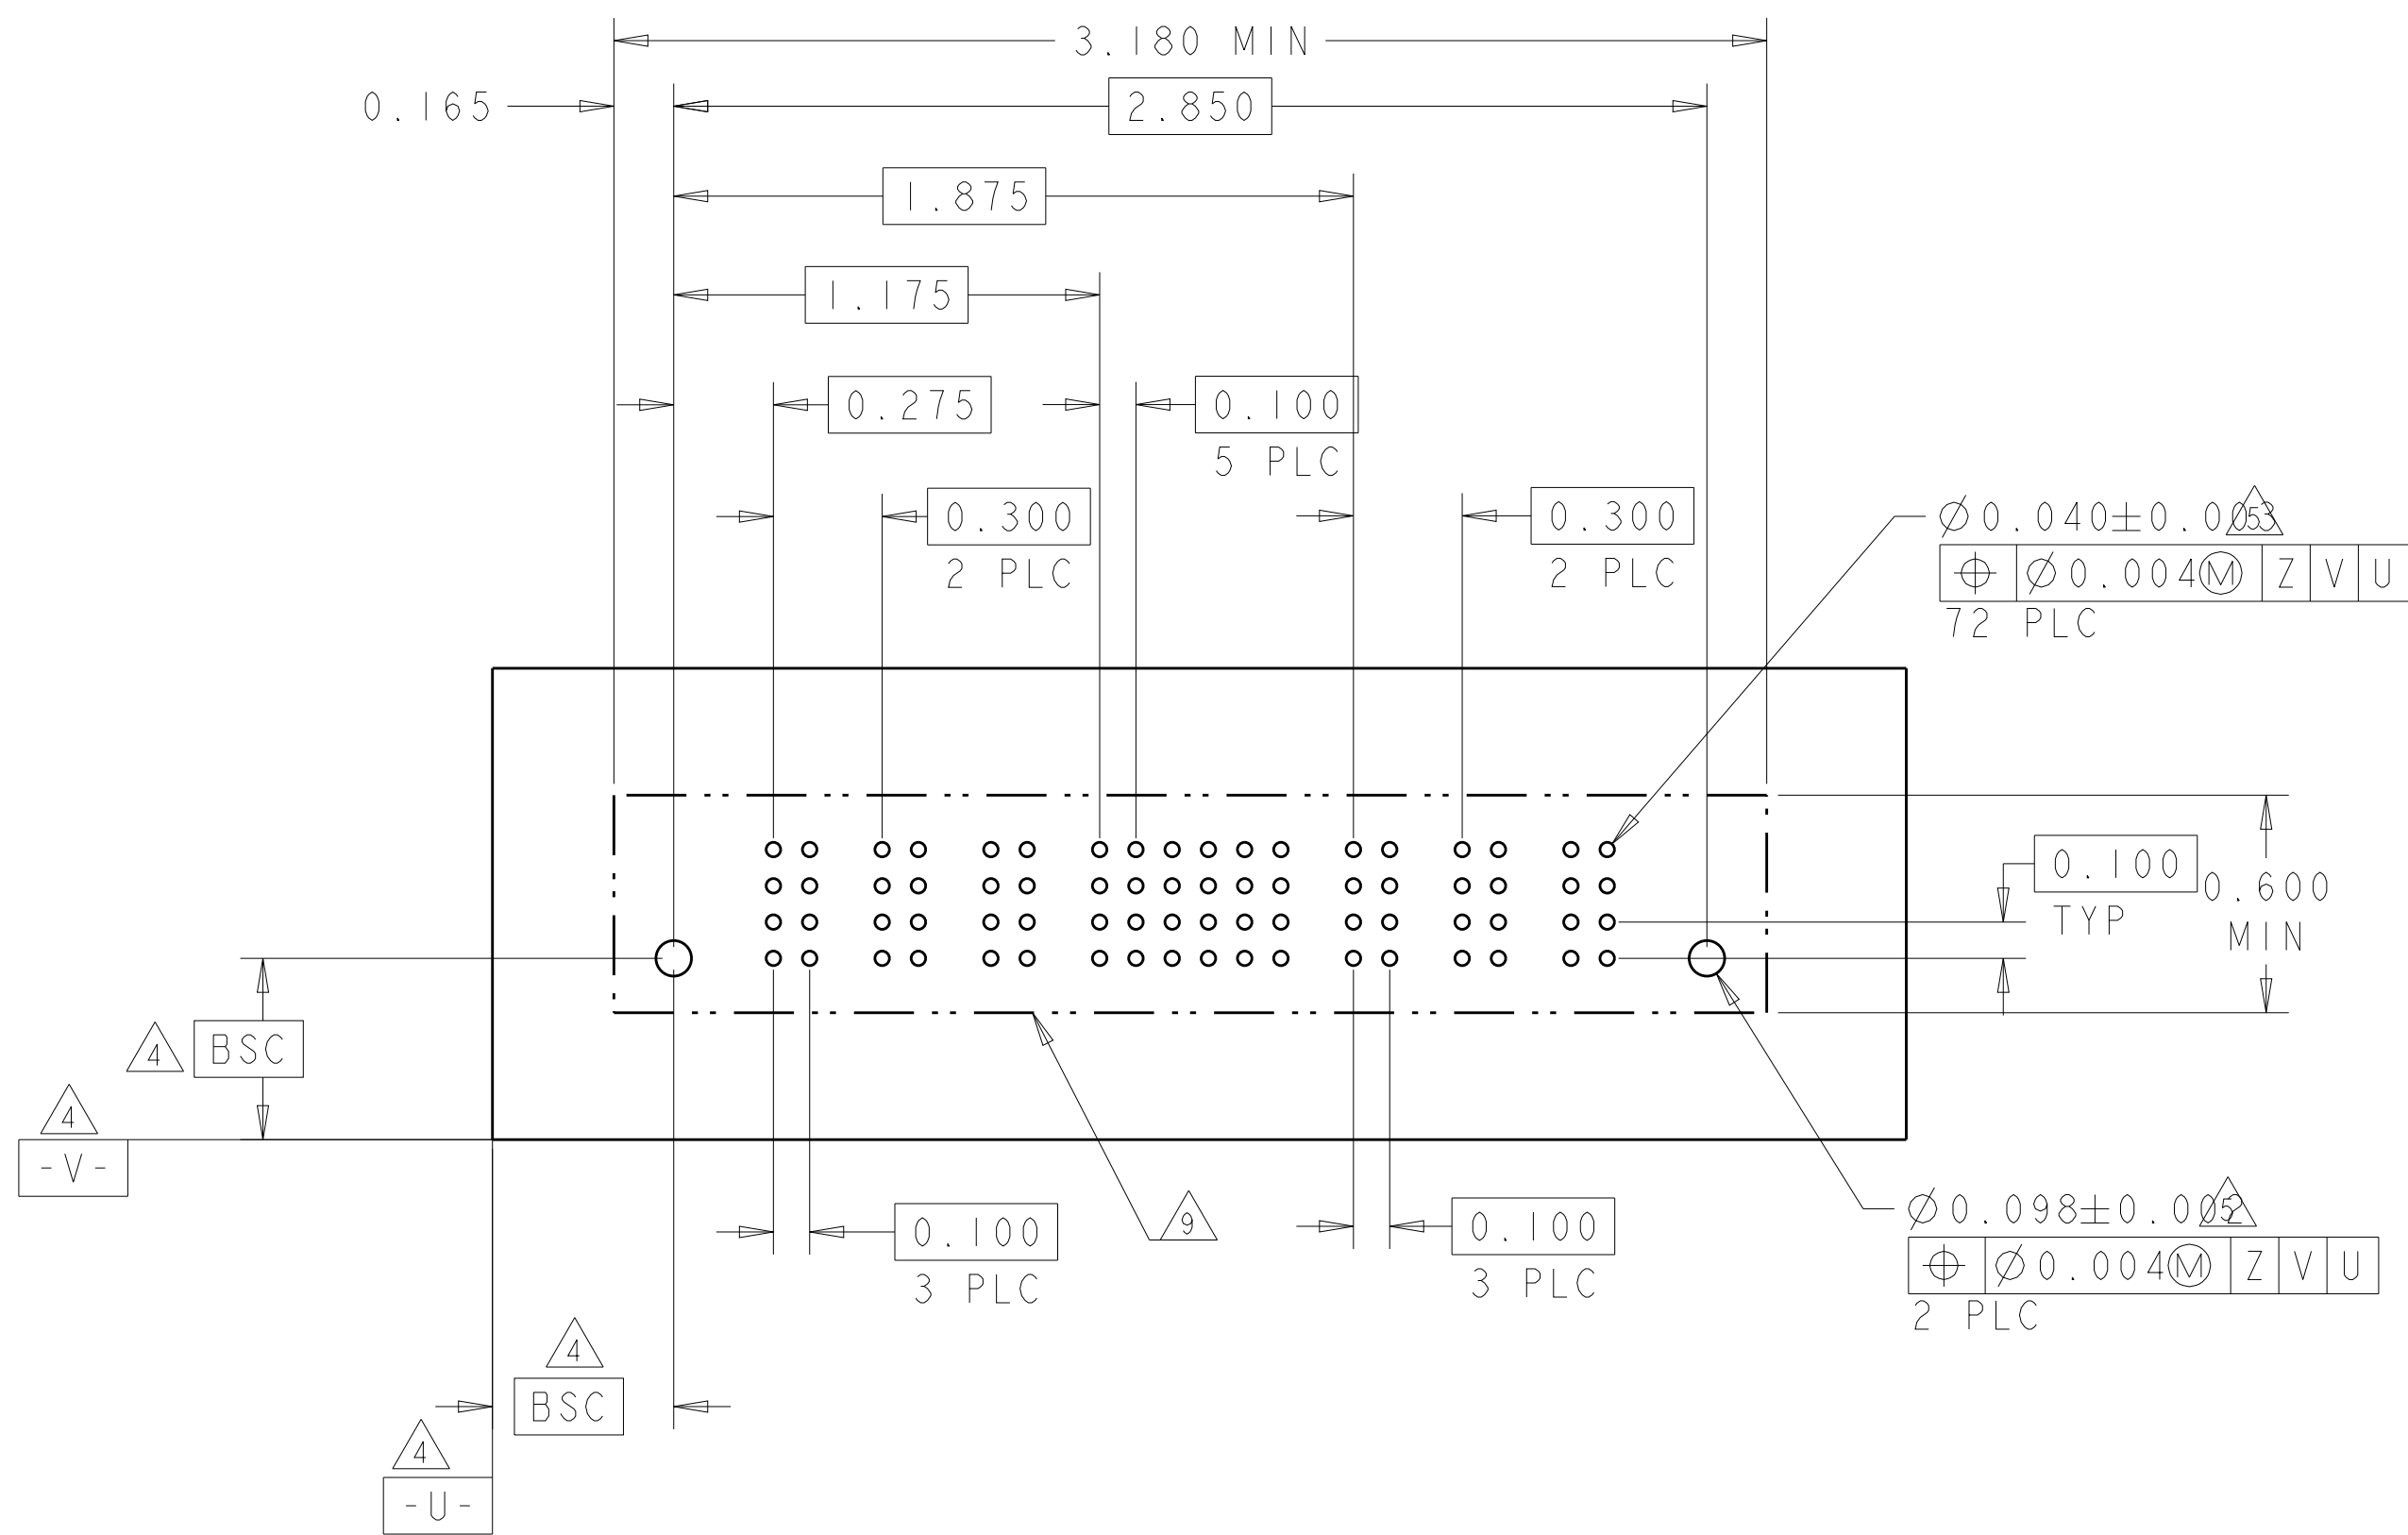4805 (3/11)

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER		SIGNAL			POWER		
			P1	P2	1	2	3	P3	P4	
4-6600330-1	D		VM	VM	EV	EV	EV	VM	VM	
	C				EV	EV	EV			
	B				EV	EV	EV			
	A				EV	EV	EV			
					EV	EV	EV			
2P + 12S + 2P										


PART NUMBER	ROWS		POWER		SIGNAL			POWER		
			P1	P2	1	2	3	P2	P2	
4-6600333-9	D		VM		ES	EV	EV	VM		
	C				EV	EV	EV			
	B				EV	EV	EV			
	A				EV	EV	EV			
1P+12S+1P										

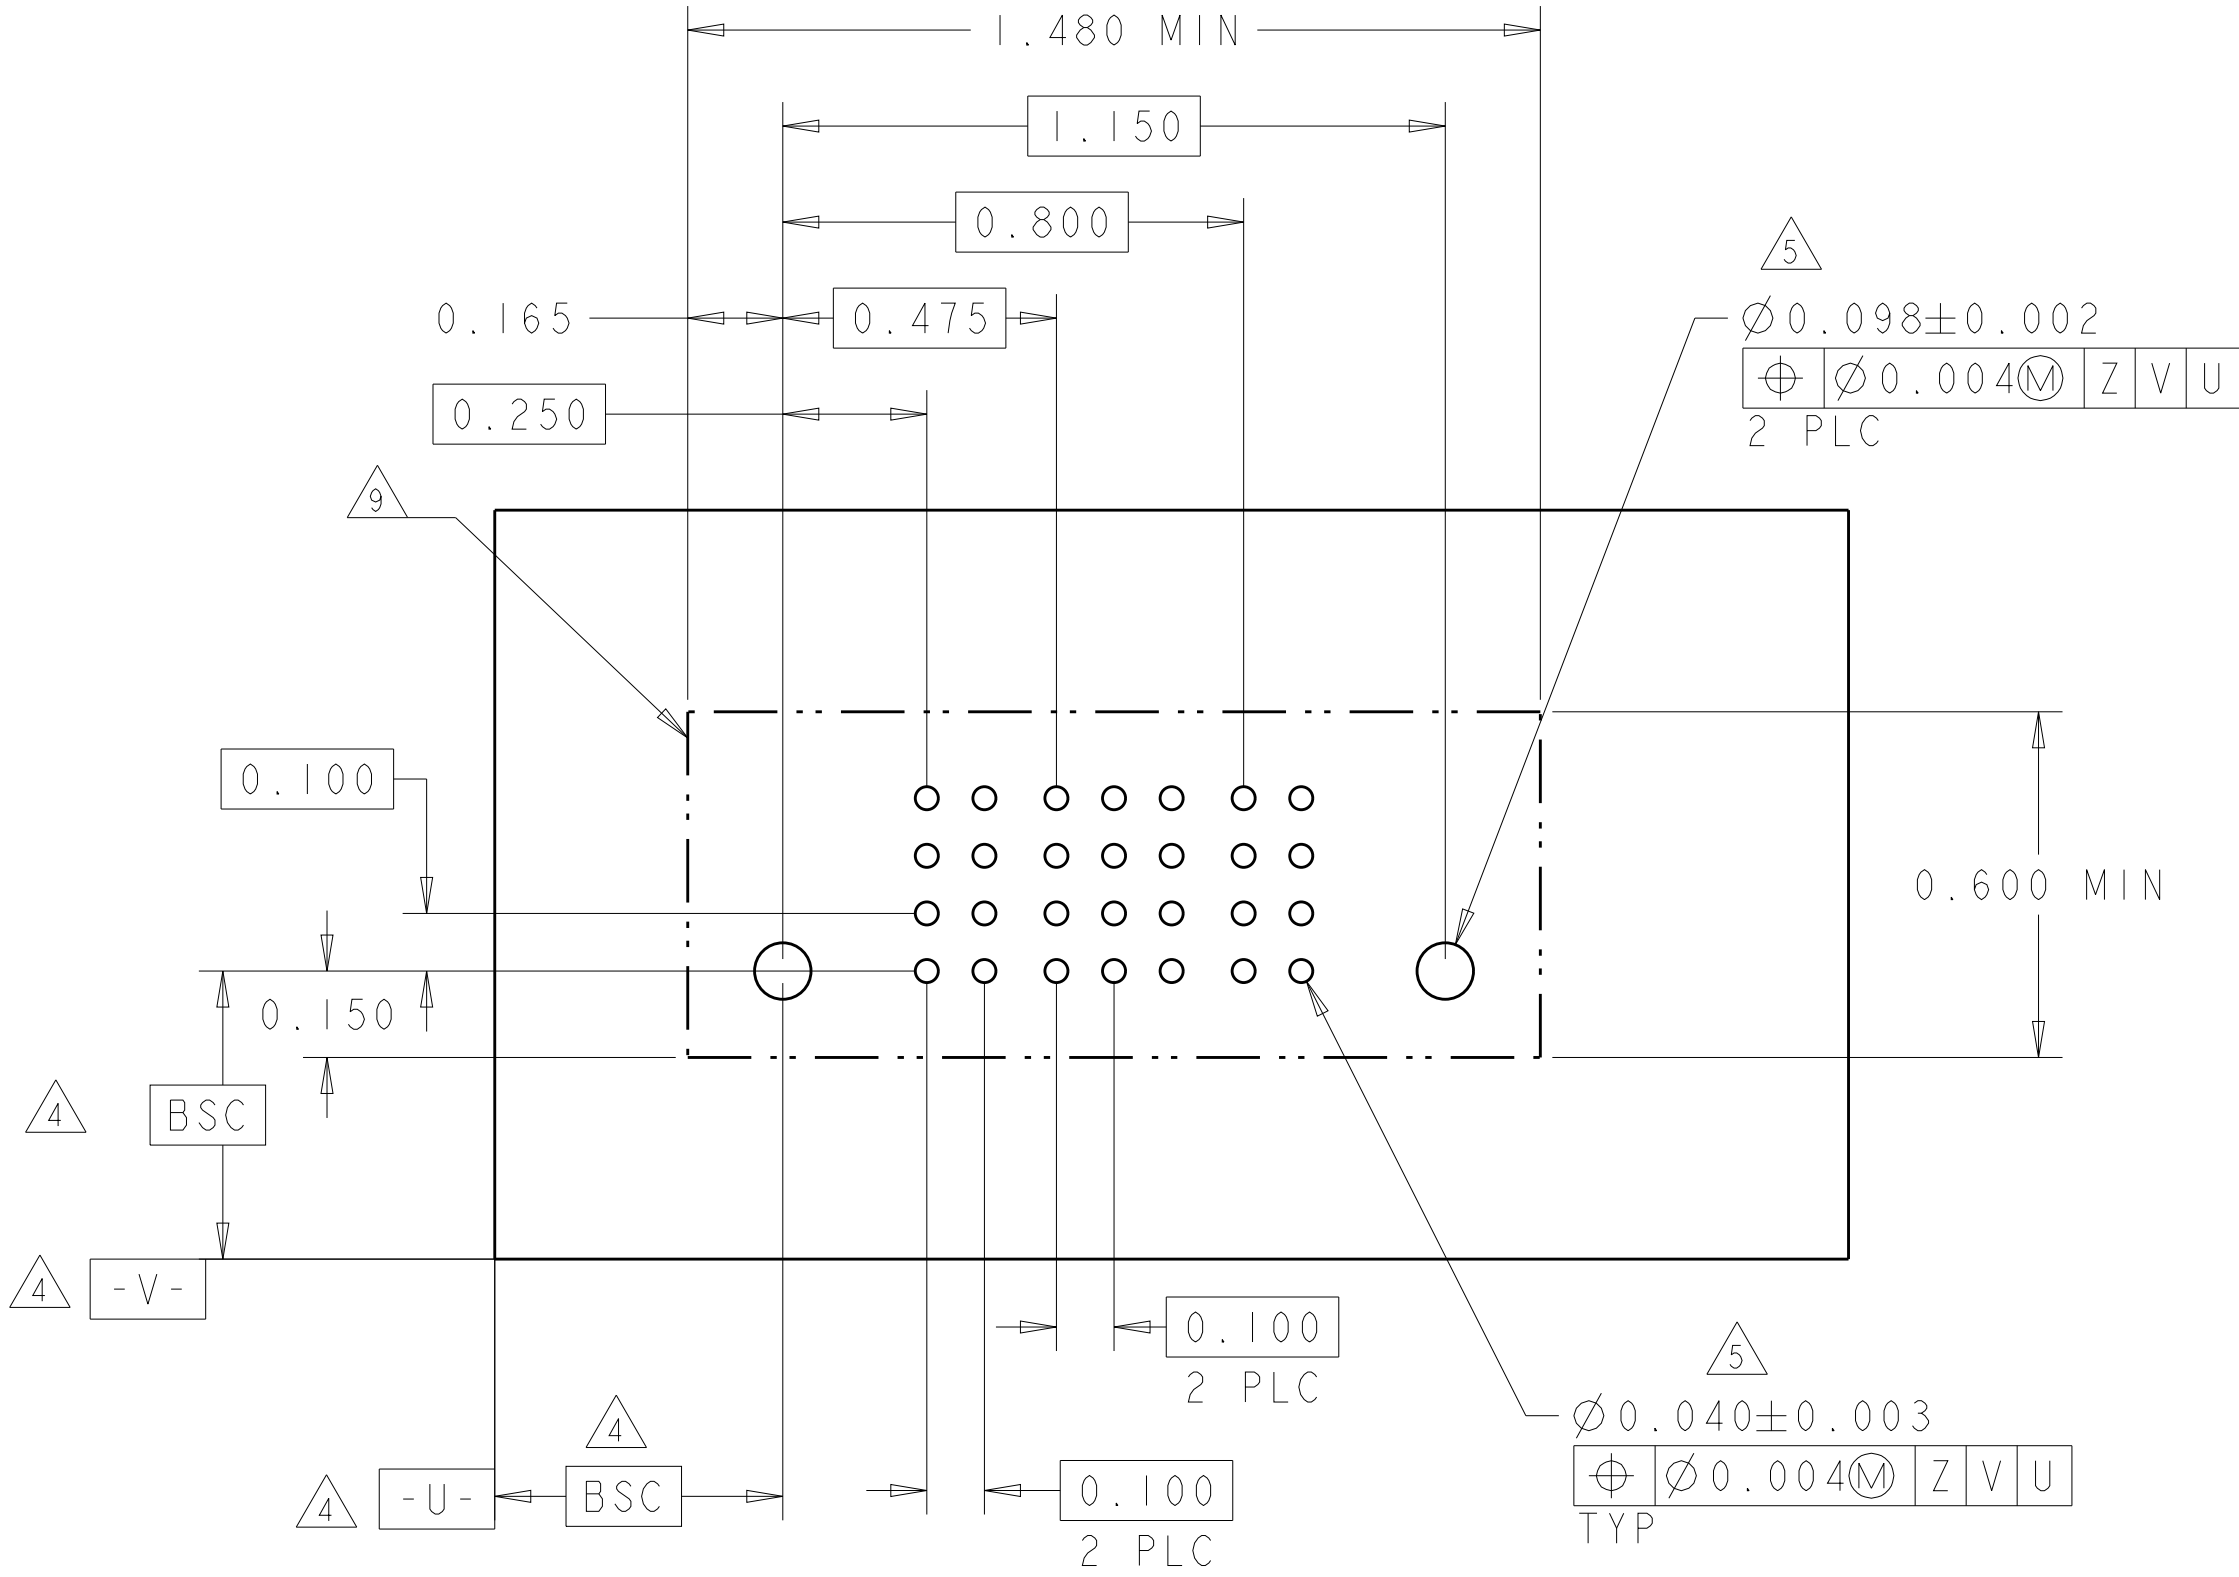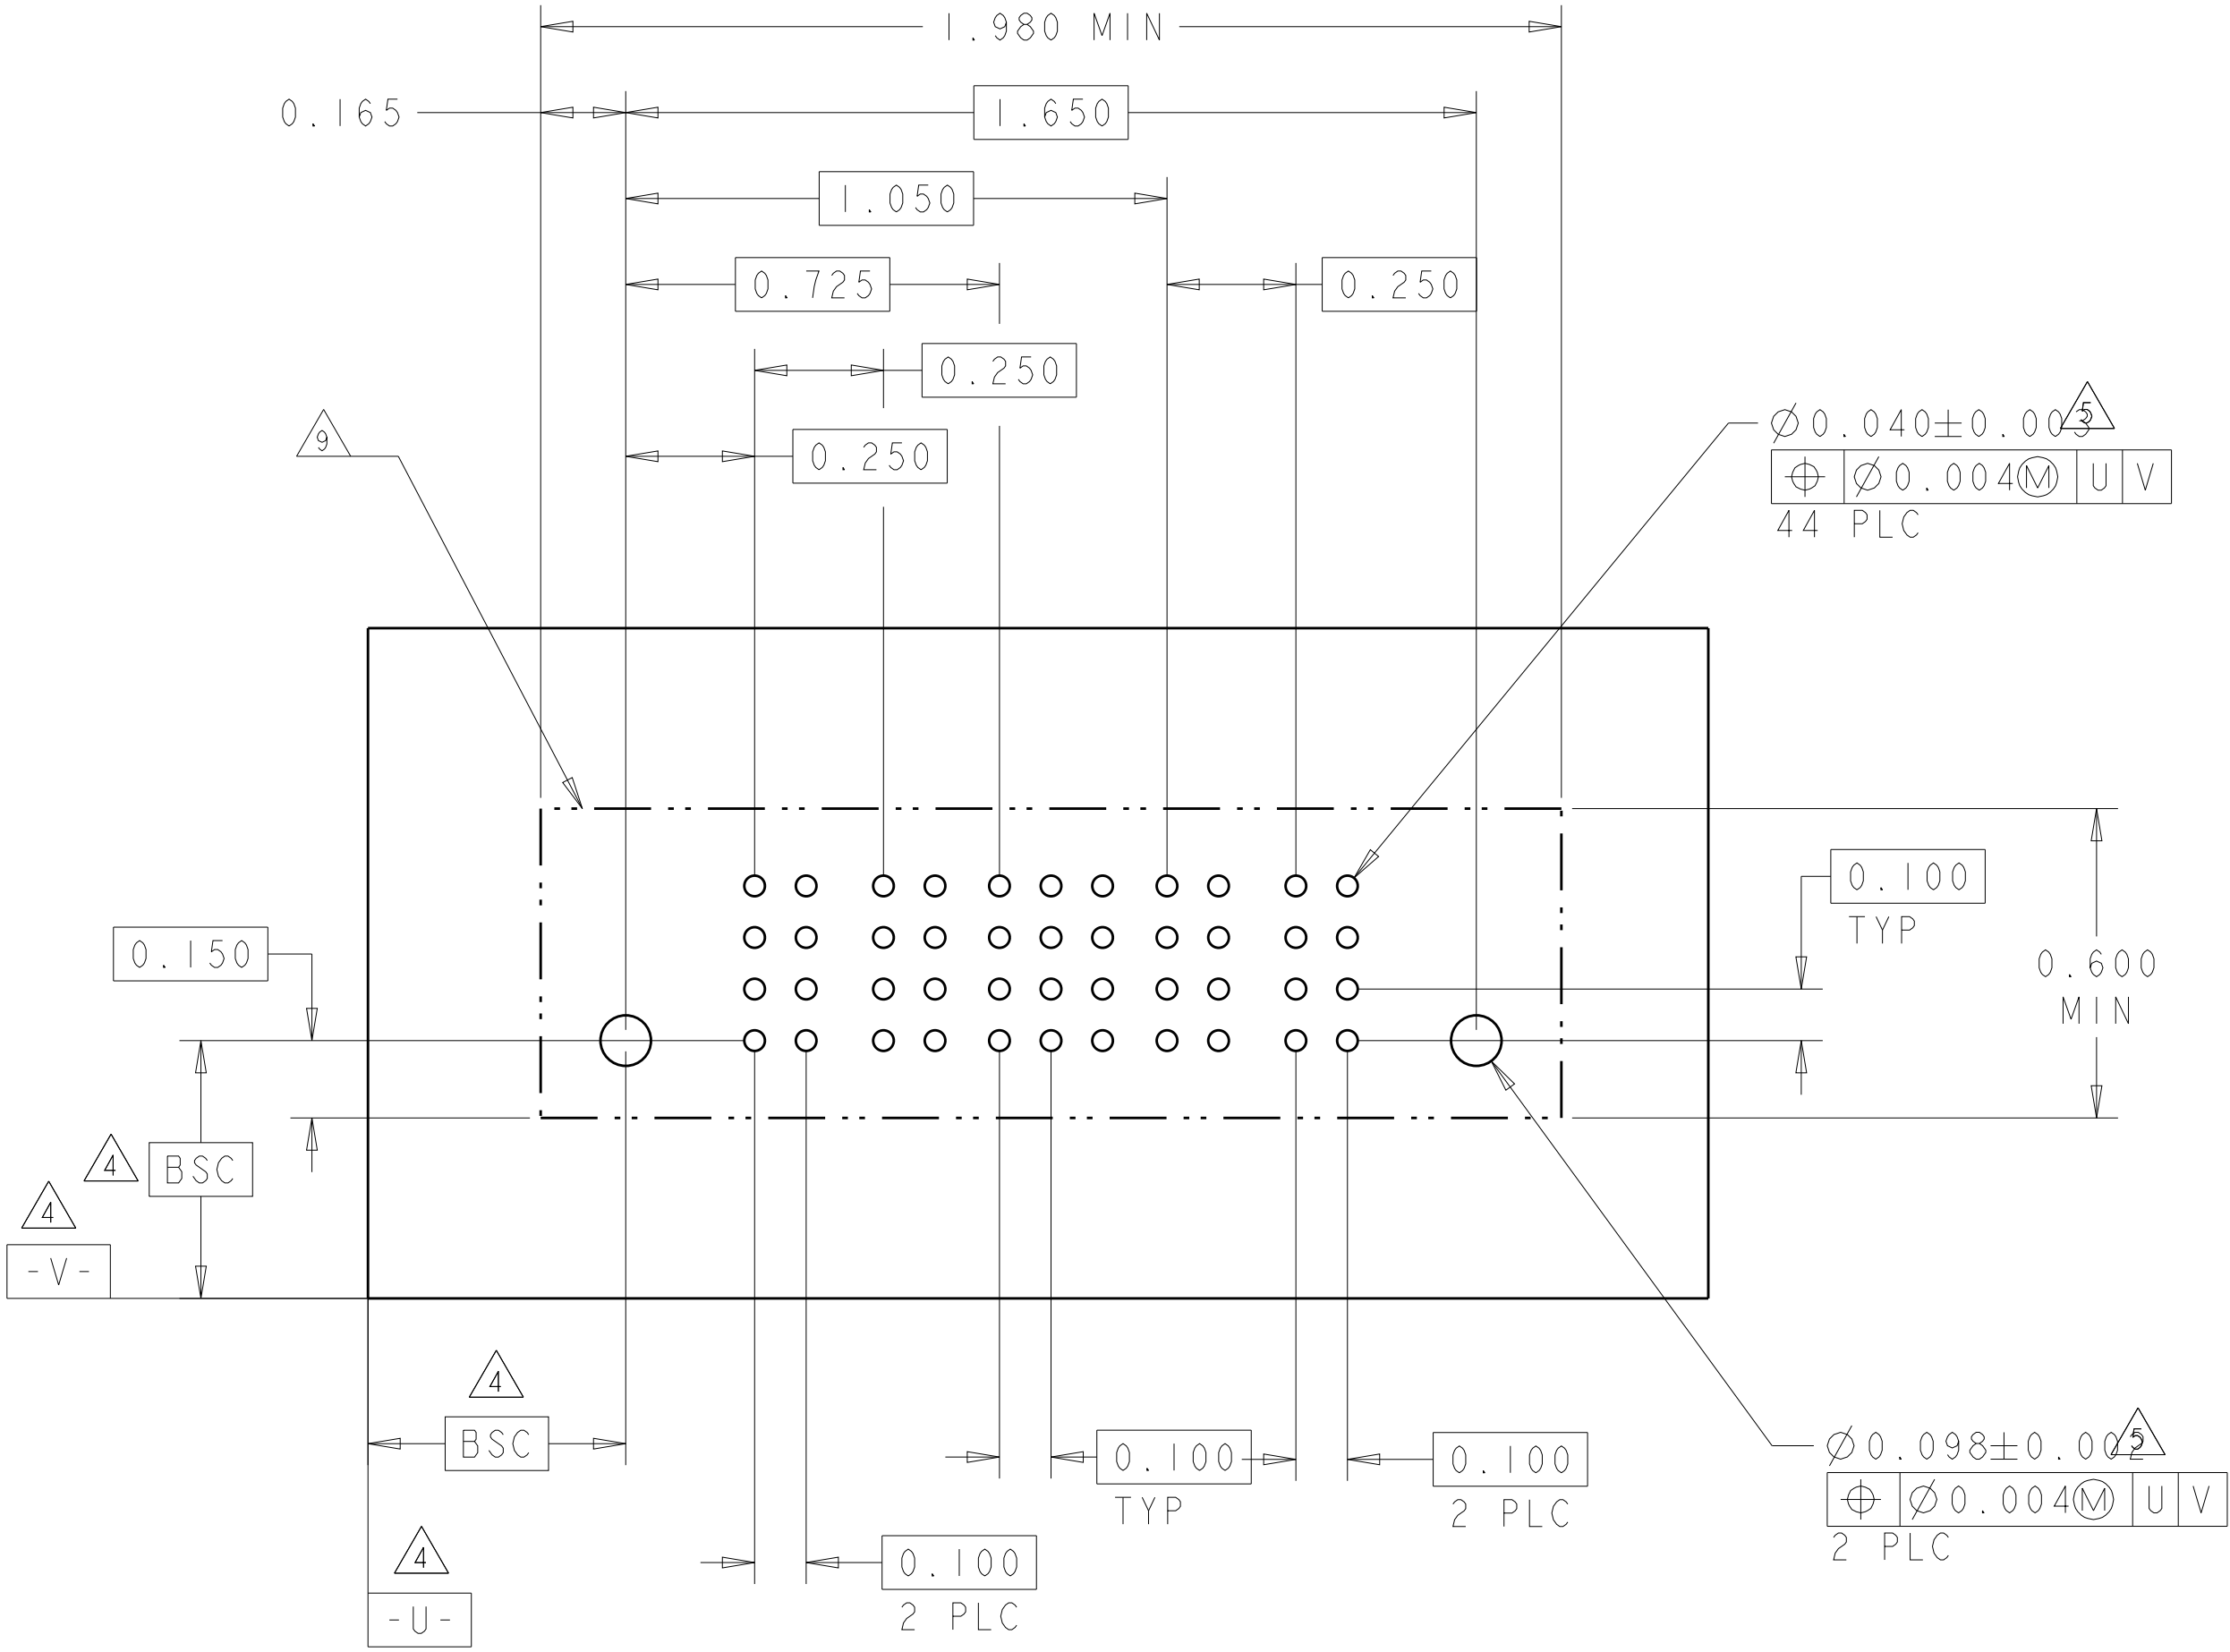


N

4805 (3/11)

PART NUMBER	ROWS		POWER				SIGNAL			POWER				
			P1	P2	P3	P4	1	2	3	P5	P6	P7	P8	
4-6600333-6	D		VM	VM	VM	VM	EV	EV	EV	VM	VM	VM	VM	
	C						EV	EV	EV					
	B						EV	EV	EV					
	A						EV	EV	EV					
4P + 12S + 4P		HD												HD

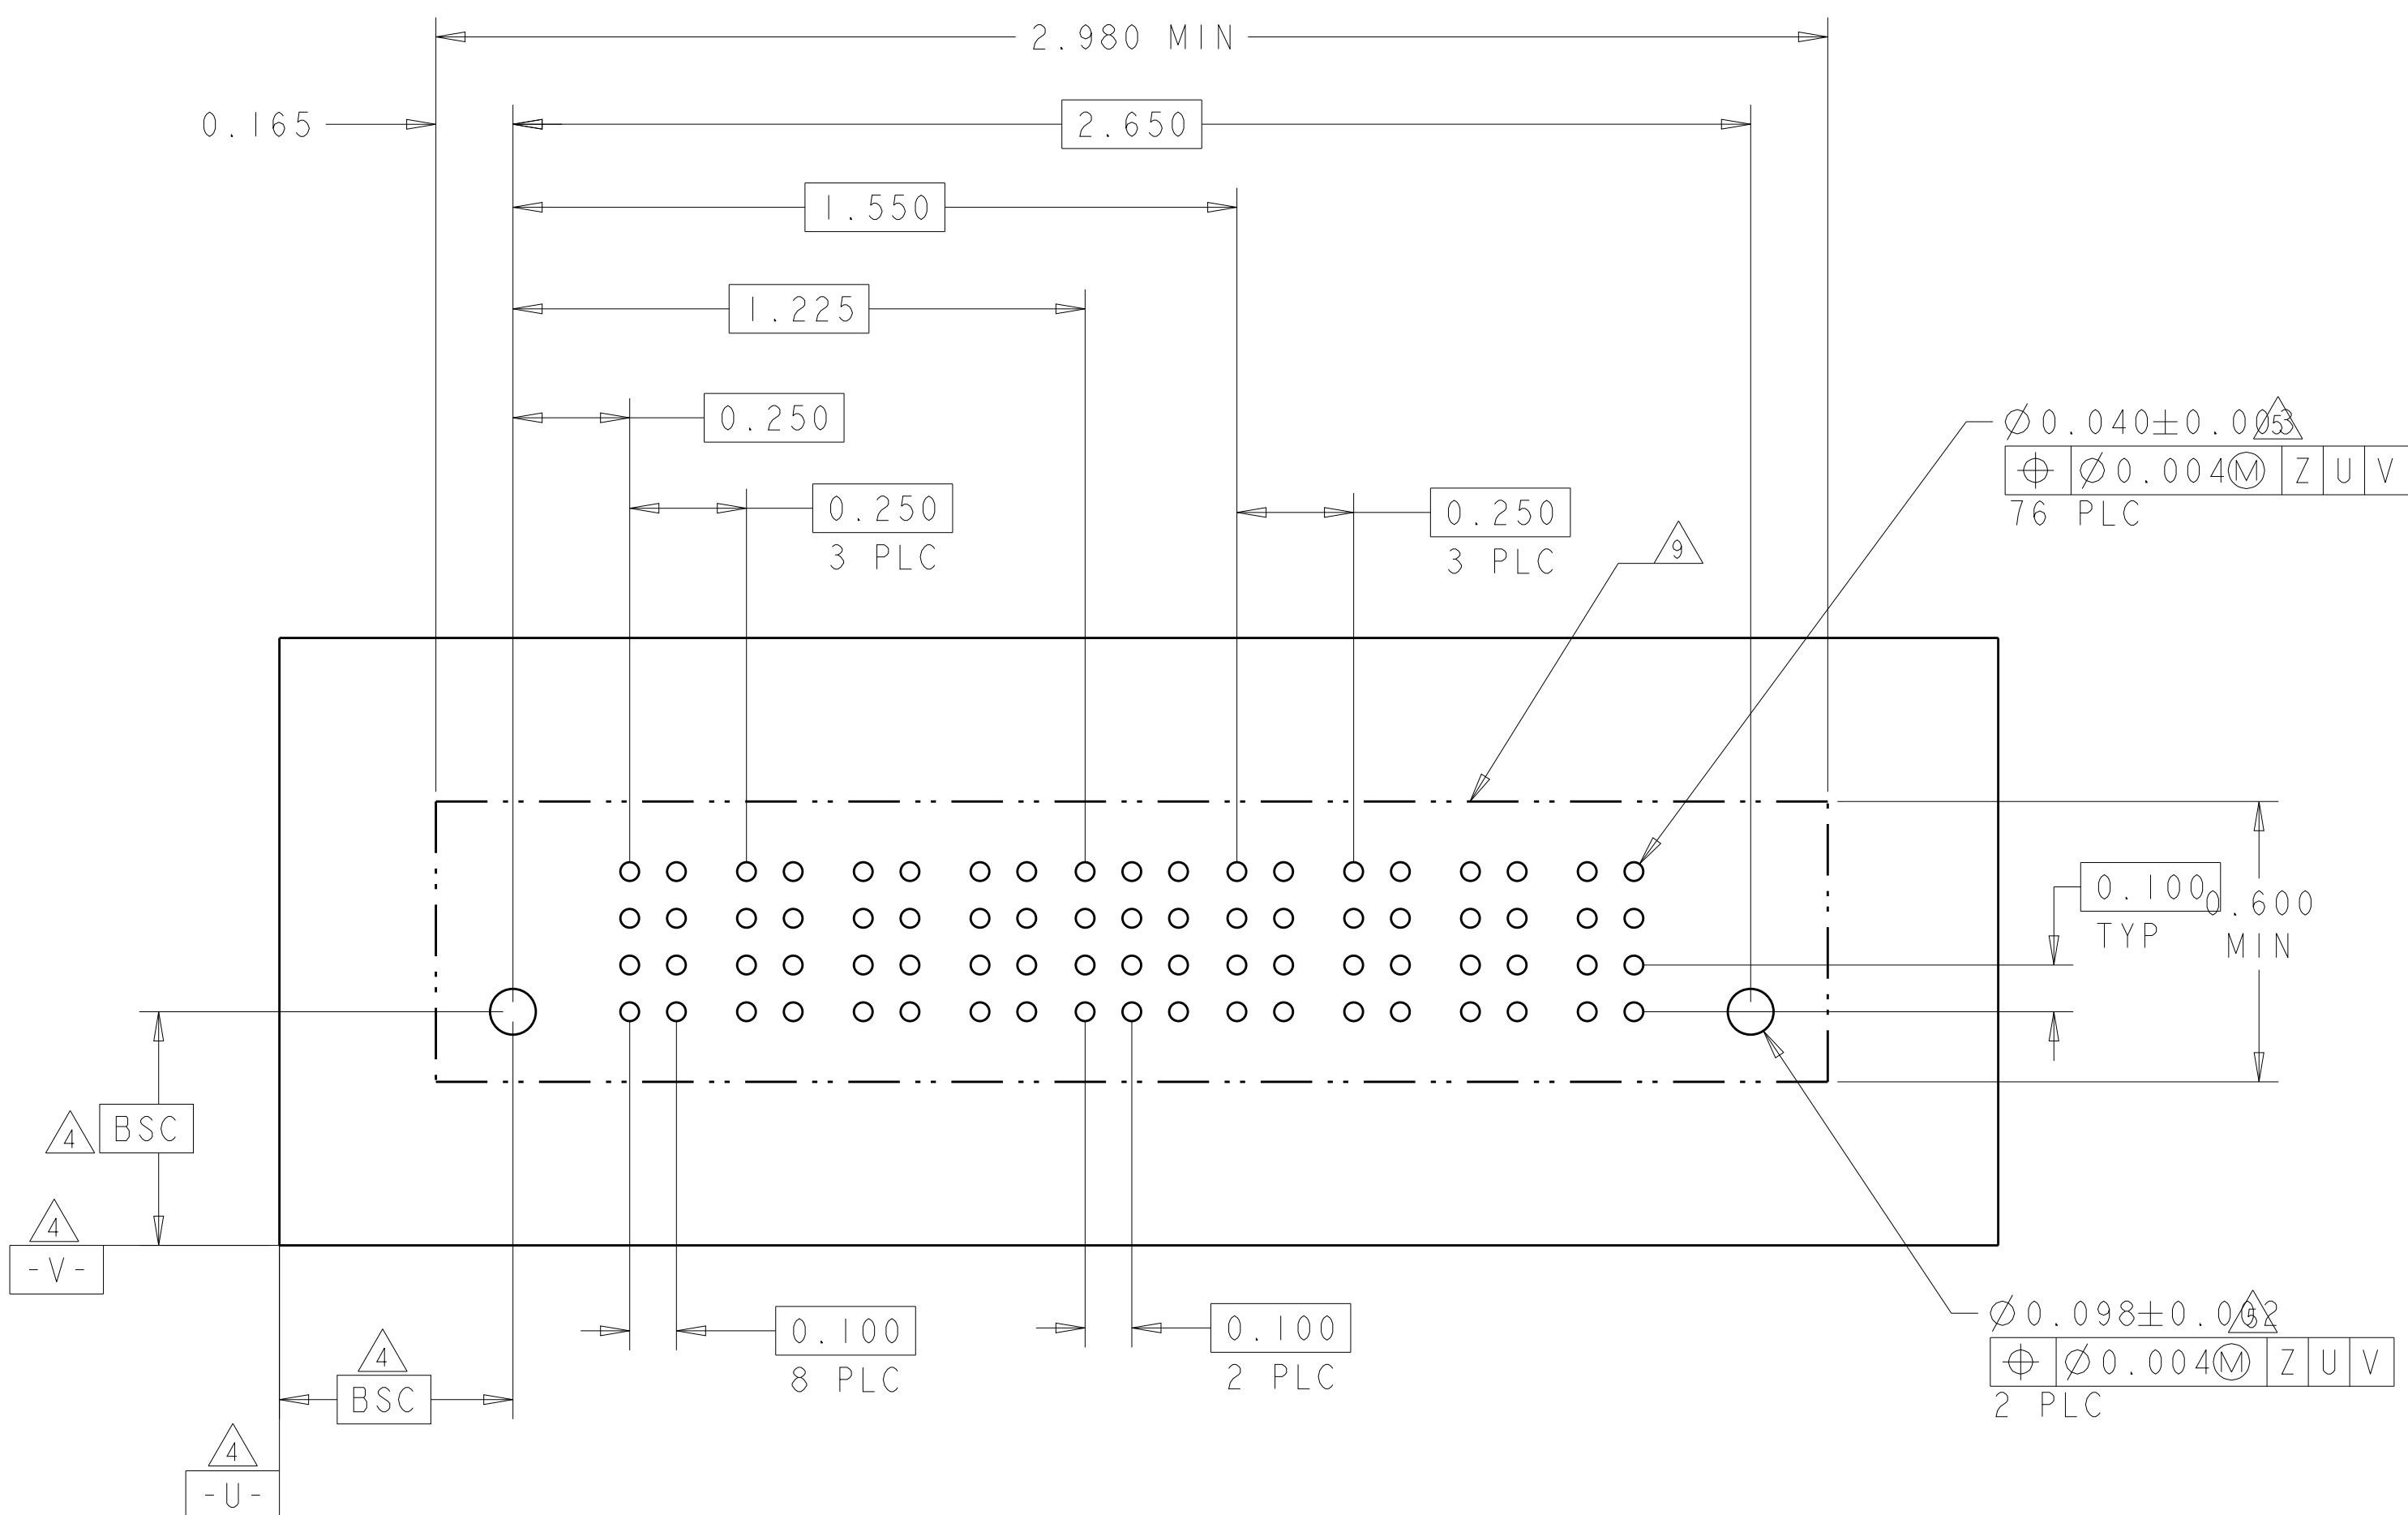4805 (3/11)

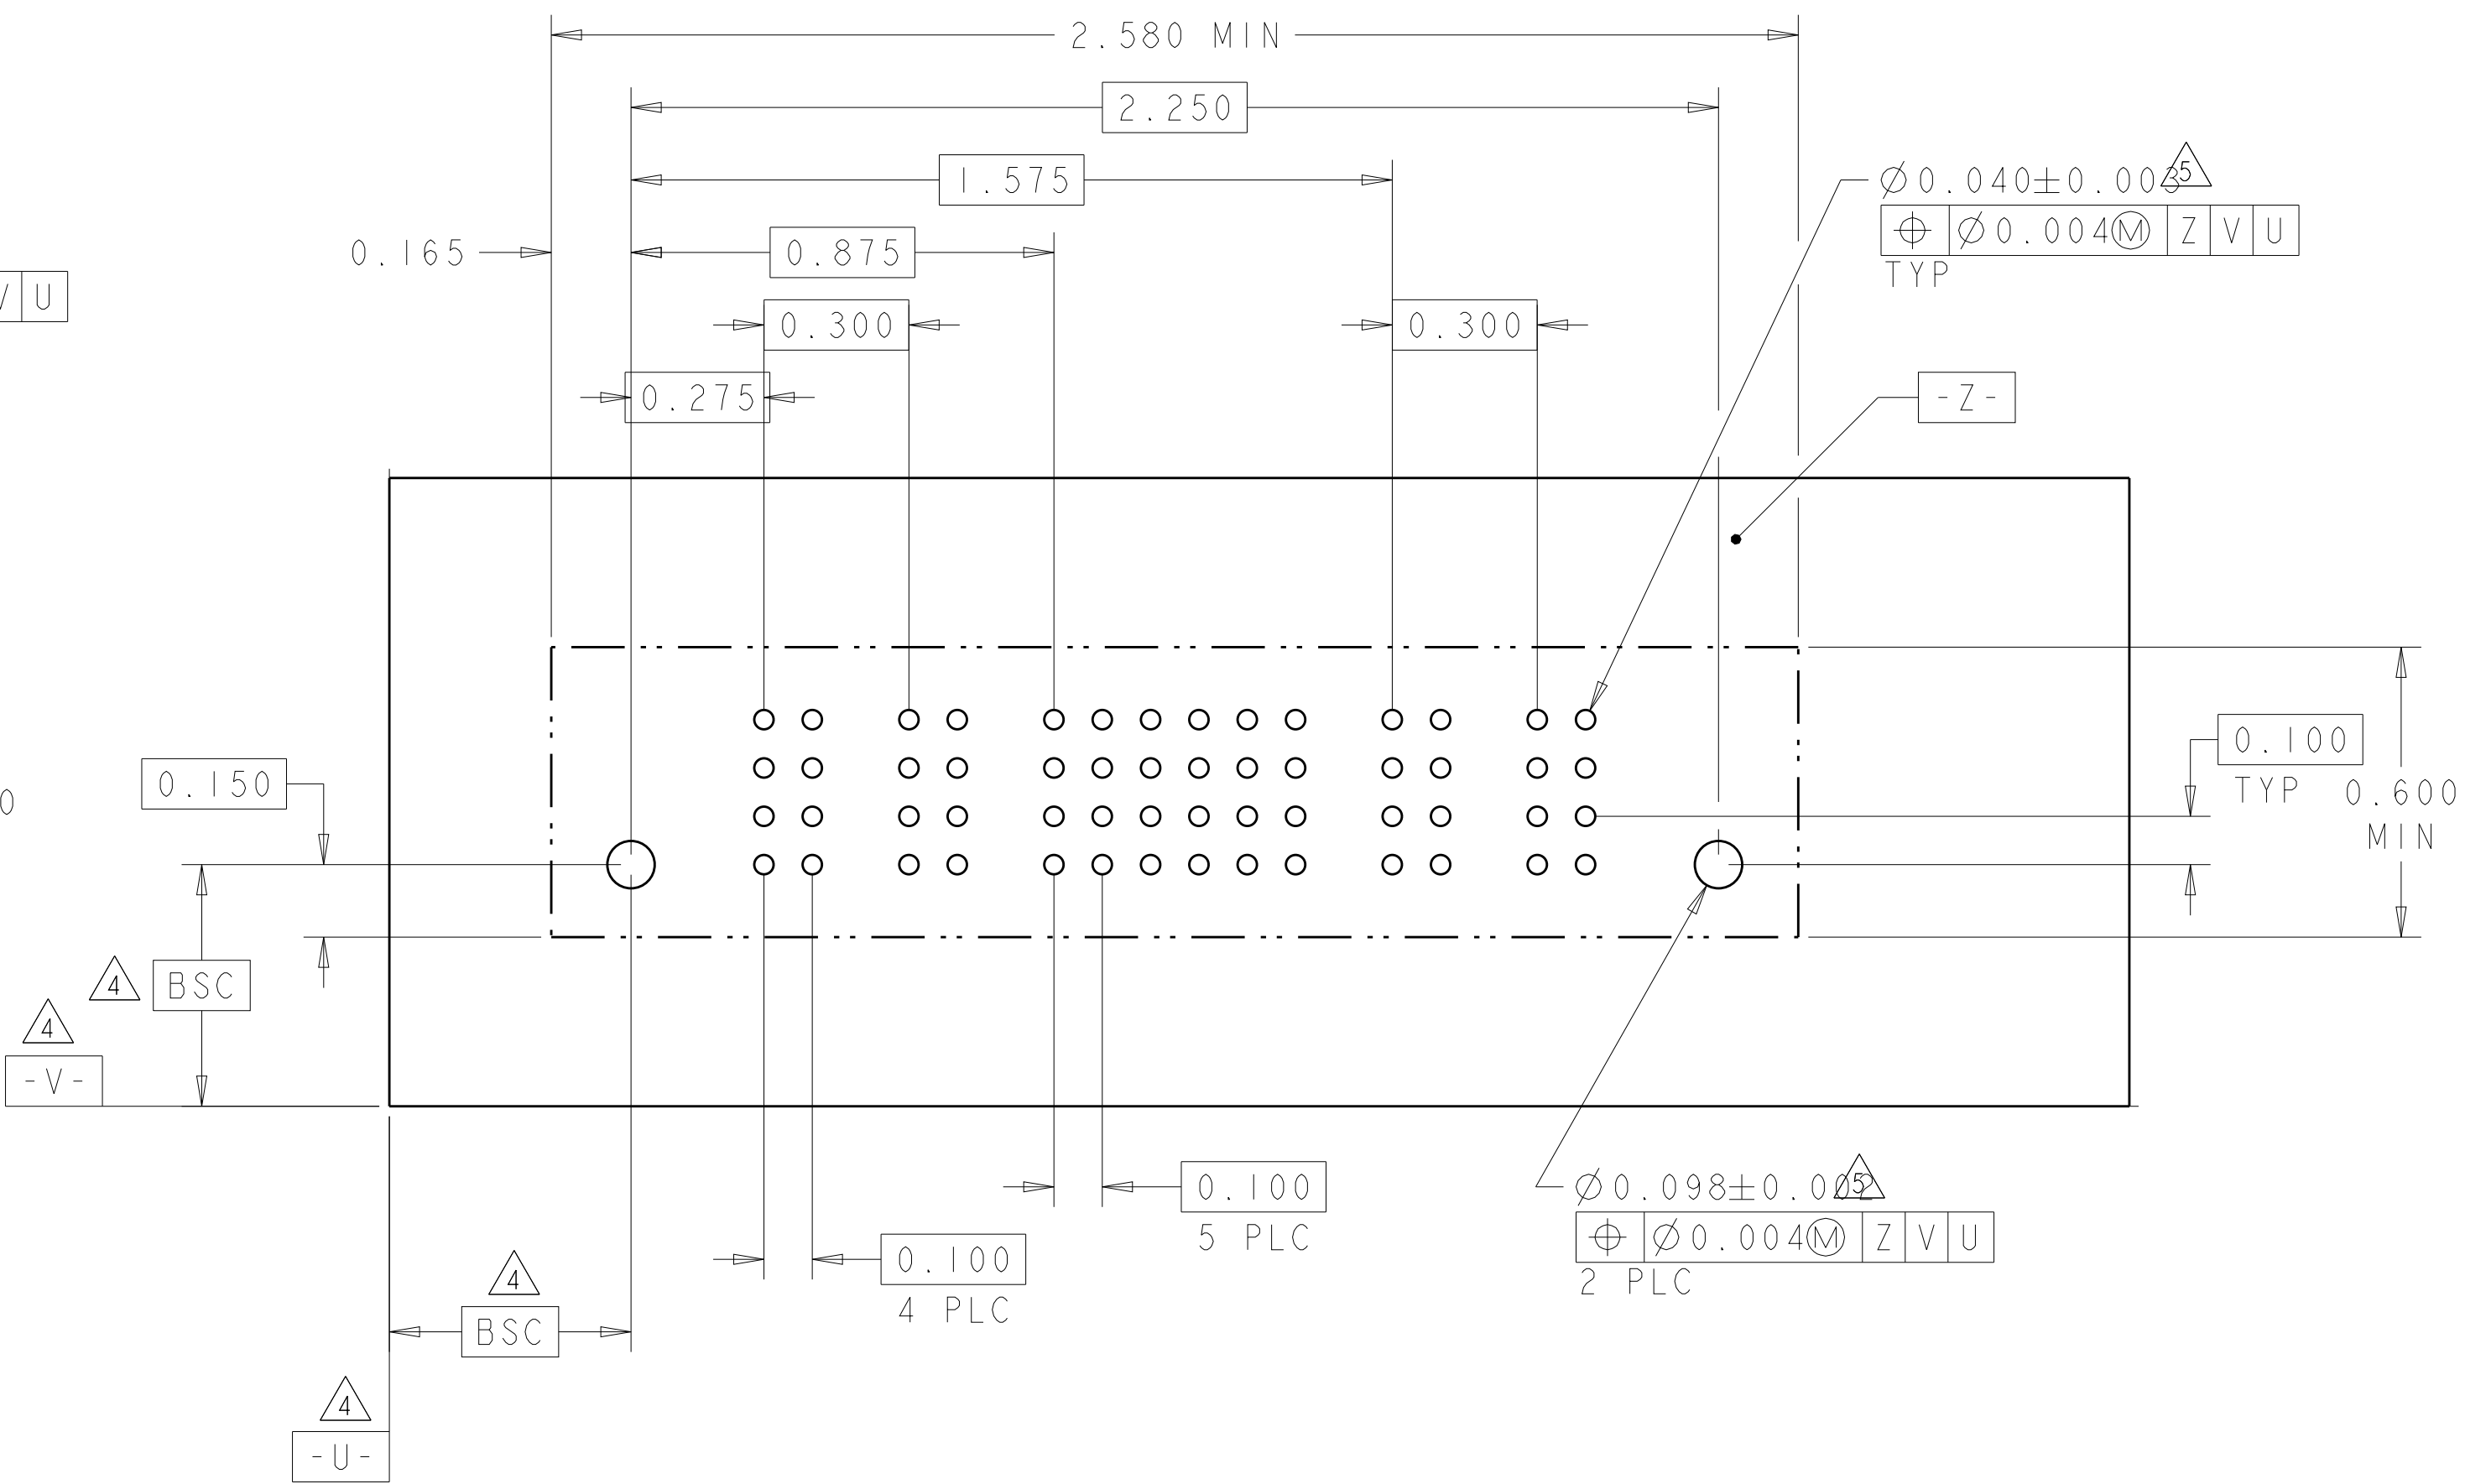[illegible]4805 (3/11)

N7



9

4805 (3/11)

Technical drawing of a rectangular plate with a grid of holes. The plate has a width of 2.880 MIN and a height of 0.600 MIN. The grid consists of 16 columns and 4 rows of holes. The center-to-center distance between columns is 0.415, and the center-to-center distance between rows is 0.250. The first column is offset by 0.415 from the left edge, and the last column is offset by 0.250 from the right edge. The first row is offset by 0.100 from the top edge, and the last row is offset by 0.100 from the bottom edge. The holes have a diameter of $\varnothing 0.040 \pm 0.003$. The plate is labeled "U -" and "BSC". A note indicates "11 PLC" and "4 PLC".

Dimensions and Tolerances:

- Overall Width: 2.880 MIN
- Overall Height: 0.600 MIN
- Column Pitch: 0.415
- Row Pitch: 0.250
- First Column Offset: 0.415
- Last Column Offset: 0.250
- First Row Offset: 0.100
- Last Row Offset: 0.100
- Hole Diameter: $\varnothing 0.040 \pm 0.003$
- Surface Finish: 0.004 (M) V U
- Material: 11 PLC
- Quantity: 4 PLC

4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9