

# D4 - SERIES

## SPECIFICATIONS AND ORDERING INFORMATION

1.437" DIAMETER 1.5 AMPS @ 28 VDC

The D4 Series switch is the most economical and versatile switch in our open frame rotary line. This series offers the quality feel of a ball and spring index mechanism and is available with up to 12 positions and 30° or 60° indexing.



### SPECIFICATIONS

#### ELECTRICAL

**Current and Voltage Rating:** Make and break resistive load 1.5 amps @ 28 VDC; 0.5 amp @ 115 VAC.

**Current Carrying Capacity:** 9 amps.

**Dielectric Strength:** 1,500 VAC between current carrying parts and ground.

**Contact Resistance:** Average initial 3.5 milliohms.

**Insulation Resistance:** Glass epoxy in excess of 750,000 megohms.  
Ceramic in excess of 1,000,000 megohms.  
Diallyl in excess of 900,000 megohms.

**Hardware:** Mounting nut and lockwasher are shipped assembled.

#### MECHANICAL

**Materials and Finishes:** All parts utilize non-corrosive materials as standard.

**Clips and Rotors:** Brass with silver plate as standard.

**Insulation:** Glass epoxy, ceramic, or diallyl phthalate.

**Index:** Single-ball, hill and valley.

**Index Life:** 25,000 cycles minimum.

**Index Torque:** Switches have lowest practical torque consistent with crisp detenting and smooth, reliable operation.

**Index Angles:** Positive 30° standard, 60° available.

**Index Stops:** Adjustable standard, fixed or continuous.

**Stop Strength:** 10 in. lbs. minimum.

### STANDARD PART NUMBER

#### GLASS EPOXY INSULATION

SWITCHES - SOLDER LUG TERMINALS - 30° INDEX - ADJUSTABLE STOPS

| ACTIVE<br>POLES | POLES/<br>POSITIONS | POLES/<br>SECTION | NO. OF<br>SECTIONS | SHORTING | NON-<br>SHORTING | FIG.<br>★ |
|-----------------|---------------------|-------------------|--------------------|----------|------------------|-----------|
| 01              | 02-11               | 1                 | 1                  | D4G0111S | D4G0111N         | DA        |
| 02              | 02-11               | 1                 | 2                  | D4G0211S | D4G0211N         | DA        |
| 02              | 02-05               | 2                 | 1                  | D4G0205S | D4G0205N         | DG        |
| 03              | 02-11               | 1                 | 3                  | D4G0311S | D4G0311N         | DA        |
| 03              | 02-03               | 3                 | 1                  | D4G0303S | D4G0303N         | DM        |
| 04              | 02-11               | 1                 | 4                  | D4G0411S | D4G0411N         | DA        |
| 04              | 02-05               | 2                 | 2                  | D4G0405S | D4G0405N         | DG        |
| 05              | 02-11               | 1                 | 5                  | D4G0511S | D4G0511N         | DA        |
| 06              | 02-11               | 1                 | 6                  | D4G0611S | D4G0611N         | DA        |
| 06              | 02-05               | 2                 | 3                  | D4G0605S | D4G0605N         | DG        |
| 06              | 02-03               | 3                 | 2                  | D4G0603S | D4G0603N         | DM        |
| 09              | 02-03               | 3                 | 3                  | D4G0903S | D4G0903N         | DM        |

#### CERAMIC INSULATION


SWITCHES - SOLDER LUG TERMINALS - 30° INDEX - ADJUSTABLE STOPS

| ACTIVE<br>POLES | POLES/<br>POSITIONS | POLES/<br>SECTION | NO. OF<br>SECTIONS | SHORTING | NON-<br>SHORTING | FIG.<br>★ |
|-----------------|---------------------|-------------------|--------------------|----------|------------------|-----------|
| 01              | 02-12               | 1                 | 1                  | D4C0112S | D4C0112N         | DD        |
| 02              | 02-12               | 1                 | 2                  | D4C0212S | D4C0212N         | DD        |
| 02              | 02-06               | 2                 | 1                  | D4C0206S | D4C0206N         | DL        |
| 03              | 02-12               | 1                 | 3                  | D4C0312S | D4C0312N         | DD        |
| 03              | 02-05               | 3                 | 1                  | D4C0305S | D4C0305N         | DO        |
| 04              | 02-12               | 1                 | 4                  | D4C0412S | D4C0412N         | DD        |
| 04              | 02-06               | 2                 | 2                  | D4C0406S | D4C0406N         | DL        |
| 05              | 02-12               | 1                 | 5                  | D4C0512S | D4C0512N         | DD        |
| 05              | 02-03               | 5                 | 1                  | D4C0503S | D4C0503N         | DR        |
| 06              | 02-12               | 1                 | 6                  | D4C0612S | D4C0612N         | DD        |
| 06              | 02-06               | 2                 | 3                  | D4C0606S | D4C0606N         | DL        |
| 06              | 02-05               | 3                 | 2                  | D4C0605S | D4C0605N         | DO        |


\* FIGURES ARE SHOWN ON PAGES 55 AND 56.

### DIMENSIONS

#### STANDARD CONSTRUCTION

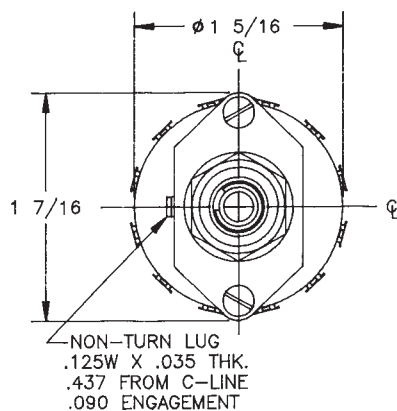

#### D4G - STANDARD GLASS EPOXY CONSTRUCTION

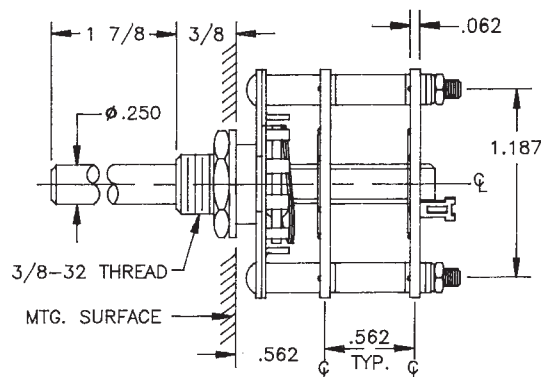

**ELECTROSWITCH • ELECTRONIC PRODUCTS**  
UNIT OF ELECTRO SWITCH CORP.

2010 Yonkers Road  
Raleigh, NC 27604

Telephone: (888) ROTARYS or (919) 833-0707  
Fax: (800) 909-9171 or (919) 833-8016


## How to Order Additional Options:

| 2 DIGIT SERIES | INSULATION TYPE                        | TOTAL POLES | ACTIVE POSITIONS                 | CONTACT TYPE                     | TERMINAL TYPE                   | INDEX ANGLE | STOP TYPE                          | SHAFT/ BUSHING | SHAFT FLAT    |
|----------------|----------------------------------------|-------------|----------------------------------|----------------------------------|---------------------------------|-------------|------------------------------------|----------------|---------------|
| D4             | G - GLASS<br>C - CERAMIC<br>D - DIALYL | 01 - MIN.   | 12 - MAX @ 30°<br>06 - MAX @ 60° | N - NON SHORTING<br>S - SHORTING | L - SOLDER LUG<br>R - REAR P.C. | 30°<br>60°  | A - ADJ.<br>F - FIXED<br>C - CONT. | SEE CHART "A"  | SEE CHART "B" |


| CUSTOMERS SPECIFIED ORDER NUMBER FOR STANDARD OPTIONS |          |           |           |           | ADDITIONAL OPTIONS |           |           |           |           |
|-------------------------------------------------------|----------|-----------|-----------|-----------|--------------------|-----------|-----------|-----------|-----------|
| <b>D</b>                                              | <b>4</b> |           |           |           |                    |           |           |           |           |
|                                                       |          | (SPECIFY) | (SPECIFY) | (SPECIFY) | (SPECIFY)          | (SPECIFY) | (SPECIFY) | (SPECIFY) | (SPECIFY) |

### ADJUSTABLE STOP MECHANISM

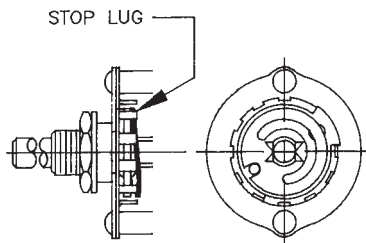

REMOVE STOP LUGS TO ACHIEVE MORE POSITIONS.

### SHAFT, BUSHING, AND FLAT OPTIONS

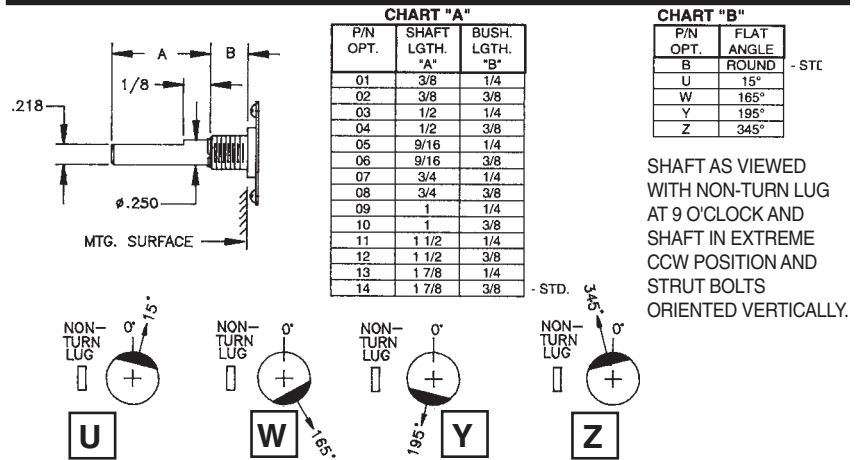


### INSULATION AND PRINTED CIRCUIT BOARD TERMINAL OPTIONS

#### D4C - CERAMIC CONSTRUCTION

#### D4D - DIALYL PHTHALATE CONSTRUCTION

#### DIALYL PHTHALATE P.C. BOARD MOUNTING PATTERN

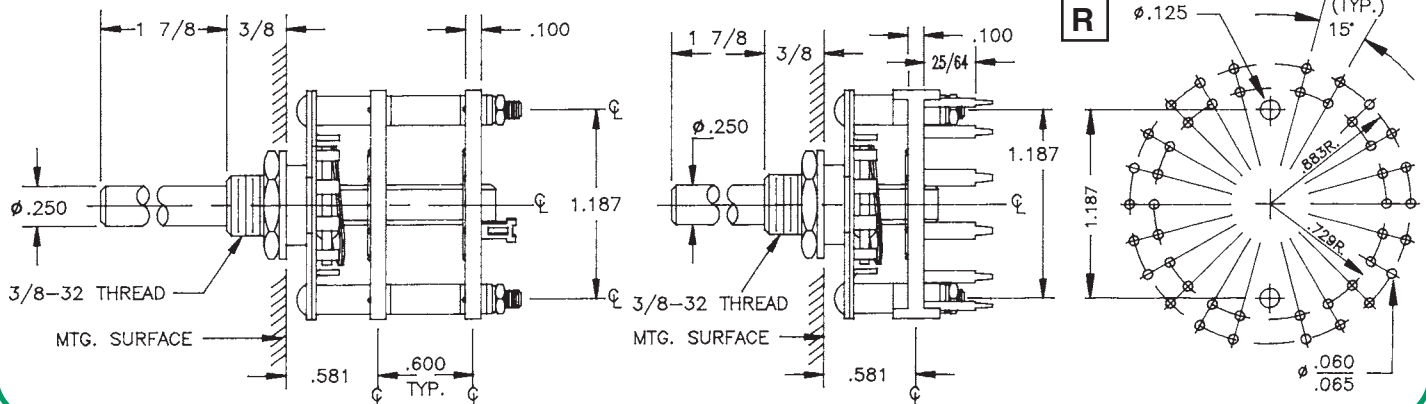

CUSTOM SWITCHES ARE AVAILABLE. CONTACT THE FACTORY WITH YOUR COMPLETE SPECIFICATIONS.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9