

# BSP52T1G, BSP52T3G

## NPN Small-Signal Darlington Transistor

This NPN small signal Darlington transistor is designed for use in switching applications, such as print hammer, relay, solenoid and lamp drivers. The device is housed in the SOT-223 package, which is designed for medium power surface mount applications.

### Features

- The SOT-223 Package can be soldered using wave or reflow. The formed leads absorb thermal stress during soldering, eliminating the possibility of damage to the die
- Available in 12 mm Tape and Reel  
Use BSP52T1 to Order the 7 Inch/1000 Unit Reel
- PNP Complement is BSP62T1
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### MAXIMUM RATINGS (T<sub>C</sub> = 25°C unless otherwise noted)

Rating	Symbol	Max	Unit
Collector-Emitter Voltage	V <sub>CES</sub>	80	V
Collector-Base Voltage	V <sub>CBO</sub>	90	V
Emitter-Base Voltage	V <sub>EBO</sub>	5.0	V
Collector Current	I <sub>C</sub>	1.0	A
Total Power Dissipation (Note 1) @ T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub>	0.8 6.4	W mW/°C
Total Power Dissipation (Note 2) @ T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub>	1.25 10	W mW/°C
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-65 to 150	°C

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Value	Unit
Thermal Resistance (Note 1) Junction-to-Ambient	R <sub>θJA</sub>	156	°C/W
Thermal Resistance (Note 2) Junction-to-Ambient	R <sub>θJA</sub>	100	°C/W
Maximum Temperature for Soldering Purposes Time in Solder Bath	T <sub>L</sub>	260 10	°C Sec

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.



1. Device mounted on a FR-4 glass epoxy printed circuit board using minimum recommended footprint.
2. Device mounted on a FR-4 glass epoxy printed circuit board using 1 cm<sup>2</sup> pad.



**ON Semiconductor**<sup>®</sup>


<http://onsemi.com>

## MEDIUM POWER NPN SILICON SURFACE MOUNT DARLINGTON TRANSISTOR



**SOT-223  
CASE 318E  
STYLE 1**

### MARKING DIAGRAM



- A = Assembly Location
  - Y = Year
  - W = Work Week
  - AS3 = Specific Device Code
  - = Pb-Free Package
- (Note: Microdot may be in either location)

### ORDERING INFORMATION

Device	Package	Shipping <sup>†</sup>
BSP52T1G	SOT-223 (Pb-Free)	1000 / Tape & Reel
BSP52T3G	SOT-223 (Pb-Free)	4000 / Tape & Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# BSP52T1G, BSP52T3G

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

### OFF CHARACTERISTICS

Collector-Base Breakdown Voltage (I <sub>C</sub> = 100 μA, I <sub>E</sub> = 0)	V <sub>(BR)CBO</sub>	90	–	–	V
Emitter-Base Breakdown Voltage (I <sub>E</sub> = 10 μA, I <sub>C</sub> = 0)	V <sub>(BR)EBO</sub>	5.0	–	–	V
Collector-Emitter Cutoff Current (V <sub>CE</sub> = 80 V, V <sub>BE</sub> = 0)	I <sub>CES</sub>	–	–	10	μA
Emitter-Base Cutoff Current (V <sub>EB</sub> = 4.0 V, I <sub>C</sub> = 0)	I <sub>EBO</sub>	–	–	10	μA

### ON CHARACTERISTICS (Note 3)

DC Current Gain (I <sub>C</sub> = 150 mA, V <sub>CE</sub> = 10 V) (I <sub>C</sub> = 500 mA, V <sub>CE</sub> = 10 V)	h <sub>FE</sub>	1000 2000	– –	– –	–
Collector-Emitter Saturation Voltage (I <sub>C</sub> = 500 mA, I <sub>B</sub> = 0.5 mA)	V <sub>CE(sat)</sub>	–	–	1.3	V
Base-Emitter Saturation Voltage (I <sub>C</sub> = 500 mA, I <sub>B</sub> = 0.5 mA)	V <sub>BE(sat)</sub>	–	–	1.9	V

### SWITCHING CHARACTERISTICS

Rise Time (V <sub>CC</sub> = 10 V, I <sub>C</sub> = 150 mA, I <sub>B1</sub> = 0.15 mA)	t <sub>r</sub>	–	155	–	ns
Delay Time (V <sub>CC</sub> = 10 V, I <sub>C</sub> = 150 mA, I <sub>B1</sub> = 0.15 mA)	t <sub>d</sub>	–	205	–	ns
Storage Time (V <sub>CC</sub> = 10 V, I <sub>C</sub> = 150 mA, I <sub>B1</sub> = 0.15 mA, I <sub>B2</sub> = 0.15 mA)	t <sub>s</sub>	–	420	–	ns
Fall Time (V <sub>CC</sub> = 10 V, I <sub>C</sub> = 150 mA, I <sub>B1</sub> = 0.15 mA, I <sub>B2</sub> = 0.15 mA)	t <sub>f</sub>	–	365	–	ns

3. Pulse Test: Pulse Width ≤ 300 μs, Duty Cycle ≤ 2.0%

# BSP52T1G, BSP52T3G

## TYPICAL CHARACTERISTICS ( $T_J = 25^\circ\text{C}$ unless otherwise noted)

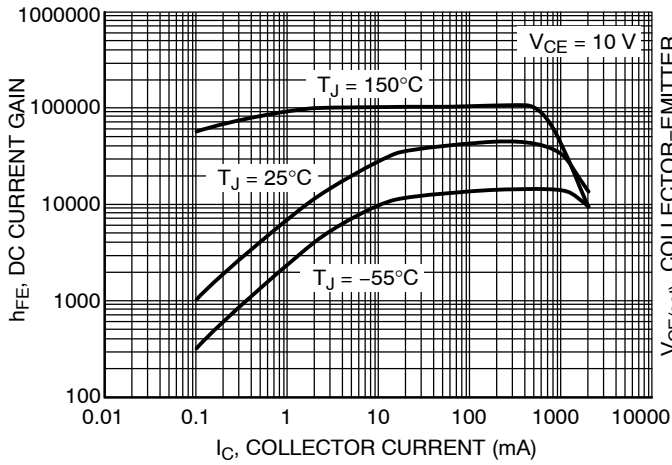


Figure 1. DC Current Gain

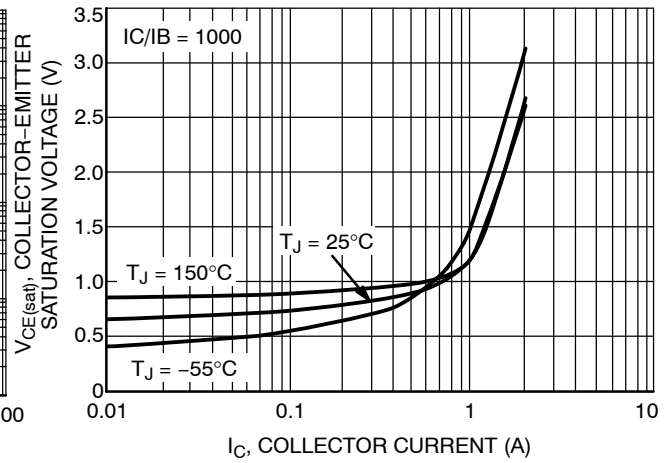


Figure 2. Collector-Emitter Saturation Voltage

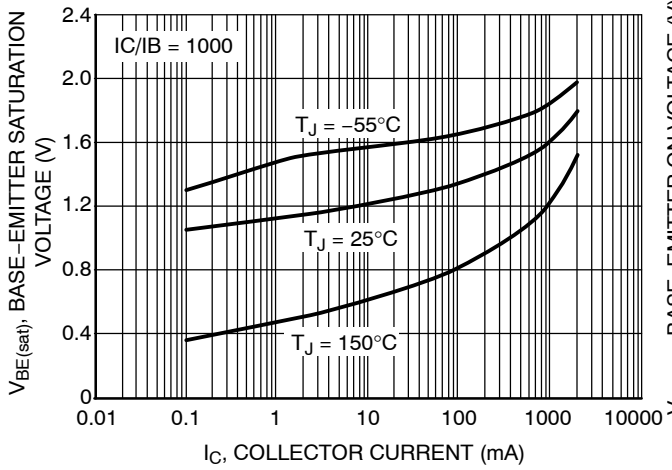


Figure 3. Base-Emitter Saturation Voltage

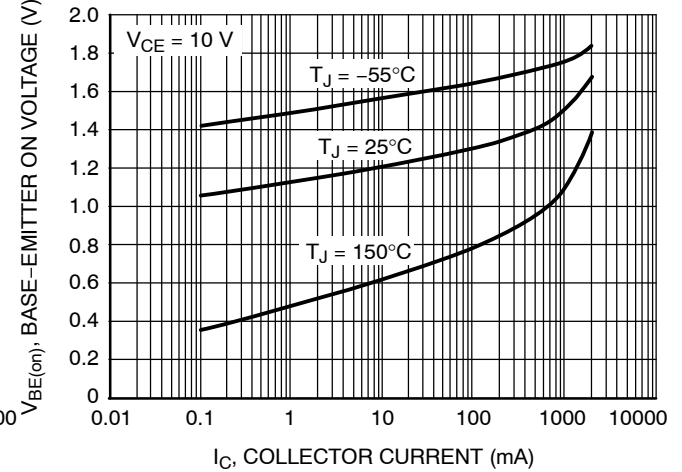


Figure 4. Base-Emitter ON Voltage

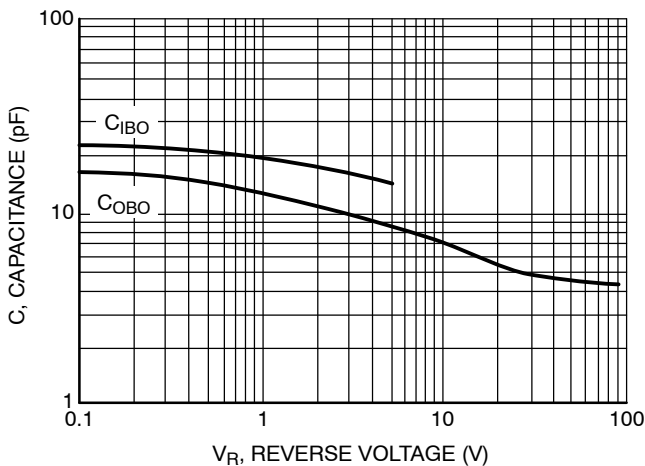


Figure 5. Capacitance



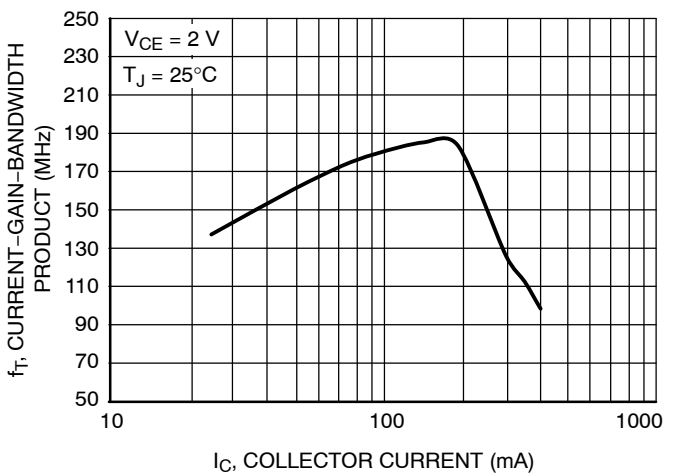


Figure 6. Current Gain Bandwidth Product vs. Collector Current

# BSP52T1G, BSP52T3G

## PACKAGE DIMENSIONS

SOT-223 (TO-261)  
CASE 318E-04  
ISSUE N

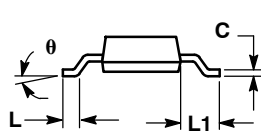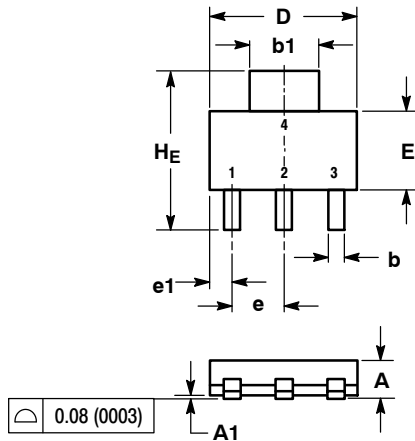

NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: INCH.

DIM	MILLIMETERS			INCHES		
	MIN	NOM	MAX	MIN	NOM	MAX
A	1.50	1.63	1.75	0.060	0.064	0.068
A1	0.02	0.06	0.10	0.001	0.002	0.004
b	0.60	0.75	0.89	0.024	0.030	0.035
b1	2.90	3.06	3.20	0.115	0.121	0.126
c	0.24	0.29	0.35	0.009	0.012	0.014
D	6.30	6.50	6.70	0.249	0.256	0.263
E	3.30	3.50	3.70	0.130	0.138	0.145
e	2.20	2.30	2.40	0.087	0.091	0.094
e1	0.85	0.94	1.05	0.033	0.037	0.041
L	0.20	---	---	0.008	---	---
L1	1.50	1.75	2.00	0.060	0.069	0.078
HE	6.70	7.00	7.30	0.264	0.276	0.287
θ	0°	---	10°	0°	---	10°

STYLE 1:

- PIN 1. BASE
- COLLECTOR
- EMITTER
- COLLECTOR

### SOLDERING FOOTPRINT\*

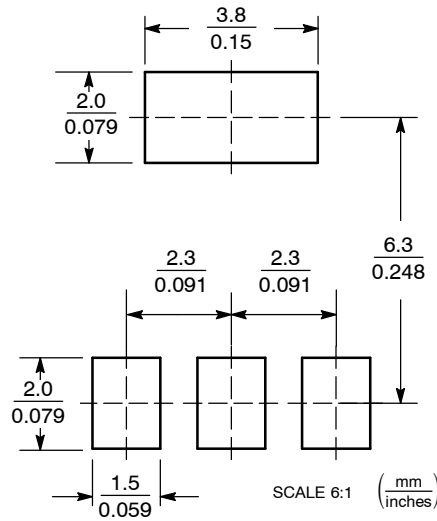

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada  
Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910  
Japan Customer Focus Center  
Phone: 81-3-5817-1050

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local Sales Representative

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9