SUBMINIATURE MICROSWITCHES - DOUBLE BREAK

83132 / 83133 / 83134

- **Double-break flexible leaf snap-action mechanism**
- **Side, rear or on front face terminals**
- **Momentary or maintained action (option)**
- **Very long life**
- **Ratings from 1 mA 4 V⎓ to 6 A 250 V~**
- **Operating temperature -40 °C up to +150 °C**
- **Wide choice of actuators on 2 symmetric fixing positions**

Main specifications

		Side outputs 83132		Rear outputs 83133		Front face outputs 83134	
		Standard	Dual-current (DORE)	Standard	Dual-current (DORE)	Standard	Dual-current (DORE)
Function	**Connections**						
I (changeover)	W2	**83132030**	**83132053**	**83133035**	**83133073**	-	-
I (changeover)	X1	-	-	**83133045**	**83133052**	**83134001**	**83134003**
R (normally closed)	W2	**83132032**	●	**83133042**	**83133210**	-	-
R (normally closed)	X1	-	-	●	●	-	-
C (normally open)	W2	**83132040**	●	**83133050**	●	-	-
C (normally open)	X1	-	-	●	●	-	-
Electrical characteristics							
Rating nominal / 250 V AC (A)		6	5*	6	5*	6	5*
Rating thermal / 250 V AC (A)		11		11		11	
Mechanical characteristics							
Maximum operating force (N)		1.6		1.6		1.6	
Min. Release force (N)		0.4		0.4		0.4	
Max. Allowable overtravel force (N)		10		10		10	
Rest position max. (mm)		8.45		8.45		8.10	
Operating position (mm)		$7.7^{\pm 0.2}$		$7.7^{\pm 0.2}$		$7.35^{\pm 0.25}$	
Differential travel (mm)		$0.35^{\pm 0.1}$		$0.35^{\pm 0.1}$		$0.35^{\pm 0.1}$	
Min. overtravel (mm)		0.27		0.27		0.27	
Ambient operating temperature (°C)		-40 → +125		-40 → +125		-40 → +125	
Mechanical life (operations)		10^7		10^7		10^7	
Contact gap (mm)		0.3 x 2		0.3 x 2		0.3 x 2	
Weight (g)		1.8		1.8		1.8	

Additional specifications

- Case, Button: PA66 GF (UL 94-V0 / GWFI 960 °C / GWIT 775 °C)
- Moving blade: beryllium copper
- Contacts: silver, gold-plated silver (dual-current)
- Terminals: copper nickel
- Levers: stainless steel, polyamide roller
- Degree of protection: IP40 (mechanism)
- Proof tracking index: PTI 400
- Recommanded min actuating speed: 0.01 mm/s

Note: fixing holes are fitted with metal inserts

Product adaptations

- **Maintained action variants (bistable reset switch), with or without lever**
- **2 or 3-pole assembly with single actuator. Optional mounting on metal plate (8331)**
- **Special levers: special shapes and lengths**
- **Plunger with ball (Ø 5 mm) for lateral approach from any direction**
- **High operating temperature: max +150 °C**
- **Applications in irradiated environment**
- **Higher operating force: max 2.6 N**
- **Larger overtravel: min 0.5 mm (SP4225)**
- **Added overtravel and/or adjustable fixing by threaded barrel (see 83528 and 8354 Series)**
- **cURus and NF approved versions up to 480 V~**

Principles

Double break snap-action switch

Changeover - SPDT (form Za)

Normally closed - SPST-NC (form Y)



Normally open - SPST-NO (form X)



Both circuits must be used at same polarity

Standard product | Product made to order | ● Contact us

Curves

Operating curve for types 83132 - 83133 - 83134



1. Number of cycles
2. Resistive circuit
3. Inductive circuit
4. Mechanical life limit
5. Current in Amps

* Dual-current models are designed to operate equally well on low-current (1 mA 4 V minimum recommended) or medium-current (5 A maximum) circuits. However, a given product should only be used to switch one type of circuit during its working life.

Dimensions

Product

83132

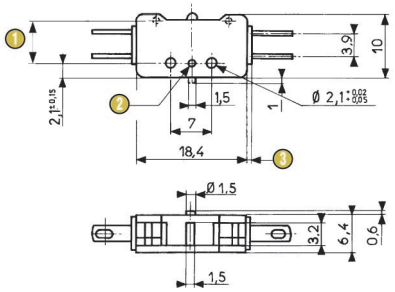

83133



83134

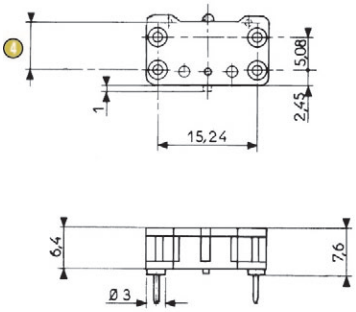

1. Total travel position = 7.35 max.
2. Ø1.5, depth 0.7
3. 2 PTFE plates, thickness 0.8

4. Total travel position = 7 max.

Connections

W2 solder or quick-connect 2.8 x 0.5 (83132 - 83133)

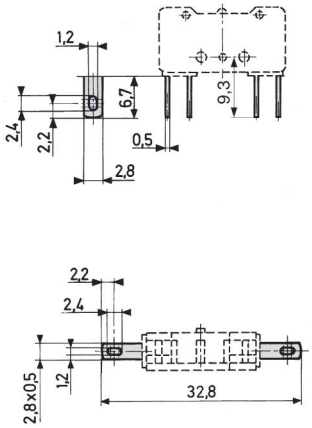

X1 for PCB, straight output (83133)



X1 for PCB, straight output (83134)



Actuators

54A flat

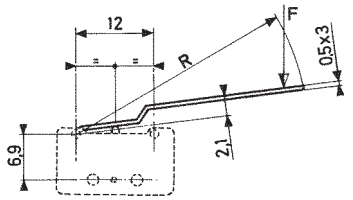

54B folded



54E roller



54A2 2-pole



54D adjustable



54EL transverse roller



Standard mounting position

For 831320 and 831330



1 Cover

For 831340



1 Cover

Actuators and mounting accessories

Part numbers for standard actuators		70514175	70514194	70514181	70514182	70514183
Actuators		Flat **54A** R14.75	Flat **54A** R35.75	Roller **54E** R7.5	Roller **54E** R14.1	Roller **54E** R34.4
		83132	83132	83132	83132	83132
		83133 / 83134	83133 / 83134	83133 / 83134	83133 / 83134	83133 / 83134
Operating position	mm	9.5 ±0.8 / 9.2 ±0.8	10 ±1.5 / 9.7 ±0.15	14.2 ±0.3 / 13.9 ±0.3	15.5 ±0.8 / 15.2 ±0.8	16.1 ±1.4 / 15.8 ±1.4
Operating force max.	N	0.8	0.34	1.6	0.8	0.34
Release force min.	N	0.16	0.06	0.32	0.17	0.07
Pretravel max.	mm	2.15	5.15	1.1	2.05	4.9
Differential travel	mm	1 ±0.3	2.1 ±0.65	0.5 ±0.15	0.95 ±0.3	2 ±0.6
Total travel max.	mm	2.8	6.8	1.45	2.7	6.6

Part numbers for standard actuators		70514559	70514125	70514188	70514178	70514179	70514280
Actuators		Folded **54B** R13.17	2-pole **54A2** R30	Adjustable **54D** R27.1	Transverse Roller **54EL** R7.5	Transverse Roller **54EL** R14.1	Side fixing plate **54Y** stainless steel (16 x 8 x 0,4 mm)
		83132	83132	83132	83132	83132	Always supplied separately
		83133 / 83134	83133	83133 / 83134	83133 / 83134	83133 / 83134	
Operating position	mm	12.7 ±0.8 / 12.4 ±0.8	8.8 ±0.8	12.6-17.6 ±1.2 / 12.3-17.3 ±1.2	14.2 ±0.3 / 13.9 ±0.3	15.6 ±0.8 / 15.3 ±0.8	
Operating force max.	N	0.85	0.8	0.43	1.6	0.75	
Release force min.	N	0.18	0.16	0.08	0.32	0.15	
Pretravel max.	mm	2.05	4.3	3.9	1.1	2.25	
Differential travel	mm	0.95 ±0.3	2 ±0.55	1.8 ±0.5	0.5 ±0.15	1 ±0.35	
Total travel max.	mm	2.7	5.75	5.2	1.45	3	

Unless mentioned specifically, the levers are mounted in the position illustrated on the dimension diagrams (standard mounting).
We recommend that these levers are assembled in our workshops.

83132/133/134 microswitches with referenced actuators

			Lever	54A		54A2	54B	54D	54E			54EL	
	(standard mounting = on left)			R14.75	R35.75	R30	R13.17	R27.1	R7.5	R14.1	R34.4	R7.5	R14.1
			Mounting	70514175	70514194	70514125	70514559	70514188	70514181	70514182	70514183	70514178	70514179
STANDARD	83132	IW2	Standard	83132039	83132045	•	83132087	83132076	83132033	83132003	83132005	•	83132054
	83133	IW2	Standard	83133015	83133038	83133301	83133171	83133118	83133004	83133002	83133003	83133058	83133059
		IX1	Standard	83133174	83133062	83133306	83133212	83133120	•	83133119	•	•	•
	83134	IX1	Standard	83134004	83134016	-	83134002	•	83134015	83134011	83134009	•	•
			On right	83134005	83134012	-	83134007	•	•	83134006	•	•	•
DUAL-CURRENT	83132	IW2	Standard	83132090	•	•	•	•	•	•	•	•	•
	83133	IW2	Standard	•	•	•	•	•	•	83133122	•	•	•
		IX1	Standard	•	83133173	•	•	•	•	•	•	•	•
	83134	IX1	Standard	83134046	•	-	83134028	•	•	83134014	•	•	•
			On right	•	•	-	•	•	•	•	•	•	•

Installation recommendations

See “Basic technical concepts”

For 83133 and 83134: to ensure protection against electric shock after installation in the application, please consult us when conductive parts are located in the immediate proximity of the side walls of the switch housing.

How to order

Use the 8 digit part numbers when they are defined

Other cases, precise: Type of microswitch - Function - Connection -Contact* - UL approval* - Actuator* - Fixing position* - Adaptation*
* if needed
Example: 83133 I W2 DORE UL 54E R7.5

Standard product | Product made to order | • Contact us

Examples of special adaptations

Maintained action variant (bistable reset switch) for level regulation. Has lever with hole for push-pull actuation by a rod with 2 stops

Plunger with ball (Ø 5 mm) for lateral approach from any direction



3 pole assembly (3PDT) on metal plate: 833162

«US format»: housing with 1/2" (12.7 mm) mounting hole pitch (831337)

Flexible pre-armed lever: provides both precise operating position and extra-long overtravel (5 mm)

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9