

Ø172×51 mm

San Ace 172 9E type   

Round type



General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage)
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 547.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ or more with a 500 VDC megger (between lead wire conductors and frame)
- Sound pressure level (SPL) At 1 m away from the air inlet
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black or Blue (Sensor) Yellow
- Mass 780 g

Specifications

The models listed below **have pulse sensors**.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m³/min] [CFM]		Max. static pressure [Pa] [inchH ₂ O]		SPL [dB (A)]	Operating temperature [°C]	Expected life [h]	
109E1712K501	12	10.2 to 13.8	2.9	34.8	4100	8.5	300	243.0	0.976	55	-20 to +60	40000/60°C	
109E1712Y501			2.3	27.6	3800	7.8	276	210.0	0.843	53			
109E1712H501			1.2	14.4	3050	6.4	226	137.2	0.551	47			
109E1712F501			0.68	10.8	2500	5.1	180	95.0	0.382	42			
109E1712M501			0.48	5.76	2000	4.2	148	67.6	0.271	36			
109E1724C501	24	20.4 to 27.6	2.3	55.2	4800	9.9	350	308.0	1.237	60	-20 to +70		
109E1724K501			1.3	31.2	4100	8.5	300	243.0	0.976	55			
109E1724H501			0.58	13.92	3050	6.4	226	137.2	0.551	47			
109E1724F501			0.35	8.4	2500	5.1	180	95	0.382	42			
109E1724M501			0.2	4.8	2000	4.2	148	67.6	0.271	36			
109E1748C501	48	40.8 to 55.2	1.2	57.6	4800	9.9	350	308.0	1.237	60			
109E1748K501			0.7	33.6	4100	8.5	300	243.0	0.976	55			-20 to +60
109E1748H501			0.28	13.44	3050	6.4	226	137.2	0.551	47			-20 to +70
109E1748F501			0.19	9.12	2500	5.1	180	95	0.382	42			-20 to +60
109E1748M501			0.11	5.28	2000	4.2	148	67.6	0.271	36			-20 to +70

The following sensor and control options are available for selection.


Available for all models. **Without sensor**

Differs according to the model. Refer to the table on p. 561. **Lock sensor** **PWM control**


Airflow - Static Pressure Characteristics

109E1712K501 With pulse sensor


Operating voltage range

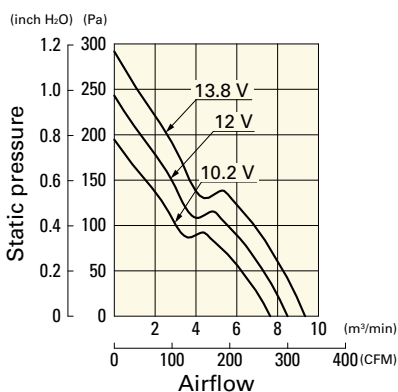
109E1712Y501 With pulse sensor

Operating voltage range

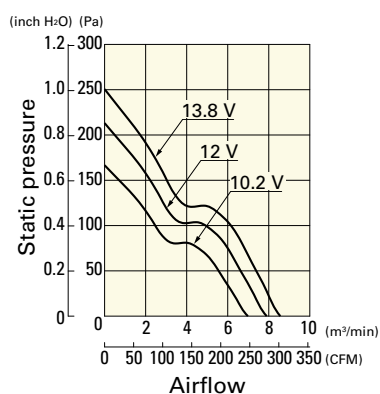
109E1712H501 With pulse sensor


Operating voltage range

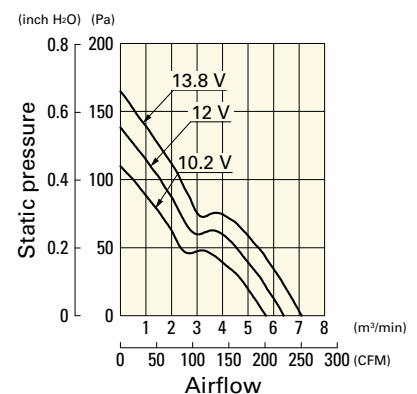

Airflow - Static Pressure Characteristics


109E1712F501 With pulse sensor

Operating voltage range

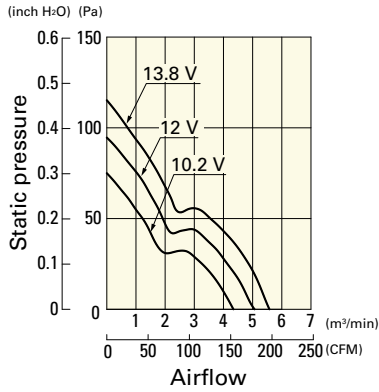


109E1712M501 With pulse sensor

Operating voltage range

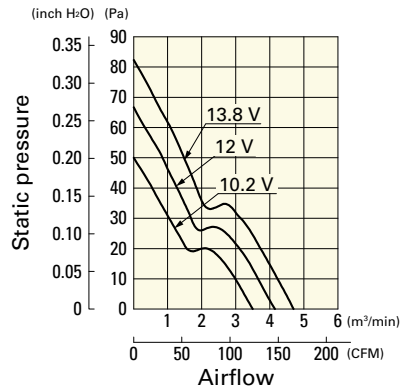


109E1724C501 With pulse sensor

Operating voltage range

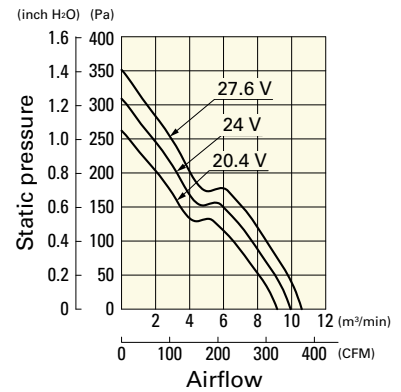


109E1724K501 With pulse sensor

Operating voltage range

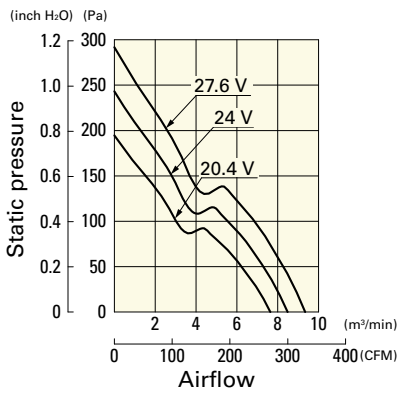


109E1724H501 With pulse sensor

Operating voltage range

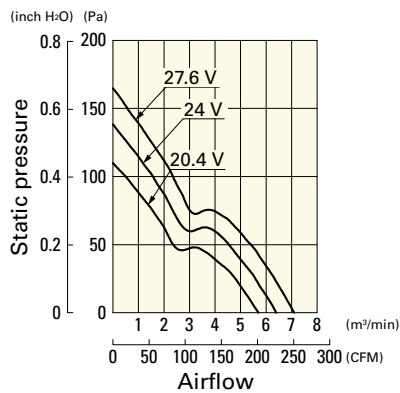


109E1724F501 With pulse sensor

Operating voltage range

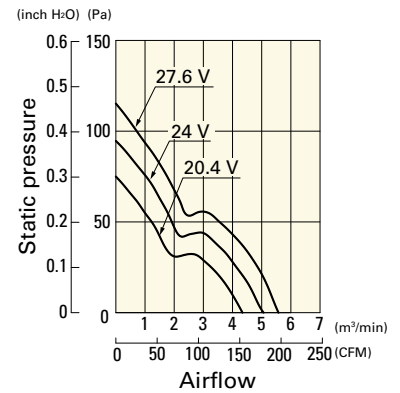


109E1724M501 With pulse sensor

Operating voltage range

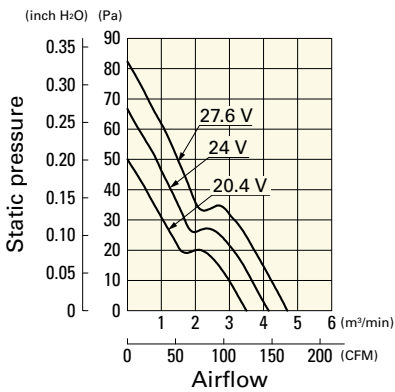


109E1748C501 With pulse sensor

Operating voltage range

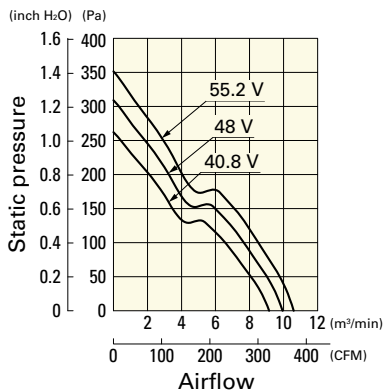


109E1748K501 With pulse sensor

Operating voltage range

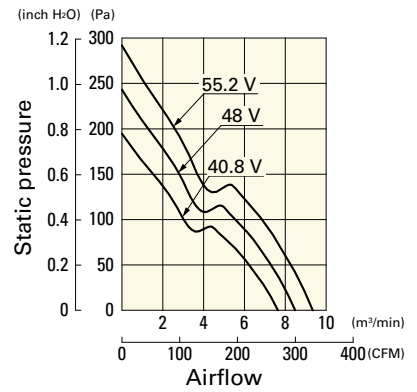


109E1748H501 With pulse sensor

Operating voltage range

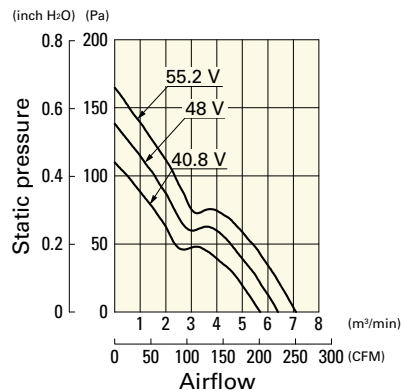


109E1748F501 With pulse sensor

Operating voltage range

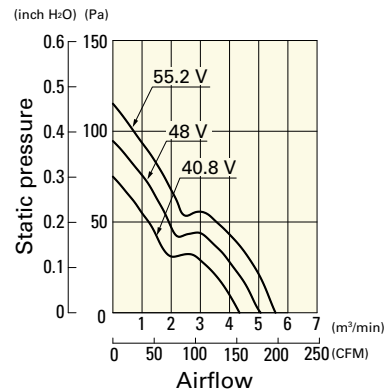

109E1748M501 With pulse sensor


Operating voltage range

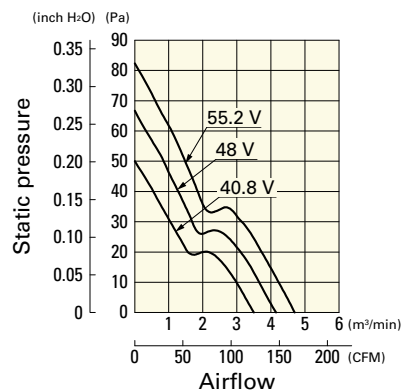


DC

DC Fan #172 mm

■ Dimensions (unit: mm)

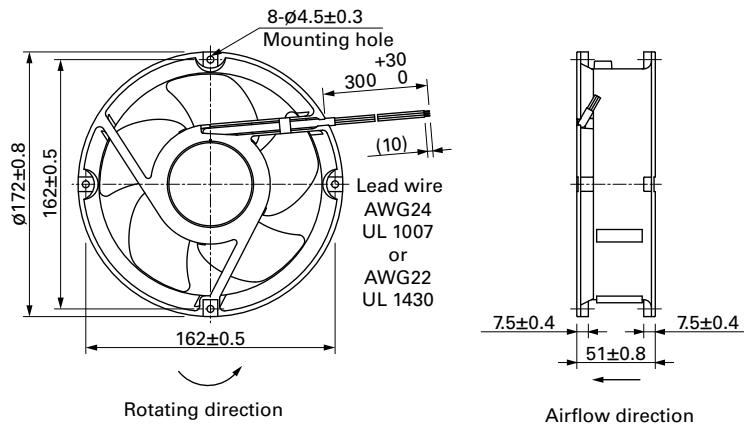

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

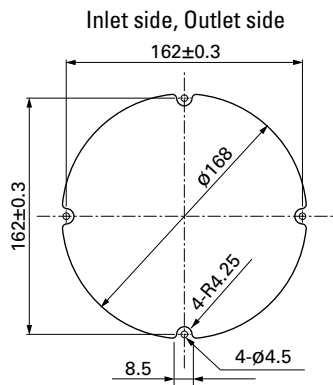

■ Options

Finger guards

page: p. 534

Model no.: 109-1066, 109-1068, 109-319E, 109-319H,
109-320

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9