

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0260010401

Status:

Active

Overview:

ribbon\_cable\_jumpers

Description:

2.54mm (.100") Pitch Board-to-Board Ribbon Cable Jumper - 24 AWG, Solid Tinned, 4 Circuits, Kinked Tails, 0.025m (1.00") Length

Documents:

Drawing (PDF)

RoHS Certificate of Compliance (PDF)

General

Product Family

Cable

Series

26001

Crimp Quality Equipment

Yes

Geographic Area

Asia

Overview

ribbon\_cable\_jumpers

Product Name

Ribbon

Physical

Cable Length

0.025m (1.00")

Circuits (Loaded)

4

Circuits (maximum)

4

Insulation

PVC

Packaging Type

Bag

Pitch - Term. Interface (in)

0.100 In

Pitch - Term. Interface (mm)

2.54 mm

Temperature Range - Operating

-20°C to +105°C

Wire Size AWG

24

Wire/Cable Type

(1x24) Solid, Tinned

Electrical

Current - Maximum per Contact

N/A

Voltage - Maximum

300V

Material Info

Reference - Drawing Numbers

Sales Drawing

SD-26001-001

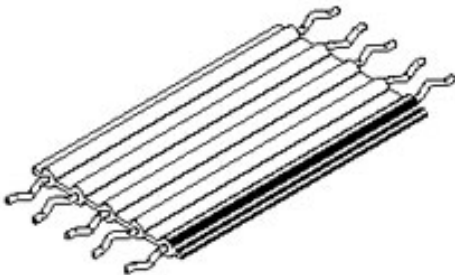


image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

China RoHS



Need more information on product environmental compliance?

Email [productcompliance@molex.com](mailto:productcompliance@molex.com)

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

26001Series

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

# CABLE SPECIFICATIONS:

## 1.- STANDARD KINKED JUMPER SERIES #26001 (24545 CABLE, .128" S/R BOTH ENDS)

### 2.- PHYSICAL

CONDUCTOR SPACING ----- .100" (2.54mm) C TO C  
WIRE GAUGE ----- 24 AWG (1/24), SOLID TINNED  
INSULATION ----- PVC (MOLEX GRAY)  
EDGE MARK COLOR ----- RED

### 3.- AGENCY

U.L. STYLE ----- 2651  
TEMPERATURE RATING ----- -20 °C TO 105 °C  
VOLTAGE RATING ----- 300V. MAX.  
FLAMMABILITY RATING ----- VW-1

### 4.- SPECIAL REQUIREMENT

RoHS AND LEAD FREE COMPLIANT  
NO TEXT MARKING ON PCB


### 5.- GENERAL

NON-OPERATING TEMPERATURE-----20°C TO 105°C

### 6.- SOLDERING CONDITION

SOLDER TEMPERATURE-----260°C. MAX.  
SOLDERING TIME-----3 SECOND, MAX.  
INSULATION SHRINK-----2MM. NOM

## PCB HOLE LAYOUT RECOMENDED HOLE DIA. .042 In.



## NOTES:

- 1.- ADD 0.020" TO QTY. OF CABLE.
- 2.- STRIP OF CABLE MUST BE 0.138" TO REMAIN 0.128" AFTER KINK ON EACH END.

## STRIP & KINK



OVERALL LENGTH ("A")  
TOLERANCE FOR OAL +/- .100"  
INSULATION LENGTH ("B" REF.)  
DIMS "A" & "B" REFERS TO  
SHOWN IN MATRIX.

| MATRIX FOR STANDARD KINKED JUMPER SERIES # 26001 (24545 CABLE) |            |            |            |            |            |            |            |            |
|----------------------------------------------------------------|------------|------------|------------|------------|------------|------------|------------|------------|
| LENGTH "A"<br>(±.100")                                         | 1.256"     | 2.256"     | 3.256"     | 4.256"     | 5.256"     | 6.256"     | 7.256"     | 8.256"     |
| LENGTH "B"<br>(REF.)                                           | 1.000"     | 2.000"     | 3.000"     | 4.000"     | 5.000"     | 6.000"     | 7.000"     | 8.000"     |
| CIRCUITS                                                       |            |            |            |            |            |            |            |            |
| 3                                                              | 26001-0301 | 26001-0302 | 26001-0303 | 26001-0304 | 26001-0305 | 26001-0306 | 26001-0307 | 26001-0308 |
| 4                                                              | 26001-0401 | 26001-0402 | 26001-0403 | 26001-0404 | 26001-0405 | 26001-0406 | 26001-0407 | 26001-0408 |
| 5                                                              | 26001-0501 | 26001-0502 | 26001-0503 | 26001-0504 | 26001-0505 | 26001-0506 | 26001-0507 | 26001-0508 |
| 6                                                              | 26001-0601 | 26001-0602 | 26001-0603 | 26001-0604 | 26001-0605 | 26001-0606 | 26001-0607 | 26001-0608 |
| 7                                                              | 26001-0701 | 26001-0702 | 26001-0703 | 26001-0704 | 26001-0705 | 26001-0706 | 26001-0707 | 26001-0708 |
| 8                                                              | 26001-0801 | 26001-0802 | 26001-0803 | 26001-0804 | 26001-0805 | 26001-0806 | 26001-0807 | 26001-0808 |
| 9                                                              | 26001-0901 | 26001-0902 | 26001-0903 | 26001-0904 | 26001-0905 | 26001-0906 | 26001-0907 | 26001-0908 |
| 10                                                             | 26001-1001 | 26001-1002 | 26001-1003 | 26001-1004 | 26001-1005 | 26001-1006 | 26001-1007 | 26001-1008 |

26001-\*\*\*  
A B C

A = STD. KINKED JUMPER I.D. No

B = CIRCUIT SIZE  
3 THRU 10

C = DENOTES LENGTH  
1.000" TO 8.000"

|      |              |                                                         |          |
|------|--------------|---------------------------------------------------------|----------|
| B    | E-07-0793    | B <sub>1</sub> : ADD GENERAL & SOLDERING CONDITION DATA | 07/12/07 |
| A    | THL2006-0004 | NEW RELEASE                                             | 06/06/01 |
| REV. | EC NO.       | DETAIL                                                  | DATE     |

SEE CHANGE DETAIL  
EC NO: THL2008-0019  
DRWN: CPANSAXHOM 2007/12/07  
CHKD: NCHALERM 2007/12/11  
APPR: SVIRATJAPOL 2007/12/20

| DESCRIPTION | REV |
|-------------|-----|
| B           |     |

| QUALITY SYMBOLS |
|-----------------|
| ▽=3             |
| ▽=0             |

## GENERAL TOLERANCES (UNLESS SPECIFIED)

|          | mm     | INCH  |
|----------|--------|-------|
| 4 PLACES | ± ---  | ± --- |
| 3 PLACES | ± ---  | ± --- |
| 2 PLACES | ± ---  | ± --- |
| 1 PLACE  | ± ---  | ± --- |
| ANGULAR  | ± ---° |       |

DRAFT WHERE APPLICABLE  
MUST REMAIN  
WITHIN DIMENSIONS

| DIMENSION STYLE | IN/MM      |
|-----------------|------------|
| DRAWN BY        | DATE       |
| CPANSAXHOM      | 2006/06/01 |
| CHECKED BY      | DATE       |
| PMEECHAI        | 2006/06/01 |
| APPROVED BY     | DATE       |
| SVIRATJAPOL     | 2006/06/01 |
| MATERIAL NO.    |            |
| SIZE            | SEE CHART  |
| A4              |            |

| SCALE                                                                                                                         | DESIGN UNITS | THIRD ANGLE |
|-------------------------------------------------------------------------------------------------------------------------------|--------------|-------------|
| NTS                                                                                                                           | INCH         | PROJECTION  |
| TITLE                                                                                                                         |              |             |
| STANDARD KINKED TAIL JMP<br>.100" CTR PVC INSULATED<br>24 AWG SOLID TINNED                                                    |              |             |
| MOLEX INCORPORATED                                                                                                            |              |             |
| DOCUMENT NO.                                                                                                                  | SD-26001-001 | SHEET NO.   |
|                                                                                                                               |              | 1 OF 1      |
| THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION |              |             |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9