


9200 Series/Surface Mount Reed Relays

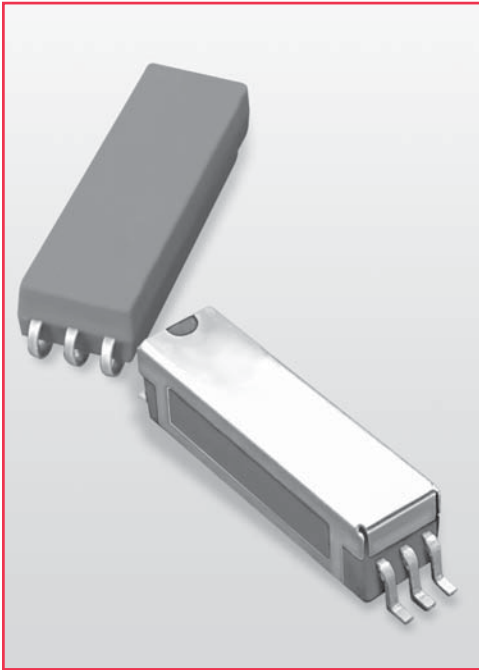

Surface Mount Reed Relays

Ideally suited to the needs of Automated Test Equipment, Instrumentation and Telecommunications requirements, Coto's 9200 Series specification tables allow you to select the appropriate relay for your particular application. If your requirements differ, please consult your local representative or Coto's Factory to discuss a custom design.

Series Features

- ◆ High Insulation Resistance - $10^{12} \Omega$ minimum ($10^{13} \Omega$ Typical)
- ◆ High reliability, hermetically sealed contacts for long life
- ◆ Molded thermoset body on integral lead frame design
- ◆ High speed switching compared to electromechanical relays









9200 Series

- ◆ Low profile - .190" height. Meets high board density requirements
- ◆ 50 Ω Coaxial Shield for RF and Fast Rise Time Pulse switching

9290 Series

- ◆ Low profile - .193" (4.9mm) max height
- ◆ Minimum Footprint .140" Sq. (3.5mm Sq.)
- ◆ 50 Ω Co-axial Shield for RF and Fast Rise Time Pulse switching
- ◆ External Magnetic Shield
- ◆ UL Recognized
- ◆ Tape and Reel Available

Dimensions in Inches (Millimeters)

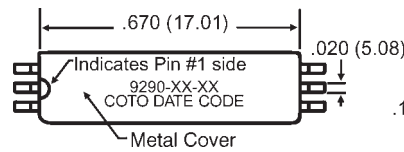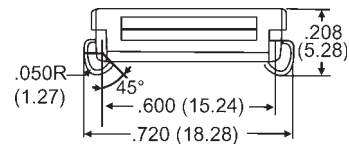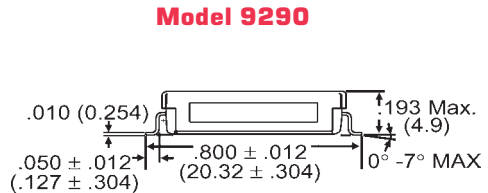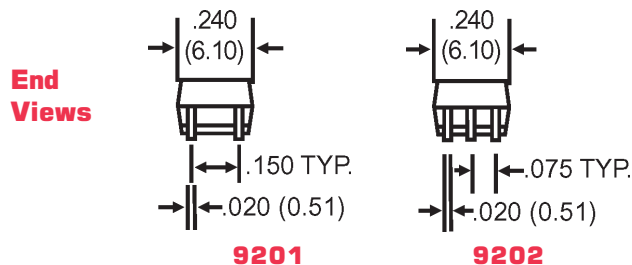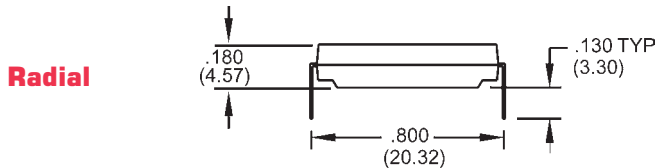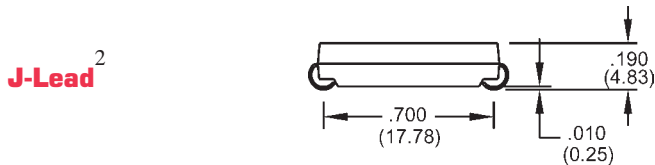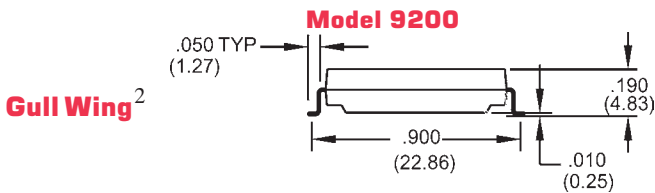


Ordering Information

| | |
|----------------|----------------------|
| Part Number | 9XXX-XX-XX |
| Model Number | Lead Style |
| 9201 9202 9290 | 00=Gull Wing |
| Coil Voltage | 20=J-Lead |
| 05=5 volts | 30=Radial (9290 N/A) |
| 12=12 volts | |

9200 Series/Surface Mount Reed Relays

| Model Number | | | 9201 | 9202 | 9290 |
|--|---|------------------------|------------------|--------------------------|--------------------------|
| Parameters | Test Conditions | Units | 1 Form A | 1 Form A 50 Ω Coaxial | 1 Form A 50 Ω Coaxial |
| COIL SPECS. | | | | | |
| Nom. Coil Voltage | | VDC | 5 12 | 5 12 | 5 12 |
| Max. Coil Voltage | | VDC | 6.5 15.0 | 6.5 15.0 | 6.5 15.0 |
| Coil Resistance | +/- 10%, 25° C | Ω | 250 650 | 150 650 | 160 600 |
| Operate Voltage | Must Operate by | VDC - Max. | 3.75 9.0 | 3.75 9.0 | 3.75 9.0 |
| Release Voltage | Must Release by | VDC - Min. | 0.4 1.0 | 0.4 1.0 | 0.4 1.0 |
| CONTACT RATINGS | | | | | |
| Switching Voltage | Max DC/Peak AC Resist. | Volts | 200 | 200 | 200 |
| Switching Current | Max DC/Peak AC Resist. | Amps | 0.5 | 0.5 | 0.5 |
| Carry Current | Max DC/Peak AC Resist. | Amps | 1.5 | 1.5 | 1.5 |
| Contact Rating | Max DC/Peak AC Resist. | Watts | 10 | 10 | 10 |
| Life Expectancy-Typical ¹ | Signal Level 1.0V,10mA | x 10 ⁶ Ops. | 1000 | 1000 | 1000 |
| Static Contact Resistance (max. init.) | 50mV, 10mA | Ω | 0.150 | 0.150 | 0.150 |
| Dynamic Contact Resistance (max. init.) | 0.5V, 50mA at 100 Hz, 1.5 msec | Ω | 0.200 | 0.200 | 0.200 |
| RELAY SPECIFICATIONS | | | | | |
| Insulation Resistance (minimum) | Between all Isolated Pins at 100V, 25°C, 40% RH | Ω | 10 ¹² | 10 ¹² | 10 ¹² |
| Capacitance - Typical Across Open Contacts | No Shield | pF | 0.7 | - | - |
| | Shield Floating | pF | - | 0.8 | 1.0 |
| | Shield Guarding | pF | - | 0.1 | 0.2 |
| Open Contact to Coil | No Shield | pF | 1.4 | - | - |
| | Shield Floating | pF | - | 1.4 | 2.0 |
| | Shield Guarding | pF | - | 0.2 | 0.4 |
| Contact to Shield | Contacts Open, Shield Floating | pF | - | 1.4 | 2 |
| | | | | | |
| Dielectric Strength (minimum) | Between Contacts | VDC/peak AC | 300 | 300 | 250 |
| | Contacts to Shield | VDC/peak AC | - | 1500 | 500 |
| | Contacts/Shield to Coil | VDC/peak AC | 1500 | 1500 | 500 |
| Operate Time - including bounce - Typical | At Nominal Coil Voltage, 30 Hz Square Wave | msec. | 0.40 | 0.40 | 0.40 |
| Release Time - Typical | Zener-Diode Suppression ³ | msec. | 0.10 | 0.10 | 0.10 |

Top View:
Dot stamped on top of relay refers to pin #1 location

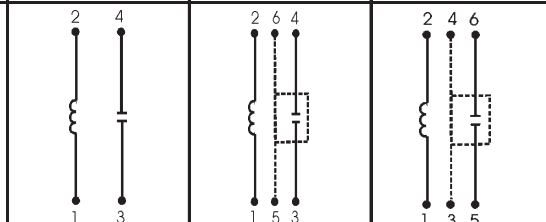

Notes:

¹Consult factory for life expectancy at other switching loads.

²Surface mount component processing temperature: 500°F / 260°C max for 1 minute dwell time. Temperature measured on leads where lead exits molded package.

³Consists of 56V Zener diode and 1N4148 diode in series, connected in parallel with coil.

Environmental Ratings:

Storage Temp: -35°C to +100°C;

Operating Temp: -20°C to +85°C

The operate and release voltage and the coil resistance are specified at 25°C. These values vary by approximately 0.4% / °C as the ambient temperature varies.

Vibration: 20 G's to 2000 Hz; Shock: 50 G's

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9