

# 1.6 $\Omega$ On Resistance, $\pm 5$ V, +12 V, and +3 V Quad SPST Switches

## DESCRIPTION

The DG9424E, DG9425E, DG9426E are monolithic quad single-pole-single-throw analog switches. The G9424E and DG9425E differ only in that they respond to opposite logic levels. The DG9426E has two normally open and two normally closed switches. It can be given various configurations, including four SPST, two SPDT, and one DPDT.

Using BiCMOS wafer fabrication technology allows the DG9424E, DG9425E, and DG9426E to operate on single and dual supplies. Single supply voltage ranges from 3 V to 16 V while dual supply operation is recommended with  $\pm 3$  V to  $\pm 8$  V. Each switch conducts equally well in both direction when on, and blocks input voltages up to the supply levels when off.

The low and flat on resistance over the full input signal voltage rang bring excellent linearity, reduce insertion loss and signal distortion, make them ideal for data acquisition and programmable gain control applications. These switch characters also make them ideal fit for audio signal switch and reed relay replacement.

The DG9424E, DG9425E, DG9426E feature low power dissipation, fast switching speed, and low voltage logic control threshold. Proprietary design enables the low charge injection that minimize the switching transient.

Operation temperature is specified from  $-40$   $^{\circ}\text{C}$  to  $+85$   $^{\circ}\text{C}$ . The DG9424E, DG9425E, DG9426E are available in 16 lead TSSOP packages.

## FEATURES

- 3 V to 16 V single supply or  $\pm 3$  V thru  $\pm 8$  V dual supply operation
- 1.6  $\Omega$  typical on resistance
- 3 V logic compatible for control
- Bi-directional rail to rail signal switching
- Fast switching speed
- $< 0.2$  nA switch on leakage
- Break-before-make switching - DG9426


## BENEFITS

- Wide operation voltage range
- Low signal errors and distortion
- Fast switching time
- Simple interfacing

## APPLICATIONS

- Automatic test equipment
- Data acquisition systems
- Meters and instruments
- Medical and healthcare systems
- Communication systems
- Audio and video signal routing
- Relay replacement
- Battery powered systems
- Computer peripherals
- Audio and video signal routing


## FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

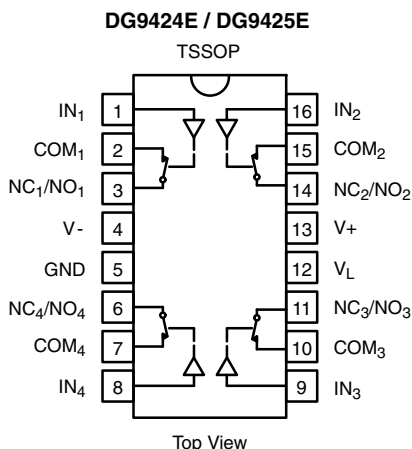

| TRUTH TABLE |         |         |
|-------------|---------|---------|
| LOGIC       | DG9424E | DG9425E |
| 0           | OFF     | ON      |
| 1           | ON      | OFF     |



## FUNCTIONAL BLOCK DIAGRAM AND PIN CONFIGURATION

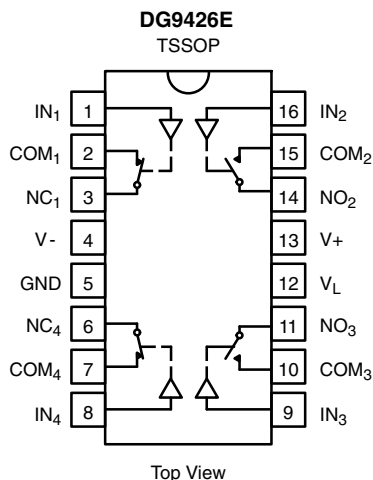

## TRUTH TABLE

| LOGIC | SW <sub>1</sub> , SW <sub>4</sub> | SW <sub>2</sub> , SW <sub>3</sub> |
|-------|-----------------------------------|-----------------------------------|
| 0     | ON                                | OFF                               |
| 1     | OFF                               | ON                                |

## ORDERING INFORMATION

| TEMP. RANGE      | PACKAGE      | PART NUMBER      | PART MARKING | STD PACK QUANTITY        |
|------------------|--------------|------------------|--------------|--------------------------|
| -40 °C to +85 °C | 16-Pin TSSOP | DG9424EDQ-T1-GE3 | 9424E        | Tape and Reel 3000 Units |
|                  |              | DG9425EDQ-T1-GE3 | 9425E        | Tape and Reel 3000 Units |
|                  |              | DG9426EDQ-T1-GE3 | 9426E        | Tape and Reel 3000 Units |

## ABSOLUTE MAXIMUM RATINGS

| PARAMETER                                                   |                           | LIMIT                     | UNIT |
|-------------------------------------------------------------|---------------------------|---------------------------|------|
| V+ to V-                                                    |                           | -0.3 to +18               | V    |
| GND to V-                                                   |                           | 18                        |      |
| V <sub>L</sub>                                              |                           | (GND - 0.3) to (V+) + 0.3 |      |
| IN, COM, NC, NO <sup>a</sup>                                |                           | (V-) - 0.3 to (V+) + 0.3  |      |
| Continuous Current (NO, NC, COM Pins)                       |                           | 100                       | mA   |
| Peak Current, S or D (Pulsed 1 ms, 10 % Duty Cycle)         |                           | 200                       |      |
| Storage Temperature                                         |                           | -65 to +150               | °C   |
| Power Dissipation (Package) <sup>b</sup>                    | 16-Pin TSSOP <sup>c</sup> | 450                       | mW   |
| Thermal Resistance <sup>b</sup>                             |                           | 178                       | °C/W |
| ESD Human Body Model (HBM); per ANSI / ESDA / JEDEC® JS-001 |                           | >1500                     | V    |
| Latch Up Current, per JESD78D                               |                           | 400                       | mA   |

## Notes

- Signals on NC, NO, COM or IN exceeding V<sub>+</sub> or V<sub>-</sub> will be clamped by internal diodes. Limit forward diode current to maximum current ratings.
- All leads welded or soldered to PC board.
- Derate 7 mW/°C above 25 °C.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



| SPECIFICATIONS <sup>a</sup> Single Supply 12 V |                                      |                                                                                                                                                                |                    |                            |                   |                   |      |  |
|------------------------------------------------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|-------------------|-------------------|------|--|
| PARAMETER                                      | SYMBOL                               | TEST CONDITIONS UNLESS OTHERWISE SPECIFIED<br>V <sub>+</sub> = 12 V, V <sub>-</sub> = 0 V<br>V <sub>L</sub> = 5 V, V <sub>IN</sub> = 2.4 V, 0.8 V <sup>f</sup> | TEMP. <sup>b</sup> | LIMITS<br>-40 °C to +85 °C |                   |                   | UNIT |  |
|                                                |                                      |                                                                                                                                                                |                    | MIN. <sup>d</sup>          | TYP. <sup>c</sup> | MAX. <sup>d</sup> |      |  |
| Analog Switch                                  |                                      |                                                                                                                                                                |                    |                            |                   |                   |      |  |
| Analog Signal Range <sup>e</sup>               | V <sub>ANALOG</sub>                  |                                                                                                                                                                | Full               | 0                          | -                 | 12                | V    |  |
| On-Resistance                                  | R <sub>ON</sub>                      | V <sub>+</sub> = 10.8 V, V <sub>-</sub> = 0 V<br>I <sub>NO</sub> , I <sub>NC</sub> = 50 mA, V <sub>COM</sub> = 2/9 V                                           | Room               | -                          | 1.6               | 3                 | Ω    |  |
|                                                |                                      |                                                                                                                                                                | Full               | -                          | -                 | 4                 |      |  |
| Digital Control                                |                                      |                                                                                                                                                                |                    |                            |                   |                   |      |  |
| Input Current                                  | I <sub>INL</sub> or I <sub>INH</sub> |                                                                                                                                                                | Full               | -1                         | 0.01              | 1                 | μA   |  |
| Dynamic Characteristics                        |                                      |                                                                                                                                                                |                    |                            |                   |                   |      |  |
| Turn-On Time <sup>e</sup>                      | t <sub>ON</sub>                      | R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF<br>V <sub>NO</sub> , V <sub>NC</sub> = 5 V, see fig. 2                                                          | Room               | -                          | 36                | 51                | ns   |  |
|                                                |                                      |                                                                                                                                                                | Full               | -                          | -                 | 65                |      |  |
| Turn-Off Time <sup>e</sup>                     | t <sub>OFF</sub>                     |                                                                                                                                                                | Room               | -                          | 20                | 35                |      |  |
|                                                |                                      |                                                                                                                                                                | Full               | -                          | -                 | 44                |      |  |
| Break-Before-Make Time Delay <sup>e</sup>      | t <sub>D</sub>                       | DG9426E only, V <sub>NO</sub> , V <sub>NC</sub> = 5 V<br>R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF                                                        | Room               | 2                          | -                 | -                 |      |  |
| Charge Injection <sup>e</sup>                  | Q <sub>INJ</sub>                     | V <sub>g</sub> = 0 V, R <sub>g</sub> = 0 Ω, C <sub>L</sub> = 1 nF                                                                                              | Room               | -                          | 38                | -                 | pC   |  |
| Off-Isolation <sup>e</sup>                     | OIRR                                 | R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF<br>f = 1 MHz                                                                                                      | Room               | -                          | -56               | -                 | dB   |  |
| Channel-to-Channel Crosstalk <sup>e</sup>      | X <sub>TALK</sub>                    |                                                                                                                                                                | Room               | -                          | -77               | -                 |      |  |
| NO, NC Off Capacitance <sup>e</sup>            | C <sub>NO(off)</sub>                 | f = 1 MHz                                                                                                                                                      | Room               | -                          | 49                | -                 | pF   |  |
|                                                | C <sub>NC(off)</sub>                 |                                                                                                                                                                |                    |                            |                   |                   |      |  |
| COM Off Capacitance <sup>e</sup>               | C <sub>COM(off)</sub>                |                                                                                                                                                                | Room               | -                          | 37                | -                 |      |  |
| Channel On Capacitance <sup>e</sup>            | C <sub>COM(on)</sub>                 |                                                                                                                                                                | Room               | -                          | 89                | -                 |      |  |
| Power Supplies                                 |                                      |                                                                                                                                                                |                    |                            |                   |                   |      |  |
| Positive Supply Current                        | I <sub>+</sub>                       | V <sub>IN</sub> = 0 or V <sub>L</sub>                                                                                                                          | Room               | -                          | 0.02              | 1                 | μA   |  |
|                                                |                                      |                                                                                                                                                                | Full               | -                          | -                 | 5                 |      |  |
| Negative Supply Current                        | I <sub>-</sub>                       |                                                                                                                                                                | Room               | -1                         | -0.002            | -                 |      |  |
|                                                |                                      |                                                                                                                                                                | Full               | -5                         | -                 | -                 |      |  |
| Logic Supply Current                           | I <sub>L</sub>                       |                                                                                                                                                                | Room               | -                          | 0.002             | 1                 |      |  |
|                                                |                                      |                                                                                                                                                                | Full               | -                          | -                 | 5                 |      |  |
| Ground Current                                 | I <sub>GND</sub>                     |                                                                                                                                                                | Room               | -1                         | -0.002            | -                 |      |  |
|                                                |                                      |                                                                                                                                                                | Full               | -5                         | -                 | -                 |      |  |



| SPECIFICATIONS <sup>a</sup> Dual Supply $\pm 5$ V |                                              |                                                                                                                                       |                    |                            |                   |                   |      |
|---------------------------------------------------|----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|-------------------|-------------------|------|
| PARAMETER                                         | SYMBOL                                       | TEST CONDITIONS UNLESS OTHERWISE SPECIFIED<br>V+ = 5 V, V- = 5 V<br>V <sub>L</sub> = 5 V, V <sub>IN</sub> = 2.4 V, 0.8 V <sup>f</sup> | TEMP. <sup>b</sup> | LIMITS<br>-40 °C to +85 °C |                   |                   | UNIT |
|                                                   |                                              |                                                                                                                                       |                    | MIN. <sup>d</sup>          | TYP. <sup>c</sup> | MAX. <sup>d</sup> |      |
| Analog Switch                                     |                                              |                                                                                                                                       |                    |                            |                   |                   |      |
| Analog Signal Range <sup>e</sup>                  | V <sub>ANALOG</sub>                          |                                                                                                                                       | Full               | -5                         |                   | 5                 | V    |
| On-Resistance                                     | R <sub>ON</sub>                              | V+ = 4.5 V, V- = -4.5 V<br>I <sub>NO</sub> , I <sub>NC</sub> = 50 mA                                                                  | Room               | -                          | 1.9               | 3.3               | Ω    |
|                                                   |                                              |                                                                                                                                       | Full               | -                          | -                 | 4.3               |      |
| Switch Off Leakage Current                        | I <sub>NO(off)</sub>                         | V+ = 5.5 V, V- = -5.5 V<br>V <sub>COM</sub> = $\pm$ 4.5 V, V <sub>NO</sub> , V <sub>NC</sub> = $\pm$ 4.5 V                            | Room               | -1                         | -                 | 1                 | nA   |
|                                                   | I <sub>NC(off)</sub>                         |                                                                                                                                       | Full               | -10                        | -                 | 10                |      |
|                                                   | I <sub>COM(off)</sub>                        |                                                                                                                                       | Room               | -1                         | -                 | 1                 |      |
|                                                   |                                              |                                                                                                                                       | Full               | -10                        | -                 | 10                |      |
| Channel On Leakage Current                        | I <sub>COM(on)</sub>                         | V+ = 5.5 V, V- = -5.5 V,<br>V <sub>NO</sub> , V <sub>NC</sub> = V <sub>COM</sub> = $\pm$ 4.5 V                                        | Room               | -1                         | -                 | 1                 |      |
|                                                   |                                              |                                                                                                                                       | Full               | -10                        | -                 | 10                |      |
| Digital Control                                   |                                              |                                                                                                                                       |                    |                            |                   |                   |      |
| Input Current <sup>a</sup>                        | I <sub>INL</sub> or I <sub>INH</sub>         |                                                                                                                                       | Full               | -1                         | 0.05              | 1                 | μA   |
| Dynamic Characteristics                           |                                              |                                                                                                                                       |                    |                            |                   |                   |      |
| Turn-On Time <sup>e</sup>                         | t <sub>ON</sub>                              | R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF<br>V <sub>NO</sub> , V <sub>NC</sub> = $\pm$ 3.5 V, see fig. 2                         | Room               | -                          | 48                | 67                | ns   |
|                                                   |                                              |                                                                                                                                       | Full               | -                          | -                 | 81                |      |
| Turn-Off Time <sup>e</sup>                        | t <sub>OFF</sub>                             |                                                                                                                                       | Room               | -                          | 34                | 57                |      |
|                                                   |                                              |                                                                                                                                       | Full               | -                          | -                 | 67                |      |
| Break-Before-Make Time Delay <sup>e</sup>         | t <sub>D</sub>                               | DG9426E only, V <sub>NO</sub> , V <sub>NC</sub> = 3.5 V<br>R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF                             | Room               | 2                          | -                 | -                 |      |
| Charge Injection <sup>e</sup>                     | Q <sub>INJ</sub>                             | V <sub>g</sub> = 0 V, R <sub>g</sub> = 0 Ω, C <sub>L</sub> = 1 nF                                                                     | Room               | -                          | 112               | -                 | pC   |
| Off Isolation <sup>e</sup>                        | OIRR                                         | R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF, f = 1 MHz                                                                               | Room               | -                          | -56               | -                 | dB   |
| Channel-to-Channel Crosstalk <sup>e</sup>         | X <sub>TALK</sub>                            |                                                                                                                                       | Room               | -                          | -82               | -                 |      |
| Source Off Capacitance <sup>e</sup>               | C <sub>NO(off)</sub><br>C <sub>NC(off)</sub> | f = 1 MHz                                                                                                                             | Room               | -                          | 38                | -                 | pF   |
| Drain Off Capacitance <sup>e</sup>                | C <sub>COM(off)</sub>                        |                                                                                                                                       | Room               | -                          | 38                | -                 |      |
| Channel On Capacitance <sup>e</sup>               | C <sub>COM(on)</sub>                         |                                                                                                                                       | Room               | -                          | 89                | -                 |      |
| Power Supplies                                    |                                              |                                                                                                                                       |                    |                            |                   |                   |      |
| Positive Supply Current <sup>e</sup>              | I+                                           | V <sub>IN</sub> = 0 or V <sub>L</sub>                                                                                                 | Room               | -                          | 0.03              | 1                 | μA   |
|                                                   |                                              |                                                                                                                                       | Full               | -                          | -                 | 5                 |      |
| Negative Supply Current <sup>e</sup>              | I-                                           |                                                                                                                                       | Room               | -1                         | -0.002            | -                 |      |
|                                                   |                                              |                                                                                                                                       | Full               | -5                         | -                 | -                 |      |
| Logic Supply Current <sup>e</sup>                 | I <sub>L</sub>                               |                                                                                                                                       | Room               | -                          | 0.002             | 1                 |      |
|                                                   |                                              |                                                                                                                                       | Full               | -                          | -                 | 5                 |      |
| Ground Current <sup>e</sup>                       | I <sub>GND</sub>                             |                                                                                                                                       | Room               | -1                         | -0.002            | -                 |      |
|                                                   |                                              |                                                                                                                                       | Full               | -5                         | -                 | -                 |      |



| SPECIFICATIONS <sup>a</sup> Single Supply 5 V |                     |                                                                                                                                                               |                    |                            |                   |                   |      |
|-----------------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|-------------------|-------------------|------|
| PARAMETER                                     | SYMBOL              | TEST CONDITIONS UNLESS OTHERWISE SPECIFIED<br>V <sub>+</sub> = 5 V, V <sub>-</sub> = 0 V<br>V <sub>L</sub> = 5 V, V <sub>IN</sub> = 2.4 V, 0.8 V <sup>f</sup> | TEMP. <sup>b</sup> | LIMITS<br>-40 °C to +85 °C |                   |                   | UNIT |
|                                               |                     |                                                                                                                                                               |                    | MIN. <sup>d</sup>          | TYP. <sup>c</sup> | MAX. <sup>d</sup> |      |
| Analog Switch                                 |                     |                                                                                                                                                               |                    |                            |                   |                   |      |
| Analog Signal Range <sup>e</sup>              | V <sub>ANALOG</sub> |                                                                                                                                                               | Full               | -                          | -                 | 5                 | V    |
| On-Resistance <sup>e</sup>                    | R <sub>ON</sub>     | V <sub>+</sub> = 4.5 V, I <sub>NO</sub> , I <sub>NC</sub> = 50 mA                                                                                             | Room               | -                          | 3.1               | 4.8               | Ω    |
|                                               |                     |                                                                                                                                                               | Full               | -                          | -                 | 5.8               |      |
| Dynamic Characteristics                       |                     |                                                                                                                                                               |                    |                            |                   |                   |      |
| Turn-On Time <sup>e</sup>                     | t <sub>ON</sub>     | R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF<br>V <sub>NO</sub> , V <sub>NC</sub> = 3.5 V, see fig. 2                                                       | Room               | -                          | 62                | 78                | ns   |
|                                               |                     |                                                                                                                                                               | Hot                | -                          | -                 | 106               |      |
| Turn-Off Time <sup>e</sup>                    | t <sub>OFF</sub>    |                                                                                                                                                               | Room               | -                          | 29                | 44                |      |
|                                               |                     |                                                                                                                                                               | Hot                | -                          | -                 | 56                |      |
| Break-Before-Make Time Delay <sup>e</sup>     | t <sub>D</sub>      | DG9426E only, V <sub>NO</sub> , V <sub>NC</sub> = 3.5 V<br>R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF                                                     | Room               | 5                          | -                 | -                 |      |
| Charge Injection <sup>e</sup>                 | Q <sub>INJ</sub>    | V <sub>g</sub> = 0 V, R <sub>g</sub> = 0 Ω, C <sub>L</sub> = 1 nF                                                                                             | Room               | -                          | 10                | -                 | pC   |
| Power Supplies                                |                     |                                                                                                                                                               |                    |                            |                   |                   |      |
| Positive Supply Current <sup>e</sup>          | I <sub>+</sub>      | V <sub>IN</sub> = 0 or V <sub>L</sub>                                                                                                                         | Room               | -                          | 0.02              | 1                 | μA   |
|                                               |                     |                                                                                                                                                               | Hot                | -                          | -                 | 5                 |      |
| Negative Supply Current <sup>e</sup>          | I <sub>-</sub>      |                                                                                                                                                               | Room               | -1                         | -0.002            | -                 |      |
|                                               |                     |                                                                                                                                                               | Hot                | -5                         | -                 | -                 |      |
| Logic Supply Current <sup>e</sup>             | I <sub>L</sub>      |                                                                                                                                                               | Room               | -                          | 0.002             | 1                 |      |
|                                               |                     |                                                                                                                                                               | Hot                | -                          | -                 | 5                 |      |
| Ground Current <sup>e</sup>                   | I <sub>GND</sub>    |                                                                                                                                                               | Room               | -1                         | -0.002            | -                 |      |
|                                               |                     |                                                                                                                                                               | Hot                | -5                         | -                 | -                 |      |




| SPECIFICATIONS <sup>a</sup> Single Supply 3 V |                                      |                                                                                                                                                               |                    |                            |                   |                   |      |
|-----------------------------------------------|--------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------------------|-------------------|-------------------|------|
| PARAMETER                                     | SYMBOL                               | TEST CONDITIONS UNLESS OTHERWISE SPECIFIED<br>V <sub>+</sub> = 3 V, V <sub>-</sub> = 0 V<br>V <sub>L</sub> = 3 V, V <sub>IN</sub> = 2.4 V, 0.4 V <sup>f</sup> | TEMP. <sup>b</sup> | LIMITS<br>-40 °C to +85 °C |                   |                   | UNIT |
|                                               |                                      |                                                                                                                                                               |                    | MIN. <sup>d</sup>          | TYP. <sup>c</sup> | MAX. <sup>d</sup> |      |
| Analog Switch                                 |                                      |                                                                                                                                                               |                    |                            |                   |                   |      |
| Analog Signal Range <sup>e</sup>              | V <sub>ANALOG</sub>                  |                                                                                                                                                               | Full               | 0                          | -                 | 3                 | V    |
| On-Resistance                                 | R <sub>ON</sub>                      | V <sub>+</sub> = 2.7 V, V <sub>-</sub> = 0 V<br>I <sub>NO</sub> , I <sub>NC</sub> = 5 mA, V <sub>COM</sub> = 0.5, 2.2 V                                       | Room               | -                          | 6                 | -                 | Ω    |
|                                               |                                      |                                                                                                                                                               | Full               | -                          | -                 | -                 |      |
| Switch Off Leakage Current <sup>a</sup>       | I <sub>NO(off)</sub>                 | V <sub>+</sub> = 3.3 V, V <sub>-</sub> = 0 V<br>V <sub>COM</sub> = 0.3, 3 V, V <sub>NO</sub> , V <sub>NC</sub> = 3, 0.3 V                                     | Room               | -1                         | -                 | 1                 | nA   |
|                                               | I <sub>NC(off)</sub>                 |                                                                                                                                                               | Full               | -10                        | -                 | 10                |      |
|                                               | I <sub>COM(off)</sub>                |                                                                                                                                                               | Room               | -1                         | -                 | 1                 |      |
|                                               |                                      |                                                                                                                                                               | Full               | -10                        | -                 | 10                |      |
| Channel On Leakage Current <sup>a</sup>       | I <sub>COM(on)</sub>                 | V <sub>+</sub> = 3.3 V, V <sub>-</sub> = 0 V,<br>V <sub>NO</sub> , V <sub>NC</sub> = V <sub>COM</sub> = 0.3, 3 V                                              | Room               | -1                         | -                 | 1                 | nA   |
|                                               |                                      |                                                                                                                                                               | Full               | -10                        | -                 | 10                |      |
| Digital Control <sup>e</sup>                  |                                      |                                                                                                                                                               |                    |                            |                   |                   |      |
| Input Current                                 | I <sub>INL</sub> or I <sub>INH</sub> |                                                                                                                                                               | Full               | -1                         | 0.005             | 1                 | μA   |
| Dynamic Characteristics                       |                                      |                                                                                                                                                               |                    |                            |                   |                   |      |
| Turn-On Time                                  | t <sub>ON</sub>                      | R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF<br>V <sub>NO</sub> , V <sub>NC</sub> = 1.5 V, see fig. 2                                                       | Room               | -                          | 140               | -                 | ns   |
|                                               |                                      |                                                                                                                                                               | Full               | -                          | -                 | 193               |      |
| Turn-Off Time                                 | t <sub>OFF</sub>                     |                                                                                                                                                               | Room               | -                          | 65                | -                 |      |
|                                               |                                      |                                                                                                                                                               | Full               | -                          | -                 | 89                |      |
| Break-Before-Make Time Delay                  | t <sub>D</sub>                       | DG9426E only, V <sub>NO</sub> , V <sub>NC</sub> = 1.5 V<br>R <sub>L</sub> = 300 Ω, C <sub>L</sub> = 35 pF                                                     | Room               | 5                          |                   |                   |      |
| Charge Injection <sup>e</sup>                 | Q <sub>INJ</sub>                     | V <sub>g</sub> = 0 V, R <sub>g</sub> = 0 Ω, C <sub>L</sub> = 1 nF                                                                                             | Room               | -                          | 15                | -                 | pC   |
| Off Isolation <sup>e</sup>                    | OIRR                                 | R <sub>L</sub> = 50 Ω, C <sub>L</sub> = 5 pF<br>f = 1 MHz                                                                                                     | Room               | -                          | -56               | -                 | dB   |
| Channel-to-Channel Crosstalk <sup>e</sup>     | X <sub>TALK</sub>                    |                                                                                                                                                               | Room               | -                          | -80               | -                 |      |
| Source Off Capacitance <sup>e</sup>           | C <sub>NO(off)</sub>                 | f = 1 MHz                                                                                                                                                     | Room               | -                          | 53                | -                 | pF   |
|                                               | C <sub>NC(off)</sub>                 |                                                                                                                                                               |                    |                            |                   |                   |      |
| Drain Off Capacitance <sup>e</sup>            | C <sub>COM(off)</sub>                |                                                                                                                                                               | Room               | -                          | 42                | -                 |      |
| Channel On Capacitance <sup>e</sup>           | C <sub>COM(on)</sub>                 |                                                                                                                                                               | Room               | -                          | 92                | -                 |      |

**Notes**


- a. Leakage parameters are guaranteed by worst case test conditions and not subject to production test.
- b. Room = 25 °C, Full = As determined by the operating temperature suffix.
- c. Typical values are for DESIGN AID ONLY, not guaranteed nor subject to production testing.
- d. The algebraic convention whereby the most negative value is a minimum and the most positive a maximum, is used in this datasheet.
- e. Guaranteed by design, not subject to production test.
- f.  $V_{IN}$  = Input voltage to perform proper function.




**TYPICAL CHARACTERISTICS** (25 °C, unless otherwise noted)

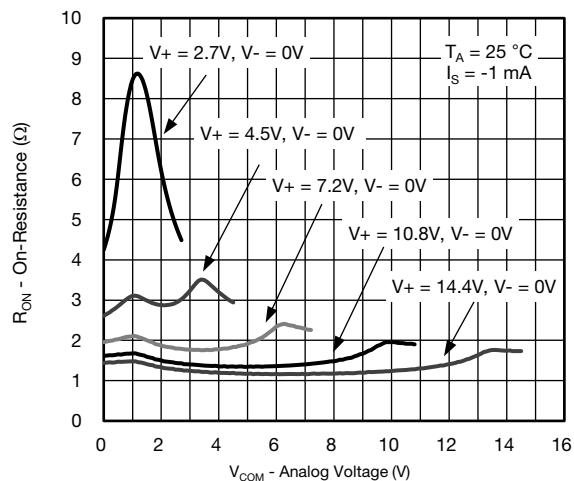


**RON vs. VCOM and Supply Voltage**

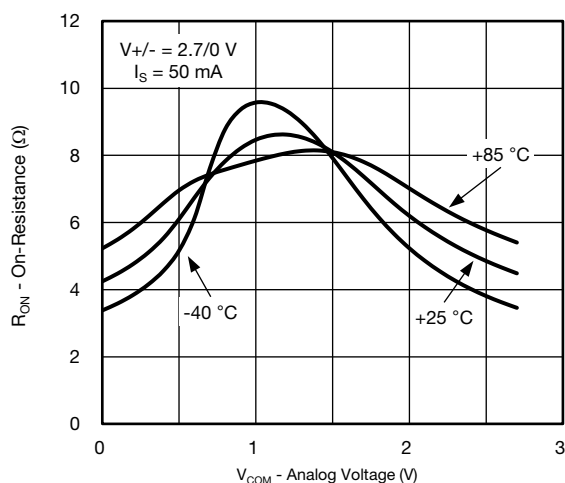


**RON vs. Analog Voltage and Temperature**

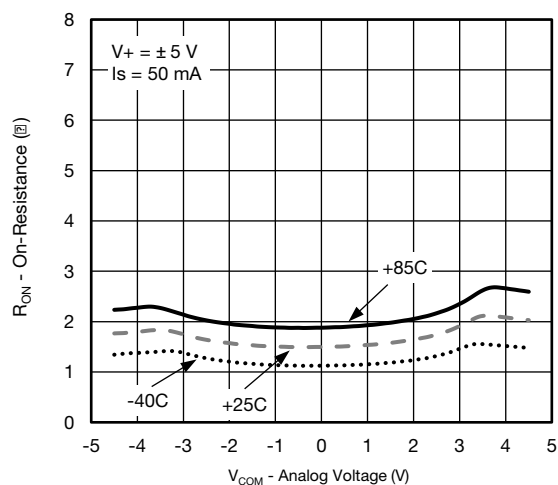


**RON vs. Analog Voltage and Temperature**

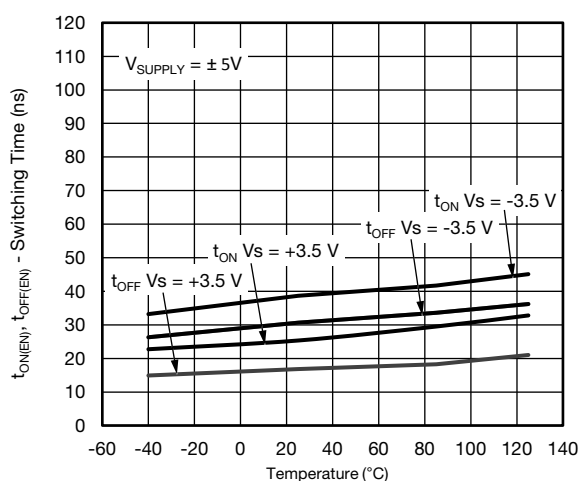

**Switching Time vs. Temperature and Dual Supply Voltage**

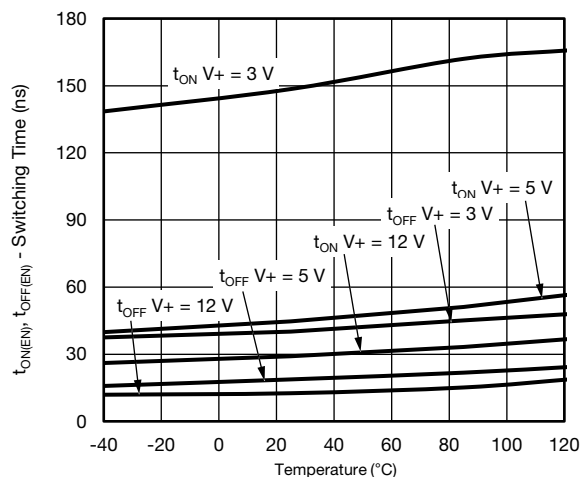


**Switching Time vs. Temperature and Single Supply Voltage**

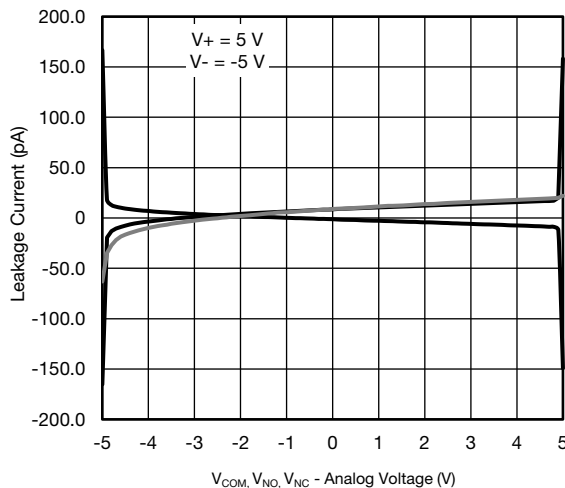


**Leakage Current vs. Analog Voltage**




**TYPICAL CHARACTERISTICS** (25 °C, unless otherwise noted)

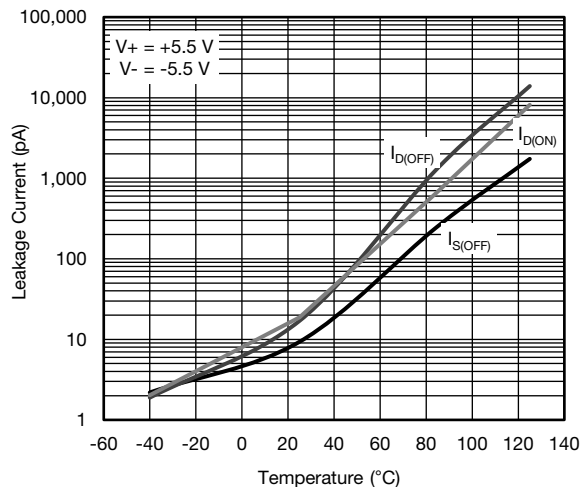


**Leakage Current vs. Temperature**

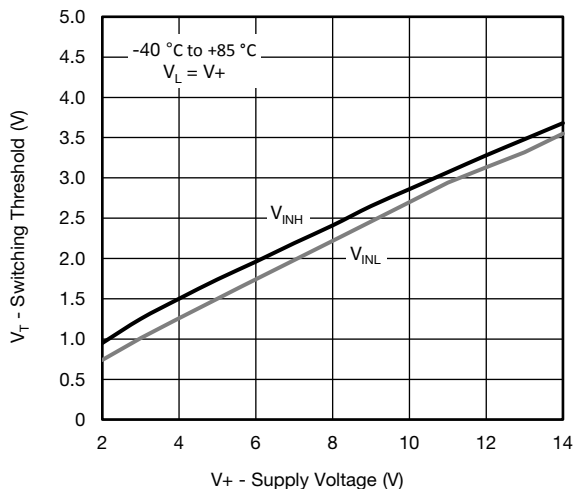

**Switching Threshold vs. Supply Voltage**


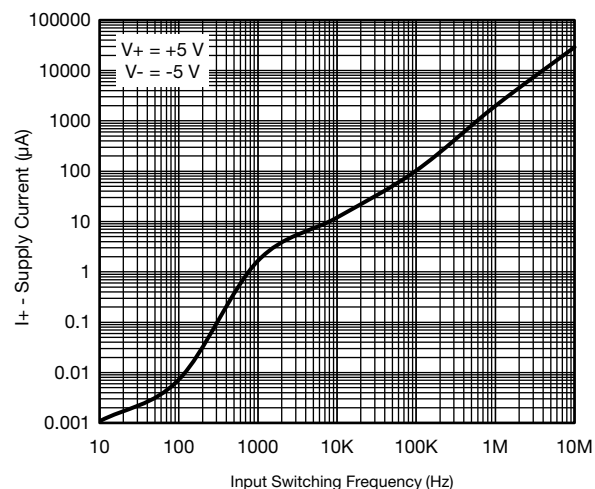


**Switching Current vs. Input Switching Frequency**

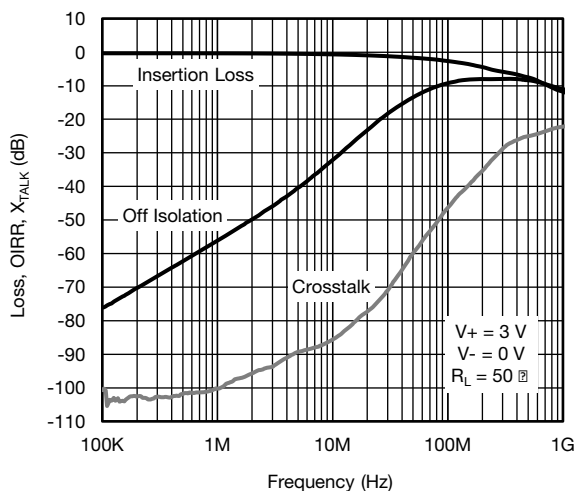


**Insertion Loss, Off Isolation and Crosstalk vs. Frequency**

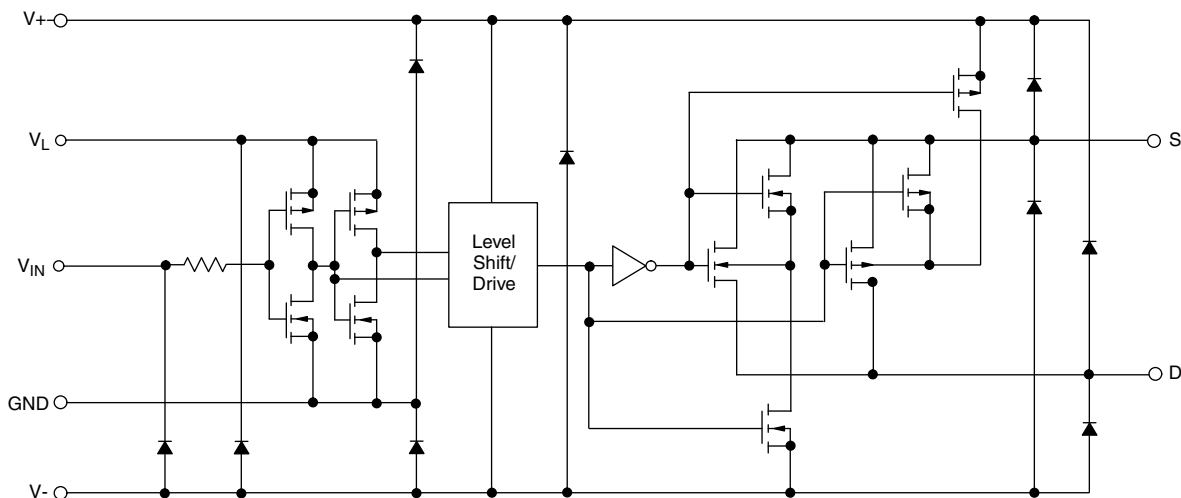
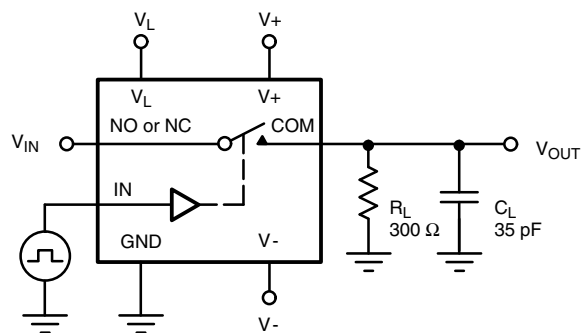






**SCHEMATIC DIAGRAM** (typical channel)

**Fig. 1**
**TEST CIRCUITS**

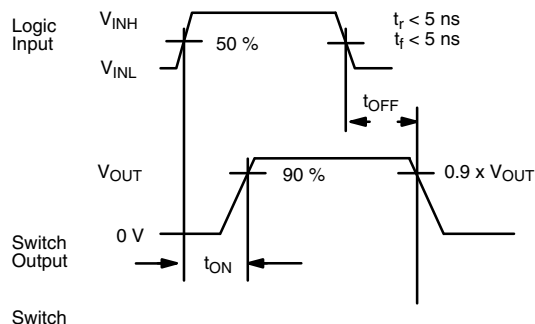 $C_L$  (includes fixture and stray capacitance)

$$V_{OUT} = V_{IN} \frac{R_L}{R_L + r_{ON}}$$

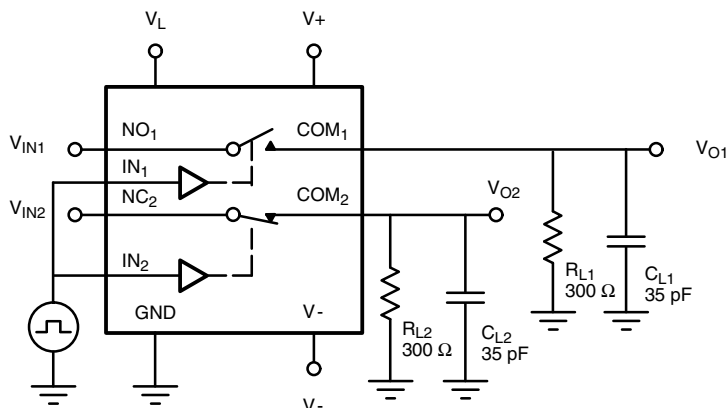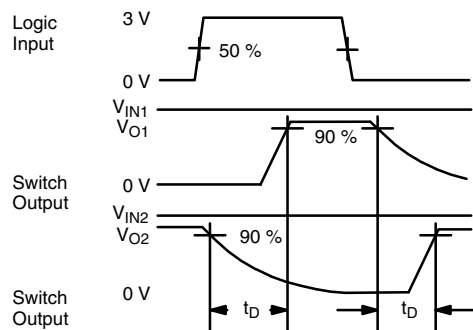

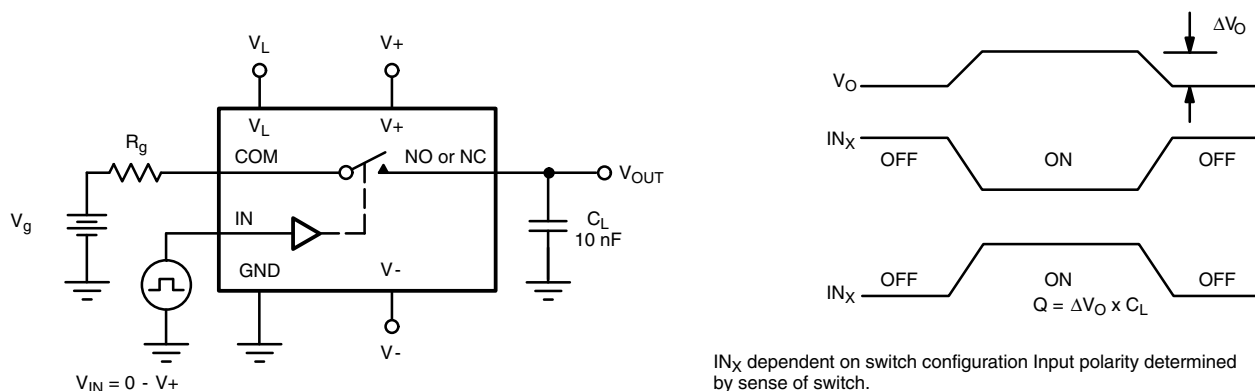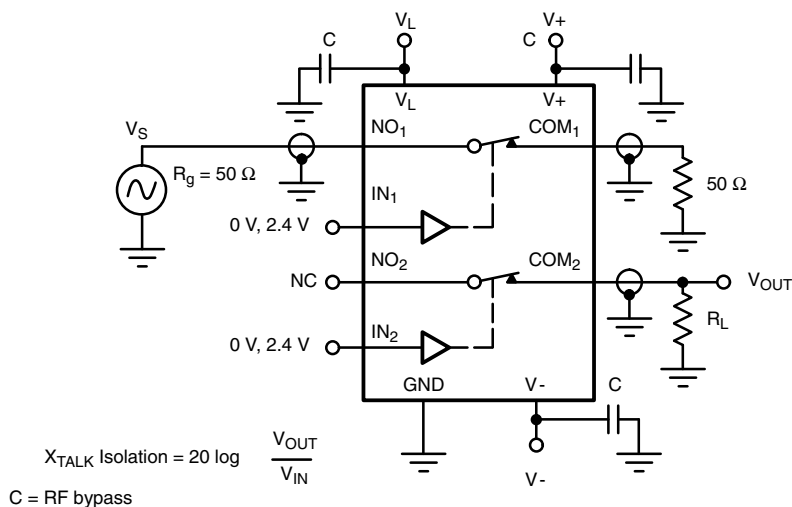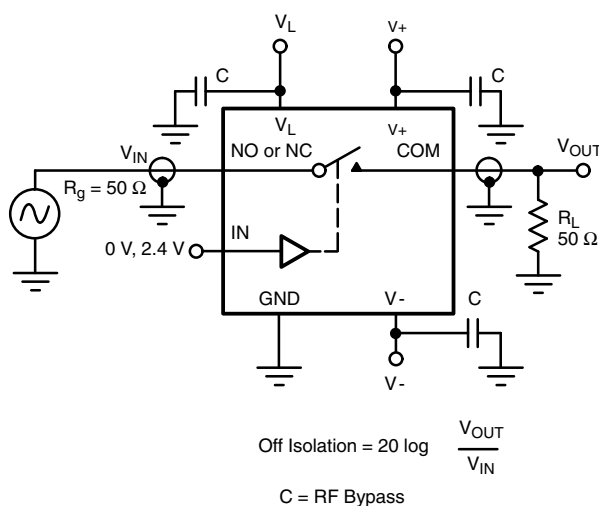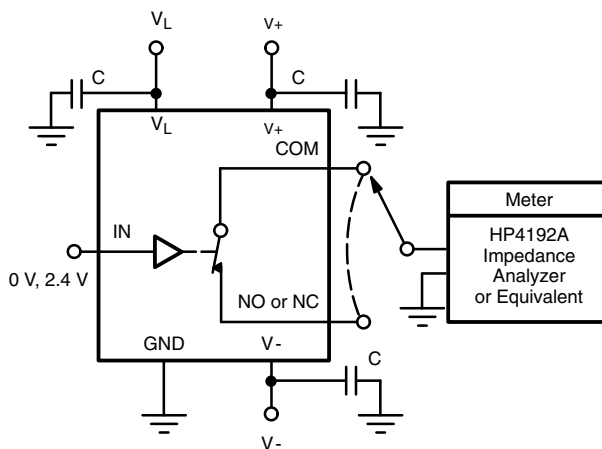
Note: Logic input waveform is inverted for switches that have the opposite logic sense control

**Fig. 2 - Switching Time**

 $C_L$  (includes fixture and stray capacitance)

**Fig. 3 - Break-Before-Make (DG9426E)**

**TEST CIRCUITS**

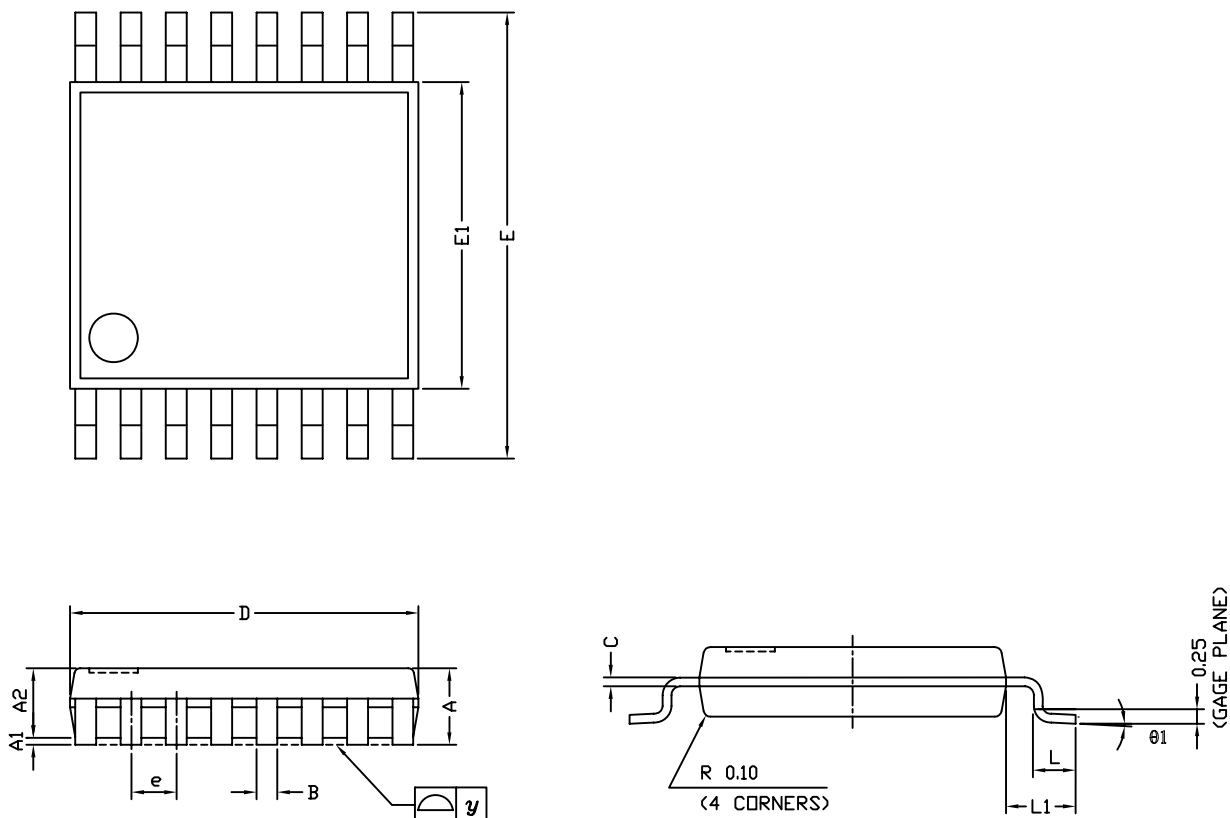**Fig. 4 - Charge Injection**

**Fig. 5 - Crosstalk**

**Fig. 6 - Off-Isolation**

**Fig. 7 - Source/Drain Capacitances**


Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package/tape drawings, part marking, and reliability data, see [www.vishay.com/ppg?75770](http://www.vishay.com/ppg?75770).

## TSSOP: 16-LEAD



| Symbols                        | DIMENSIONS IN MILLIMETERS |       |      |
|--------------------------------|---------------------------|-------|------|
|                                | Min                       | Nom   | Max  |
| A                              | -                         | 1.10  | 1.20 |
| A1                             | 0.05                      | 0.10  | 0.15 |
| A2                             | -                         | 1.00  | 1.05 |
| B                              | 0.22                      | 0.28  | 0.38 |
| C                              | -                         | 0.127 | -    |
| D                              | 4.90                      | 5.00  | 5.10 |
| E                              | 6.10                      | 6.40  | 6.70 |
| E1                             | 4.30                      | 4.40  | 4.50 |
| e                              | -                         | 0.65  | -    |
| L                              | 0.50                      | 0.60  | 0.70 |
| L1                             | 0.90                      | 1.00  | 1.10 |
| y                              | -                         | -     | 0.10 |
| θ1                             | 0°                        | 3°    | 6°   |
| ECN: S-61920-Rev. D, 23-Oct-06 |                           |       |      |
| DWG: 5624                      |                           |       |      |

### RECOMMENDED MINIMUM PAD FOR TSSOP-16

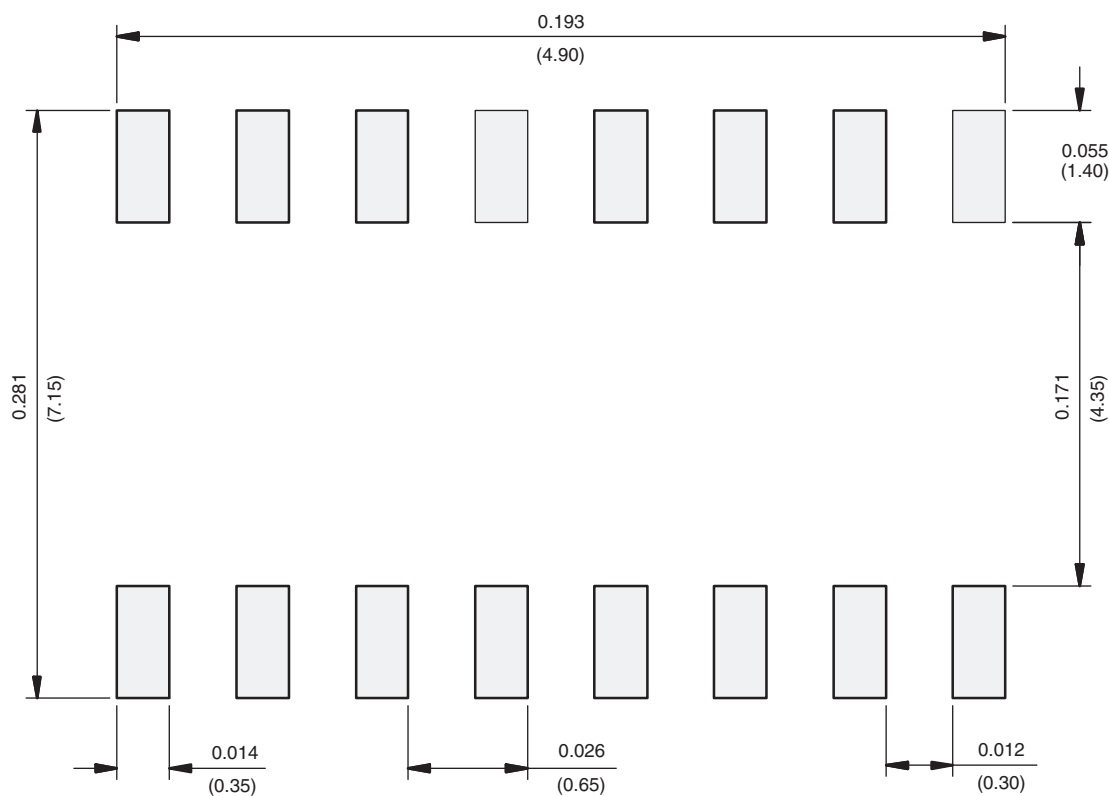

Recommended Minimum Pads  
Dimensions in inches (mm)



## Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

## Material Category Policy

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as RoHS-Compliant fulfill the definitions and restrictions defined under Directive 2011/65/EU of The European Parliament and of the Council of June 8, 2011 on the restriction of the use of certain hazardous substances in electrical and electronic equipment (EEE) - recast, unless otherwise specified as non-compliant.**

**Please note that some Vishay documentation may still make reference to RoHS Directive 2002/95/EC. We confirm that all the products identified as being compliant to Directive 2002/95/EC conform to Directive 2011/65/EU.**

**Vishay Intertechnology, Inc. hereby certifies that all its products that are identified as Halogen-Free follow Halogen-Free requirements as per JEDEC JS709A standards. Please note that some Vishay documentation may still make reference to the IEC 61249-2-21 definition. We confirm that all the products identified as being compliant to IEC 61249-2-21 conform to JEDEC JS709A standards.**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9