

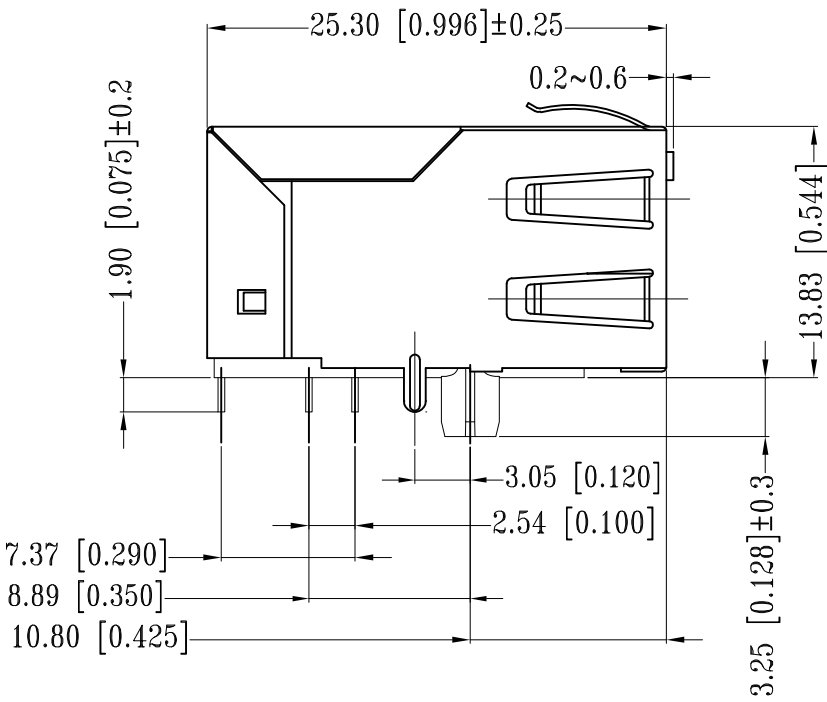
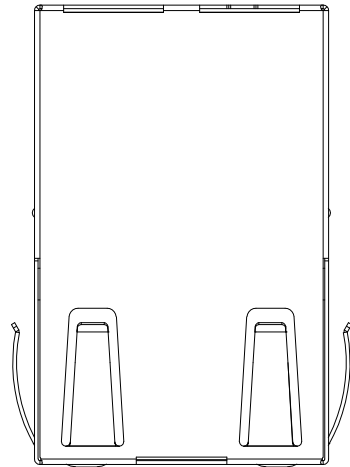
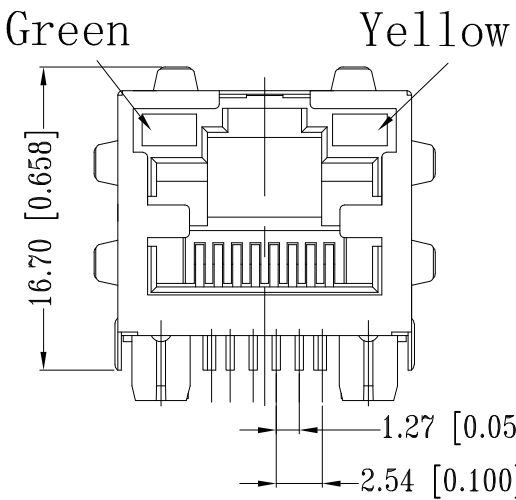


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B2	REV. PER PCN E-17-002286	28FEB2017	GCM	MSZ

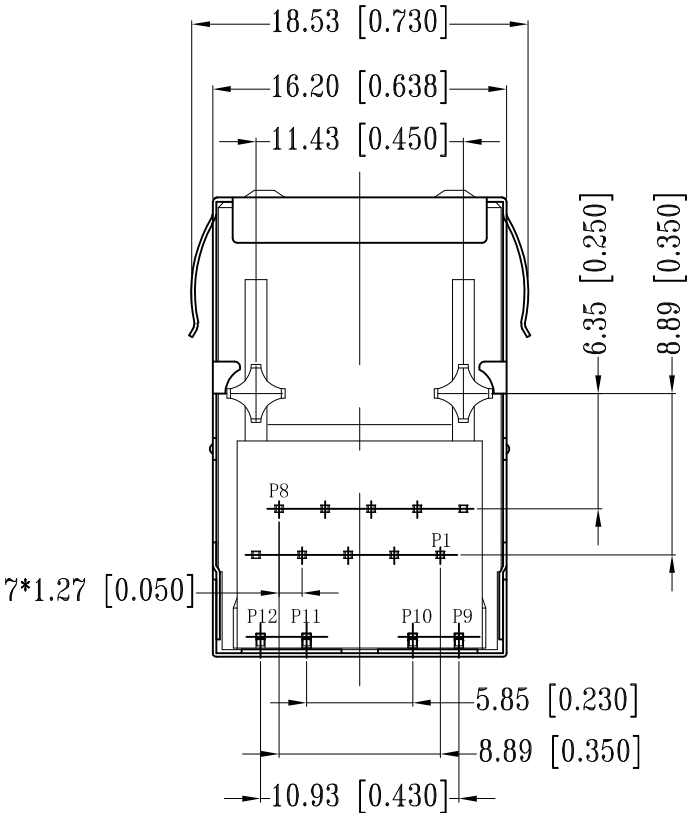

1:1




- 1 CONNECTOR MATERIAL:
HOUSING: LCP BLACK UL94 V-0
INSERT: LCP BLACK UL94 V-0
SHIELD: BRASS
SHIELD PLATING: NICKEL
CONTACT: COPPER ALLOY
CONTACT PLATING: SELECTIVE GOLD, MIN. 0.76µm (30µinch) IN CONTACT AREA
OVER MIN. 1.27µm (50µinch) NICKEL
SOLDER PIN PLATING: 3.05µm (120µinch) TIN OVER 1.02µm (40µinch) NICKEL OVER ALL
SHIELDING PIN PLATING: NICKEL
- 2 PIN NOT ELECTRICALLY CONNECTED MAYBE OMITTED SEE ELECTRICAL CIRCUIT DIAGRAM FOR OMITTED PINS
- 3 RJ45 CAVITIES CONFORM TO FCC RULES AND REGULATION PART 68
- 4 THE PART IS RECOMMENDED FOR REFLOW SOLDERING PROCESS PEAK
SOLDERING: TEMPERATURE MAX. +260° C, MAX. 10s
- 5 OPERATING TEMPERATURE: T = -40° C TO +85° C
- 6 STORAGE TEMPERATURE: T = -40° C TO +85° C
- 7 UNLESS OTHERWISE SPECIFIED, SEE TABLE FOR ALL DIMENSIONS TOLERANCES
- 8 JACK CONFIGURATION: 1 x 1
TAB DIRECTION: UP
- 9 PACKAGING: REEL (T+R) ACCORDING TO PACKAGING SPECIFICATION 107-18116

TABLE OF TOLERANCE (mm)	
RANGE	TOLERANCE
0-10	±0.15
>10-40	±0.25
>40-70	±0.30
>70	±0.40

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 16AUG2016 GANESH C M	TE Connectivity		
		CHK 16AUG2016 FRANZ MUELLER			
		APVD 16AUG2016 MARTIN SZELAG	NAME RJ45 JACK INT.MAG. 10/100 LED 1x1 INV.		
		PRODUCT SPEC 108-94552			
		APPLICATION SPEC 114-94447			
		WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-2301994-2
		CUSTOMER DRAWING	SCALE 3:1	SHEET 1 of 3	REV B2

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

SUGGESTED PCB LAYOUT

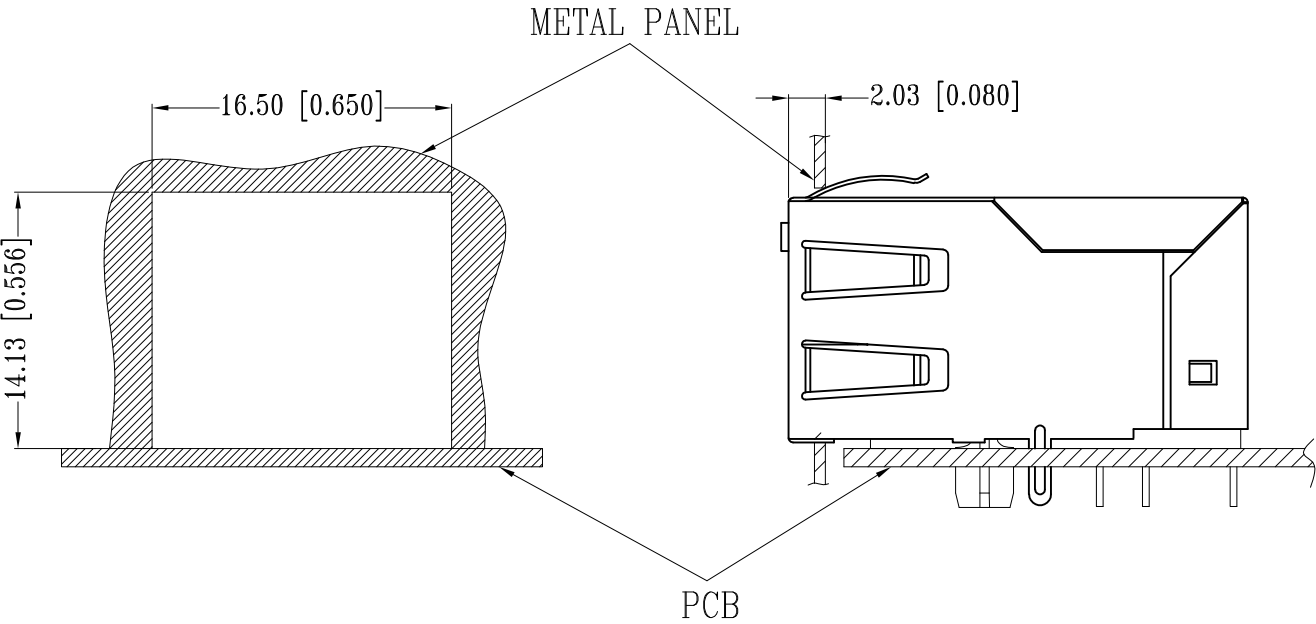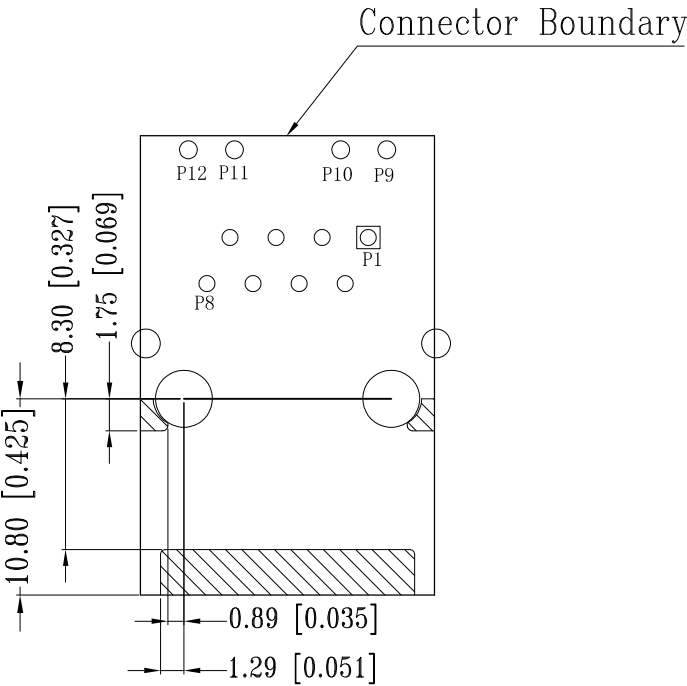
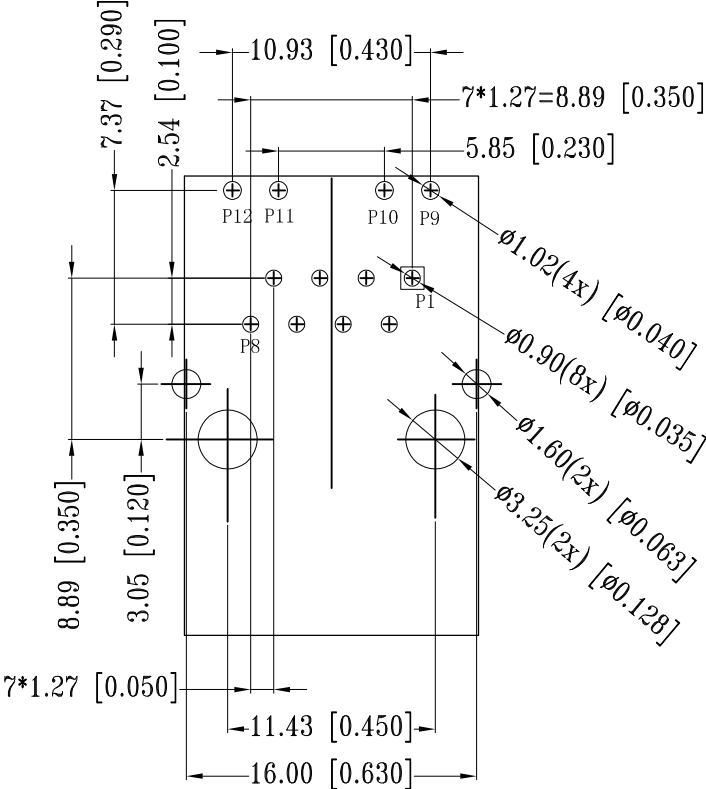


UNIT: mm / inch
TOLERANCES: ± 0.10 / 0.004

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GANESH C M 16AUG2016	TE Connectivity		
		CHK FRANZ MUELLER 16AUG2016			
		APVD MARTIN SZELAG 16AUG2016	NAME RJ45 JACK INT.MAG. 10/100 LED 1x1 INV.		
		PRODUCT SPEC 108-94552			
		APPLICATION SPEC 114-94447			
		WEIGHT	SIZE A3	CAGE CODE 00779	DRAWING NO C-2301994-2
		CUSTOMER DRAWING	SCALE 3:1	SHEET 2 OF 3	REV B2

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	—	SEE SHEET 1	—	—	—

ELECTRICAL CIRCUIT DIAGRAM

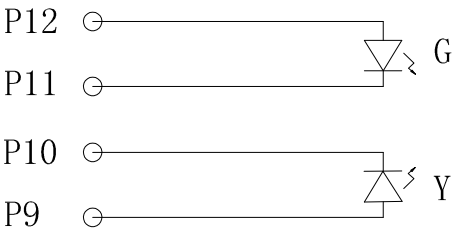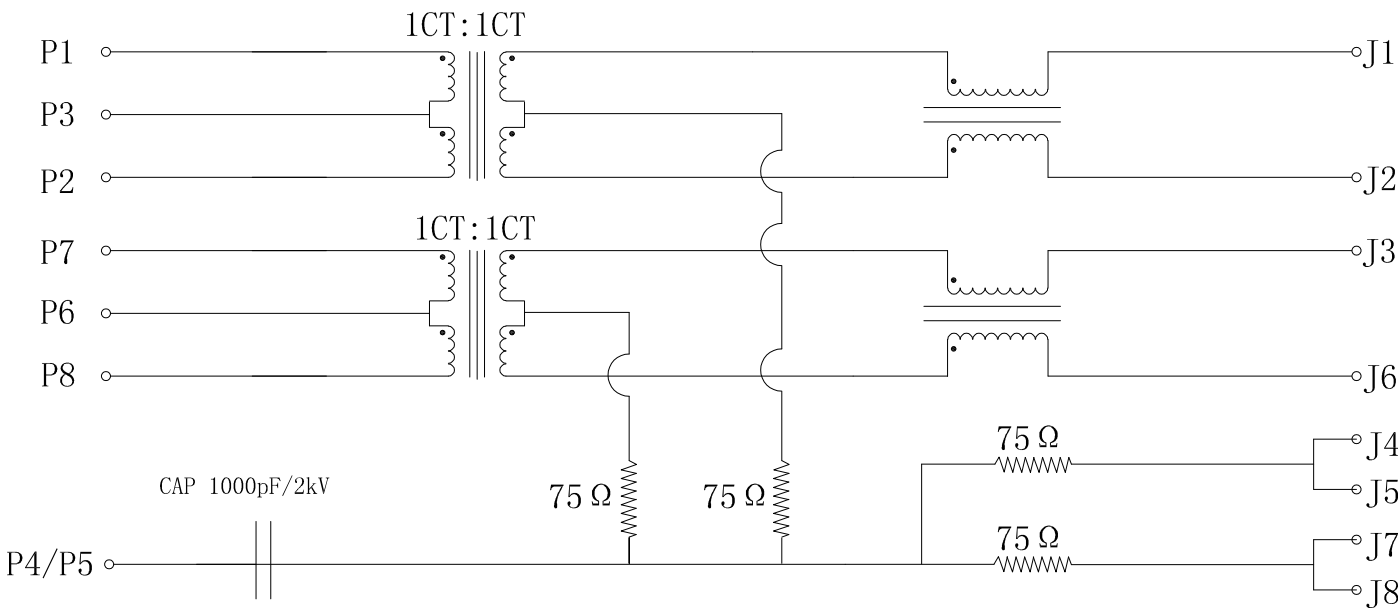

Pin	Yellow		Green
P9	+	P11	—
P10	—	P12	+



CONTROL CODE
DATE CODE
"0213"
YY—YEAR
WW—WEEK

- 1.0 Turn Ratio @100kHz: (P1~P2):(J1~J2) = 1:1±2%
(P7~P8):(J3~J6) = 1:1±2%
- 2.0 Primary Inductance: 350µH MIN. @100kHz, 0.1V 8mA DC BIAS
- 3.0 DC Resistance: 1.2 OHMS MAX.
- 4.0 Insertion Loss: 1–100MHz –1.2dB MAX.
- 5.0 Return Loss: 1–30MHz –16dB MIN.
30–60MHz –12dB MIN.
60–80MHz –10dB MIN.
- 6.0 CROSS TALK: 1–100MHz –30dB MIN.
- 7.0 COMMON TO COMMON MODE ATTENUATION: 1–100MHz –30dB MIN.
- 8.0 Isolation: PHY Side to Line Side: 1500VAC or 2250VDC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN GANESH C M 16AUG2016		 TE Connectivity				
DIMENSIONS: mm [INCHES]		CHK FRANZ MUELLER 16AUG2016						
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± – 1 PLC ± – 2 PLC ± – 3 PLC ± – 4 PLC ± – ANGLES ± – 	APVD MARTIN SZELAG 16AUG2016		NAME RJ45 JACK INT.MAG. 10/100 LED 1x1 INV. — —				
		PRODUCT SPEC 108–94552						
		MATERIAL 		APPLICATION SPEC 114–94447		SIZE	CAGE CODE	DRAWING NO
FINISH 		WEIGHT		A3	00779	C=2301994–2	—	
CUSTOMER DRAWING						SCALE 3:1	SHEET 3 OF 3	REV B2

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9