


### TPSMC Series

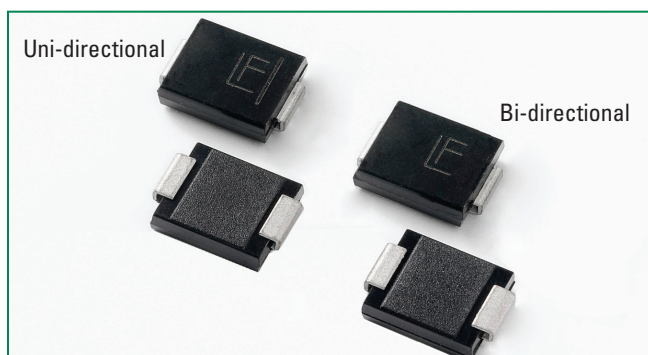

#### Agency Approvals

| AGENCY                                                                            | AGENCY FILE NUMBER |
|-----------------------------------------------------------------------------------|--------------------|
|  | E230531            |


#### Maximum Ratings and Thermal Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

| Parameter                                                                                            | Symbol                            | Value      | Unit |
|------------------------------------------------------------------------------------------------------|-----------------------------------|------------|------|
| Peak Pulse Power Dissipation at T <sub>A</sub> =25°C by 10/1000µs Waveform (Fig.2)(Note 1), (Note 2) | P <sub>PPM</sub>                  | 1500       | W    |
| Power Dissipation on Infinite Heat Sink at T <sub>A</sub> =50°C                                      | P <sub>MAV</sub>                  | 6.5        | W    |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave (Note 3)                                     | I <sub>FSM</sub>                  | 200        | A    |
| Maximum Instantaneous Forward Voltage at 100A for Unidirectional Only (Note 4)                       | V <sub>F</sub>                    | 3.5/5.0    | V    |
| Operating Junction and Storage Temperature Range                                                     | T <sub>J</sub> , T <sub>STG</sub> | -55 to 150 | °C   |
| Typical Thermal Resistance Junction to Lead                                                          | R <sub>uJL</sub>                  | 15         | °C/W |
| Typical Thermal Resistance Junction to Ambient                                                       | R <sub>uJA</sub>                  | 75         | °C/W |

#### Notes:

1. Non-repetitive current pulse, per Fig. 4 and derated above T<sub>A</sub> = 25°C per Fig. 3.
2. Mounted on copper pad area of 0.31x0.31" (8.0 x 8.0mm) to each terminal.
3. Measured on 8.3ms single half sine wave or equivalent square wave for unidirectional device only, duty cycle=4 per minute maximum.
4. V<sub>F</sub><3.5V for V<sub>BR</sub> ≤ 200V and V<sub>F</sub><5.0V for V<sub>BR</sub> ≥ 201V.

#### Functional Diagram

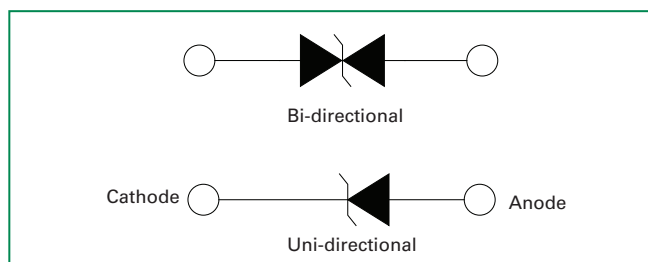

#### Description

The TPSMC series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

#### Features

- Hi reliability application and automotive grade AEC Q101 qualified
- For surface mounted applications to optimize board space
- Low profile package.
- Typical failure mode is short from over-specified voltage or current
- Whisker test is conducted based on JEDEC JESD201A per its table 4a and 4c
- IEC-61000-4-2 ESD 15kV(Air), 8kV (Contact)
- ESD protection of data lines in accordance with IEC 61000-4-2 (IEC801-2)
- EFT protection of data lines in accordance with IEC 61000-4-4 (IEC801-4)
- Built-in strain relief
- V<sub>BR</sub> @T<sub>J</sub> = V<sub>BR</sub> @25°C × (1 + α T × (T<sub>J</sub> - 25)) (α T: Temperature Coefficient)
- Glass passivated chip junction
- 1500W peak pulse power capability at 10/1000µs waveform, repetition rate (duty cycles):0.01 %
- Fast response time: typically less than 1.0ps from 0V to BV min
- Excellent clamping capability
- Low incremental surge resistance
- Typical I<sub>R</sub> less than 1µA above 13V
- High temperature soldering guaranteed: 160°C/10 seconds at terminals
- Plastic package has underwriters laboratory flammability 94V-0
- Meet MSL level1, per J-STD-020, LF maximum peak of 260°C
- Matte tin lead-free plated
- Halogen free and RoHS compliant
- 2nd level interconnect is Pb-free per IPC/JEDEC J-STD-609A.01

#### Applications

TVS devices are ideal for the protection of I/O Interfaces, V<sub>CC</sub> bus and other vulnerable circuits used in Telecom, Computer, Industrial and Consumer electronic applications.



### Electrical Characteristics

| Part Number (Uni) | Part Number (Bi) | Marking |      | Reverse Stand off Voltage $V_R$ (Volts) | Breakdown Voltage $V_{BR}$ (Volts) @ $I_T$ |       | Test Current $I_T$ (mA) | Maximum Clamping Voltage $V_C$ @ $I_{PP}$ (V) | Maximum Peak Pulse Current $I_{PP}$ (A) | Maximum Reverse Leakage $I_R$ @ $V_R$ ( $\mu$ A) | Agency Approval  |
|-------------------|------------------|---------|------|-----------------------------------------|--------------------------------------------|-------|-------------------------|-----------------------------------------------|-----------------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------------------------|
|                   |                  | UNI     | BI   |                                         | MIN                                        | MAX   |                         |                                               |                                         |                                                  |                                                                                                     |
| TPSMC12A          | TPSMC12CA        | 12AA    | 12CA | 10.20                                   | 11.40                                      | 12.60 | 1                       | 16.7                                          | 91.0                                    | 5                                                | X                                                                                                   |
| TPSMC13A          | TPSMC13CA        | 13AA    | 13CA | 11.10                                   | 12.40                                      | 13.70 | 1                       | 18.2                                          | 83.5                                    | 1                                                | X                                                                                                   |
| TPSMC15A          | TPSMC15CA        | 15AA    | 15CA | 12.80                                   | 14.30                                      | 15.80 | 1                       | 21.2                                          | 71.7                                    | 1                                                | X                                                                                                   |
| TPSMC16A          | TPSMC16CA        | 16AA    | 16CA | 13.60                                   | 15.20                                      | 16.80 | 1                       | 22.5                                          | 67.6                                    | 1                                                | X                                                                                                   |
| TPSMC18A          | TPSMC18CA        | 18AA    | 18CA | 15.30                                   | 17.10                                      | 18.90 | 1                       | 25.2                                          | 60.3                                    | 1                                                | X                                                                                                   |
| TPSMC20A          | TPSMC20CA        | 20AA    | 20CA | 17.10                                   | 19.00                                      | 21.00 | 1                       | 27.7                                          | 54.9                                    | 1                                                | X                                                                                                   |
| TPSMC22A          | TPSMC22CA        | 22AA    | 22CA | 18.80                                   | 20.90                                      | 23.10 | 1                       | 30.6                                          | 49.7                                    | 1                                                | X                                                                                                   |
| TPSMC24A          | TPSMC24CA        | 24AA    | 24CA | 20.50                                   | 22.80                                      | 25.20 | 1                       | 33.2                                          | 45.8                                    | 1                                                | X                                                                                                   |
| TPSMC27A          | TPSMC27CA        | 27AA    | 27CA | 23.10                                   | 25.70                                      | 28.40 | 1                       | 37.5                                          | 40.5                                    | 1                                                | X                                                                                                   |
| TPSMC30A          | TPSMC30CA        | 30AA    | 30CA | 25.60                                   | 28.50                                      | 31.50 | 1                       | 41.4                                          | 36.7                                    | 1                                                | X                                                                                                   |
| TPSMC33A          | TPSMC33CA        | 33AA    | 33CA | 28.20                                   | 31.40                                      | 34.70 | 1                       | 45.7                                          | 33.3                                    | 1                                                | X                                                                                                   |
| TPSMC36A          | TPSMC36CA        | 36AA    | 36CA | 30.80                                   | 34.20                                      | 37.80 | 1                       | 49.9                                          | 30.5                                    | 1                                                | X                                                                                                   |
| TPSMC39A          | TPSMC39CA        | 39AA    | 39CA | 33.30                                   | 37.10                                      | 41.00 | 1                       | 53.9                                          | 28.2                                    | 1                                                | X                                                                                                   |
| TPSMC43A          | TPSMC43CA        | 43AA    | 43CA | 36.80                                   | 40.90                                      | 45.20 | 1                       | 59.3                                          | 25.6                                    | 1                                                | X                                                                                                   |
| TPSMC47A          | TPSMC47CA        | 47AA    | 47CA | 40.20                                   | 44.70                                      | 49.40 | 1                       | 64.8                                          | 23.5                                    | 1                                                | X                                                                                                   |
| TPSMC51A          | TPSMC51CA        | 51AA    | 51CA | 43.60                                   | 48.50                                      | 53.60 | 1                       | 70.1                                          | 21.7                                    | 1                                                | X                                                                                                   |
| TPSMC56A          | TPSMC56CA        | 56AA    | 56CA | 47.80                                   | 53.20                                      | 58.80 | 1                       | 77.0                                          | 19.7                                    | 1                                                | X                                                                                                   |
| TPSMC62A          | TPSMC62CA        | 62AA    | 62CA | 53.00                                   | 58.90                                      | 65.10 | 1                       | 85.0                                          | 17.9                                    | 1                                                | X                                                                                                   |
| TPSMC68A          | TPSMC68CA        | 68AA    | 68CA | 58.10                                   | 64.60                                      | 71.40 | 1                       | 92.0                                          | 16.5                                    | 1                                                | X                                                                                                   |
| TPSMC75A          | TPSMC75CA        | 75AA    | 75CA | 64.10                                   | 71.30                                      | 78.80 | 1                       | 103.0                                         | 14.8                                    | 1                                                | X                                                                                                   |
| TPSMC82A          | TPSMC82CA        | 82AA    | 82CA | 70.10                                   | 77.90                                      | 86.10 | 1                       | 113.0                                         | 13.5                                    | 1                                                | X                                                                                                   |
| TPSMC91A          | TPSMC91CA        | 91AA    | 91CA | 77.80                                   | 86.50                                      | 95.50 | 1                       | 125.0                                         | 12.2                                    | 1                                                | X                                                                                                   |

For bidirectional type having  $V_R$  of 10 volts and less, the  $I_R$  limit is double.

For parts without A, the  $V_{BR}$  is  $\pm 10\%$  and  $V_C$  is 5% higher than with A parts.

### I-V Curve Characteristics

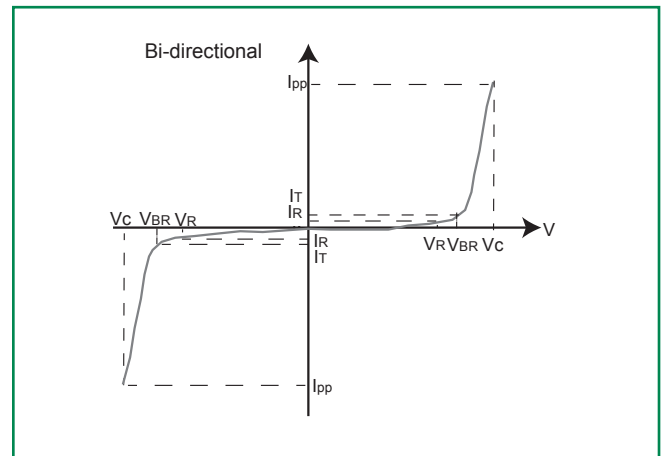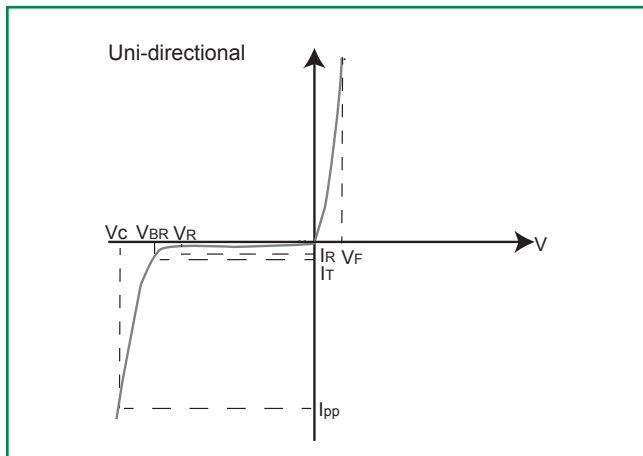

**$P_{PPM}$  Peak Pulse Power Dissipation** – Max power dissipation

**$V_R$  Stand-off Voltage** – Maximum voltage that can be applied to the TVS without operation

**$V_{BR}$  Breakdown Voltage** – Maximum voltage that flows through the TVS at a specified test current ( $I_R$ )


**$V_C$  Clamping Voltage** – Peak voltage measured across the suppressor at a specified  $I_{PPM}$  (peak impulse current)

**$I_R$  Reverse Leakage Current** – Current measured at  $V_R$


**$V_F$  Forward Voltage Drop for Uni-directional**

### Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted)

**Figure 1 - TVS Transients Clamping Waveform**

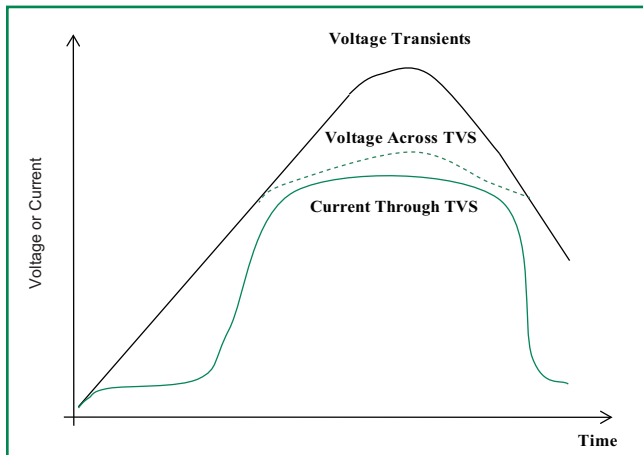


**Figure 2 - Peak Pulse Power Rating**

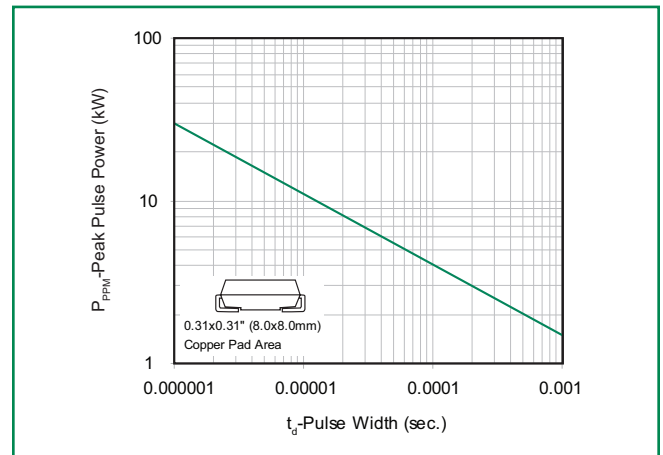


continues on next page.

### Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$ unless otherwise noted) (Continued)


**Figure 3 - Pulse Derating Curve**

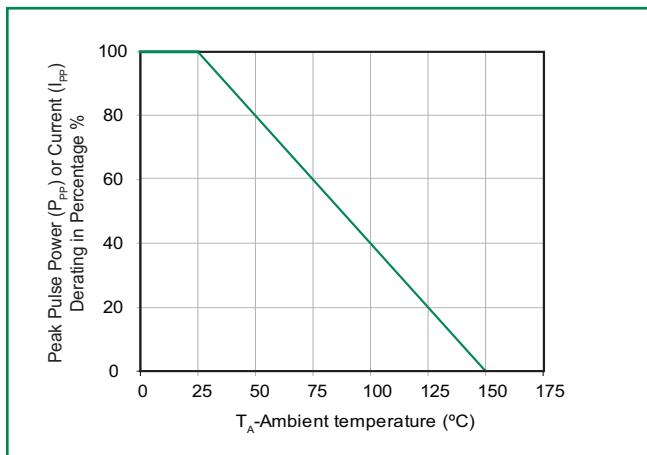


**Figure 4 - Pulse Waveform**

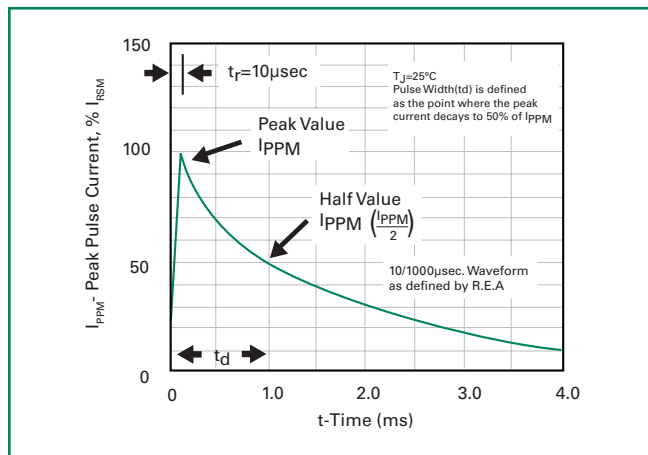


**Figure 5 - Typical Junction Capacitance**

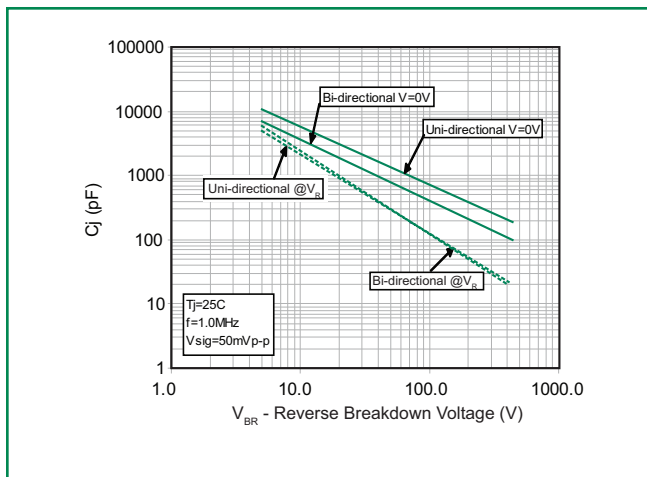

**Figure 6 - Steady State Power Dissipation Derating Curve**

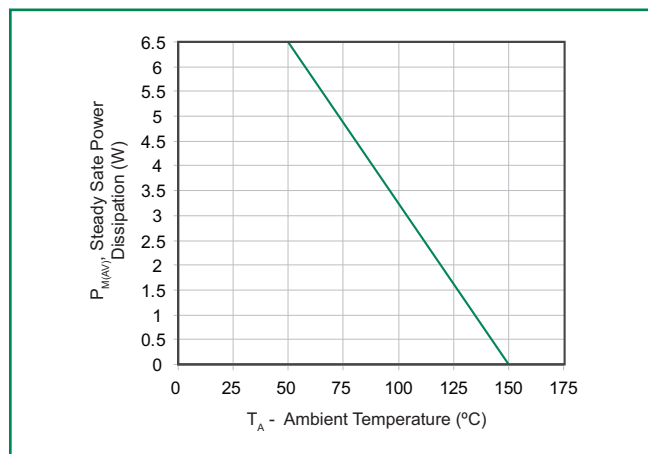


**Figure 7 - Maximum Non-Repetitive Peak Forward Surge Current Uni-Directional Only**

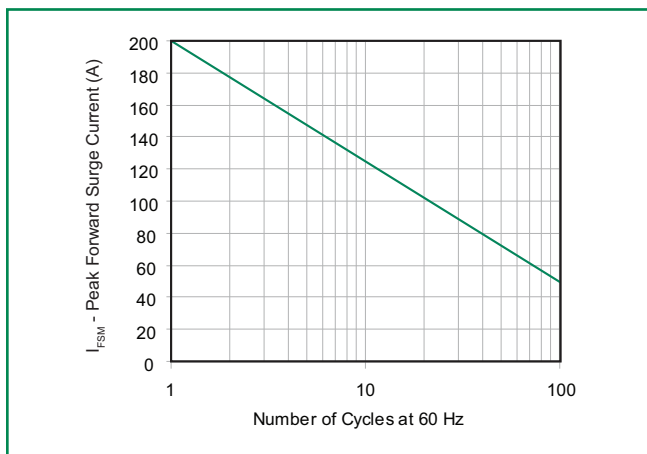

### Soldering Parameters

|                                                        |                                    |                         |
|--------------------------------------------------------|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Lead-free assembly      |
| Pre Heat                                               | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|                                                        | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 120 secs           |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow                                                 | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|                                                        | - Time (min to max) ( $t_s$ )      | 60 – 150 seconds        |
| Peak Temperature ( $T_P$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 30 seconds max          |
| Ramp-down Rate                                         |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_P$ )                |                                    | 8 minutes max.          |
| Do not exceed                                          |                                    | 280°C                   |

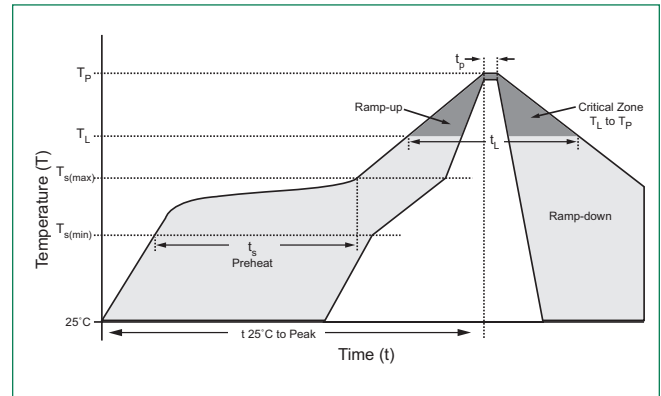


### Physical Specifications

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| <b>Weight</b>   | 0.007 ounce, 0.21 grams                                           |
| <b>Case</b>     | JEDEC DO214AB. Molded plastic body over glass passivated junction |
| <b>Polarity</b> | Color band denotes positive end (cathode) except Bidirectional.   |
| <b>Terminal</b> | Matte Tin-plated leads, Solderable per JESD22-B102                |

### Environmental Specifications


|                            |                          |
|----------------------------|--------------------------|
| <b>High Temp. Storage</b>  | JESD22-A103              |
| <b>HTRB</b>                | JESD22-A108              |
| <b>Temperature Cycling</b> | JESD22-A104              |
| <b>MSL</b>                 | JEDEC-J-STD-020, Level 1 |
| <b>H3TRB</b>               | JESD22-A101              |
| <b>RSH</b>                 | JESD22-B106              |

### Dimensions

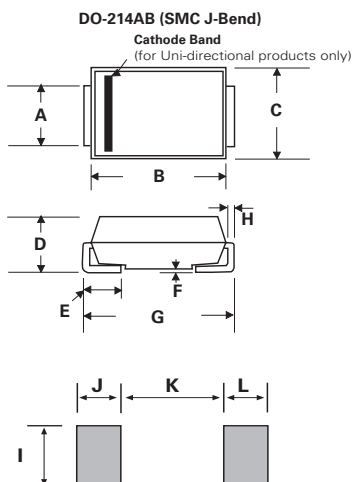


| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| A          | 0.114  | 0.126 | 2.900       | 3.200 |
| B          | 0.260  | 0.280 | 6.600       | 7.110 |
| C          | 0.220  | 0.245 | 5.590       | 6.220 |
| D          | 0.079  | 0.103 | 2.060       | 2.620 |
| E          | 0.030  | 0.060 | 0.760       | 1.520 |
| F          | -      | 0.008 | -           | 0.203 |
| G          | 0.305  | 0.320 | 7.750       | 8.130 |
| H          | 0.006  | 0.012 | 0.152       | 0.305 |
| I          | 0.129  | -     | 3.300       | -     |
| J          | 0.094  | -     | 2.400       | -     |
| K          | -      | 0.165 | -           | 4.200 |
| L          | 0.094  | -     | 2.400       | -     |

### Part Numbering System

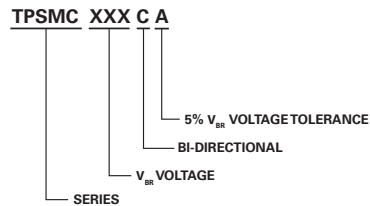


### Part Marking System

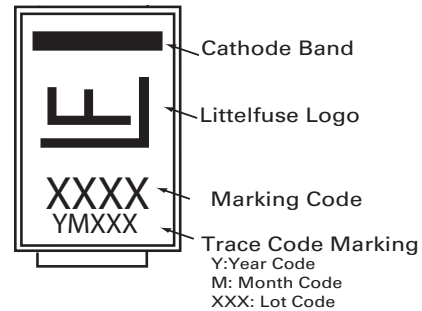

### Packaging

| Part number | Component Package | Quantity | Packaging Option                 | Packaging Specification |
|-------------|-------------------|----------|----------------------------------|-------------------------|
| TPSMCxxxXX  | DO-214AB          | 3000     | Tape & Reel - 16mm tape/13" reel | EIA STD RS-481          |

### Tape and Reel Specification

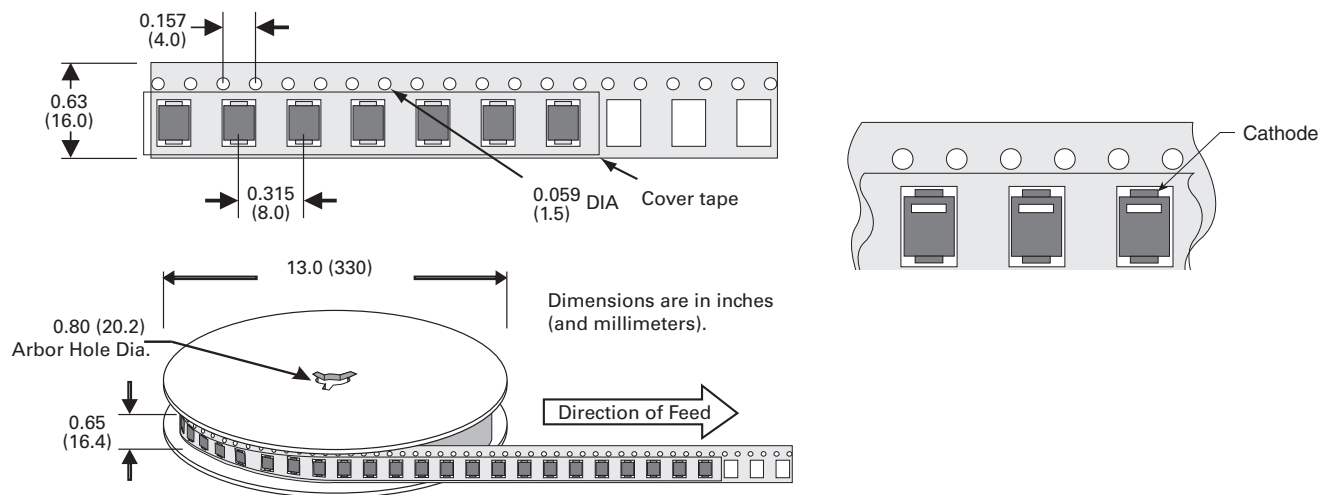

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9