


FEATURES

- C0G (NP0), X7R, X5R, Z5U and Y5V Dielectrics
- 10, 16, 25, 50, 100 and 200 Volts
- Standard End Metallization: Tin-plate over nickel barrier
- Available Capacitance Tolerances: ± 0.10 pF; ± 0.25 pF; ± 0.5 pF; $\pm 1\%$; $\pm 2\%$; $\pm 5\%$; $\pm 10\%$; $\pm 20\%$; and $+80\%-20\%$
- Tape and reel packaging per EIA481-1. (See page 63 for specific tape and reel information.) Bulk Cassette packaging (0402, 0603, 0805 only) per IEC60286-6 and EIAJ 7201.
- RoHS Compliant

CAPACITOR OUTLINE DRAWINGS

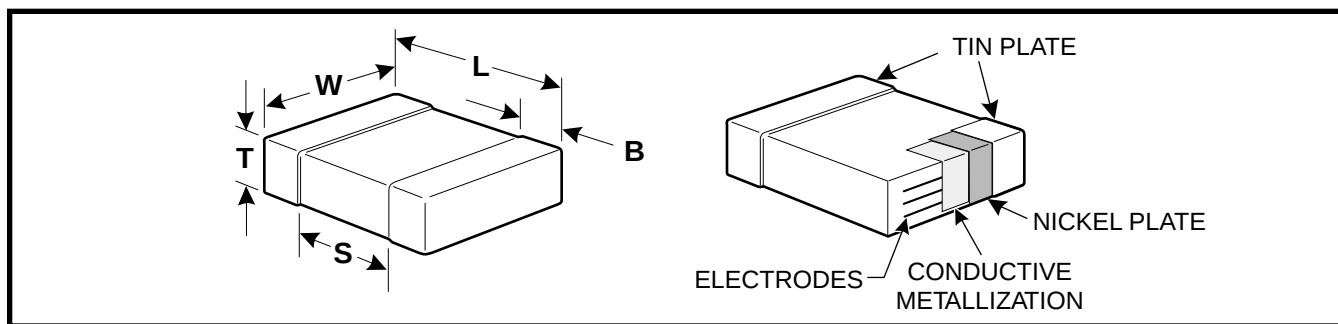

DIMENSIONS—MILLIMETERS AND (INCHES)

EIA SIZE CODE	METRIC SIZE CODE (Ref only)	L # LENGTH	W # WIDTH	See page 63 for thickness dimensions.	B BANDWIDTH	S MIN. SEPARATION	MOUNTING TECHNIQUE
0402*	1005	1.0 (.04) $\pm$.05 (.002)	0.5 (.02) $\pm$.05 (.002)		0.20 (0.008)-0.40 (0.016)	0.3 (.012)	Solder Reflow
0603*	1608	1.6 (.063) $\pm$ 0.15 (.006)	0.8 (.032) $\pm$ 0.15 (.006)		0.35 (.014) $\pm$ 0.15 (.006)	0.7 (.028)	Solder Wave † or Solder Reflow
0805*	2012	2.0 (.079) $\pm$ 0.2 (.008)	1.25 (.049) $\pm$ 0.2 (.008)		0.5 (.02) $\pm$.25 (.010)	0.75 (.030)	
1206*	3216	3.2 (.126) $\pm$ 0.2 (.008)	1.6 (.063) $\pm$ 0.2 (.008)		0.5 (.02) $\pm$.25 (.010)	N/A	
1210*	3225	3.2 (.126) $\pm$ 0.2 (.008)	2.5 (.098) $\pm$ 0.2 (.008)		0.5 (.02) $\pm$.25 (.010)	N/A	Solder Reflow
1812	4532	4.5 (.177) $\pm$ 0.3 (.012)	3.2 (.126) $\pm$ 0.3 (.012)		0.6 (.024) $\pm$.35 (.014)	N/A	
1825*	4564	4.5 (.177) $\pm$ 0.3 (.012)	6.4 (.252) $\pm$ 0.4 (.016)		0.6 (.024) $\pm$.35 (.014)	N/A	
2220	5650	5.6 (.220) $\pm$ 0.4 (.016)	5.0 (.197) $\pm$ 0.4 (.016)		0.6 (.024) $\pm$.35 (.014)	N/A	
2225	5664	5.6 (.220) $\pm$ 0.4 (.016)	6.3 (.248) $\pm$ 0.4 (.016)		0.6 (.024) $\pm$.35 (.014)	N/A	

* Note: Indicates EIA Preferred Case Sizes (Tightened tolerances apply for 0402, 0603, and 0805 packaged in bulk cassette, see page 82.)

† For extended value 1210 case size – solder reflow only.

CAPACITOR ORDERING INFORMATION (Standard Chips - For Military see page 72)

CERAMIC SIZE CODE	0805	C	103	K	5	R	A	C*	END METALLIZATION
SPECIFICATION									C-Standard (Tin-plated nickel barrier)
CAPACITANCE CODE									FAILURE RATE LEVEL
Expressed in Picofarads (pF)									A- Not Applicable
First two digits represent significant figures.									TEMPERATURE CHARACTERISTIC
Third digit specifies number of zeros. (Use 9 for 1.0 through 9.9pF. Use 8 for 0.5 through 0.99pF)									Designated by Capacitance
(Example: 2.2pF = 229 or 0.50 pF = 508)									Change Over Temperature Range
CAPACITANCE TOLERANCE									G – C0G (NP0) (± 30 PPM/°C)
B – ± 0.10 pF	J – $\pm 5\%$								R – X7R ($\pm 15\%$) ($-55^\circ\text{C} + 125^\circ\text{C}$)
C – ± 0.25 pF	K – $\pm 10\%$								P – X5R ($\pm 15\%$) ($-55^\circ\text{C} + 85^\circ\text{C}$)
D – ± 0.5 pF	M – $\pm 20\%$								U – Z5U ($+22\%$, -56%) ($+10^\circ\text{C} + 85^\circ\text{C}$)
F – $\pm 1\%$	P – (GMV) – special order only								V – Y5V ($+22\%$, -82%) ($-30^\circ\text{C} + 85^\circ\text{C}$)
G – $\pm 2\%$	Z – $+80\%$, -20%								VOLTAGE
									1 - 100V
									2 - 200V
									3 - 25V
									4 - 16V
									5 - 50V
									8 - 10V
									9 - 6.3V

* Part Number Example: C0805C103K5RAC (14 digits - no spaces)

CERAMIC CHIP/STANDARD

C0G CAPACITANCE RANGE – 1210, 1812, 1825, 2220, 2225

Cap pF	Cap Code	Cap Tol.	C1210*			C1812*			C1825*			C2220			C2225		
			50V	100V	200V	50V	100V	200V	50V	100V	200V	50V	100V	200V	50V	100V	200V
10	100	D	J,K,M	FB	FB	FB											
12	120	D	J,K,M	FB	FB	FB											
15	150	D	G,J,K,M	FB	FB	FB											
18	180	D	G,J,K,M	FB	FB	FB											
22	220	D	G,J,K,M	FB	FB	FB											
27	270	D	F,G,J,K,M	FB	FB	FB											
33	330	D	F,G,J,K,M	FB	FB	FB											
39	390	D	F,G,J,K,M	FB	FB	FB											
47	470	D	F,G,J,K,M	FB	FB	FB											
56	560	F	G,J,K,M	FB	FB	FB											
68	680	F	G,J,K,M	FB	FB	FB											
82	820	F	G,J,K,M	FB	FB	FB											
100	101	F	G,J,K,M	FB	FB	FB											
120	121	F	G,J,K,M	FB	FB	FB											
150	131	F	G,J,K,M	FB	FB	FB											
180	181	F	G,J,K,M	FB	FB	FB											
220	221	F	G,J,K,M	FB	FB	FB											
270	271	F	G,J,K,M	FB	FB	FB											
330	331	F	G,J,K,M	FB	FB	FB											
390	391	F	G,J,K,M	FB	FB	FB											
470	471	F	G,J,K,M	FB	FB	FB	GB	GB	GB								
560	561	F	G,J,K,M	FB	FB	FB	GB	GB	GB								
680	681	F	G,J,K,M	FB	FB	FB	GB	GB	GB								
820	821	F	G,J,K,M	FB	FB	FB	GB	GB	GB								
1,000	102	F	G,J,K,M	FB	FB	FB	GB	GB	GB								
1,200	122	F	G,J,K,M	FB	FB	FB	GB	GB	GB								
1,500	152	F	G,J,K,M	FB	FB	FE	GB	GB	GB								
1,800	182	F	G,J,K,M	FB	FB	FE	GB	GB	GB								
2,200	222	F	G,J,K,M	FB	FC	GB	GB	GB	GB								
2,700	272	F	G,J,K,M	FB	FC	GB	GB	GB	GB								
3,300	332	F	G,J,K,M	FB	FF	GB	GB	GB	GB								
3,900	392	F	G,J,K,M	FB	FF	GB	GB	GB	GB	HB	HB	HB					
4,700	472	F	G,J,K,M	FF	FF	GB	GB	GB	GB	HB	HB	HB					
5,600	562	F	G,J,K,M	FF	FF	GB	GB	GB	GB	HB	HB	HB					
6,800	682	F	G,J,K,M	FB	FG	GB	GB	GB	GB	HB	HB	HB	JB	JB			
8,200	822	F	G,J,K,M	FC		GB	GB	GB	GB	HB	HB	HB	JB	JB			
10,000	103	F	G,J,K,M	FF		GB	GB	GB	GB	HB	HB	HB	JB	JB			
12,000	123	F	G,J,K,M	FG		GB	GB	GB	GB	HB	HB	HB	JB	JB			
15,000	153	F	G,J,K,M			GB	GB	GB	GB	HB	HB	HB	JB	JB			
18,000	183	F	G,J,K,M			GB	GB	GB	GB	HB	HB	HB	JB	JB			
22,000	223	F	G,J,K,M			GB	GB	GB	GB	HB	HB	HB	JB	JB			
27,000	273	F	G,J,K,M			GB	GB	GB	GB	HB	HB	HB	JB	JB			
33,000	333	F	G,J,K,M			GB	GB	GB	GB	HB	HB	HB	JB	JB			

X7R CAPACITANCE RANGE – 0402, 0603, 0805, 1206

Cap pF	Cap Code	Cap Tol.	C0402*					C0603*							C0805*							C1206*						
			6.3V	10V	16V	25V	50V	6.3V	10V	16V	25V	50V	100V	200V	6.3V	10V	16V	25V	50V	100V	200V	6.3V	10V	16V	25V	50V	100V	200V
150	151	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
180	181	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
220	221	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
270	271	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
330	331	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
390	391	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
470	471	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
560	561	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
680	681	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
820	821	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC						
1,000	102	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CB	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
1,200	122	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
1,500	152	K,M,J	BB	BB	BB	BB	BB	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
1,800	182	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
2,200	222	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
2,700	272	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
3,300	332	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
3,900	392	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
4,700	472	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
5,600	562	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
6,800	682	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
8,200	822	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
10,000	103	K,M,J	BB	BB	BB	BB	BB#	CB	CB	CB	CB	CB	CB	CB	CC	DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
12,000	123	K,M,J**	BB	BB	BB	BB		CB	CB	CB	CB	CB	CB	CC		DC	DC	DC	DC	DC	DC	DC	EB	EB	EB	EB	EB	EB
15,000	153	K,M,J**	BB	BB	BB	BB		CB	CB	CB	CB	CB	CB	CC		DD	DD	DD	DD	DD	DD	DD	EB	EB	EB	EB	EB	EB
18,000	183	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CB	CC		DC	DC	DC	DC	DC	DD	DC	EB	EB	EB	EB	EB	EB
22,000	223	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CB	CC		DC	DC	DC	DC	DC	DD	DC	EB	EB	EB	EB	EB	EB
27,000	273	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CB	CC		DC	DC	DC	DC	DC	DD	DE	EB	EB	EB	EB	EB	EB
33,000	333	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CB	CC		DC	DC	DC	DC	DC	DD	DE	EB	EB	EB	EB	EB	EB
39,000	393	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CB	CC		DD	DD	DD	DD	DD	DD	DE	EB	EB	EB	EB	EB	EB
47,000	473	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CB			DD	DD	DD	DD	DD	DD	DE	DE	EB	EB	EB	EB	EB
56,000	563	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CC			DD	DD	DD	DD	DD#	DE	DG	EB	EB	EB	EB	EB	EB
68,000	683	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CC			DD	DD	DD	DD	DD#	DE		EB	EB	EB	EB	EB	EB
82,000	823	K,M,J**	BB	BB	BB			CB	CB	CB	CB	CB	CC			DD	DD	DD	DD	DD#	DE		EB	EB	EB	EB	EB	EB
100,000	104	K,M,J**	BB	BB	BB			CB#	CB#	CB#	CB#	CB#	CC#			DD	DD	DD	DD	DD#	DE		EB	EB	EB	EB	EB	EB
120,000	124	K,M,J**						CB#	CB#	CB#	CB#	CB#				DC	DC	DC	DC	DD#	DG		EC	EC	EC	EC	EC	EC
150,000	154	K,M,J**						CB#	CB#	CB#	CB#	CB#				DC	DC	DC	DC	DD#			EC	EC	EC	EC	EC	EC
180,000	184	K,M,J**						CB#	CB#	CB#	CB#	CB#				DC	DC	DC	DC	DD#			EC	EC	EC	EC	EC	EC
220,000	224	K,M,J**						CB#	CB#	CB#	CB#	CB#				DC	DC	DC	DC	DD#			EC	EC	EC	EC	EC	EC
270,000	274	K,M,J**						CB#	CB#	CB#	CB#	CB#				DD	DD	DD	DD	DD			EB	EB	EB	EB	EB	EB
330,000	334	K,M,J**						CB#	CB#	CB#	CB#	CB#				DE	DE	DE	DE				EB	EB	EB	EB	EB	EB
390,000	394	K,M,J**						CB#	CB#	CB#	CB#	CB#				DG	DG	DG	DG				EB	EB	EB	EB	EG	EG
470,000	474	K,M,J**						CB#	CB#	CB#	CB#	CB#				DG	DG	DG	DG				EC	EC	EC	EC	EC	EC
560,000	564	K,M,J**														DG	DG	DG	DG				ED	ED	ED	ED	EC#	EC#
680,000	684	K,M,J**														DG	DG	DG				EE	EE	EE	EE	ED#		
820,000	824	K,M,J*														DG	DG	DG				EF	EF	EF	EF			
1,000,000	105	K,M,J**														DG	DG	DG				EE	EE	EF	EG			
1,200,000	125	K,M,J**														DE	DE	DE				ED	ED	EF	EG			
1,500,000	155	K,M,J**														DG	DG	DG				EF	EF	EF				
1,800,000	185	K,M,J**														DG	DG	DG				EF	EF	EF				
2,200,000	225	K,M,J**														DG	DG	DG										
2,700,000	275	K,M,J**																				EG	EG	EG				
3,300,000	335	K,M,J**																				EN	EN	EK				
3,900,000	395	K,M,J**																				ED	ED	ED				
4,700,000	475	K,M,J**																				EL	EL	EL				
5,600,000	565	K,M,J**																				EM	EM	EM				
6,800,000	685	K,M,J**																				EH	EH	EH				
8,200,000	825	K,M,J**																				EH	EH	EH				
10,000,000	106	K,M,J**																				FH	FH					

X7R CAPACITANCE RANGE – 1210, 1812, 1825, 2220, 2225

Cap pF	Cap Code	Cap Tol.	C1210*							C1812*			C1825*			C2220			C2225		
			6.3V	10V	16V	25V	50V	100V	200V	50V	100V	200V	50V	100V	200V	50V	100V	200V	50V	100V	200V
2,200	222	K,M,J	FB	FB	FB	FB	FB	FB	FB												
2,700	272	K,M,J	FB	FB	FB	FB	FB	FB	FB												
3,300	332	K,M,J	FB	FB	FB	FB	FB	FB	FB												
3,900	392	K,M,J	FB	FB	FB	FB	FB	FB	FB												
4,700	472	K,M,J	FB	FB	FB	FB	FB	FB	FB												
5,600	562	K,M,J	FB	FB	FB	FB	FB	FB	FB												
6,800	682	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB									
8,200	822	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB									
10,000	103	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB									
12,000	123	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB									
15,000	153	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB									
18,000	183	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB									
22,000	223	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB	HB	HB	HB						
27,000	273	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB	HB	HB	HB						
33,000	333	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB	HB	HB	HB						
39,000	393	K,M,J	FB	FB	FB	FB	FB	FB	FB	GB	GB	GB	HB	HB	HB						
47,000	473	K,M,J	FB	FB	FB	FB	FB	FB	FC	GB	GB	GB	HB	HB	HB				KC	KC	KC
56,000	563	K,M,J	FB	FB	FB	FB	FB	FB	FC	GB	GB	GB	HB	HB	HB				KC	KC	KC
68,000	683	K,M,J	FB	FB	FB	FB	FB	FB	FC	GB	GB	GB	HB	HB	HB				KC	KC	KC
82,000	823	K,M,J	FB	FB	FB	FB	FC	FC	FF	GB	GB	GB	HB	HB	HB				KC	KC	KC
100,000	104	K,M,J	FB	FB	FB	FB	FD	FD	FG	GB	GB	GB	HB	HB	HB				KC	KC	KC
120,000	124	K,M,J	FB	FB	FB	FB	FD	FD		GB	GB	GB	HB	HB	HB				KC	KC	KC
150,000	154	K,M,J	FC	FC	FC	FC	FD	FD		GB	GB	GE	HB	HB	HB				KC	KC	KC
180,000	184	K,M,J	FC	FC	FC	FC	FD	FD		GB	GB	GG	HB	HB	HB				KC	KC	KC
220,000	224	K,M,J	FC	FC	FC	FC	FD	FD		GB	GB		HB	HB	HB				KC	KC	KC
270,000	274	K,M,J	FC	FC	FC	FC	FD#	FD#		GB	GH		HB	HB	HB	JC	JC	JC	KB	KC	KC
330,000	334	K,M,J	FD	FD	FD	FD	FD#	FD#		GB	GH		HB	HB	HB	JC	JC	JC	KB	KC	KC
390,000	394	K,M,J	FD	FD	FD	FD	FD#	FD#		GB			HB	HB	HD	JC	JC	JC	KB	KC	KC
470,000	474	K,M,J	FD	FD	FD	FD	FD#	FD#		GB			HB	HB		JC	JC	JC	KB	KC	KD
560,000	564	K,M,J	FD	FD	FD	FD	FD#	FD#		GC			HB	HD		JC	JC	JC	KB	KC	
680,000	684	K,M,J	FD	FD	FD	FD	FD#	FD#		GC			HB	HD		JC	JD		KB	KC	
820,000	824	K,M,J	FF	FF	FF	FF	FF#	FF#		GE			HB			JC	JF		KB	KC	
1,000,000	105	K,M,J	FH	FH	FH	FH	FH#	FH#		GE			HB			JC			KB	KD	
1,200,000	125	K,M,J	FH	FH	FH	FH							HB			JC			KB		
1,500,000	155	K,M,J	FH	FH	FH	FH							HB			JC			KC		
1,800,000	185	K,M,J	FH	FH	FH	FH							HD			JD			KD		
2,200,000	225	K,M,J	FJ	FJ	FJ	FJ							HF			JF			KD		

* Indicates EIA preferred chip sizes.

NOTE: For non-standard capacitance values or voltages, contact your local KEMET sales representative.

50 Volt Ceramic Chips can be used for 63 volt applications.

Extended Range Values – Cap and DF measured @ 0.5 Vrms.

Improved product with higher ratings and tighter capacitance tolerance product may be substituted within the same size (length, width, and thickness) at KEMET's option.

Reels with such substitutions will be marked with the improved KEMET part numbers.

X5R CAPACITANCE RANGE

Cap pF	Cap Code	Cap Tol.	C0402*		C0603*			C0805*				C1206*				C1210*				
			6.3V	10V	6.3V	10V	16V	6.3V	10V	16V	25V	6.3V	10V	16V	25V	6.3V	10V	16V	25V	50V
12,000	123	K,M	BB	BB																
15,000	153	K,M	BB	BB																
18,000	183	K,M	BB	BB																
22,000	223	K,M	BB	BB																
27,000	273	K,M	BB	BB																
33,000	333	K,M	BB	BB																
39,000	393	K,M	BB	BB																
47,000	473	K,M	BB	BB																
56,000	563	K,M	BB	BB																
68,000	683	K,M	BB	BB																
82,000	823	K,M	BB	BB																
100,000	104	K,M	BB	BB																
120,000	124	K,M																		
150,000	154	K,M																		
180,000	184	K,M																		
220,000	224	K,M																		
270,000	274	K,M			CC	CC	CC								EB					
330,000	334	K,M			CC	CC	CC								EB					
390,000	394	K,M			CC	CC	CC								EB					
470,000	474	K,M			CC	CC	CC								ED					
560,000	564	K,M			CC	CC	CC				DC				ED					
680,000	684	K,M			CC	CC	CC				DE				EE					
820,000	824	K,M			CC	CC	CC				DF				EF					
1,000,000	105	K,M			CC	CC	CC				DG				EH			FH+	FH+	FH+
1,200,000	125	K,M			CC			DD	DD	DD					EC			FD+	FD+	
1,500,000	155	K,M			CC			DE	DE	DE		EC	EC	EC	EC			FD+	FD+	
1,800,000	185	K,M			CC			DH	DH	DH		EC	EC	EC	EC			FD+	FD+	
2,200,000	225	K,M			CC			DD	DD	DD		EE	EE	EE	EE			FG+	FG+	
2,700,000	275	K,M						DD	DD	DD		EF	EF	EF	EF			FG+	FG+	
3,300,000	335	K,M						DE	DE	DE		EH	EH	EH	EH			FH+	FH+	
4,700,000	475	K,M						DH	DH	DH		EH	EH	EH	EH	FK+	FK+	FK+	FK+	
6,800,000	685	K,M						DH				EK	EK	EK		FJ+	FJ+	FJ+	FJ+	
8,200,000	825	K,M						DH				EK	EK	EK		FK+	FK+	FK+	FK+	
10,000,000	106	K,M						DH				EL	EL	EH		FK+	FK+	FK+	FK+	
12,000,000	126	K,M										EH				FD+	FD+	FG+		
15,000,000	156	K,M										EH				FD+	FD+	FL+		
18,000,000	186	K,M										EH				FL+	FL+	FH+		
22,000,000	226	K,M										EH				FH+	FH+	FJ+		

NOTE: For non-standard capacitance values or voltages, contact your local KEMET sales representative.

+ Reflow only

Improved product with higher ratings and tighter capacitance tolerance product may be substituted within the same size (length, width, and thickness) at KEMET's option.

Reels with such substitutions will be marked with the improved KEMET part numbers.

See page 63 for Thickness Code Reference Chart.

THICKNESS CODE REFERENCE CHART

PACKAGING QTY BASED ON FINISHED CHIP THICKNESS SPECIFICATIONS

Thickness Code	Chip Size	Chip Thickness Range (mm)	Qty per Reel 7" Plastic	Qty per Reel 13" Plastic	Qty per Reel 7" Paper	Qty per Reel 13" Paper	Qty per Bulk Cassette
AA	0201	.30 ± .03	N/A	N/A	15,000	N/A	N/A
BB	0402	.50 ± .05	N/A	N/A	10,000	50,000	50,000
CB	0603	.80 ± .07	N/A	N/A	4,000	10,000	15,000
CC	0603	.80 ± .10	N/A	N/A	4,000	10,000	N/A
CD	0603	.80 ± .15	N/A	N/A	4,000	10,000	N/A
DB	0805	.60 ± .10	N/A	N/A	N/A	N/A	10,000
DC	0805	.78 ± .10	4,000	10,000	4,000	10,000	N/A
DD	0805	.90 ± .10	4,000	10,000	N/A	N/A	N/A
DE	0805	1.00 ± .10	2,500	10,000	N/A	N/A	N/A
DF	0805	1.10 ± .10	2,500	10,000	N/A	N/A	N/A
DG	0805	1.25 ± .15	2,500	10,000	N/A	N/A	N/A
DH	0805	1.25 ± .20	2,500	10,000	N/A	N/A	N/A
EB	1206	.78 ± .10	4,000	10,000	4,000	10,000	N/A
EC	1206	.90 ± .10	4,000	10,000	N/A	N/A	N/A
ED	1206	1.00 ± .10	2,500	10,000	N/A	N/A	N/A
EE	1206	1.10 ± .10	2,500	10,000	N/A	N/A	N/A
EF	1206	1.20 ± .15	2,500	10,000	N/A	N/A	N/A
EG	1206	1.60 ± .15	2,000	8,000	N/A	N/A	N/A
EH	1206	1.60 ± .20	2,000	8,000	N/A	N/A	N/A
EJ	1206	1.70 ± .20	2,000	8,000	N/A	N/A	N/A
EK	1206	.80 ± .10	2,000	8,000	N/A	N/A	N/A
EL	1206	1.15 ± .15	2,000	8,000	N/A	N/A	N/A
EM	1206	1.25 ± .15	2,500	10,000	N/A	N/A	N/A
EN	1206	0.95 ± 0.1	4,000	10,000	N/A	N/A	N/A
FB	1210	.78 ± .10	4,000	10,000	N/A	N/A	N/A
FC	1210	.90 ± .10	4,000	10,000	N/A	N/A	N/A
FD	1210	.95 ± .10	4,000	10,000	N/A	N/A	N/A
FE	1210	1.00 ± .10	2,500	10,000	N/A	N/A	N/A
FF	1210	1.10 ± .10	2,500	10,000	N/A	N/A	N/A
FG	1210	1.25 ± .15	2,500	10,000	N/A	N/A	N/A
FH	1210	1.55 ± .15	2,000	8,000	N/A	N/A	N/A
FJ	1210	1.85 ± .20	2,000	8,000	N/A	N/A	N/A
FK	1210	2.10 ± .20	2,000	8,000	N/A	N/A	N/A
FL	1210	1.40 ± .15	2,000	8,000	N/A	N/A	N/A
FM	1210	1.70 ± .20	2,000	8,000	N/A	N/A	N/A
FN	1210	1.85 ± .20	2,000	8,000	N/A	N/A	N/A
GB	1812	1.00 ± .10	1,000	4,000	N/A	N/A	N/A
GC	1812	1.10 ± .10	1,000	4,000	N/A	N/A	N/A
GD	1812	1.25 ± .15	1,000	4,000	N/A	N/A	N/A
GE	1812	1.30 ± .10	1,000	4,000	N/A	N/A	N/A
GF	1812	1.50 ± .10	1,000	4,000	N/A	N/A	N/A
GG	1812	1.55 ± .10	1,000	4,000	N/A	N/A	N/A
GH	1812	1.40 ± .15	1,000	4,000	N/A	N/A	N/A
GJ	1812	1.70 ± .15	1,000	4,000	N/A	N/A	N/A
GK	1812	1.60 ± .20	1,000	4,000	N/A	N/A	N/A
GL	1812	1.90 ± .20	1,000	4,000	N/A	N/A	N/A
GM	1812	2.00 ± .20	1,000	4,000	N/A	N/A	N/A
HB	1825	1.10 ± .15	1,000	4,000	N/A	N/A	N/A
HC	1825	1.15 ± .15	1,000	4,000	N/A	N/A	N/A
HD	1825	1.30 ± .15	1,000	4,000	N/A	N/A	N/A
HE	1825	1.40 ± .15	1,000	4,000	N/A	N/A	N/A
HF	1825	1.50 ± .15	1,000	4,000	N/A	N/A	N/A
JB	2220	1.00 ± .15	1,000	4,000	N/A	N/A	N/A
JC	2220	1.10 ± .15	1,000	4,000	N/A	N/A	N/A
JD	2220	1.30 ± .15	1,000	4,000	N/A	N/A	N/A
JE	2220	1.40 ± .15	1,000	4,000	N/A	N/A	N/A
JF	2220	1.50 ± .15	1,000	4,000	N/A	N/A	N/A
KB	2225	1.00 ± .15	1,000	4,000	N/A	N/A	N/A
KC	2225	1.10 ± .15	1,000	4,000	N/A	N/A	N/A
KD	2225	1.30 ± .15	1,000	4,000	N/A	N/A	N/A
KE	2225	1.40 ± .15	1,000	4,000	N/A	N/A	N/A

This chart refers to ceramic chip thickness codes on pages 59-62.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9