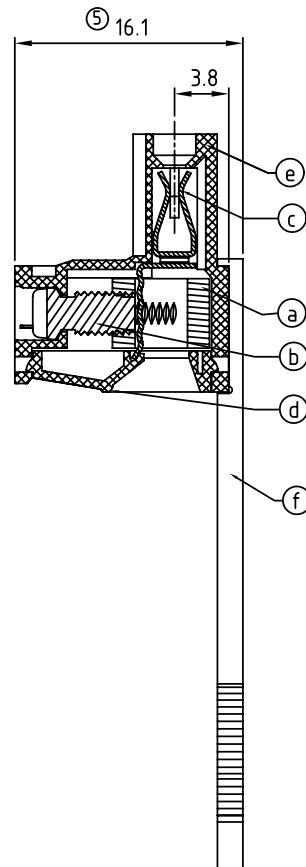
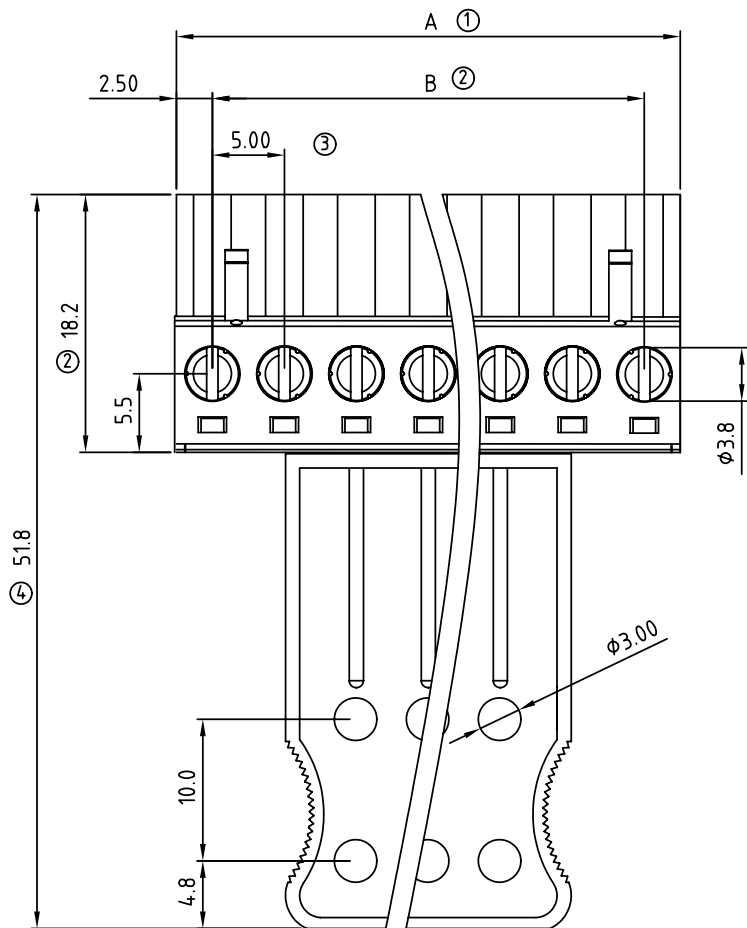


SIGN	DATE	DESCRIPTION	APPROVER
△	2010.02.02	Add the tolerance table	Jacke
△	2010.03.08	Add the 2P mark	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item ① Clamp: Brass(CuZn) Ni plated
- Item ② Terminal screw: Steel Zinc plating "-" slot type
- Item ③ Female contact: PhBz ,Tin plated
- Item ④ Terminal (Cover): Thermoplastic (UL94V-0)
- Item ⑤ Terminal (Body): Thermoplastic (UL94V-0)
- Item ⑥ Handle: Thermoplastic (UL94V-0)

Electrical cULus/VDE/TUV

- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus VDE TUV

TJ xx 71 x 4 xxxx G

02 2 CONTACTS	0 Black (RAL9005)	000 0 Standard @ Logo	Pb < 40,000ppm
03 3 CONTACTS	2 Red (RAL3001/D)	000 A Standard ANY Logo (RoHS)	
...	3 Orange (RAL2011/P)	Any special item by	
24 24 CONTACTS	4 Yellow (RAL1018/A)	customer request,	
	5 Green (RAL6018/T)	please contact sales	
	6 Blue (RAL5015/A)	department.	
	8 Grey (RAL7035/D)		

△
N = Number of poles
Dim A = N x 5.0
Dim B = (N-1) x 5.0

	Dim A	Dim B
2-6p	±0.20	±0.15
7-12p	±0.25	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

拉柄對應P數表

TJ成品P數	拉柄P數
2P-4P	2P
5P-9P	5P
10P-15P	8P
16P-24P	12P

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TJ 5.0mm Series with handle type			
PART NO.	TJxx71x4xxxxG			DWG NO.	8TJ0397
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.	
		Jacke 2010.03.08	Jacke 2010.02.02		
SHEET: 01/01				UNIT: mm	X. ±0.50
				SCALE: NONE	X.X ±0.30
				REV.: D	X.XX ±0.10
					X° ±1°


SIGN	DATE	DESCRIPTION	APPROVER
△			
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item① Clamp: Brass(CuZn) Ni plated
- Item② Terminal screw: Steel Zinc plating "-" slot type
- Item③ Female contact: PhBz ,Tin plated
- Item④ Terminal (Cover): Thermoplastic (UL94V-0)
- Item⑤ Terminal (Body): Thermoplastic (UL94V-0)
- Item⑥ Handle: Thermoplastic (UL94V-0)

Electrical cULus/VDE/TUV

- Voltage rating: 300V/300V/300V
- Current rating: 20A/20A/20A
- Wire range:
- Solid wire(AWG): 12-24
- Stranded wire(AWG): 12-24
- Torque: 5Lb-In/0.5Nm/0.56Nm
- Screw: M3
- Wire strip length: 7-8mm
- Withstanding Voltage: 1.6KV/2.5KV/2.5KV
- Operating temperature: -40°C to +115°C
- Safety Approval: cULus VDE TÜV

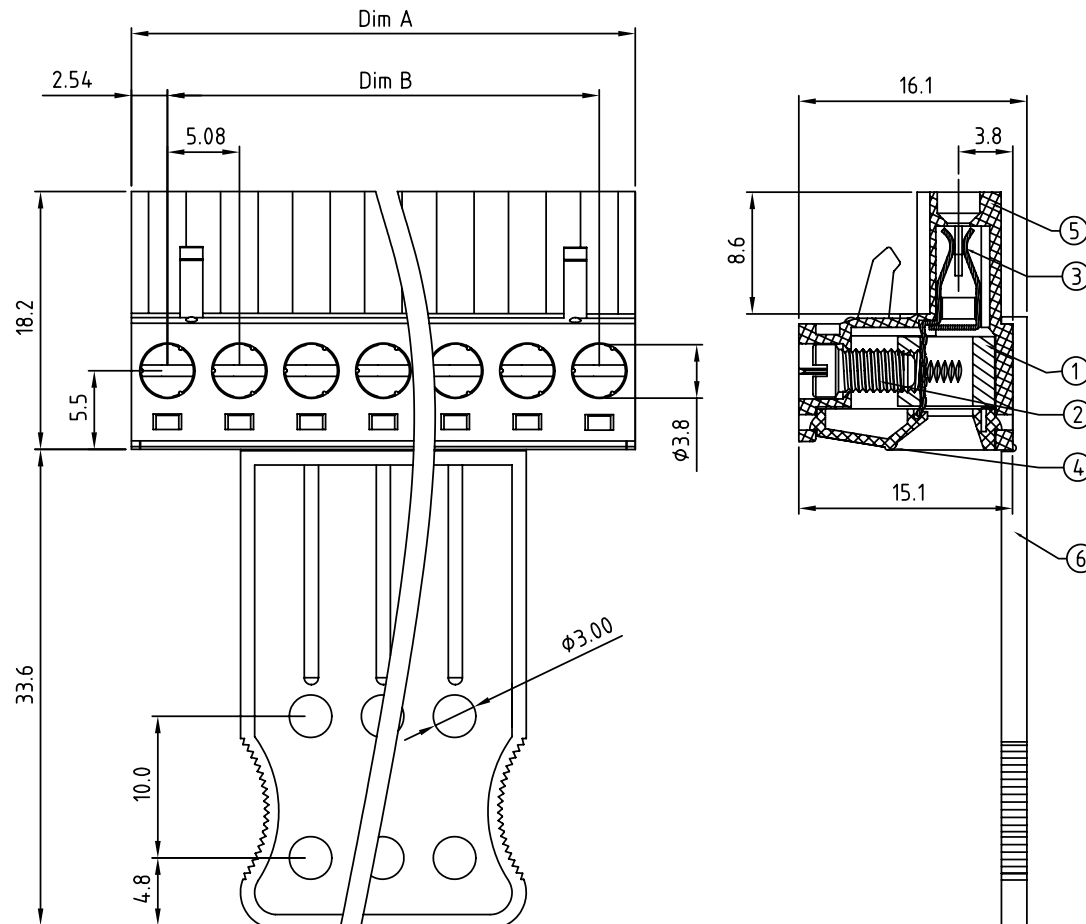

TJ xx 51 x 4 xxxx G

02	2 CONTACTS	0	Black (RAL9005)	000 0	Standard @ Logo	Pb < 40,000ppm
03	3 CONTACTS	2	Red (RAL3001/D)	000 A	Standard ANY Logo (RoHS)	
...	...	3	Orange(RAL2011/P)		Any special item by customer request,	
24	24 CONTACTS	4	Yellow(RAL1018/A)		please contact sales department.	
		5	Green(RAL6018/T)			
		6	Blue (RAL5015/A)			
		8	Grey(RAL7035/D)			

拉柄對應P數表

TJ成品P數	拉柄P數
2P-4P	2P
5P-9P	5P
10P-15P	8P
16P-24P	12P

N = Number of poles

Dim A=Nx5.08

Dim B=(N-1)x5.08

	Dim A	Dim B
2-6p	±0.15	±0.10
7-12p	±0.20	±0.20
13-18p	±0.30	±0.25
19-24p	±0.40	±0.30

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	TJ 5.08mm Series with handle type						
PART NO.	TJxx51x4xxxxG			DWG NO.	8TJ00176		
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Jacke 2009.04.06	Jacke 2009.04.06		UNIT: mm	X.	±0.50
					SCALE: NONE	X.X	±0.30
				SHEET: 01/01	REV.: B	X.XX	±0.10
						X°	±1°

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9