

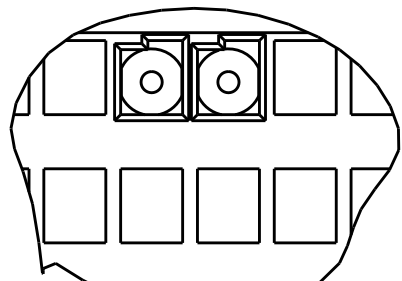
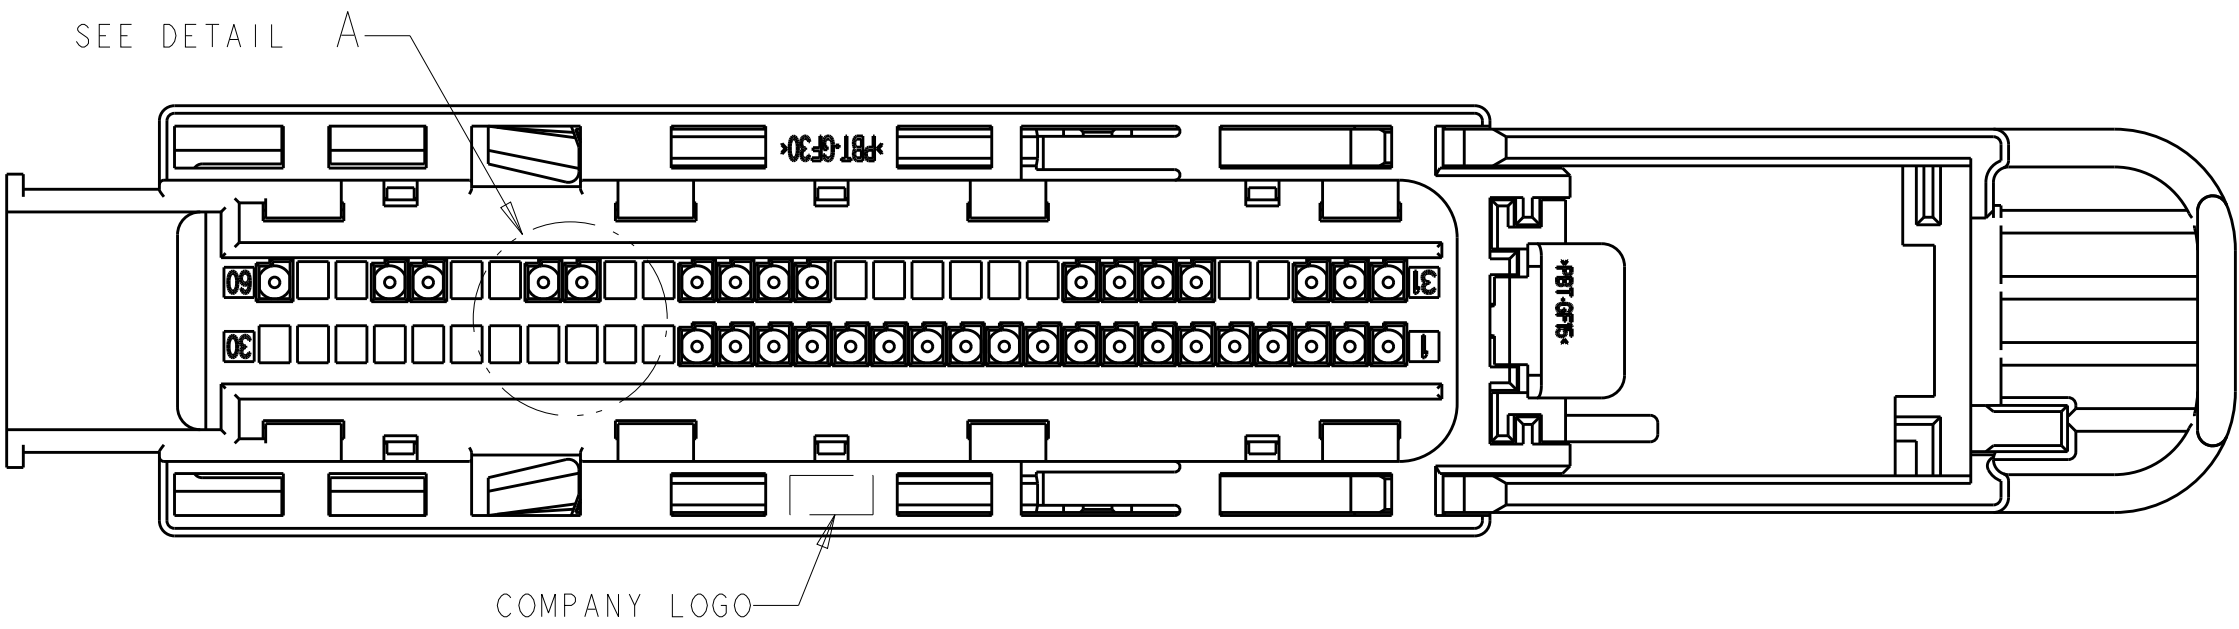


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	BA3	REVISED PER ECO-15-004852	21MAR2015	DLD	DLD






DETAIL A
SCALE 4:1

ALTERNATE CONSTRUCTION

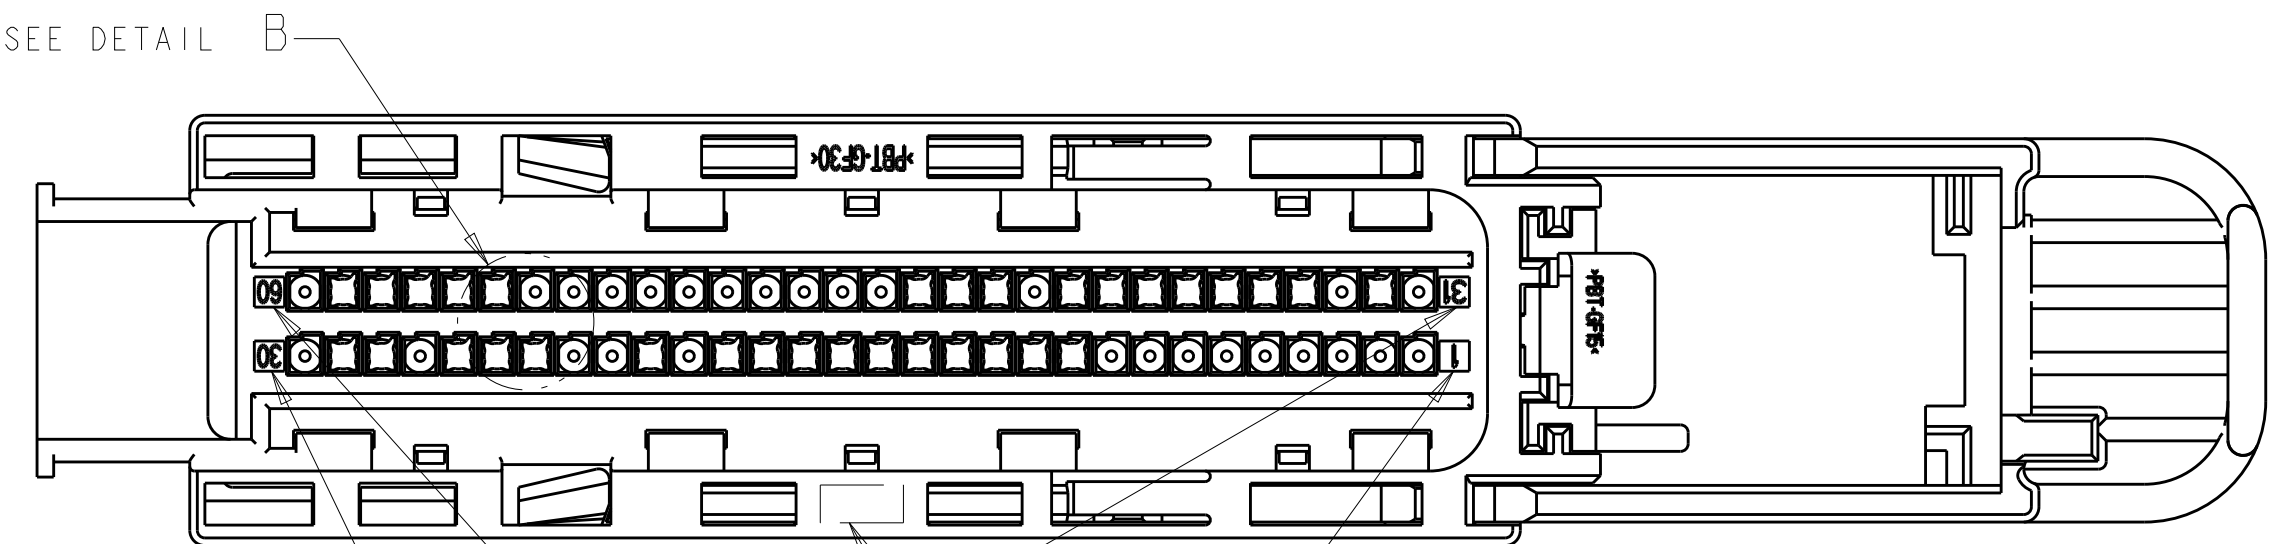

DETAIL B
SCALE 4:1

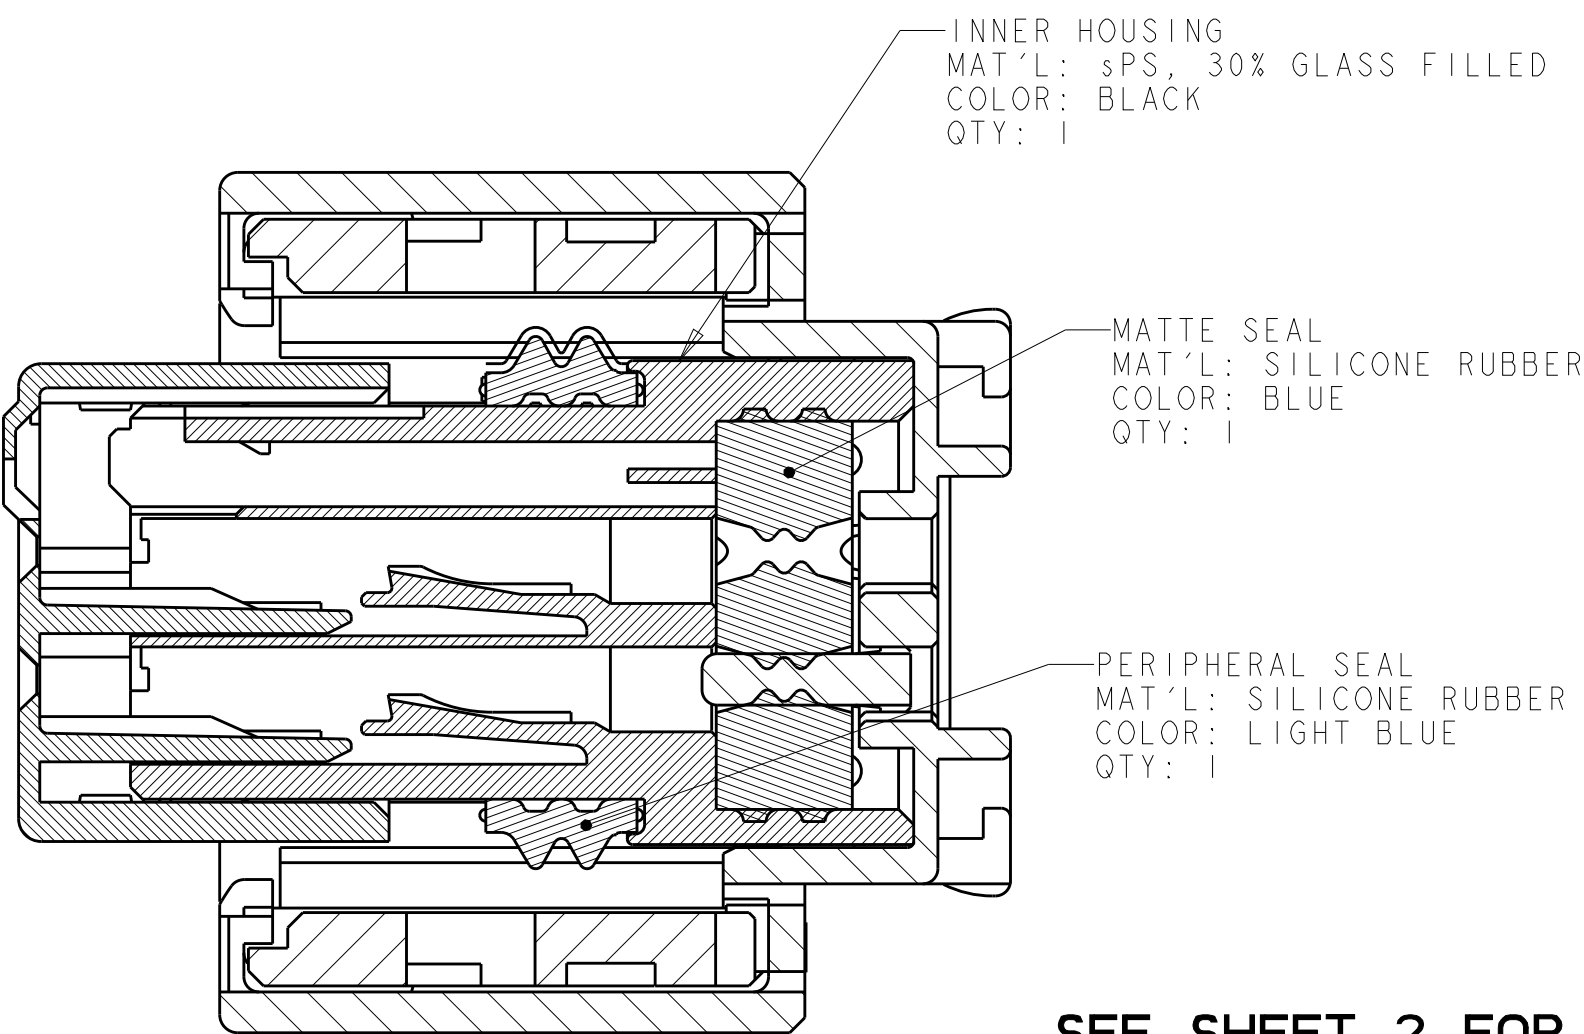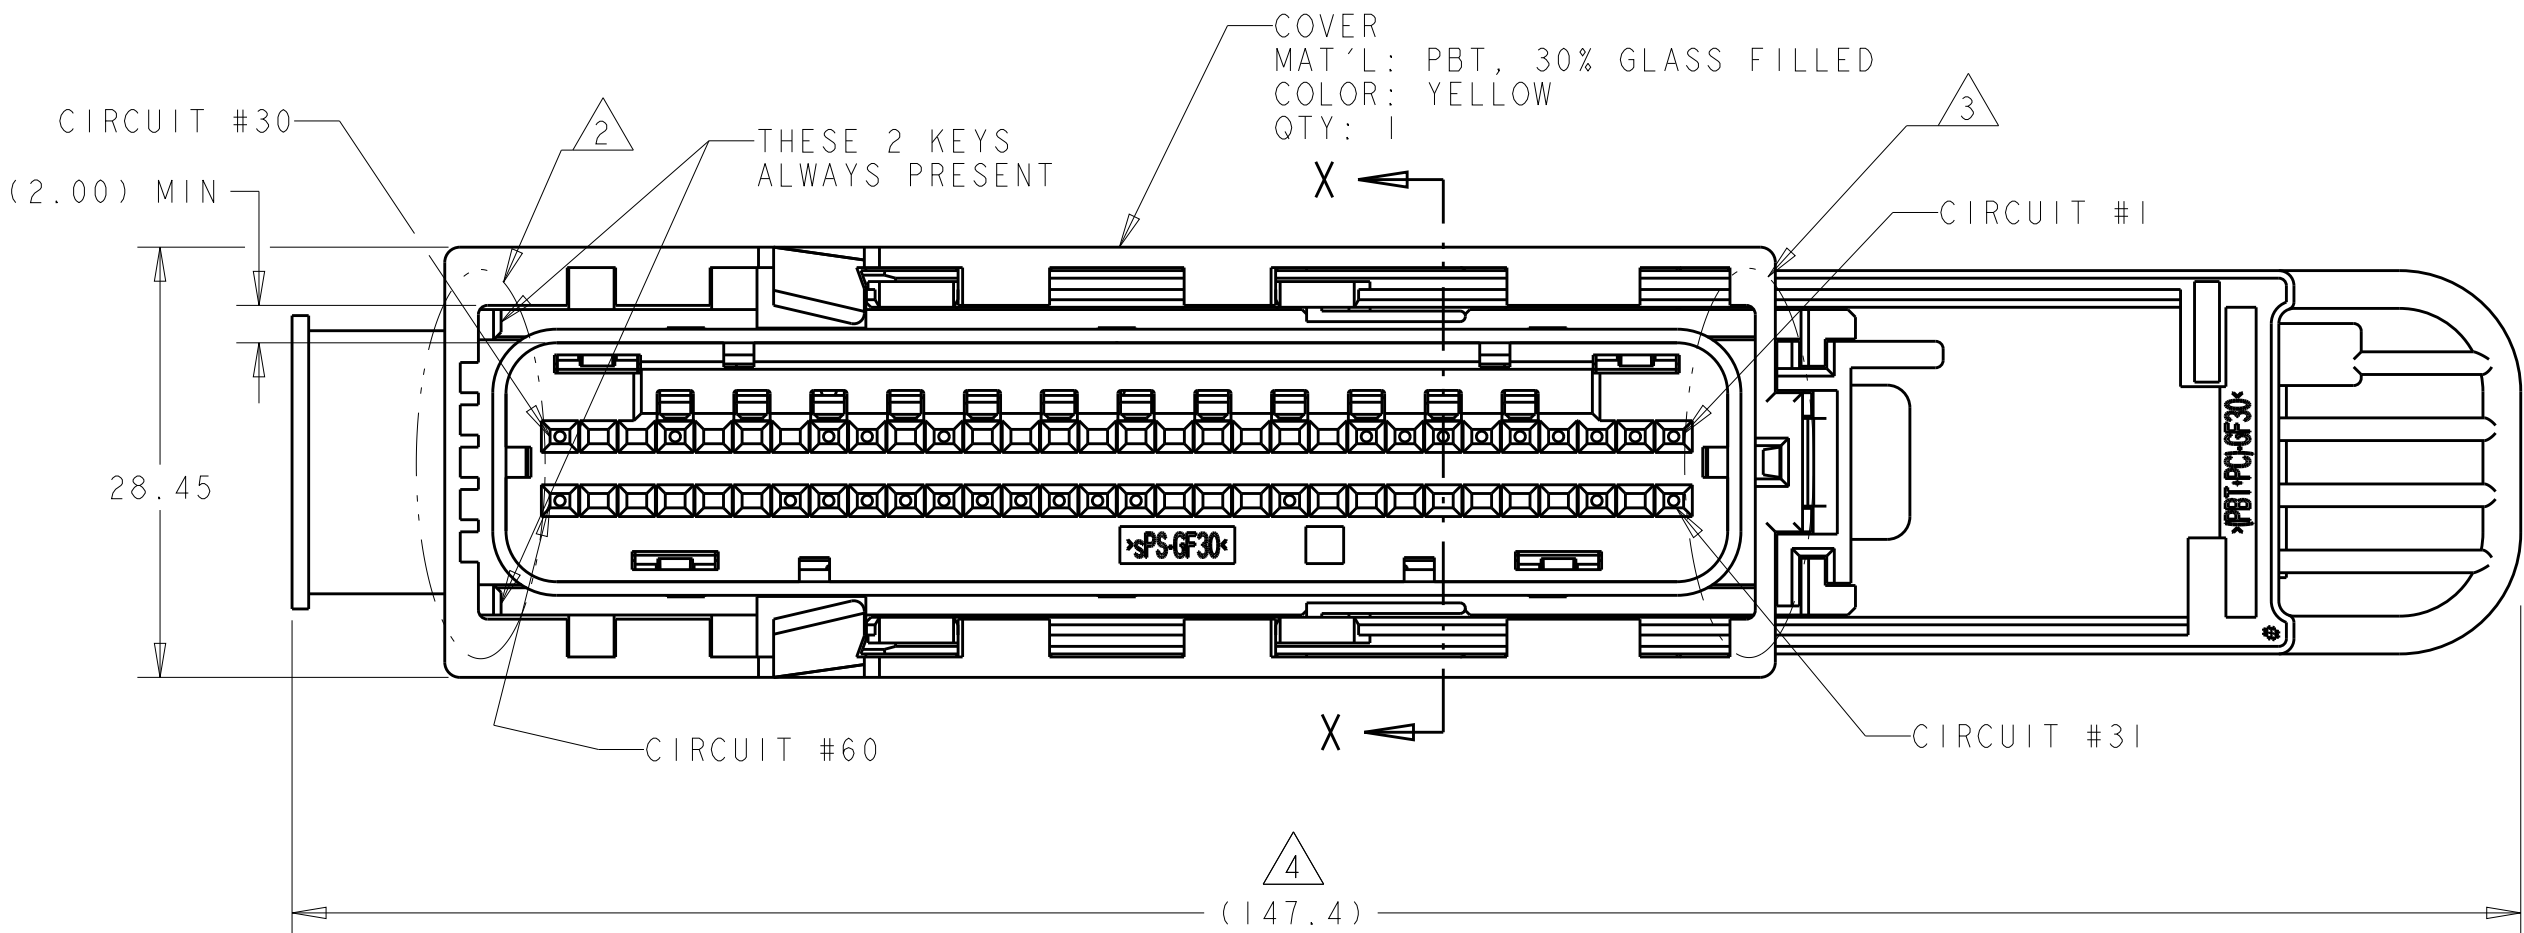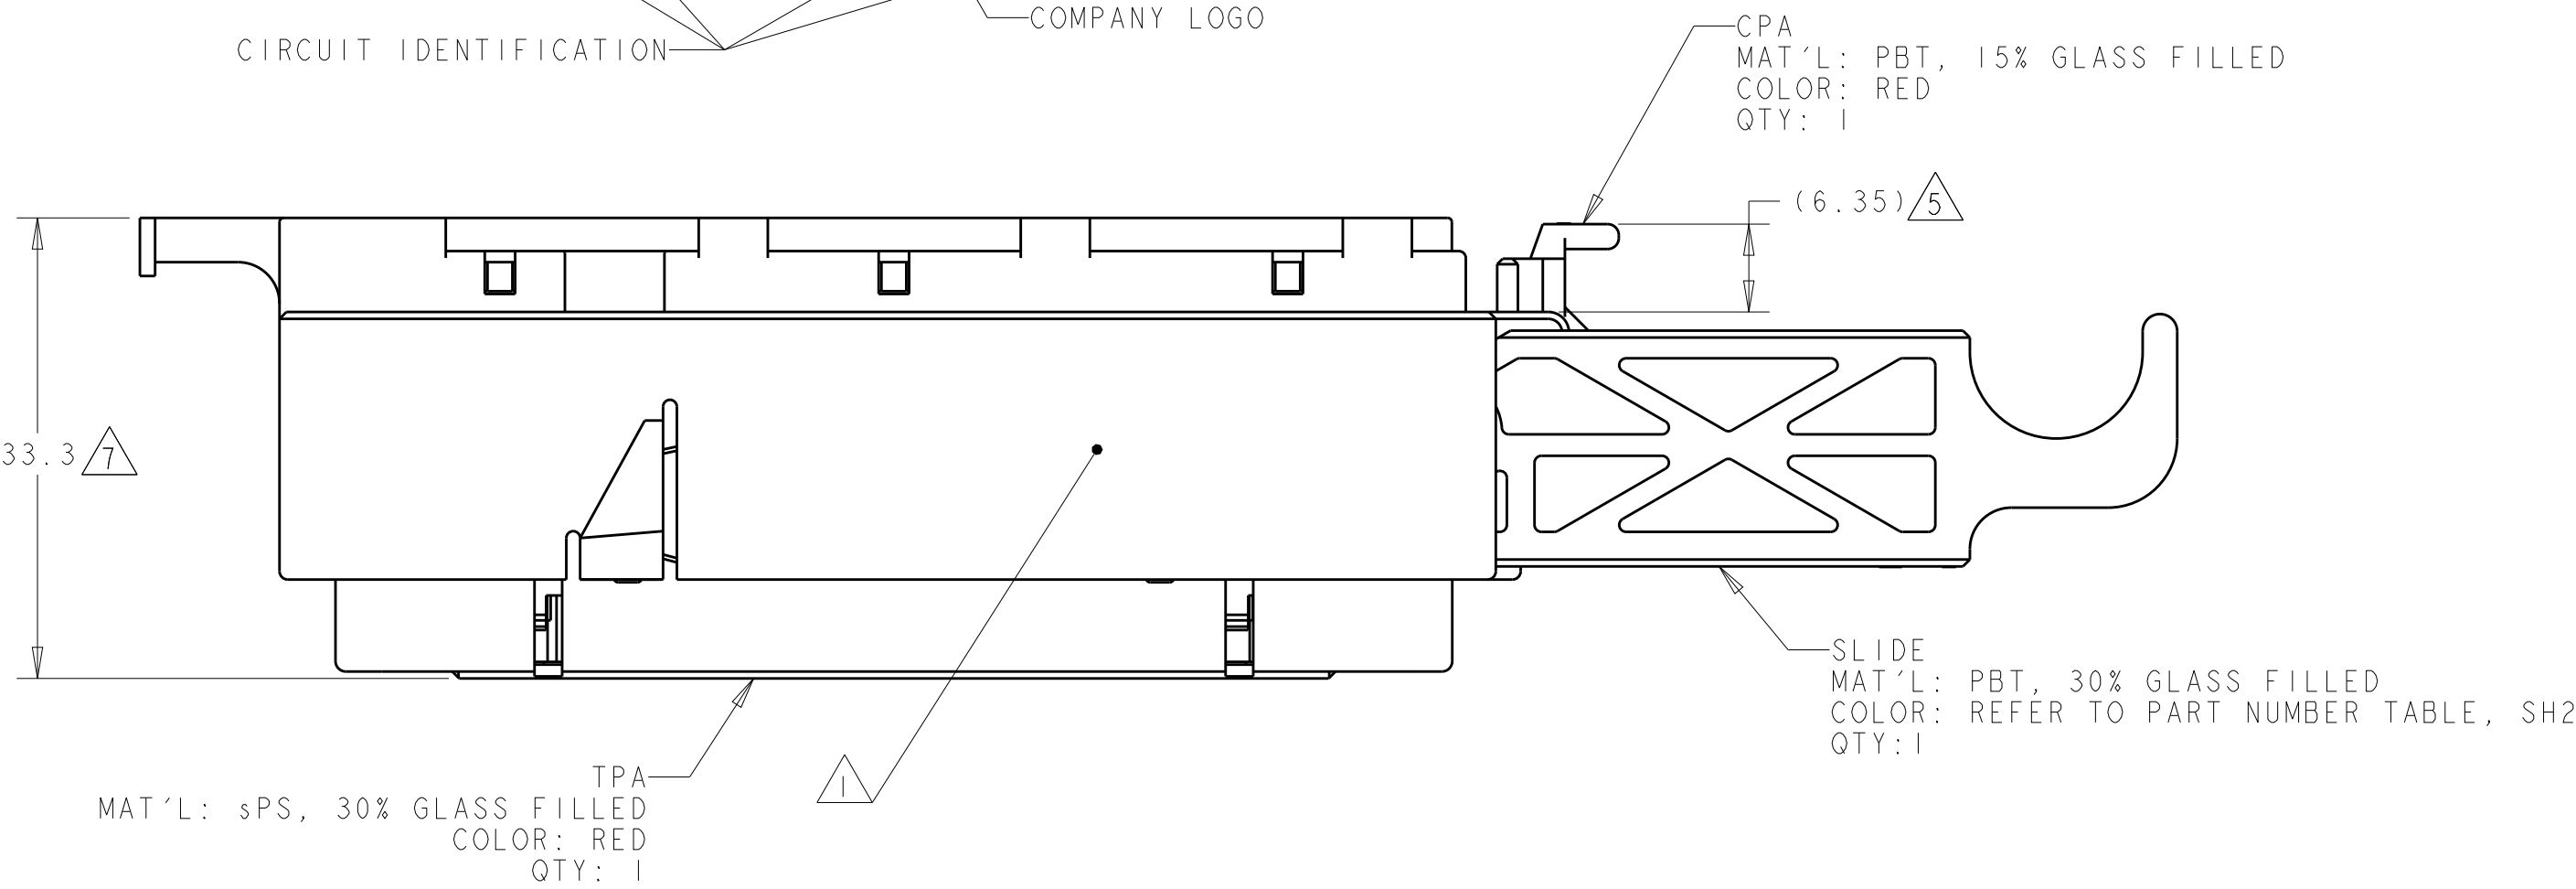

SECTION X-X
SCALE 4:1


SEE SHEET 2 FOR HEADER INTERFACE SPECIFICATION,
SHEET 6 FOR KEYING ARRANGEMENTS,
AND SHEETS 7, 8 & 9 FOR CIRCUIT ARRANGEMENTS

- △ TE CONNECTIVITY (TE) PART NUMBER AND JULIAN DATE CODE MARKED ON THIS SIDE.
- △ SEE KEYING ARRANGEMENT TABLE FOR KEYWAY LOCATIONS, SEE SHEET 6.
- △ SEE KEYING ARRANGEMENT TABLE FOR KEY LOCATIONS, SEE SHEET 6.
- △ SLIDE SHOWN IN UNLOCKED POSITION.
- △ CPA SHOWN IN UNLOCKED POSITION.
- △ NOTE DELETED.
- △ TPA SHOWN IN UNLOCKED POSITION.
8. REFER TO DRAWING C-638623 AND/OR C-1488143 FOR MATING CONNECTOR INFORMATION.
- △ NOT FOR PRODUCTION USE.
10. MISCELLANEOUS COMPONENT ENGAGE/DISENGAGE FORCE, SAE/USCAR-2, SECTION 5.4.4.4, G.M. APPROVED DEVIATION:
TPA (PRE-SET TO FULL) FORCES TO BE 15 TO 55 NEWTONS.
11. MISCELLANEOUS COMPONENT ENGAGE/DISENGAGE FORCE, SAE/USCAR-2, SECTION 5.4.4.4, G.M. APPROVED DEVIATION:
CPA (PRE-SET TO FULL) FORCES TO BE 7 TO 30 NEWTONS.
12. POLARIZATION FEATURE EFFECTIVENESS, SAE/USCAR-2, SECTION 4.3.4, G.M. APPROVED DEVIATION:
DURING MISMATING FORCE TESTING CERTAIN CONNECTOR/HEADER COMBINATIONS MAY ALLOW ELECTRICAL CONTACT OF UP TO 26 PINS BELOW THE REQUIRED 220 NEWTON FORCE.
13. CONNECTOR-CONNECTOR MATING/UNMATING FORCE, SAE/USCAR-2, SECTION 5.4.2.4, G.M. APPROVED DEVIATION:
MATING FORCE IS ACCEPTABLE FOR THE CONNECTOR/HEADER SYSTEM UP TO 50 TERMINALS AT ≤ 75 NEWTONS.
14. APPLICABLE TE GET FEMALE TERMINALS:
FOR 0.22/0.35 WIRE SECTION, TERMINAL PART NUMBER 1393364-2
FOR 0.50/0.0.75 WIRE SECTION, TERMINAL PART NUMBER 1393365-2
15. REFER TO POGO PIN FOR GET SOCKET TERMINAL ON TE DRAWING #114-18411 FOR CONTINUITY TESTING.
- △ PRELIMINARY NOT RELEASED FOR PRODUCTION.

SEE SHEET 3

PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.R. SHUEY 31MAR2000	 TE Connectivity			
DIMENSIONS:		CHK V.KANE 31MAR2000				
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD J.M. MYER 31MAR2000	NAME	ASSEMBLY, FEMALE, 60 WAY GET SDM CONNECTOR (SHUNTLESS VERSION)		
		PRODUCT SPEC				
	0 PLC ±.	APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	2 PLC ±0.5					
MATERIAL	4 PLC ±.	WEIGHT	A100779C=638595		-	
	4 PLC ±.	FINISH	SEE CALLOUT		CUSTOMER DRAWING	
SEE CALLOUT		SCALE 2:1		SHEET 1 OF 10		REBA3

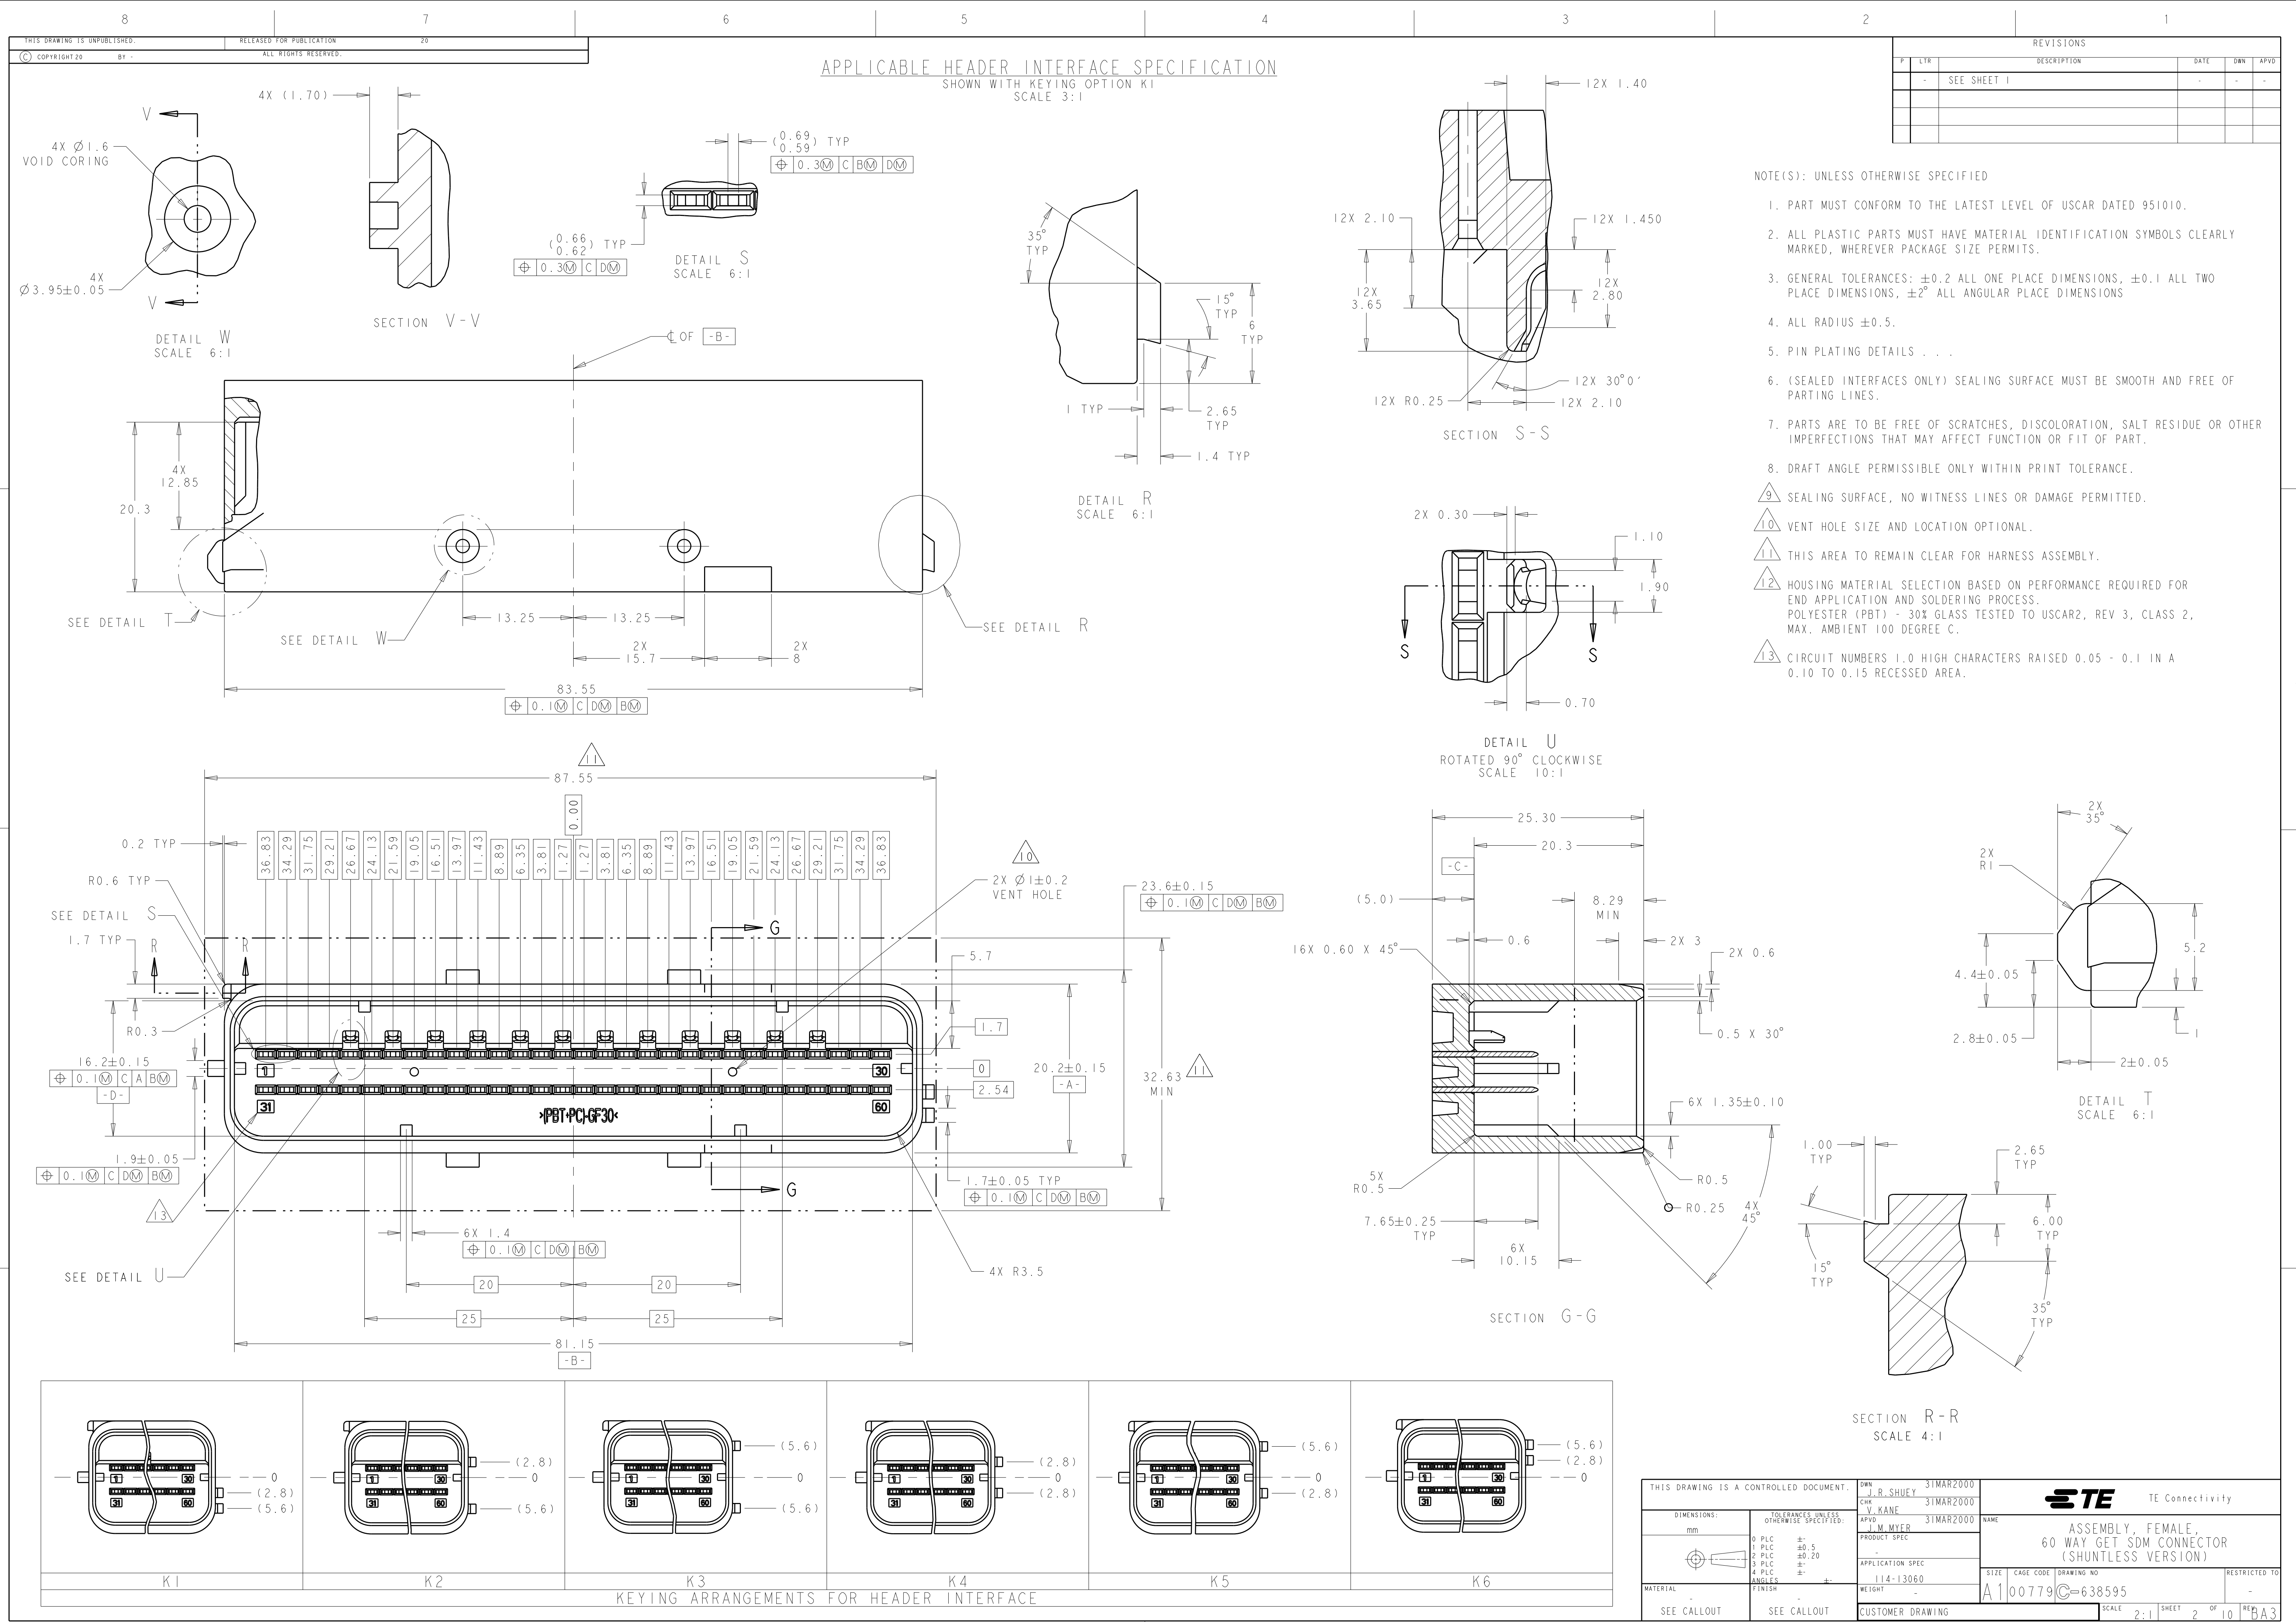

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

13577852	BLACK	C134	K5	3-1924558-7
13502172	BLACK	C130	K3	2-1924558-2
13502171	BLACK	C120	K3	2-1924558-1
13502170	BLACK	C42	K6	2-1924558-0
13502169	BLACK	C91	K6	1-1924558-9
19206496	BLACK	C125	K4	1-1924558-8
19206495	BLACK	C126	K2	1-1924558-7
19206494	BLACK	C125	K1	1-1924558-6
19206493	BLACK	C124	K3	1-1924558-5
19206492	BLACK	C123	K3	1-1924558-4
19206488	BLACK	C46	K3	1-1924558-0
19152767	BLACK	C37	K2	1924558-8
19180411	BLACK	C22	K3	1924558-7
19179682	BLACK	C22	K6	1924558-5
19179684	BLACK	C29	K5	1924558-2
19179685	BLACK	C28	K2	1924558-1
GM PART NUMBER	SLIDE COLOR	CIRCUIT ARRANGEMENT (SEE TABLE ON SH 5 & 6)	KEYING ARRANGEMENT (SEE TABLE ON SHEET 5)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J.R. SHUEY 31MAR2000		TE Connectivity	
		CHK V.KANE 31MAR2000			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ± 1 PLC ±0.5 2 PLC ±0.20 3 PLC ± 4 PLC ± ANGLES ± FINISH		PRODUCT SPEC	
		APPLICATION SPEC		SIZE	
		114-13060		CAGE CODE	
MATERIAL -		WEIGHT -		DRAWING NO	
SEE CALLOUT		CUSTOMER DRAWING		A100779C=638595	
				RESTRICTED TO	
				SCALE 2:1	
				SHEET 4 OF 10	
				REV BA3	

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
-	-	SEE SHEET 1	-	-	-

NOT INTENDED FOR PRODUCTION USE

SERVICE PART

9	BLACK	C3	K0	8-184464-7
	SLIDE COLOR	CIRCUIT ARRANGEMENT (SEE TABLE ON SHEET 4)	KEYING ARRANGEMENT (SEE TABLE ON SHEET 4)	PART NUMBER

NOT INTENDED FOR PRODUCTION USE

SERVICE PART

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60
CIRCUIT ARRANGEMENT																													
[X] INDICATES UNAVAILABLE (BLOCKED) CIRCUIT																													
C3																													

	K0 (OPTIONAL)
	K0
KEYING ARRANGEMENT ([] INDICATES PRESENCE OF KEYWAY OR ABSENCE OF KEY)	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN. J. R. SHUEY 31MAR2000	TE Connectivity	
DIMENSIONS:		CHK. V. KANE 31MAR2000		
mm		APVD. J. M. MYER 31MAR2000		
		PRODUCT SPEC	NAME ASSEMBLY, FEMALE, 60 WAY GET-SDM CONNECTOR (SHUNTLESS VERSION)	
		APPLICATION SPEC		
		114-13060		
MATERIAL -		WEIGHT -	SIZE A1	CAGE CODE 00779
SEE CALLOUT		SEE CALLOUT	DRAWING NO. C=638595	
		CUSTOMER DRAWING	SCALE 2:1	SHEET 5 OF 10

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

	K 9 9
	K 7
	K 6
	K 5
	K 4
	K 3
	K 2
	K 1

KEYING ARRANGEMENT
( INDICATES PRESENCE OF
KEYWAY OR ABSENCE OF KEY)

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	J. R. SHUEY	31MAR2000	 TE Connectivity																	
DIMENSIONS:			CHK	V. KANE	31MAR2000																		
mm			APVD	J. M. MYER	31MAR2000																		
			TOLERANCES UNLESS OTHERWISE SPECIFIED:			NAME	ASSEMBLY, FEMALE, 60 WAY GET SDM CONNECTOR (SHUNTLESS VERSION)																
			0 PLC ±																				
			1 PLC ±0.5																				
			2 PLC ±0.20																				
			3 PLC ±																				
4 PLC ±			PRODUCT SPEC			SIZE			CAGE CODE			DRAWING NO			RESTRICTED TO								
ANGLES ±			APPLICATION SPEC																				
FINISH			114-13060																				
MATERIAL			WEIGHT			A100779			G=638595			-											
SEE CALLOUT			CUSTOMER DRAWING																				
						SCALE			2:1			SHEET			6 OF 10			REV			BA3		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9