

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
ALL RIGHTS RESERVED.

© COPYRIGHT


By

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
H	—		A	INITIAL RELEASE	07APR2014	YC	BvH


UNSHIELDED

3, 4 and 5 pos PUR & PVC



3x 0.34mm²



4x 0.34mm²




5x 0.34mm²

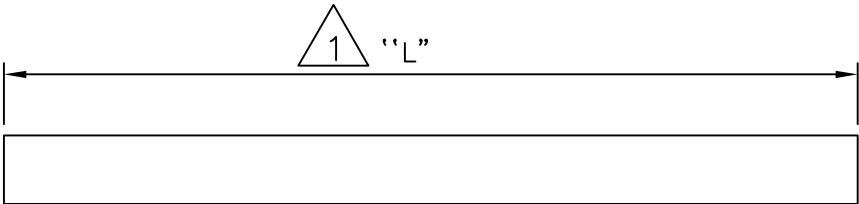

1 NOTE: Length "L" to be determined by online configurator

8 Pos PUR ONLY


8x 0.25mm²




SHIELDED

3, 4 and 5 pos PUR & PVC


3x 0.34mm²



4x 0.34mm²




5x 0.34mm²



8 Pos PUR ONLY

8x 0.25mm²



PVC	5	0.34	22	Grey	5x0.34mm ² PVC CABLE SHIELDED	3-2273231-3
	4	0.34	22	Grey	4x0.34mm ² PVC CABLE SHIELDED	3-2273231-2
	3	0.34	22	Grey	3x0.34mm ² PVC CABLE SHIELDED	3-2273231-1
PUR	8	0.25	24	Grey	8x0.25mm ² PUR CABLE SHIELDED	2-2273231-4
	5	0.34	22	Grey	5x0.34mm ² PUR CABLE SHIELDED	2-2273231-3
	4	0.34	22	Grey	4x0.34mm ² PUR CABLE SHIELDED	2-2273231-2
	3	0.34	22	Grey	3x0.34mm ² PUR CABLE SHIELDED	2-2273231-1
SHIELDED						
PVC	5	0.34	22	Black	5x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-3
	4	0.34	22	Black	4x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-2
	3	0.34	22	Black	3x0.34mm ² PVC CABLE UNSHIELDED	1-2273231-1
PUR	8	0.25	24	Grey	8x0.25mm ² PUR CABLE UNSHIELDED	2273231-4
	5	0.34	22	Black	5x0.34mm ² PUR CABLE UNSHIELDED	2273231-3
	4	0.34	22	Black	4x0.34mm ² PUR CABLE UNSHIELDED	2273231-2
	3	0.34	22	Black	3x0.34mm ² PUR CABLE UNSHIELDED	2273231-1
UNSHIELDED						

#cond	mm ²	AWG	JACKET COLOR	DESCRIPTION	TEPN
-------	-----------------	-----	--------------	-------------	------

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± —
4 PLC ± —
ANGLES ± —
FINISH —

DWN
YATHISH C
07APR2014

CHK
B.VELDHOVEN
15APR2014

APVD
A.VAN ZANDVOORT
15APR2014

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

TE Connectivity

M8 M12 BULK CABLE TYPES

SIZE
A3

CAGE CODE
00779

DRAWING NO
C=2273231

RESTRICTED TO
—

SCALE
NTS

SHEET
1 of 5

REV
A

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION
-,-

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC
H

DIST
-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

Unshielded PVC

1-2273231-1

PVC CABLE	
No./diameter of wires	3 x 0.34 mm²
Wire isolation	PVC (br, bl, bk)
C-track properties	n.a.
Jacket	PVC (UL/CSA)
Outer diameter	approx. 4.6 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C

1-2273231-2


PVC CABLE	
No./diameter of wires	4 x 0.34 mm²
Wire isolation	PVC (br, wh, bl, bk)
C-track properties	n.a.
Jacket	PVC (UL/CSA)
Outer diameter	approx. 5.0 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C

1-2273231-3

PVC CABLE	
No./diameter of wires	5 x 0.34 mm²
Wire isolation	PP (br, wh, bl, bk, gnye)
C-track properties	n.a.
Jacket	PVC (UL/CSA)
Outer diameter	approx. 5.2 mm
Bend radius (moving)	10 x outer diameter
Temperature range (fixed)	-30...+80 °C
Temperature range (mobile)	-5...+80 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL -

FINISH -

DWN YATHISH C 07APR2014
CHK B.VELDHOVEN 15APR2014
APVD A.VAN ZANDVOORT 15APR2014
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

CUSTOMER DRAWING

SCALE NTS

SHEET 3 of 5

REV A

TE Connectivity

M8 M12 BULK CABLE TYPES

SIZE A3 CAGE CODE 00779 DRAWING NO C-2273231 RESTRICTED TO -

1470-19 (3/11)

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

-

SEE SHEET 1

-

-

-

2-2273231-1

PUR CABLE

No./diameter of wires3 x 0.34 mm²

Wire isolationPVC (br, wh, bk)

C-track properties

JacketPUR/PVC (UL/CSA)

Outer diameterapprox. 5.9 mm

Bend radius (moving)15 x outer diameter

Temperature range (fixed)-30...+80 °C

Temperature range (mobile)-5...+70 °C

2-2273231-4

PUR CABLE

No./diameter of wires8 x 0.25 mm²

Wire isolationPP (br, wh, bl, bk, gr, pk, vi, or)

C-track properties2 million

JacketPUR (UL/CSA)

Outer diameterapprox. 7.0 mm

Bend radius (moving)10 x outer diameter

Temperature range (fixed)-40...+80 °C

Temperature range (mobile)-20...+80 °C

2-2273231-2

PUR CABLE

No./diameter of wires4 x 0.34 mm²

Wire isolationPVC (br, wh, bl, bk)

C-track properties

JacketPUR/PVC (UL/CSA)

Outer diameterapprox. 5.9 mm

Bend radius (moving)15 x outer diameter

Temperature range (fixed)-30...+80 °C

Temperature range (mobile)-5...+70 °C

2-2273231-3

PUR CABLE

No./diameter of wires5 x 0.34 mm²

Wire isolationPVC (br, wh, bl, bk, gnye)

C-track properties

JacketPUR/PVC (UL/CSA)

Outer diameterapprox. 5.9 mm

Bend radius (moving)15 x outer diameter


Temperature range (fixed)-40...+80 °C

Temperature range (mobile)-5...+70 °C

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC± -

1 PLC± -

2 PLC± -

3 PLC± -

4 PLC± -

ANGLES± -

MATERIAL-

FINISH-

DWN

YATHISH C

07APR2014

CHK

B.VELDHOVEN

15APR2014

APVD

A.VAN ZANDVOORT

15APR2014

PRODUCT SPEC

APPLICATION SPEC

WEIGHT-

CUSTOMER DRAWING

NAME

M8 M12 BULK CABLE TYPES

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

©=2273231

-

SCALE

NTS

SHEET

4 of 5

REV

A

TE

TE Connectivity

Shielded PUR

1470-19 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9