

64-Kbit/256-Kbit Integrated Processor Companion with F-RAM

Features

- 64-Kbit/256-Kbit ferroelectric random access memory (F-RAM)
 - □ Logically organized as 8K × 8 (FM31276)/32K × 8 (FM31278)
 - □ High-endurance 100 trillion (10¹⁴) read/writes
 - □ 151-year data retention (See Data Retention and Endurance on page 28)
 - ¬ NoDelay™ writes
 - □ Advanced high-reliability ferroelectric process
- High Integration Device Replaces Multiple Parts
 - □ Serial nonvolatile memory
 - □ Real time clock (RTC)
 - □ Low voltage reset
 - □ Watchdog timer
 - □ Early power-fail warning/NMI
 - ☐ Two 16-bit event counter
 - Serial number with write-lock for security
- Real-time Clock/Calendar
 - Backup current at 2 V: 1.15 μA at +25 °C
 - □ Seconds through centuries in BCD format
 - □ Tracks leap years through 2099
 - □ Uses standard 32.768 kHz crystal (6 pF/12.5 pF)
 - □ Software calibration
 - Supports battery or capacitor backup
- Processor Companion
 - $\ \square$ Active-low reset output for V_{DD} and watchdog
 - $\ \square$ Programmable low-V_{DD} reset trip point
 - Manual reset filtered and debounced
 - □ Programmable watchdog timer
 - Dual Battery-backed event counter tracks system intrusions or other events
 - Comparator for power-fail interrupt
 - ☐ 64-bit programmable serial number with lock
- Fast 2-wire serial interface (I²C)
 - □ Up to 1-MHz frequency
 - □ Supports legacy timings for 100 kHz and 400 kHz
 - □ RTC, Supervisor controlled via I²C interface
 - □ Device select pins for up to 4 memory devices
- Low power consumption
 - 1.5 mA active current at 1 MHz
 - □ 150 µA standby current
- Operating voltage: V_{DD} = 4.0 V to 5.5 V
- Industrial temperature: -40 °C to +85 °C
- 14-pin small outline integrated circuit (SOIC) package

- Restriction of hazardous substances (RoHS) compliant
- Underwriters laboratory (UL) recognized

Functional Description

The FM31276/FM31278 device integrates F-RAM memory with the most commonly needed functions for processor-based systems. Major features include nonvolatile memory, real time clock, low-V_{DD} reset, watchdog timer, nonvolatile event counter, lockable 64-bit serial number area, and general purpose comparator that can be used for a power-fail (NMI) interrupt or any other purpose.

The FM31276/FM31278 is a 64-Kbit/256-Kbit nonvolatile memory employing an advanced ferroelectric process. A ferroelectric random access memory or F-RAM is nonvolatile and performs reads and writes similar to a RAM. This memory is truly nonvolatile rather than battery backed. It provides reliable data retention for 151 years while eliminating the complexities, overhead, and system-level reliability problems caused by other nonvolatile memories. The FM31276/FM31278 is capable of supporting 10¹⁴ read/write cycles, or 100 million times more write cycles than EEPROM.

The real time clock (RTC) provides time and date information in BCD format. It can be permanently powered from an external backup voltage source, either a battery or a capacitor. The timekeeper uses a common external 32.768 kHz crystal and provides a calibration mode that allows software adjustment of timekeeping accuracy.


The processor companion includes commonly needed CPU support functions. Supervisory functions include a reset output signal controlled by either a low V_{DD} condition or a watchdog timeout. \overline{RST} goes active when V_{DD} drops below a programmable threshold and remains active for 100 ms after V_{DD} rises above the trip point. A programmable watchdog timer runs from 100 ms to 3 seconds. The watchdog timer is optional, but if enabled it will assert the reset signal for 100 ms if not restarted by the host before the timeout. A flag-bit indicates the source of the reset.

A comparator on PFI compares an external input pin to the onboard 1.2 V reference. This is useful for generating a power-fail interrupt (NMI) but can be used for any purpose. The family also includes a programmable 64-bit serial number that can be locked making it unalterable. Additionally it offers a dual battery-backed event counter that tracks the number of rising or falling edges detected on a dedicated input pin.

For a complete list of related documentation, click here.



Logic Block Diagram

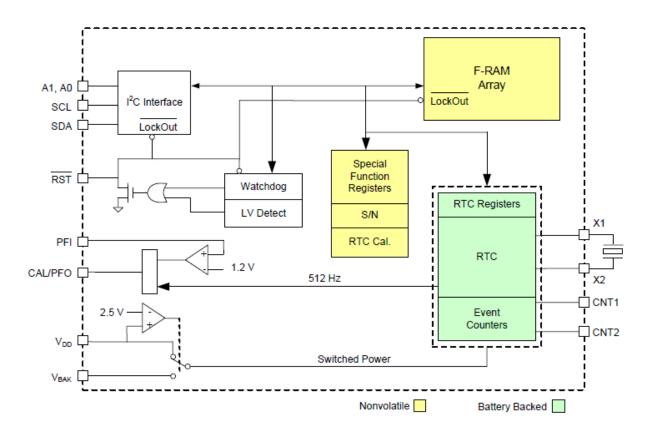



Contents


Pinout	4
Pin Definitions	4
Functional Overview	5
Memory Architecture	5
Processor Companion	5
Processor Supervisor	5
Manual Reset	
Reset Flags	6
Early Power Fail Comparator	6
Event Counter	
Serial Number	7
Real-time Clock Operation	7
Backup Power	8
Trickle Charger	8
Calibration	
Crystal Oscillator	9
Layout Recommendations	10
Register Map	13
I2C Interface	
STOP Condition (P)	20
START Condition (S)	
Data/Address Transfer	20
Acknowledge/No-acknowledge	21
Slave Address	21
Addressing Overview - Memory	
Addressing Overview - RTC & Companion	22
Data Transfer	22
Memory Operation	
Memory Write Operation	23
Memory Read Operation	24

RTC/Companion Write Operation	25
RTC/Companion Read Operation	25
Addressing FRAM Array	
in the FM31276/FM31278 Family	25
Maximum Ratings	
Operating Range	
DC Electrical Characteristics	26
Data Retention and Endurance	28
Capacitance	28
Thermal Resistance	28
AC Test Loads and Waveforms	28
AC Test Conditions	28
Supervisor Timing	29
AC Switching Characteristics	30
Ordering Information	31
Ordering Code Definitions	31
Package Diagram	32
Acronyms	33
Document Conventions	33
Units of Measure	33
Document History Page	34
Sales, Solutions, and Legal Information	35
Worldwide Sales and Design Support	35
Products	
PSoC® Solutions	
Cypress Developer Community	35
Technical Support	35



Pinout

Figure 1. 14-pin SOIC pinout

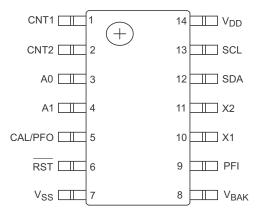

Pin Definitions

Pin Name	I/O Type	Description
A1–A0	Input	Device Select Address 1–0 . These pins are used to select one of up to 4 devices of the same type on the same I ² C bus. To select the device, the address value on the three pins must match the corresponding bits contained in the slave address. The address pins are pulled down internally.
SDA	Input/Output	Serial Data/Address . This is a bi-directional pin for the I ² C interface. It is open-drain and is intended to be wire-OR'd with other devices on the I ² C bus. The input buffer incorporates a Schmitt trigger for noise immunity and the output driver includes slope control for falling edges. An external pull-up resistor is required.
SCL	Input	Serial Clock . The serial clock pin for the I ² C interface. Data is clocked out of the device on the falling edge, and into the device on the rising edge. The SCL input also incorporates a Schmitt trigger input for noise immunity.
CNT1, CNT2	Input	Event Counter Inputs . These battery-backed inputs increment counters when an edge is detected on the corresponding CNT pin. The polarity is programmable. These pins should not be left floating. Tie to ground if these pins are not used.
X1, X2	Input/Output	32.768 kHz crystal connection. When using an external oscillator, apply the clock to X1 and a DC mid-level to X2. These pins should be left unconnected if RTC is not used.
RST	Input/Output	Reset . This active-low output is open drain with weak pull-up. It is also an input when used as a manual reset. This pin should be left floating if unused.
PFI	Input	Early Power-fail Input . Typically connected to an unregulated power supply to detect an early power failure. This pin must be tied to ground if unused.
CAL/PFO	Output	Calibration/Early Power-fail Output. In calibration mode, this pin supplies a 512 Hz square-wave output for clock calibration. In normal operation, this is the early power-fail output.
V _{BAK}	Power supply	Backup supply voltage . Connected to a 3 V battery or a large value capacitor. If no backup supply is used, this pin should be tied to ground and the VBC bit should be cleared in the RTC register 0Bh. The trickle charger is UL recognized and ensures no excessive current when using a lithium battery.
V _{SS}	Power supply	Ground for the device. Must be connected to the ground of the system.
V _{DD}	Power supply	Power supply input to the device.



Functional Overview

The FM31276/FM31278 device combines a serial nonvolatile RAM with a real time clock (RTC) and a processor companion. The companion is a highly integrated peripheral including a processor supervisor, a comparator used for early power-fail warning, nonvolatile event counters, and a 64-bit serial number. The FM31276/FM31278 integrates these complementary but distinct functions under a common interface in a single package. The product is organized as two logical devices. The first is a memory and the second is the companion which includes all the remaining functions. From the system perspective they appear to be two separate devices with unique IDs on the serial bus.

The memory is organized as a standalone nonvolatile I^2C memory using standard device ID value. The real time clock and supervisor functions are accessed with a separate I^2C device ID. This allows clock/calendar data to be read while maintaining the most recently used memory address. The clock and supervisor functions are controlled by 25 special function registers. The RTC and event counter circuits are maintained by the power source on the V_{BAK} pin, allowing them to operate from battery or backup capacitor power when V_{DD} drops below a set threshold. Each functional block is described below.

Memory Architecture

The FM31276/FM31278 device is available in memory size 64-Kbit/256-Kbit. The device uses two-byte addressing for the memory portion of the chip. This makes the device software compatible with its standalone memory counterparts, but makes them compatible within the entire family.

The memory array is logically organized as $8,192 \times 8$ bits/ $32,768 \times 8$ bits and is accessed using an industry-standard I^2C interface. The memory is based on F-RAM technology. Therefore it can be treated as RAM and is read or written at the speed of the I^2C bus with no delays for write operations. It also offers effectively unlimited write endurance unlike other nonvolatile memory technologies. The I^2C protocol is described in I^2C Interface on page 20.

The memory array can be write-protected by software. Two bits in the processor companion area (WP1, WP0 in register 0Bh) control the protection setting. Based on the setting, the protected addresses cannot be written and the I²C interface will not acknowledge any data to protected addresses. The special function registers containing these bits are described in detail below.

Table 1. Block Memory Write Protection

WP1	WP0	Protected Address Range				
0	0	None				
0	1	Bottom 1/4				
1	0	Bottom 1/2				
1	1	Full array				

Processor Companion

In addition to nonvolatile RAM, the FM31276/FM31278 incorporates a real time clock and highly integrated processor companion. The companion includes a low- V_{DD} reset, a programmable watchdog timer, a battery-backed event counters, a comparator for early power-fail detection or other purposes, and a 64-bit serial number.

Processor Supervisor


Supervisors provide a host processor two basic functions: detection of power supply fault conditions and a watchdog timer to escape a software lockup condition. The FM31276/FM31278 has a reset pin (RST) to drive a processor reset input during power faults, power-up, and software lockups. It is an open drain output with a weak internal pull-up to V_{DD}. This allows other reset sources to be wire-OR'd to the RST pin. When V_{DD} is above the programmed trip point, RST output is pulled weakly to V_{DD}. If V_{DD} drops below the reset trip point voltage level (V_{TP}), the \overline{RST} pin will be driven LOW. It will remain LOW until V_{DD} falls too low for circuit operation which is the V_{RST} level. When V_{DD} rises again above V_{TP}, RST continues to drive LOW for at least 100 ms (t_{RPU}) to ensure a robust system reset at a reliable V_{DD} level. After t_{RPU} has been met, the RST pin will return to the weak HIGH state. While RST is asserted, serial bus activity is locked out even if a transaction occurred as V_{DD} dropped below V_{TP}. A memory operation started while V_{DD} is above V_{TP} will be completed internally.

Table 2 below shows how bit VTP controls the trip point of the low-V_{DD} reset. They are located in register 0Bh, bits 1 and 0. The reset pin will drive LOW when V_{DD} is below the selected V_{TP} voltage, and the $\rm I^2C$ interface and F-RAM array will be locked out. Note that the bit 1 location is a don't care. Figure 2 illustrates the reset operation in response to a low V_{DD}.

Table 2. VTP setting

VTP Setting	VTP
3.9 V	0
4.4 V	1

Figure 2. Low V_{DD} Reset

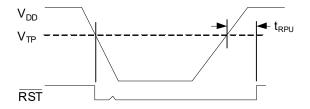

A watchdog timer can also be used to drive an active reset signal. The watchdog is a free-running programmable timer. The timeout period can be software programmed from 100 ms to 3 seconds in 100 ms increments via a 5-bit nonvolatile register.




All programmed settings are minimum values and vary with temperature according to the operating specifications. The watchdog has two additional controls associated with its operation, a watchdog enable bit (WDE) and timer restart bits (WR). Both the enable bit must be set and the watchdog must timeout in order to drive RST active. If a reset event occurs, the timer will automatically restart on the rising edge of the reset pulse. If WDE = '0', the watchdog timer runs but a watchdog fault will not cause RST to be asserted LOW. The WTR flag will be set, indicating a watchdog fault. This setting is useful during software development if the developer does not want RST to drive. Note that setting the maximum timeout setting (11111b) disables the counter to save power. The second control is a nibble that restarts the timer preventing a reset. The timer should be restarted after changing the timeout value.

The watchdog timeout value is located in register 0Ah, bits 4:0, and the watchdog enable is bit 7. The watchdog is restarted by writing the pattern 1010b to the lower nibble of register 09h. Writing this pattern will also cause the timer to load new timeout values. Writing other patterns to this address will not affect its operation. Note the watchdog timer is free-running. Prior to enabling it, users should restart the timer as described above. This assures that the full timeout period will be set immediately after enabling. The watchdog is disabled when $\rm V_{DD}$ is below $\rm V_{TP}$. The following table summarizes the watchdog bits. A block diagram follows.

Watchdog Timeout	WDT(4:0)	0Ah, bits 4:0
Watchdog Enable	WDE` ´	0Ah, bit 7
Watchdog Restart	WR(3:0)	09h. bits 3:0


Figure 3. Watchdog Timer

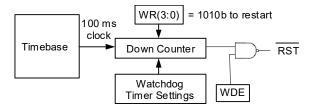

Manual Reset

The RST is a bi-directional signal allowing the FM31276/FM31278 to filter and de-bounce a manual reset switch. The RST input detects an external low condition and responds by driving the RST signal LOW for 100 ms.

Figure 4. Manual Reset

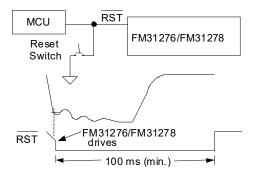

Note The internal weak pull-up eliminates the need for additional external components.


Reset Flags

In case of a reset condition, a flag bit will be set to indicate the source of the reset. A low- V_{DD} reset is indicated by the POR flag, register 09h bit 6. A watchdog reset is indicated by the WTR flag, register 09h bit 7. Note that the flags are internally set in response to reset sources, but they must be cleared by the user. When the register is read, it is possible that both flags are set if both have occurred since the user last cleared them.

Early Power Fail Comparator

An early power fail warning can be provided to the processor well before V_{DD} drops out of spec. The comparator is used to create a power fail interrupt (NMI). This can be accomplished by connecting the PFI pin to the unregulated power supply via a resistor divider. An application circuit is shown below.

Figure 5. Comparator as a Power-Fail Warning

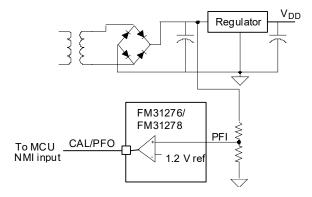



The voltage on the PFI input pin is compared to an onboard 1.2 V reference. When the PFI input voltage drops below this threshold, the comparator will drive the CAL/PFO pin to a LOW state. The comparator has 100 mV (max) of hysteresis to reduce noise sensitivity, only for a rising PFI signal. For a falling PFI edge, there is no hysteresis.

The comparator is a general purpose device and its application is not limited to the NMI function.


The comparator is not integrated into the special function registers except as it shares its output pin with the CAL output. When the RTC calibration mode is invoked by setting the CAL bit (register 00h, bit 2), the CAL/PFO output pin will be driven with a 512 Hz square wave and the comparator will be ignored. Since most users only invoke the calibration mode during production, this should have no impact on system operations using the comparator.

Note The maximum voltage on the comparator input PFI is limited to 3.75 V under normal operating conditions.

Event Counter

The FM31276/FM31278 offers the user two battery-backed event counters. Input pins CNT1 and CNT2 are programmable edge detectors. Each clocks a 16-bit counter. When an edge occurs, the counters will increment their respective registers. Counter 1 is located in registers 0Dh and 0Eh, Counter 2 is located in registers 0Fh and 10h. These register values can be read anytime V_{DD} is above V_{TP} , and they will be incremented as long as a valid V_{RAK} power source is provided. To read, set the long as a valid $V_{\rm BAK}$ power source is provided. To read, set the RC bit, register 0Ch bit 3 to 1. This takes a snapshot of all four counter bytes allowing a stable value even if a count occurs during the read. The registers can be written by software allowing the counters to be cleared or initialized by the system. Counts are blocked during a write operation. The two counters can be cascaded to create a single 32-bit counter by setting the CC control bit (register 0Ch, bit 2). When cascaded, the CNT1 input will cause the counter to increment. CNT2 is not used in this mode and should be tied to ground.

Figure 6. Event Counter

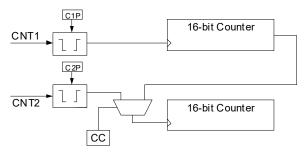

The control bits for event counting are located in register 0Ch. Counter 1 Polarity is bit C1P, bit 0; Counter 2 Polarity is C2P, bit

1; the Cascade Control is CC, bit 2; and the Read Counter bit is RC. bit 3.

The polarity bits must be set prior to setting the counter value(s). If a polarity bit is changed, the counter may inadvertently increment. If the counter pins are not being used, tie them to ground.

Serial Number

A memory location to write a 64-bit serial number is provided. It is a writeable nonvolatile memory block that can be locked by the user once the serial number is set. The 8 bytes of data and the lock bit are all accessed via the device ID for the Processor Companion. Therefore the serial number area is separate and distinct from the memory array. The serial number registers can be written an unlimited number of times, so these locations are general purpose memory. However, once the lock bit is set, the values cannot be altered and the lock cannot be removed. Once locked the serial number registers can still be read by the system.

The serial number is located in registers 11h to 18h. The lock bit is SNL (register 0Bh, bit 7). Setting the SNL bit to a '1' disables writes to the serial number registers, and the SNL bit cannot be cleared.

Real-time Clock Operation

The real-time clock (RTC) is a timekeeping device that can be battery or capacitor backed for permanently-powered operation. It offers a software calibration feature that allows high accuracy.

The RTC consists of an oscillator, clock divider, and a register system for user access. It divides down the 32.768 kHz time-base and provides a minimum resolution of seconds (1 Hz). Static registers provide the user with read/write access to the time values. It includes registers for seconds, minutes, hours, day-of-the-week, date, months, and years. A block diagram (Figure 7 on page 8) illustrates the RTC function.

The user registers are synchronized with the timekeeper core using R and W bits in register 00h described below. Changing the R bit from '0' to '1' transfers timekeeping information from the core into holding registers that can be read by the user. If a timekeeper update is pending when R is set, then the core will be updated prior to loading the user registers. The registers are frozen and will not be updated again until the R bit is cleared to '0'. R is used for reading the time.

Setting the W bit to '1' locks the user registers. Clearing it to '0' causes the values in the user registers to be loaded into the timekeeper core. W bit is used for writing new time values. Users should be certain not to load invalid values, such as FFh, to the timekeeping registers. Updates to the timekeeping core occur continuously except when locked.

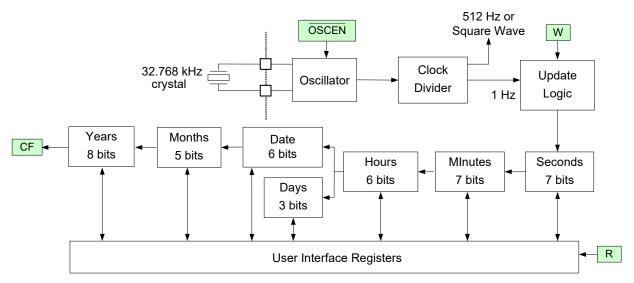



Figure 7. Real-time Clock Core Block Diagram

Backup Power

The real-time clock/calendar is intended to be permanently powered. When the primary system power fails, the voltage on the V_{DD} pin will drop. When V_{DD} is less than 2.5 V, the RTC (and event counters) will switch to the backup power supply on V_{BAK} . The clock operates at extremely low current in order to maximize battery or capacitor life. However, an advantage of combining a clock function with F-RAM memory is that data is not lost regardless of the backup power source.

The I_{BAK} current varies with temperature and voltage (see DC Electrical Characteristics on page 26). The following graph shows I_{BAK} as a function of V_{BAK} . These curves are useful for calculating backup time when a capacitor is used as the V_{BAK} source.


Figure 8. I_{BAK} vs. V_{BAK} Voltage

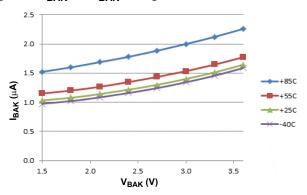

The minimum V_{BAK} voltage varies linearly with temperature. The user can expect the minimum V_{BAK} voltage to be 1.23 V at +85 °C and 1.90 V at -40 °C. The tested limit is 1.55 V at +25 °C.

Note The minimum V_{BAK} voltage has been characterized at -40 °C and +85 °C but is not 100% tested.

Figure 9. V_{BAK}(min.) vs Temperature

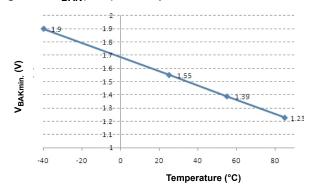

Trickle Charger

To facilitate capacitor backup the V_{BAK} pin can optionally provide a trickle charge current. When the VBC bit (register 0Bh, bit 2) is set to '1', the V_{BAK} pin will source approximately 80 μ A until V_{BAK} reaches 3.75 V. In 5 V systems, this charges the capacitor to V_{DD} without an external diode and resistor charger and also prevents the user from exceeding the V_{BAK} maximum voltage specification. There is a Fast Charge mode which is enabled by the FC bit (register 0Bh, bit 5). In this mode the trickle charger current is set to approximately 1 mA, allowing a large backup capacitor to charge more quickly.



In the case where no battery is used, the V_{BAK} pin should be tied to V_{SS} . V_{BAK} should not be tied to 5 V since the V_{BAK} (max) specification will be exceeded. Be sure to turn off the trickle charger (VBC = '0'), otherwise charger current will be shunted to ground from V_{DD} .

Note Systems using lithium batteries should clear the VBC bit to '0' to prevent battery charging. The V_{BAK} circuitry includes an internal 1 $K\Omega$ series resistor as a safety element. The trickle charger is UL Recognized.

Calibration

When the CAL bit in the register 00h is set to '1', the clock enters calibration mode. In calibration mode, the CAL/PFO output pin is dedicated to the calibration function and the power fail output is temporarily unavailable. Calibration operates by applying a digital correction to the counter based on the frequency error. In this mode, the CAL/PFO pin is driven with a 512 Hz (nominal) square wave. Any measured deviation from 512 Hz translates into a timekeeping error. The user converts the measured error in ppm and writes the appropriate correction value to the calibration register. The correction factors are listed in the table below. Positive ppm errors require a negative adjustment that removes pulses. Negative ppm errors require a positive correction that adds pulses. Positive ppm adjustments have the CALS (sign) bit set to '1', whereas negative ppm adjustments have CALS = '0'. After calibration, the clock will have a maximum error of ±2.17 ppm or ±0.09 minutes per month at the calibrated temperature.


The calibration setting is stored in F-RAM so it is not lost should the backup source fail. It is accessed with bits CAL(4:0) in register 01h. This value can be written only when the CAL bit is set to a '1'. To exit the calibration mode, the user must clear the CAL bit to a '0'. When the CAL bit is '0', the CAL/PFO pin will revert to the power fail output function.

Crystal Oscillator

The crystal oscillator is designed to use a 6 pF/12.5 pF crystal without the need for external components, such as loading capacitors. The FM31276/FM31278 device has built-in loading capacitors that are optimized for use with 6 pF crystals, but which work well with 12.5 pF crystals. For either crystal, no additional external loading capacitors are required nor suggested.

If a 32.768 kHz crystal is not used, an external oscillator may be connected to the FM31276/FM31278. Apply the oscillator to the X1 pin. Its high and low voltage levels can be driven rail-to-rail or amplitudes as low as approximately 500 mV p-p. To ensure proper operation, a DC bias must be applied to the X2 pin. It should be centered between the high and low levels on the X1 pin. This can be accomplished with a voltage divider.

Figure 10. External Oscillator



In the example, R1 and R2 are chosen such that the X2 voltage is centered around the X1 oscillator drive levels. If you wish to avoid the DC current, you may choose to drive X1 with an external clock and X2 with an inverted clock using a CMOS inverter.



Layout Recommendations


The X1 and X2 crystal pins employ very high impedance circuits and the oscillator connected to these pins can be upset by noise or extra loading. To reduce RTC clock errors from signal switching noise, a guard ring must be placed around these pads

and the guard ring grounded. SDA and SCL traces should be routed away from the X1 / X2 pads. The X1 and X2 trace lengths should be less than 5 mm. The use of a ground plane on the backside or inner board layer is preferred. See layout example. Red is the top layer, green is the bottom layer.

VDD SCL SDA X2 X1 PFI V_{BAK}

Figure 11. Layout Recommendations

Layout for Surface Mount Crystal (red = top layer, green = bottom layer)

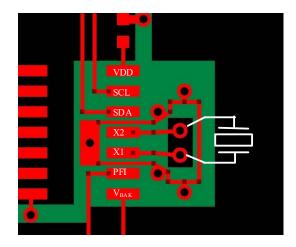

Layout for Through Hole Crystal (red = top layer, green = bottom layer)



Table 3. Digital Calibration Adjustments

Measured Fre		quency Range	Error Range (PPM)		Duament Calibratian Banist	
S.No.	Min Max		Min	Max	Program Calibration Register to	
Positiv	e Calibration for	slow clocks: Calib	ration will achiev	e ±2.17 PPM after o	calibration	
0	512.0000	511.9989	0	2.17	000000	
1	511.9989	511.9967	2.18	6.51	100001	
2	511.9967	511.9944	6.52	10.85	100010	
3	511.9944	511.9922	10.86	15.19	100011	
4	511.9922	511.9900	15.20	19.53	100100	
5	511.9900	511.9878	19.54	23.87	100101	
6	511.9878	511.9856	23.88	28.21	100110	
7	511.9856	511.9833	28.22	32.55	100111	
8	511.9833	511.9811	32.56	36.89	101000	
9	511.9811	511.9789	36.90	41.23	101001	
10	511.9789	511.9767	41.24	45.57	101010	
11	511.9767	511.9744	45.58	49.91	101011	
12	511.9744	511.9722	49.92	54.25	101100	
13	511.9722	511.9700	54.26	58.59	101101	
14	511.9700	511.9678	58.60	62.93	101110	
15	511.9678	511.9656	62.94	67.27	101111	
16	511.9656	511.9633	67.28	71.61	110000	
17	511.9633	511.9611	71.62	75.95	110001	
18	511.9611	511.9589	75.96	80.29	110010	
19	511.9589	511.9567	80.30	84.63	110011	
20	511.9567	511.9544	84.64	88.97	110100	
21	511.9544	511.9522	88.98	93.31	110101	
22	511.9522	511.9500	93.32	97.65	110110	
23	511.9500	511.9478	97.66	101.99	110111	
24	511.9478	511.9456	102.00	106.33	111000	
25	511.9456	511.9433	106.34	110.67	111001	
26	511.9433	511.9411	110.68	115.01	111010	
27	511.9411	511.9389	115.02	119.35	111011	
28	511.9389	511.9367	119.36	123.69	111100	
29	511.9367	511.9344	123.70	128.03	111101	
30	511.9344	511.9322	128.04	132.37	111110	
31	511.9322	511.9300	132.38	136.71	111111	



Table 3. Digital Calibration Adjustments (continued)

C N-	Measured Fre	quency Range	Error Rai	nge (PPM)	Drawnam Calibration Deviat		
S.No.	Min	Max	Max Min Max		Program Calibration Register to:		
Negativ	ve Calibration for	fast clocks: Calib	ration will achieve	±2.17 PPM after (calibration		
0	512.0000	512.0011	0	2.17	000000		
1	512.0011	512.0033	2.18	6.51	000001		
2	512.0033	512.0056	6.52	10.85	000010		
3	512.0056	512.0078	10.86	15.19	000011		
4	512.0078	512.0100	15.20	19.53	000100		
5	512.0100	512.0122	19.54	23.87	000101		
6	512.0122	512.0144	23.88	28.21	000110		
7	512.0144	512.0167	28.22	32.55	000111		
8	512.0167	512.0189	32.56	36.89	001000		
9	512.0189	512.0211	36.90	41.23	001001		
10	512.0211	512.0233	41.24	45.57	001010		
11	512.0233	512.0256	45.58	49.91	001011		
12	512.0256	512.0278	49.92	54.25	001100		
13	512.0278	512.0300	54.26	58.59	001101		
14	512.0300	512.0322	58.60	62.93	001110		
15	512.0322	512.0344	62.94	67.27	001111		
16	512.0344	512.0367	67.28	71.61	010000		
17	512.0367	512.0389	71.62	75.95	010001		
18	512.0389	512.0411	75.96	80.29	010010		
19	512.0411	512.0433	80.30	84.63	010011		
20	512.0433	512.0456	84.64	88.97	010100		
21	512.0456	512.0478	88.98	93.31	010101		
22	512.0478	512.0500	93.32	97.65	010110		
23	512.0500	512.0522	97.66	101.99	010111		
24	512.0522	512.0544	102.00	106.33	011000		
25	512.0544	512.0567	106.34	110.67	011001		
26	512.0567	512.0589	110.68	115.01	011010		
27	512.0589	512.0611	115.02	119.35	011011		
28	512.0611	512.0633	119.36	123.69	011100		
29	512.0633	512.0656	123.70	128.03	011101		
30	512.0656	512.0678	128.04	132.37	011110		
31	512.0678	512.0700	132.38	136.71	011111		



Register Map

The RTC and processor companion functions are accessed via 25 special function registers, which are mapped to a separate I²C device ID. The interface protocol is described on page 20. The registers contain timekeeping data, control bits, and information flags. A description of each register follows the summary table.

Table 4. Register Map Summary Table

Nonvolatile = Battery-backed =

Address	Data						Function	Dange		
Address	D7	D6	D5	D4	D3	D2	D1	D0	Function	Range
18h		Serial Number Byte 7							Serial Number 7	FFh
17h				Serial Number 6	FFh					
16h				Serial Num	nber Byte 5				Serial Number 5	FFh
15h				Serial Num	nber Byte 4				Serial Number 4	FFh
14h				Serial Num	nber Byte 3				Serial Number 3	FFh
13h				Serial Num	nber Byte 2				Serial Number 2	FFh
12h				Serial Num	nber Byte 1				Serial Number 1	FFh
11h				Serial Num	nber Byte 0				Serial Number 0	FFh
10h				Counte	r 2 MSB				Event Counter 2 MSB	FFh
0Fh				Counte	er 2 LSB				Event Counter 2 LSB	FFh
0Eh					Event Counter 1 MSB	FFh				
0Dh				Counte	r 1 LSB				Event Counter 1 LSB	FFh
0Ch					RC	CC	C2P	C1P	Event Count Control	
0Bh	SNL	_	FC	WP1	WP0	VBC	_	VTP	Companion Control	
0Ah	WDE	_	_	WDT4	WDT3	WDT2	WDT1	WDT0	Watchdog Control	
09h	WTR	POR	LB	_	WR3	WR2	WR1	WR0	Watchdog Restart/Flags	
08h		10 y	ears			ye	ars		Years	00–99
07h	0	0	0	10 months		moi	nths		Month	01–12
06h	0	0	10 (date		da	ite		Date	01–31
05h	0	0	0	0	0		day		Day	01–07
04h	0	0	10 h	ours		ho	urs	Hours	00–23	
03h	0		10 minutes	;	minutes				Minutes	00–59
02h	0		10 seconds	3	seconds			Seconds	00–59	
01h	OSCEN	reserved	CALS	CAL4	CAL3	CAL2	CAL1	CAL0	CAL Control	
00h	reserved	CF	reserved	reserved	reserved	CAL	W	R	RTC Control	

Note When the device is first powered up and programmed, all timekeeping registers must be written because the battery-backed register values cannot be guaranteed. The table below shows the default values of the non-volatile registers. All other register values should be treated as unknown.



Table 5. Default Register Values

Address	Hex Value
18h	0x00
17h	0x00
16h	0x00
15h	0x00
14h	0x00
13h	0x00
12h	0x00
11h	0x00
0Bh	0x00

Address	Hex Value
0Ah	0x1F
08h	0x00
07h	0x01
06h	0x01
05h	0x01
04h	0x00
03h	0x01
02h	0x00
01h	0x80



Table 6. Register Description

Address				Descr	iption					
18h	Serial Number Byte 7									
	D7	D6	D5	D4	D3	D2	D1	D0		
	SN.63	SN.62	SN.61	SN.60	SN.59	SN.58	SN.57	SN.56		
	Upper byte of	the serial num	ber. Read/write	e when SNL =	0', read-only v	vhen SNL = '1'	. Nonvolatile.			
17h	Serial Number Byte 6									
	D7	D6	D5	D4	D3	D2	D1	D0		
	SN.55	SN.54	SN.53	SN.52	SN.51	SN.50	SN.49	SN.48		
16h	Byte 6 of the	serial number.	Read/write wh	en SNL = '0', re	ead-only when	SNL = '1'. Nor	volatile.			
				Serial Num	ber Byte 5					
	D7	D6	D5	D4	D3	D2	D1	D0		
	SN.47	SN.46	SN.45	SN.44	SN.43	SN.42	SN.41	SN.40		
	Byte 5 of the	serial number.	Read/write who	en SNL = '0', re	ead-only when	SNL = '1'. Nor	volatile.			
15h				Serial Num	ber Byte 4					
	D7	D6	D5	D4	D3	D2	D1	D0		
	SN.39	SN.38	SN.37	SN.36	SN.35	SN.34	SN.33	SN.32		
	Byte 4 of the serial number. Read/write when SNL = '0', read-only when SNL = '1'. Nonvolatile.									
14h	Serial Number Byte 3									
	D7	D6	D5	D4	D3	D2	D1	D0		
	SN.31	SN.30	SN.29	SN.28	SN.27	SN.26	SN.25	SN.24		
	Byte 3 of the	Byte 3 of the serial number. Read/write when SNL = '0', read-only when SNL = '1'. Nonvolatile.								
13h	Serial Number Byte 2									
	D7	D6	D5	D4	D3	D2	D1	D0		
	SN.23	SN.22	SN.21	SN.20	SN.19	SN.18	SN.17	SN.16		
	Byte 2 of the	Byte 2 of the serial number. Read/write when SNL = '0', read-only when SNL = '1'. Nonvolatile.								
12h				Serial Num	ber Byte 1					
	D7	D6	D5	D4	D3	D2	D1	D0		
	SN.15	SN.14	SN.13	SN.12	SN.11	SN.10	SN.9	SN.8		
	Byte 1 of the	serial number.	Read/write who	en SNL = '0', re	ead-only when	SNL = '1'. Nor	volatile.			
11h				Serial Num	ber Byte 0					
	D7	D6	D5	D4	D3	D2	D1	D0		
	SN.7	SN.6	SN.5	SN.4	SN.3	SN.2	SN.1	SN.0		
	LSB of the se	rial number. Re	ead/write when	SNL = '0', rea	d-only when S	NL = '1'. Nonvo	olatile.			
10h				Counter	2 MSB					
	D7	D6	D5	D4	D3	D2	D1	D0		
	C2.15	C2.14	C2.13	C2.12	C2.11	C2.10	C2.9	C2.8		
	Event Counte	r 2 MSB. Incre	ments on over	flows from Cou	nter 2 LSB. Ba	attery-backed.	ead/write.			



Table 6. Register Description (continued)

Address				Descr	iption						
0Fh				Counte	r 2 LSB						
	D7	D6	D5	D4	D3	D2	D1	D0			
	C2.7	C2.6	C2.5	C2.4	C2.3	C2.2	C2.1	C2.0			
		r 2 LSB. Incren ery-backed, re	nents on progra ad/write.	ımmed edge ev	rent on CNT2 ir	put or overflow	vs from Counte	r 1 MSB wher			
0Eh		Counter 1 MSB									
	D7	D6	D5	D4	D3	D2	D1	D0			
	C1.15	C1.14	C1.13	C1.12	C1.11	C1.10	C1.9	C1.8			
	Event Counter 1MSB. Increments on overflows from Counter 1 LSB. Battery-backed, read/write.										
0Dh	Counter 1 LSB										
	D7	D6	D5	D4	D3	D2	D1	D0			
	C1.7	C1.6	C1.5	C1.4	C1.3	C1.2	C1.1	C1.0			
	Event Counte	r 1 LSB. Increr	nents on progr	ammed edge e	event on CNT1	input. Battery-	backed, read/\	write.			
0Ch				Event Cour	iter Control						
	D7	D6	D5	D4	D3	D2	D1	D0			
	_	-	-	_	RC	CC	C2P	C1P			
RC			t to '1' takes a s s. The RC bit w			ytes allowing t	he system to r	ead the values			
C2P	Counter 2 representation when CC = '1' CNT2 detects	resent the mos '. Battery-back falling edges	When CC = '1', It significant 16- ed, read/write. when C2P = '0 ay inadvertently	-bits of the coul	when C2P = 6	is the controllin	ng input. Bit C2 n't care" when	P is don't care			
C1P			when C1P = IP is changed.			= '1'. The val	ue of Event C	ounter 1 may			
0Bh				Companio	on Control						
	D7	D6	D5	D4	D3	D2	D1	D0			
	SNL	_	FC	WP1	WP0	VBC	_	VÆD			
	Serial Number Lock: Setting to a '1' makes registers 11h to 18h and SNL permanently read-only. SNL cannot be										
SNL	Serial Numbe		to a '1' make olatile, read/w		to 18h and S	NL permanent	ly read-only. S				
	Serial Numbe cleared once	set to '1'. Non Setting FC to '1		rite. I') causes a ~1	mA trickle char			SNL cannot be			
FC	Serial Number cleared once stress Charge: SVBC to '0' disa	set to '1'. Non Setting FC to '1 ables the charg	volatile, read/will (and VBC = '1 ge current. Nor	rite. I') causes a ~1 nvolatile, read/v	mA trickle char vrite.	ge current to b	e supplied on \	SNL cannot be			
FC	Serial Numbe cleared once : Fast Charge: VBC to '0' disa Write Protect.	set to '1'. Nonv Setting FC to '1 ables the charg These bits co	volatile, read/wi ' (and VBC = '1 ge current. Nor ntrol the write p	rite. I') causes a ~1 nvolatile, read/v	mA trickle char vrite.	ge current to b	e supplied on \	SNL cannot be			
FC	Serial Number cleared once so VBC to '0' disa Write Protect. Write protect	set to '1'. Nonv Setting FC to '1 ables the charg These bits con ect address	volatile, read/will (and VBC = '1 ge current. Nor	rite. I') causes a ~1 Ivolatile, read/vorotection of the	mA trickle char vrite.	ge current to b	e supplied on \	SNL cannot be			
FC	Serial Number cleared once of Past Charge: VBC to '0' disa Write Protect. Write protect.	set to '1'. Nony Setting FC to '1 ables the charg These bits con ect address one	volatile, read/w ' (and VBC = '1 ge current. Nor ntrol the write p WP1	rite. I') causes a ~1 ovolatile, read/ovortection of the WP0	mA trickle char vrite.	ge current to b	e supplied on \	SNL cannot be			
FC	Serial Number cleared once so VBC to '0' disa Write Protect. Write protect No Botto	set to '1'. None Setting FC to '1 ables the charge These bits contact address and market address one	volatile, read/wi ' (and VBC = '1 ge current. Nor ntrol the write p WP1 0	rite. I') causes a ~1 ovolatile, read/ovortection of the WP0	mA trickle char vrite.	ge current to b	e supplied on \	SNL cannot be			
SNL FC WP(1:0)	Serial Number cleared once so VBC to '0' disast Write Protect. Write protect. Write protect. Botto Botto	set to '1'. Nony Setting FC to '1 ables the charg These bits con ect address one	volatile, read/wi ' (and VBC = '1 ge current. Nor ntrol the write p WP1 0	rite. I') causes a ~1 nvolatile, read/v protection of the WP0 0 1	mA trickle char vrite.	ge current to b	e supplied on \	SNL cannot be			



Table 6. Register Description (continued)

Address				Descr	ription							
VTP	VTP Select. T	his bit control t	he reset trip po	oint for the low	V _{DD} reset fund	ction. Nonvolat	ile, read/write.					
	Trip Voltage	VTP										
	3.9 V	0										
	4.4 V	1										
0Ah				Watchdo	g Control							
	D7	D6	D5	D4	D3	D2	D1	D0				
	WDE	_	_	WDT4	WDT3	WDT2	WDT1	WDT0				
WDE	the timer runs free-running, u	Watchdog Enable. When WDE = '1', a watchdog timer fault will cause the RST signal to go active. When WDE = '0' the timer runs but has no effect on RST, however the WTR flag will be set when a fault occurs. Note as the timer is free-running, users should restart the timer using WR(3:0) prior to setting WDE = '1'. This assures a full watchdog timeout interval occurs. Nonvolatile, read/write.										
WDT(4:0)		Watchdog Timeout. Indicates the minimum watchdog timeout interval with 100 ms resolution. New watchdog timeouts are loaded when the timer is restarted by writing the 1010b pattern to WR(3:0). Nonvolatile, read/write.										
	Watchdoo	g Timeout	WDT4	WDT3	WDT2	WDT1	WDT0					
	Invalid - def	ault 100 ms	0	0	0	0	0					
	100	ms	0	0	0	0	1					
	200	ms	0	0	0	1	0					
	300	ms	0	0	0	1	1					
	2000 ms		1	0	1	0	0					
	2100	2100 ms		0	1	0	1					
	2200) ms	1	0	1	1	0					
	2900) ms	1	1	1	0	1					
	3000) ms	1	1	1	1	0					
	Disable	Counter	1	1	1	1	1					
09h			1	Watchdog Res	start and Flags	S						
	D7	D6	D5	D4	D3	D2	D1	D0				
	WTR	POR	LB	-	WR3	WR2	WR1	WR0				
WTR	by the user. N	ner Reset Flag: lote that both \ user. Battery-	NTR and POF	R could be set	if both reset se	ources have o						
POR	by the user. N	set Flag: When lote that both \ user. Battery-	NTR and POF	R could be set	if both reset se	ources have o						
LB	counters, this	lag: On powe bit will be set nternally set, us	to '1'. The u	ser should cle								
WR(3:0)	affect this ope	start: Writing a ration. Writing TR, POR, and	any pattern ot	her than 1010l	o to WR(3:0) h	as no effect or	the timer. This	s allows users				



Table 6. Register Description (continued)

Address				Descr	ription					
08h				Timekeepi	ng – Years					
	D7	D6	D5	D4	D3	D2	D1	D0		
	10 year.3	10 year.2	10 year.1	10 year.0	Year.3	Year.2	Year.1	Year.0		
			digits of the ye							
	value for 10s	of years. Each r	nibble operates			register is 0–99	9. Battery-back	ed, read/write.		
07h				Timekeepin	g - Months					
	D7	D6	D5	D4	D3	D2	D1	D0		
	0	0	0	10 Month	Month.3	Month.2	Month.1	Month.0		
			the month. Low r digit and ope							
06h			Tin	nekeeping – D	ate of the mo	nth				
	D7	D6	D5	D4	D3	D2	D1	D0		
	0	0	10 date.1	10 date.0	Date.3	Date.2	Date.1	Date.0		
	Contains the BCD digits for the date of the month. Lower nibble contains the lower digit and operates from 0 to 9; upper nibble contains the upper digit and operates from 0 to 3. The range for the register is 1–31. Battery-backed, read/write.									
05h	Timekeeping – Day of the week									
	D7	D6	D5	D4	D3	D2	D1	D0		
	0	0	0	0	0	Day.2	Day.1	Day.0		
	1 to 7 then ref	Lower nibble contains a value that correlates to day of the week. Day of the week is a ring counter that counts from 1 to 7 then returns to 1. The user must assign meaning to the day value, as the day is not integrated with the date. Battery-backed, read/write.								
04h				Timekeepi	ng – Hours					
	D7	D6	D5	D4	D3	D2	D1	D0		
	0	0	10 hours.1	10 hours.0	Hours.3	Hours.2	Hours.1	Hours.0		
	upper nibble	Contains the BCD value of hours in 24-hour format. Lower nibble contains the lower digit and operates from 0 to 9; upper nibble (two bits) contains the upper digit and operates from 0 to 2. The range for the register is 0–23. Battery-backed, read/write.								
03h				Timekeepin	g – Minutes					
	D7	D6	D5	D4	D3	D2	D1	D0		
	0	10 min.2	10 min.1	10 min.0	Min.3	Min.2	Min.1	Min.0		
			minutes. Lowe digit and ope							



Table 6. Register Description (continued)

Address				Desci	ription					
02h				Timekeepin	g – Seconds					
	D7	D6	D5	D4	D3	D2	D1	D0		
	0	10 sec.2	10 sec.1	10 sec.0	Seconds.3	Seconds.2	Seconds.1	Seconds.0		
			seconds. Lowe operates from							
01h	CAL/Control									
	D7	D6	D5	D4	D3	D2	D1	D0		
	OSCEN	Reserved	CALS	CAL.4	CAL.3	CAL.2	CAL.1	CAL.0		
OSCEN		can save ba	to '1', the oscilla ttery power d							
Reserved	Reserved bits. Do not use. Should remain set to '0'.									
CALS			s if the calibrat				or as a subtra	ction from the		
CAL(4:0)	Calibration Se Nonvolatile, re		e bits control t	he calibration o	of the clock. The	ese bits can be	written only w	hen CAL = '1'.		
00h	RTC Control									
	D7	D6	D5	D4	D3	D2	D1	D0		
	Reserved	CF	Reserved	Reserved	Reserved	CAL	W	R		
CF	indicates a ne	w century, suc s needed. Thi	bit is set to a h as going fron is bit is cleare	n 1999 to 2000	or 2099 to 210	00. The user sl	hould record th	e new century		
CAL			et to '1', the clo pin is controlle							
W	values. Reset	ting the W bit to	t to '1' freezes t '0' causes the ry-backed, read	contents of the						
R	The user can	then read them	t to '1' copies a n without conce ng capture, so	erns over chang	ging values cau	ısing system e	rrors. The R bit	going from '0'		
Reserved	Reserved bits	. Do not use. S	Should remain :	set to '0'.						



I²C Interface

The FM31276/FM31278 employs an industry standard I²C bus that is familiar to many users. This product is unique since it incorporates two logical devices in one chip. Each logical device can be accessed individually. Although monolithic, it appears to the system software to be two separate products. One is a memory device. It has a Slave Address (Slave ID = 1010b) that operates the same as a stand-alone memory device. The second device is a real-time clock and processor companion which have a unique Slave Address (Slave ID = 1101b).

By convention, any device that is sending data onto the bus is the transmitter while the target device for this data is the receiver. The device that is controlling the bus is the master. The master is responsible for generating the clock signal for all operations. Any device on the bus that is being controlled is a slave. The FM31276/FM31278 is always a slave device.

The bus protocol is controlled by transition states in the SDA and SCL signals. There are four conditions including START, STOP, data bit, or acknowledge. Figure 12 and Figure 13 illustrates the

signal conditions that specify the four states. Detailed timing diagrams are shown in the electrical specifications section.

STOP Condition (P)

A STOP condition is indicated when the bus master drives SDA from LOW to HIGH while the SCL signal is HIGH. All operations using the FM31276/FM31278 should end with a STOP condition. If an operation is in progress when a STOP is asserted, the operation will be aborted. The master must have control of SDA in order to assert a STOP condition.

START Condition (S)

A START condition is indicated when the bus master drives SDA from HIGH to LOW while the SCL signal is HIGH. All commands should be preceded by a START condition. An operation in progress can be aborted by asserting a START condition at any time. Aborting an operation using the START condition will ready the FM31276/FM31278 for a new operation.

If during operation the power supply drops below the specified V_{TP} minimum, any I^2C transaction in progress will be aborted and the system should issue a START condition prior to performing another operation.

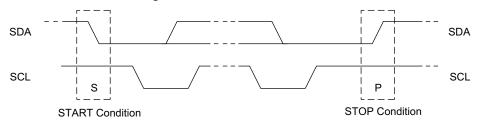


Figure 12. START and STOP Conditions

Data/Address Transfer

All data transfers (including addresses) take place while the SCL signal is HIGH. Except under the three conditions described above, the SDA signal should not change while SCL is HIGH.

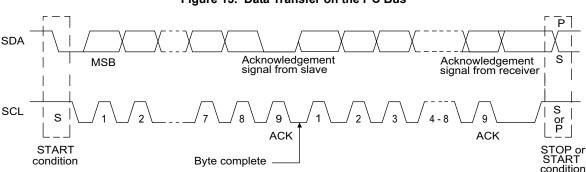


Figure 13. Data Transfer on the I²C Bus



Acknowledge/No-acknowledge

The acknowledge takes place after the 8th data bit has been transferred in any transaction. During this state the transmitter should release the SDA bus to allow the receiver to drive it. The receiver drives the SDA signal LOW to acknowledge receipt of the byte. If the receiver does not drive SDA LOW, the condition is a no-acknowledge and the operation is aborted.

The receiver would fail to acknowledge for two distinct reasons. First is that a byte transfer fails. In this case, the no-acknowledge ceases the current operation so that the device can be

addressed again. This allows the last byte to be recovered in the event of a communication error.

Second and most common, the receiver does not acknowledge to deliberately end an operation. For example, during a read operation, the FM31276/FM31278 will continue to place data onto the bus as long as the receiver sends acknowledges (and clocks). When a read operation is complete and no more data is needed, the receiver must not acknowledge the last byte. If the receiver acknowledges the last byte, this will cause the FM31276/FM31278 to attempt to drive the bus on the next clock while the master is sending a new command such as STOP.

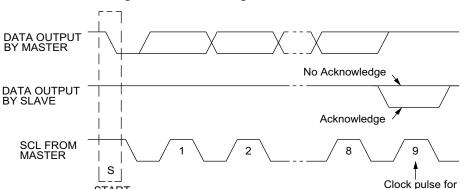


Figure 14. Acknowledge on the I²C Bus

Slave Address

The first byte that the FM31276/FM31278 expects after a START condition is the slave address. As shown in Figure 15 and Figure 16, the slave address contains the device type or slave ID, the device select address bits, and a bit that specifies if the transaction is a read or a write.

START

Condition

The FM31276/FM31278 has two Slave Addresses (Slave IDs) associated with two logical devices. Bits 7–4 are the device type (slave ID) and should be set to 1010b for the memory device. The other logical device within the FM31276/FM31278 is the real-time clock and companion. Bits 7–4 are the device type (slave ID) and should be set to 1101b for the RTC and companion. A bus transaction with this slave address will not affect the memory in any way. The figures below illustrate the two Slave Addresses.

Bits 2–1 are the device select address bits. They must match the corresponding value on the external address pins to select the device. Up to four FM31276/FM31278 devices can reside on the

same I^2C bus by assigning a different address to each. Bit 0 is the read/write bit (R/W). R/W = '1' indicates a read operation and R/W = '0' indicates a write operation.

acknowledgement

Figure 15. Memory Slave Device Address





Figure 16. Companion Slave Device Address





Addressing Overview - Memory

After the FM31276/FM31278 (as receiver) acknowledges the slave address, the master can place the memory address on the bus for a write operation. The address requires two bytes. The complete 15-bit address is latched internally. Each access causes the latched address value to be incremented automatically. The current address is the value that is held in the latch; either a newly written value or the address following the last access. The current address will be held for as long as $V_{DD} > V_{TP}$ or until a new value is written. Reads always use the current address. A random read address can be loaded by beginning a write operation as explained below.

After transmission of each data byte, just prior to the acknowledge, the FM31276/FM31278 increments the internal address latch. This allows the next sequential byte to be accessed with no additional addressing. After the last address (7FFFh) is reached, the address latch will roll over to 0000h. There is no limit to the number of bytes that can be accessed with a single read or write operation.

Addressing Overview - RTC & Companion

The RTC and Processor Companion operate in a similar manner to the memory, except that it uses only one byte of address. Addresses 00h to 18h correspond to special function registers. Attempting to load addresses above 18h is an illegal condition; the FM31276/FM31278 will return a NACK and abort the I^2 C transaction.

Data Transfer

After the address bytes have been transmitted, data transfer between the bus master and the FM31276/FM31278 can begin. For a read operation the FM31276/FM31278 will place 8 data bits on the bus then wait for an acknowledge from the master. If the acknowledge occurs, the FM31276/FM31278 will transfer the next sequential byte. If the acknowledge is not sent, the FM31276/FM31278 will end the read operation. For a write operation, the FM31276/FM31278 will accept 8 data bits from the master then send an acknowledge. All data transfer occurs MSB (most significant bit) first.



Memory Operation

The FM31276/FM31278 is designed to operate in a manner very similar to other I²C interface memory products. The major differences result from the higher performance write capability of F-RAM technology. These improvements result in some differences between the FM31276/FM31278 and a similar configuration EEPROM during writes. The complete operation for both writes and reads is explained below.

The memory address for FM31276 range from 0x0000 to 0x1FFFF, and for FM31278, they range from 0x0000 to 0x7FFF. Memory functionality is described with respect to FM31278 in the following sections.

Memory Write Operation

All writes begin with a slave address, then a memory address. The bus master indicates a write operation by setting the LSB of the slave address (R/\overline{W} bit) to a '0'. After addressing, the bus master sends each byte of data to the memory and the memory generates an acknowledge condition. Any number of sequential

bytes may be written. If the end of the address range is reached internally, the address counter will wrap from 7FFFh to 0000h.

Unlike other nonvolatile memory technologies, there is no effective write delay with F-RAM. Since the read and write access times of the underlying memory are the same, the user experiences no delay through the bus. The entire memory cycle occurs in less time than a single bus clock. Therefore, any operation including read or write can occur immediately following a write. Acknowledge polling, a technique used with EEPROMs to determine if a write is complete is unnecessary and will always return a ready condition.

Internally, an actual memory write occurs after the 8th data bit is transferred. It will be complete before the acknowledge is sent. Therefore, if the user desires to abort a write without altering the memory contents, this should be done using START or STOP condition prior to the 8th data bit. The FM31276/FM31278 uses no page buffering.

Figure 17 and Figure 18 below illustrate a single-byte and multiple-byte write cycles.


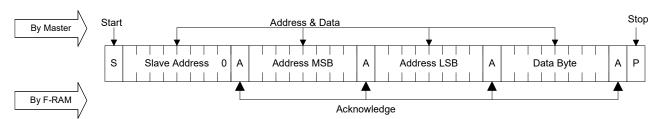


Figure 17. Single-Byte Write

Figure 18. Multi-Byte Write



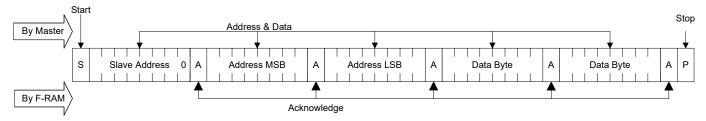

Memory Read Operation

There are two basic types of read operations. They are current address read and selective address read. In a current address read, the FM31276/FM31278 uses the internal address latch to supply the address. In a selective read, the user performs a procedure to set the address to a specific value.

Current Address & Sequential Read

As mentioned above the FM31276/FM31278 uses an internal latch to supply the address for a read operation. A current address read uses the existing value in the address latch as a starting place for the read operation. The system reads from the address immediately following that of the last operation.

To perform a current address read, the bus master supplies a slave address with the LSB set to a '1'. This indicates that a read operation is requested. After receiving the complete slave address, the FM31276/FM31278 will begin shifting out data from the current address on the next clock. The current address is the value held in the internal address latch.

Beginning with the current address, the bus master can read any number of bytes. Thus, a sequential read is simply a current address read with multiple byte transfers. After each byte the internal address counter will be incremented.

Note Each time the bus master acknowledges a byte, this indicates that the FM31276/FM31278 should read out the next sequential byte.

There are four ways to properly terminate a read operation. Failing to properly terminate the read will most likely create a bus contention as the FM31276/FM31278 attempts to read out additional data onto the bus. The four valid methods are:

- 1. The bus master issues a no-acknowledge in the 9th clock cycle and a STOP in the 10th clock cycle. This is illustrated in the diagrams below. This is preferred.
- 2. The bus master issues a no-acknowledge in the 9th clock cycle and a START in the 10th.
- 3. The bus master issues a STOP in the 9th clock cycle.
- 4. The bus master issues a START in the 9th clock cycle.

If the internal address reaches 7FFFh, it will wrap around to 0000h on the next read cycle. Figure 19 and Figure 20 below show the proper operation for current address reads.


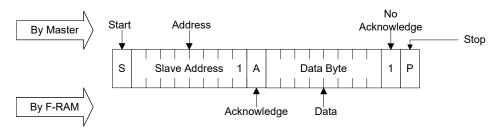


Figure 19. Current Address Read

Figure 20. Sequential Read



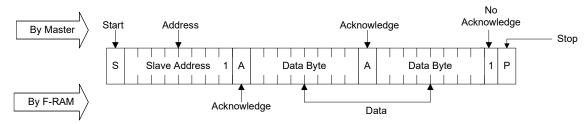


Selective (Random) Read

There is a simple technique that allows a user to select a random address location as the starting point for a read operation. This involves using the first three bytes of a write operation to set the internal address followed by subsequent read operations.

To perform a selective read, the bus master sends out the slave address with the LSB (R/\overline{W}) set to '0'. This specifies a write

operation. According to the write protocol, the bus master then sends the address bytes that are loaded into the internal address latch. After the FM31276/FM31278 acknowledges the address, the bus master issues a START condition. This simultaneously aborts the write operation and allows the read command to be issued with the slave address LSB set to a '1'. The operation is now a current address read.

Figure 21. Selective (Random) Read

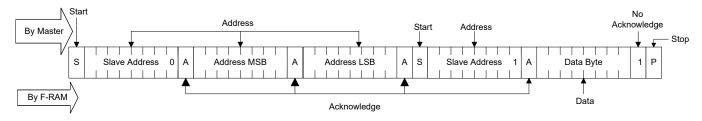

RTC/Companion Write Operation

All RTC and Companion writes operate in a similar manner to memory writes. The distinction is that a different device ID is used and only one byte address is needed instead of two byte address. Figure 22 illustrates a single byte write to this device.

Note Although not required, it is recommended that A5-A7 in the register address byte are zeros in order to preserve compatibility with future devices.

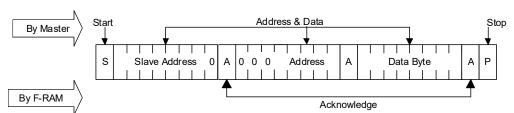


Figure 22. Single Byte Write

RTC/Companion Read Operation

As with writes, a read operation begins with the Slave Address. To perform a register read, the bus master supplies a Slave Address with the LSB set to '1'. This indicates that a read operation is requested. After receiving the complete Slave Address, the FM31276/FM31278 will begin shifting data out from the current register address on the next clock. Auto-increment operates for the special function registers as with the memory address. A current address read for the registers look exactly like the memory except that the device ID is different.

The FM31276/FM31278 contains two separate address registers, one for the memory address and the other for the register address. This allows the contents of one address

register to be modified without affecting the current address of the other register. For example, this would allow an interrupted read to the memory while still providing fast access to an RTC register. A subsequent memory read will then continue from the memory address where it previously left off, without requiring the load of a new memory address. However, a write sequence always requires an address to be supplied.

Addressing FRAM Array in the FM31276/FM31278 Family

The FM31276/FM31278 family includes 64-Kbit and 256-Kbit memory densities. The following 2-byte address field is shown for each density.

Part Number	1 st Address Byte				Number 1 st Address Byte 2 nd Address Byte											
FM31276	Х	Х	Х	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0
FM31278	Х	A14	A13	A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1	A0



Maximum Ratings

Surface mount lead soldering temperature (3 seconds)+260 °C
DC output current (1 output at a time, 1s duration)15 mA
Electrostatic Discharge Voltage Human Body Model (AEC-Q100-002 Rev. D)
Latch-up current> ±100 mA
Note PFI input voltage must not exceed 4.5 V. The " $V_{\text{IN}} < V_{\text{DD}} + 1.0 \text{ V}$ " restriction does not apply to the SCL and SDA inputs which do not employ a diode to V_{DD} .

Operating Range

Range	Ambient Temperature (T _A)	V_{DD}
Industrial	–40 °C to +85 °C	4.0 V to 5.5 V

DC Electrical Characteristics

Over the Operating Range

Parameter	Description	Test Co	onditions	Min	Typ ^[1]	Max	Unit
V _{DD} ^[2]	Power supply			4.0	-	5.5	V
I _{DD}	Average V _{DD} current	SCL toggling	f _{SCL} = 100 kHz	_	_	500	μΑ
		between V_{DD} – 0.3 V and V_{SS} ,	f _{SCL} = 400 kHz	_	_	900	μΑ
		other inputs V _{SS} or V _{DD} – 0.3 V.	f _{SCL} = 1 MHz	_	-	1500	μА
I _{SB}	V _{DD} standby current	$ \begin{array}{l} {\rm SCL = SDA = V_{DD}.} \\ {\rm All \ other \ inputs} \\ {\rm V_{SS} or V_{DD}. Stop} \\ {\rm command \ issued.} \\ \end{array} $		-	_	150	μА
V _{BAK} ^[3] F	RTC backup voltage		T _A = +25 °C to +85 °C	1.55	_	3.75	V
			$T_A = -40 ^{\circ}\text{C} \text{ to } +25 ^{\circ}\text{C}$	1.90	_	3.75	V
I _{BAK}	RTC backup current	V _{BAK} = 3.0 V, V _{DD} < 2.4 V,	T _A = +25 °C, V _{BAK} = 3.0 V	-	-	1.4	μА
		CNTI, CNTZ a	T _A = +85 °C, V _{BAK} = 3.0 V	_	_	2.1	μА
		V _{BAK} .	T _A = +25 °C, V _{BAK} = 2.0 V	-	-	1.15	μА
			T _A = +85 °C, V _{BAK} = 2.0 V	_	-	1.75	μА
I _{BAKTC} ^[4]	Trickle charge current with V _{BAK} = 0 V		Fast Charge Off (FC = '0')	50	-	120	μА
			Fast Charge On (FC = '1')	200	-	2500	μА

Notes

- 1. Typical values are at 25 °C, V_{DD} = V_{DD}(typ). Not 100% tested.
- 2. Full complete operation. Supervisory circuits, RTC, etc operate to lower voltages as specified.
- $3. \ \ The \ V_{BAK} \ trickle \ charger \ automatically \ regulates \ the \ maximum \ voltage \ on \ this \ pin \ for \ capacitor \ backup \ applications.$
- 4. V_{BAK} will source current when trickle charge is enabled (VBC bit = '1'), $V_{DD} > V_{BAK}$, and $V_{BAK} < V_{BAK}$ max.



DC Electrical Characteristics (continued)

Over the Operating Range

Parameter	Description	Test Co	onditions	Min	Typ [1]	Max	Unit
V _{TP1}	V _{DD} trip point voltage, VTP = 0	RST is asserted acti	ve when V _{DD} < V _{TP}	3.75	3.90	4.00	V
V _{TP2}	V _{DD} trip point voltage, VTP = 1	RST is asserted acti	ve when V _{DD} < V _{TP} .	4.20	4.40	4.50	V
V _{RST} ^[5]	V _{DD} for valid RST	I _{OL} = 80 μA at V _{OL}	V _{BAK} > V _{BAK} min	0	_	_	V
			V _{BAK} < V _{BAK} min	1.6	-	_	V
ILI	Input leakage current	$V_{SS} \le V_{IN} \le V_{DD}$ Do X1, PFI, RST, or X2	es not apply to A0, A1,	_	-	±1	μА
I _{LO}	Output leakage current	$V_{SS} \le V_{OUT} \le V_{DD}$. [X1, or X2	Does not apply to RST,	_	_	±1	μА
V _{IL} ^[6]	Input LOW voltage		All inputs except as listed below	- 0.3	_	0.3 × V _{DD}	V
			CNT1, CNT2 battery-backed (V _{DD} < 2.5 V)	- 0.3	_	0.5	V
			CNT1, CNT2 (V _{DD} > 2.5 V)	- 0.3	_	0.8	V
V _{IH}	Input HIGH voltage		All inputs except as listed below	0.7 × V _{DD}	_	V _{DD} + 0.3	V
			CNT1, CNT2 battery-backed (V _{DD} < 2.5 V)	V _{BAK} – 0.5	_	V _{BAK} + 0.3	V
			CNT1, CNT2 (V _{DD} > 2.5 V)	0.7 × V _{DD}	_	V _{DD} + 0.3	V
			PFI (comparator input)	_	_	3.75	V
V _{OH}	Output HIGH voltage	I _{OH} = –2 mA	•	2.4	-	-	V
V _{OL}	Output LOW voltage	I _{OL} = 3 mA		_	_	0.4	V
R _{RST}	Pull-up resistance for RST inactive			50	_	400	kΩ
R _{in}	Input resistance (A1–A0)	For $V_{IN} = V_{IL}(Max)$		20	-	-	kΩ
		For V _{IN} = V _{IH} (Min)		1	_	-	МΩ
V_{PFI}	Power fail input reference voltage			1.140	1.20	1.225	V
V _{HYS}	Power fail input (PFI) hysteresis (rising)	_		_	_	100	mV

The minimum V_{DD} to guarantee the level of RST remains a valid V_{OL} level.
 Includes RST input detection of external reset condition to trigger driving of RST signal by FM31276/FM31278.



Data Retention and Endurance

Parameter	Description	Test condition	Min	Max	Unit
T _{DR}	Data retention	T _A = 85 °C	10	_	Years
		T _A = 75 °C	38	_	
		T _A = 65 °C	151	_	
NV _C	Endurance	Over operating temperature	10 ¹⁴	_	Cycles

Capacitance


Parameter [7]	Description	Test Conditions	Тур	Max	Unit
C _{IO}	Input/Output pin capacitance	$T_A = 25 ^{\circ}\text{C}, f = 1 \text{MHz}, V_{DD} = V_{DD}(\text{typ})$	_	8	pF
C _{XTL} ^[8]	X1, X2 crystal pin capacitance		12	_	pF

Thermal Resistance

Parameter [7]	Description	Test Conditions	14-pin SOIC	Unit
Θ_{JA}	Thermal resistance (junction to ambient)	Test conditions follow standard test methods and procedures for measuring thermal impedance, per EIA /		°C/W
$\Theta_{\sf JC}$	Thermal resistance (junction to case)	JESD51.	29	°C/W

AC Test Loads and Waveforms

Figure 23. AC Test Loads and Waveforms



AC Test Conditions

Input pulse levels	.10% and 90% of V _{DD}
Input rise and fall times	10 ns
Input and output timing reference level	s0.5 × V _{DD}
Output load capacitance	100 pF

Notes

- 7. This parameter is characterized and not 100% tested.
- $^{\circ}$ The crystal attached to the X1/X2 pins must be rated as 6 pF/12.5 pF.




Supervisor Timing

Over the Operating Range

Parameter	Description	Min	Max	Units
t _{RPU}	RST active (LOW) after V _{DD} > V _{TP}	100	200	ms
t _{RNR} ^[9]	RST response time to V _{DD} < V _{TP} (noise filter)	10	25	μS
t _{VR} ^[9, 10]	V _{DD} power-up ramp rate	50	-	μs/V
t _{VF} ^[9, 10]	V _{DD} power-down ramp rate	100	-	μs/V
t _{WDP} ^[11]	Pulse width of RST for watchdog reset	100	200	ms
t _{WDOG} ^[11]	Timeout of watchdog	t _{DOG}	2 × t _{DOG}	ms
f _{CNT}	Frequency of event counters	0	10	MHz
tosc	RTC Oscillator time to start	1	2	S

Figure 24. RST Timing

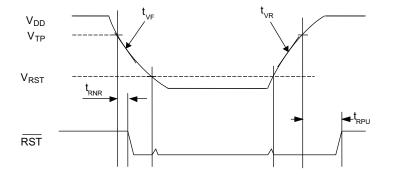

- 9. This parameter is characterized and not 100% tested.
- 10. Slope measured at any point on V_{DD} waveform.
 11. t_{DOG} is the programmed time in register in register 0Ah, V_{DD} > V_{TP}, and t_{RPU} satisfied.



AC Switching Characteristics

Over the Operating Range

Parameter [12]									
Cypress Parameter	Alt. Parameter	Description		Max	Min	Max	Min	Max	Unit
f _{SCL}		SCL clock frequency	0	100	0	400	0	1000	kHz
t _{SU; STA}		Start condition setup for repeated Start	4.7	-	0.6	ı	0.25	ı	μS
t _{HD;STA}		Start condition hold time	4.0	-	0.6	ı	0.25	ı	μS
t_{LOW}		Clock LOW period	4.7	_	1.3	_	0.6	_	μs
t _{HIGH}		Clock HIGH period	4.0	_	0.6	_	0.4	_	μs
t _{SU;DAT}	t _{SU;DATA}	Data in setup	250	_	100	-	100	-	ns
t _{HD;DAT}	t _{HD;DATA}	Data in hold	0	_	0	-	0	-	ns
t _{DH}		Data output hold (from SCL @ V _{IL})	0	_	0	_	0	_	ns
t _R ^[13]	t _r	Input rise time	_	1000	_	300	_	300	ns
t _F ^[13]	t _f	Input fall time	_	300	_	300	_	100	ns
t _{SU;STO}		STOP condition setup	4	_	0.6		0.25	_	μS
t _{AA}	t _{VD;DATA}	SCL LOW to SDA Data Out Valid	_	3		0.9	_	0.55	μS
t _{BUF}		Bus free before new transmission	4.7	_	1.3	_	0.5	_	μS
t _{SP}		Noise suppression time constant on SCL, SDA	_	50		50	_	50	ns

Figure 25. Read Bus Timing Diagram


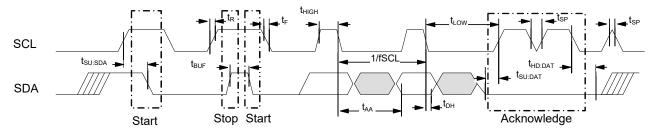


Figure 26. Write Bus Timing Diagram

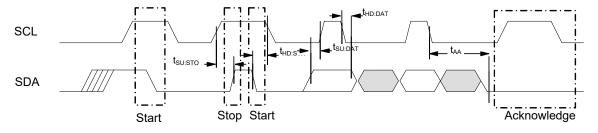

Notes

^{12.} Test conditions assume a signal transition time of 10 ns or less, timing reference levels of 0.5 × V_{DD}, input pulse levels of 10% to 90% of V_{DD}, and output loading of the specified I_{OL}/I_{OH} and 100 pF load capacitance shown in Figure 23 on page 28.

^{13.} This parameter is characterized and not 100% tested.




Ordering Information

Ordering Code	Package Diagram	Package Type	Operating Range
FM31276-G	51-85067	14-pin SOIC	Industrial
FM31276-GTR	51-85067	14-pin SOIC	
FM31278-G	51-85067	14-pin SOIC	
FM31278-GTR	51-85067	14-pin SOIC	

All these parts are Pb-free. Contact your local Cypress sales representative for availability of these parts.


Ordering Code Definitions

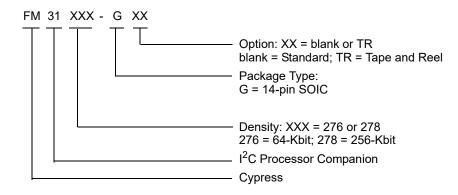




Package Diagram

Figure 27. 14-pin SOIC (150 Mils) Package Outline, 51-85067

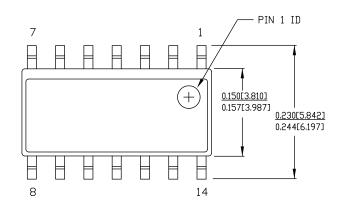

DIMENSIONS IN INCHESEMM) MIN. MAX.
REFERENCE JEDEC MS-012

PART #					
\$14,15	STANDARD PKG.				
SZ14.15	LEAD FREE PKG.				

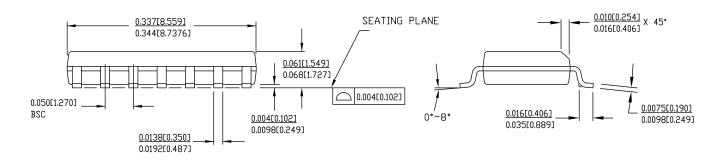

51-85067 *E



Acronyms

Acronym	Description		
EEPROM	Electrically Erasable Programmable Read-Only Memory		
EIA	Electronic Industries Alliance		
F-RAM	Ferroelectric Random Access Memory		
I ² C	Inter-Integrated Circuit		
I/O	Input/Output		
JEDEC	Joint Electron Devices Engineering Council		
JESD	JEDEC Standards		
LSB	Least Significant Bit		
MSB	Most Significant Bit		
NMI	Non Maskable interrupt		
RoHS	Restriction of Hazardous Substances		
SOIC	Small Outline Integrated Circuit		

Document Conventions

Units of Measure

Symbol	Unit of Measure
°C	degree Celsius
Hz	hertz
kHz	kilohertz
kΩ	kilohm
Mbit	megabit
MHz	megahertz
μΑ	microampere
μF	microfarad
μS	microsecond
mA	milliampere
ms	millisecond
ns	nanosecond
Ω	ohm
%	percent
pF	picofarad
V	volt
W	watt



Document History Page

ocument Title: FM31276/FM31278, 64-Kbit/256-Kbit Integrated Processor Companion with F-RAM ocument Number: 001-86393					
Rev.	ECN No.	Orig. of Change	Submission Date	Description of Change	
**	3916896	GVCH	02/28/2013	New data sheet.	
*A	3924836	GVCH	03/07/2013	Changed status to Production. Removed FM31274, FM31272 parts related information in all instances across the document. Removed 4Kb and 8Kb memory size related information in all instances across the document. Updated formatting.	
*B	3985209	GVCH	05/02/2013	Updated DC Electrical Characteristics: Changed minimum value of V_{TP1} parameter from 3.80 V to 3.75 V. Changed minimum value of V_{TP2} parameter from 4.25 V to 4.20 V. Changed minimum value of V_{PF1} parameter from 1.175 V to 1.140 V.	
*C	4333096	GVCH	05/05/2014	Updated Real-time Clock Operation: Updated Crystal Oscillator: Updated description (Added use of 6 pF crystal). Updated Maximum Ratings: Added "Maximum junction temperature" and its details. Added "DC voltage applied to outputs in High-Z state" and its details. Added "Transient voltage (< 20 ns) on any pin to ground potential" and details. Added "Package power dissipation capability (T _A = 25 °C)" and its details. Added "DC output current (1 output at a time, 1s duration)" and its details. Added "Latch-up current" and its details. Removed "Package Moisture Sensitivity Level" and its details. Updated Data Retention and Endurance: Updated details corresponding to T _{DR} parameter. Added NV _C parameter and its details. Updated Capacitance: Changed typical value of C _{XTL} parameter from 25 pF to 12 pF. Added Thermal Resistance. Updated Package Diagram: Removed SOIC Package Marking Scheme. Updated to Cypress template.	
*D	4562106	GVCH	11/05/2014	Updated Functional Description: Added "For a complete list of related documentation, click here." at the end	
*E	6072167	GVCH	02/16/2018	Updated Register Map: Updated Table 6: Removed "VTP1" bit from bit 1 corresponding to address "0Bh". Replaced "VTP0" with "VTP" in bit 0 corresponding to address "0Bh". Updated details in "Description" column corresponding to OSCEN (to add to time in the 01h register). Updated DC Electrical Characteristics: Changed typical value of V _{TP2} parameter from 4.00 V to 4.40 V. Updated Supervisor Timing: Added t _{OSC} parameter and its details. Updated Package Diagram: spec 51-85067 – Changed revision from *D to *E. Updated to new template.	



Sales, Solutions, and Legal Information

Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at Cypress Locations.

cypress.com/touch cypress.com/usb

cypress.com/wireless

Products

Touch Sensing

USB Controllers
Wireless Connectivity

Arm® Cortex® Microcontrollers cypress.com/arm Automotive cypress.com/automotive Clocks & Buffers cypress.com/clocks Interface cypress.com/interface Internet of Things cypress.com/iot Memory cypress.com/memory Microcontrollers cypress.com/mcu **PSoC** cypress.com/psoc Power Management ICs cypress.com/pmic

PSoC® Solutions

PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP | PSoC 6 MCU

Cypress Developer Community

Community | Projects | Video | Blogs | Training | Components

Technical Support

cypress.com/support

TO THE EXTENT PERMITTED BY APPLICABLE LAW, CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS DOCUMENT OR ANY SOFTWARE OR ACCOMPANYING HARDWARE, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. To the extent permitted by applicable law, Cypress reserves the right to make changes to this document without further notice. Cypress does not assume any liability arising out of the application or use of any product or circuit described in this document. Any information provided in this document, including any sample design information or programming code, is provided only for reference purposes. It is the responsibility of the user of this document to properly design, program, and test the functionality and safety of any application made of this information and any resulting product. Cypress products are not designed, intended, or authorized for use as critical components in systems designed or intended for the operation of weapons, weapons systems, nuclear installations, life-support devices or systems, other medical devices or systems (including resuscitation equipment and surgical implants), pollution control or hazardous substances management, or other teasilite to the device or system could cause personal injury, death, or property damage ("Unintended Uses"). A critical component is any component of a device or system whose failure to perform can be reasonably expected to cause the failure of the device or system, or to affect its safety or effectiveness. Cypress is not liable, in whole or in part, and you shall and hereby do release Cypress from any claim, damage, or other liability arising from or related to all Unintended Uses of Cypress products. You shall indemnify and hold Cypress harmless from and against all claims, costs, damages, and other liabilities, including claims for personal injury or death, arising from or related to any Unintended Uses of Cypress products.

Cypress, the Cypress logo, Spansion, the Spansion logo, and combinations thereof, WICED, PSoC, CapSense, EZ-USB, F-RAM, and Traveo are trademarks or registered trademarks of Cypress in the United States and other countries. For a more complete list of Cypress trademarks, visit cypress.com. Other names and brands may be claimed as property of their respective owners.

Document Number: 001-86393 Rev. *E Revised February 16, 2018 Page 35 of 35

[©] Cypress Semiconductor Corporation, 2013-2018. This document is the property of Cypress Semiconductor Corporation and its subsidiaries, including Spansion LLC ("Cypress"). This document, including any software or firmware included or referenced in this document ("Software"), is owned by Cypress under the intellectual property laws and treaties of the United States and other countries worldwide. Cypress reserves all rights under such laws and treaties and does not, except as specifically stated in this paragraph, grant any license under its patents, copyrights, trademarks, or other intellectual property rights. If the Software is not accompanied by a license agreement and you do not otherwise have a written agreement with Cypress governing the use of the Software, then Cypress hereby grants you a personal, non-exclusive, nontransferable license (without the right to sublicense) (1) under its copyright rights in the Software (a) for Software provided in source code form, to modify and reproduce the Software solely for use with Cypress hardware products, only internally within your organization, and (b) to distribute the Software in binary code form externally to end users (either directly or indirectly through resellers and distributors), solely for use on Cypress hardware product units, and (2) under those claims of Cypress's patents that are infringed by the Software (as provided by Cypress, unmodified) to make, use, distribute, and import the Software solely for use with Cypress hardware products. Any other use, reproduction, modification, translation, or compilation of the Software is prohibited.

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9