

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT

ALL RIGHTS RESERVED.

LOC

DIST


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A1	ECR-14-003320	11MAR2014	GK	HMR

REPLACED BY OCEAN STYLE APPLICATOR PART
NUMBER 2266150-1

FOR REPLACEMENT PARTS FOR APPLICATOR 1855145
REFER TO ADDITIONAL PAGE(S). SPARE PARTS KIT (IF LISTED)
WILL REMAIN AVAILABLE.


THE REPLACEMENT OCEAN STYLE APPLICATOR HAS THE
SAME TERMINATOR/PRESS INTERFACE AS APPLICATOR
1855145

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	GOPALAKRISHNA HV		 TE Connectivity					
DIMENSIONS:		CHK	RAGHAVENDRA							
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME						
		0 PLC ±		FINE ADJUST SIDE FEED HDM						
		1 PLC ±		APPLICATOR						
2 PLC ±		APVD		RAGHAVENDRA		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
3 PLC ±		PRODUCT SPEC								
4 PLC ±		APPLICATION SPEC		A 3						
MATERIAL		FINISH		WEIGHT		C- 1855145				
				CUSTOMER DRAWING		SCALE		SHEET 1 OF 2		REV A1

8				7			
THIS DRAWING IS UNPUBLISHED.				RELEASED FOR PUBLICATION			
20				20			
BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.							
COPYRIGHT 20							
PART NUMBER	REV	FIRST USED	POWER UNIT	FEED TYPE	DESCRIPTION		
1855145-1	A	122500-1	LEADMAKER	POST FEED	CUTS CARRIER		
1855145-2	A	565435-5	BENCH MODEL K	PRE FEED	CUTS CARRIER		
1855145-3	A	354500-1	BENCH MODEL G	PRE FEED	CUTS CARRIER		
1855145-6	A	122500-1	LEADMAKER	POST FEED	CONTINUOUS CARRIER		
7-1855145-7	A	-	-	-	SPARE PARTS		


- 1 RECOMMENDED SPARE PARTS
2 GREASE LIGHTLY
3 GUARD MUST BE IN PLACE WHEN OPERATING APPLICATOR IN A BENCH MACHINE
4 SEE TERMINAL CUSTOMER DRAWING FOR CUT-OFF REQUIREMENT.

* WARNING
ON INSTALLATION, SET WIRE DISC TO LARGEST WIRE SIZE SETTING. USE OF SETTINGS BELOW MIN. REQUIRED CRIMP HEIGHT SETTING WILL CAUSE DAMAGE TO CRIMP TOOLING.

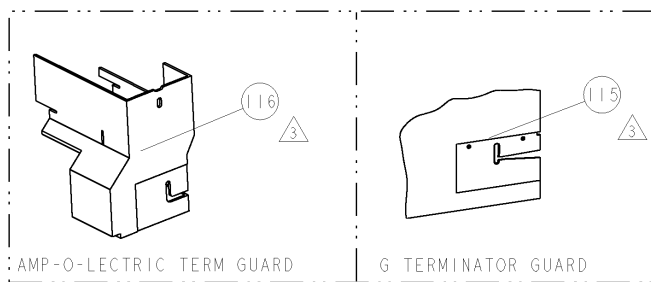


TERMINAL NAME: AMPMODU MOD.4 RECEPTACLE, S.C.P.					
SOCKET	PIN	AMP TERMINAL - AMP CRIMP SPECS		REF SETTING	
167418	-				
-	-	CRIMP HEIGHT		WIRE SIZE	
-	-	0.89±0.05mm[.035±.002]		20AWG	B2
-	-	0.79±0.05mm[.031±.002]		22AWG	C2
-	-	0.69±0.05mm[.027±.002]		24AWG	C9
-	-			-	-
-	-	CRIMP	SIZE	TYPE	RANGE
-	-	WIRE	1.40mm[.055]	F	24-20 AWG
-	-	INSUL	1.78mm[.070]	F	Ø1.60mm MAX
WIRE STRIP LENGTH 3.58 - 4.78mm		TERM APPL SPEC 114-3118	FEED 7.62mm	APPLICATOR INSTRUCTIONS 408-8040	
				SET UP GAGE 458637-1	

LOC		DIST		REVISIONS			
A		66		P	LTR	DATE	OWN
				A	RELEASED	17NOV2006	LG TE

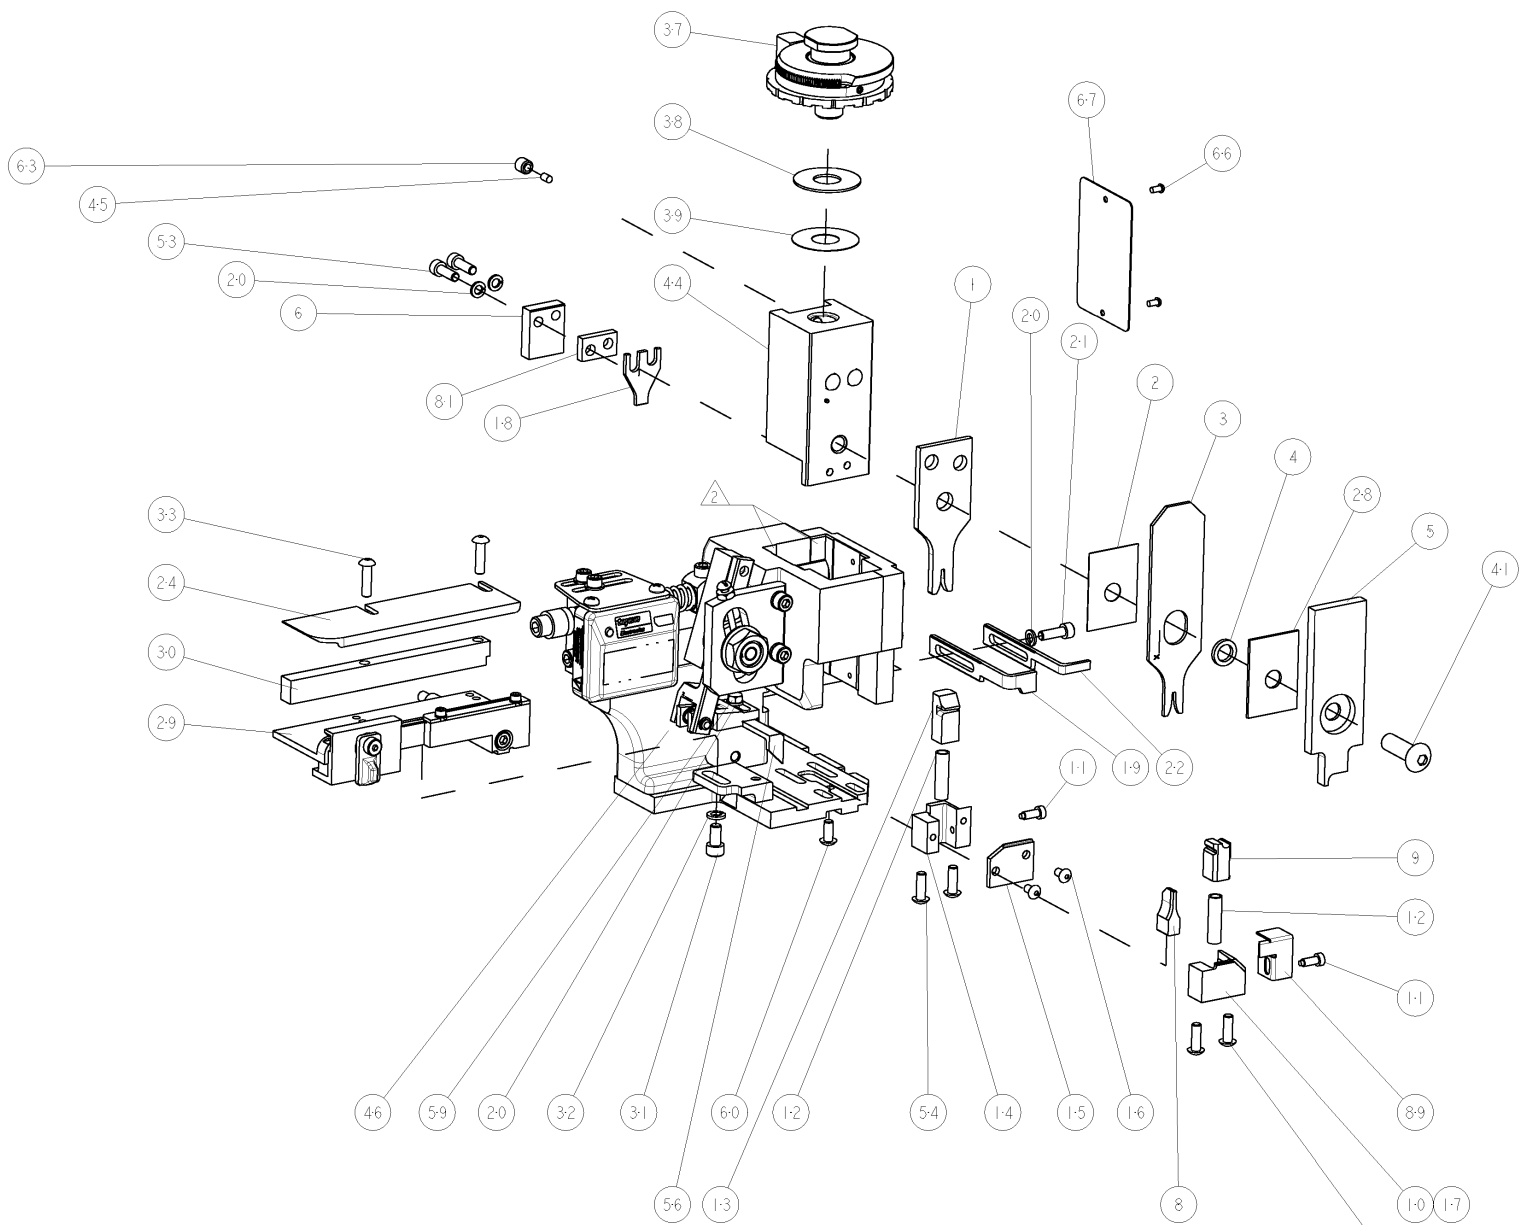

3	-	-	-	REF	-	..	455749-1	GUARD WINDOW	116
	-	-	REF	-	-	..	679532-1	INSERT, GUARD	115
3	-	1	1	1	1	-	1-21002-7	SCR, BTN SKT HD CAP 6-32 X .375	91
	-	1	1	1	1	-	318563-1	GUARD, FRONT CHIP	89
3	-	1	1	1	1	-	4-240641-1	SPACER	81
	-	1	1	1	1	-	4088040	SF APPL INST 408-8040	72
3	-	1	1	1	1	-	217238-1	GENERAL INSTRUCTION PKG	71
	-	1	1	1	1	-	461264-5	PLATE, IDENTIFICATION	67
3	-	2	2	2	2	-	21017-2	SCREW, DRIVE	66
	-	1	1	1	1	-	21009-2	SCR, SET, SELF LOCKING 1/4-20 X .250	63
3	-	1	1	1	1	-	22733-8	SCR, BHSC, SELF-LOCKING, 8-32 X .375	60
	-	1	1	1	1	-	2-22603-0	SCR, HEX HD CAP 8-32 X .312	59
3	-	1	1	1	1	-	458537-2	PAWL, FEED	56
	-	4	4	4	4	-	2-21002-2	SCR, BTN SKT HD CAP 8-32 X .500	54
3	-	2	2	2	2	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	53
	-	-	1	-	-	..	690602-6	CAM, PRE FEED, 1 5/8	49
3	-	-	-	1	-	..	690602-5	CAM, PRE FEED, 1 1/8	48
	-	1	-	-	1	-	690501-4	CAM, POST FEED, 1 5/8	47
3	-	1	1	1	1	-	459456-1	APPL. BASIC SUB ASSY (SIDE WISE MQCA)	46
	-	1	1	1	1	-	690191-1	PLUG,NYLON	45
3	-	1	1	1	1	-	455673-1	RAM, SIDE FEED	44
	-	1	1	1	1	-	7-21002-9	SCR, BTN SKT HD CAP 5/16-24 X 1.00	41
3	-	1	1	1	1	-	690125-1	SHIM SUB-ASSY	39
	-	1	1	1	1	-	469367-7	SHIM	38
3	-	1	1	1	1	-	879103-3	FINE ADJUST HEAD ASSEMBLY	37
	-	2	2	2	2	-	2-21002-3	SCR, BTN SKT HD CAP 8-32 X .625	33
3	-	1	1	1	1	-	21024-5	WASHER, SPRG LOCK, REG NO 10	32
	-	1	1	1	1	-	3-21000-4	SCR, SKT HD CAP 10-32 X .375	31
3	-	1	1	1	1	-	1320908-9	SPACER, STRIP GUIDE	30
	-	1	1	1	1	-	1633091-1	ASSEMBLY, STRIP GUIDE	29
3	-	1	1	1	1	-	1-455888-0	SPACER, CRIMPER	28
	-	1	1	1	1	-	1320928-1	PLATE, STRIP GUIDE	24
3	-	1	-	-	1	-	690472-2	STRIPPER	22
	-	1	1	1	1	-	2-21000-7	SCR, SKT HD CAP 8-32 X .500	21
3	-	4	4	4	4	-	21024-4	WASHER, SPRG LOCK, REG NO 8	20
	-	-	1	1	-	-	691353-1	STRIPPER	19
3	-	1	1	1	1	-	690518-1	HOLD DOWN, TERMINAL	18
	-	1	-	-	-	-	679625-1	SHEAR HOLDER, FRONT (NO CUT)	17
3	-	2	2	2	2	-	1-21002-6	SCR, BTN SKT HD CAP 6-32 X .250	16
	-	1	1	1	1	-	690691-4	PLATE,REAR SHEAR	15
3	-	1	1	1	1	-	690462-1	SHEAR HOLDER, REAR	14
	-	1	1	1	1	-	690463-1	FLOATING SHEAR, REAR	13
3	-	2	2	2	2	-	3-22280-3	SPRING, COMPRESSION	12
	-	2	2	2	2	-	690461-1	STOP, SHEAR	11
3	-	-	1	1	1	-	690459-1	SHEAR HOLDER, FRONT	10
	-	1	1	1	1	-	462006-1	FLOATING SHEAR, FRONT	9
3	1	1	1	1	1	-	805887-4	ANVIL, COMBINATION	8
	-	1	1	1	1	-	690468-1	DEPRESSOR SHEAR, REAR	6
3	-	1	1	1	1	-	3-455889-6	DEPRESSOR, SHEAR	5
	-	1	1	1	1	-	238011-6	BLOCK, CRIMPER SPACER	4
3	1	1	1	1	1	-	3-683453-3	CRIMPER, INSULATION PREMIUM	3
	-	1	1	1	1	-	455888-2	SPACER, CRIMPER	2
3	1	1	1	1	1	-	3-456402-3	CRIMPER, WIRE PREMIUM	1

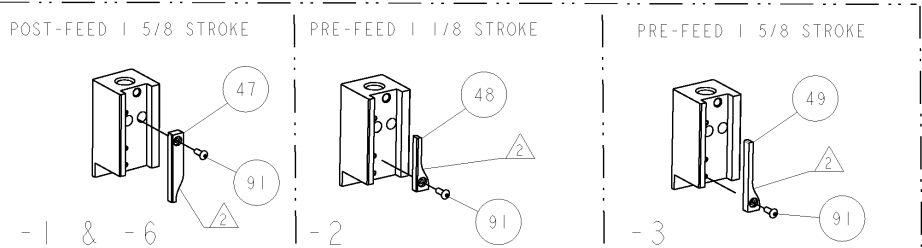

DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPROVALS	
1 PLC ±.01		2 PLC ±.01		3 PLC ±.001	
4 PLC ±.0001		5 ANGLE ±.0001		6 FINISH	
MATERIAL		FINISH		WEIGHT	
-		-		-	
CUSTOMER DRAWING		SCALE		SHEET 1 OF 1	
-		3:5		REV A	

CUSTOMER VIEWABLE ASSEMBLY

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9