

# Micropower Precision Low Dropout Series Voltage Reference Family

## FEATURES

- Trimmed to High Accuracy: 0.04% Max
- Low Drift: 3ppm/°C Max
- Low Supply Current: 50µA Max
- High Output Current: 50mA Min
- Low Dropout Voltage: 300mV Max
- Excellent Thermal Regulation
- Power Shutdown
- Thermal Limiting
- All Parts Guaranteed Functional from -40°C to 125°C
- Voltage Options: 2.5V, 3V, 3.3V, 4.096V and 5V

## APPLICATIONS

- A/D and D/A Converters
- Precision Regulators
- Handheld Instruments
- Power Supplies

## DESCRIPTION

The LT<sup>®</sup>1461 is a family of low dropout micropower band-gap references that combine very high accuracy and low drift with low supply current and high output drive. These series references use advanced curvature compensation techniques to obtain low temperature coefficient and trimmed precision thin-film resistors to achieve high output accuracy. The LT1461 family draws only 35µA of supply current, making them ideal for low power and portable applications, however their high 50mA output drive makes them suitable for higher power requirements, such as precision regulators.

In low power applications, a dropout voltage of less than 300mV ensures maximum battery life while maintaining full reference performance. Line regulation is nearly immeasurable, while the exceedingly good load and thermal regulation will not add significantly to system error budgets. The shutdown feature can be used to switch full load currents and can be used for system power down. Thermal shutdown protects the part from overload conditions. The LT1461 is available in 2.5V, 3V, 3.3V 4.096V and 5V options.

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

## TYPICAL APPLICATION



**LT1461-2.5 Load Regulation,  $P_{DISS} = 200mW$**



# LT1461

## ABSOLUTE MAXIMUM RATINGS

(Note 1)

|   |                |
|---|----------------|
| Input Voltage .....                       | 20V            |
| Output Short-Circuit Duration .....       | Indefinite     |
| Operating Temperature Range               |                |
| (Note 2) .....                            | -40°C to 125°C |
| Storage Temperature Range (Note 3).....   | -65°C to 150°C |
| Specified Temperature Range               |                |
| Commercial .....                          | 0°C to 70°C    |
| Industrial .....                          | -40°C to 85°C  |
| High .....                                | -40°C to 125°C |
| Lead Temperature (Soldering, 10 sec)..... | 300°C          |

## PIN CONFIGURATION



## ORDER INFORMATION

| LEAD FREE FINISH   | TAPE AND REEL        | PART MARKING | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE |
|--------------------|----------------------|--------------|---------------------|-----------------------------|
| LT1461ACS8-2.5#PBF | LT1461ACS8-2.5#TRPBF | 461A25       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461ACS8-3#PBF   | LT1461ACS8-3#TRPBF   | 1461A3       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461ACS8-3.3#PBF | LT1461ACS8-3.3#TRPBF | 461A33       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461ACS8-4#PBF   | LT1461ACS8-4#TRPBF   | 1461A4       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461ACS8-5#PBF   | LT1461ACS8-5#TRPBF   | 1461A5       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461BCS8-2.5#PBF | LT1461BCS8-2.5#TRPBF | 461B25       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461BCS8-3#PBF   | LT1461BCS8-3#TRPBF   | 1461B3       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461BCS8-3.3#PBF | LT1461BCS8-3.3#TRPBF | 461B33       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461BCS8-4#PBF   | LT1461BCS8-4#TRPBF   | 1461B4       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461BCS8-5#PBF   | LT1461BCS8-5#TRPBF   | 1461B5       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461CCS8-2.5#PBF | LT1461CCS8-2.5#TRPBF | 461C25       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461CCS8-3#PBF   | LT1461CCS8-3#TRPBF   | 1461C3       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461CCS8-3.3#PBF | LT1461CCS8-3.3#TRPBF | 461C33       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461CCS8-4#PBF   | LT1461CCS8-4#TRPBF   | 1461C4       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461CCS8-5#PBF   | LT1461CCS8-5#TRPBF   | 1461C5       | 8-LEAD PLASTIC SO   | 0°C to 70°C                 |
| LT1461AIS8-2.5#PBF | LT1461AIS8-2.5#TRPBF | 61AI25       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461AIS8-3#PBF   | LT1461AIS8-3#TRPBF   | 461AI3       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461AIS8-3.3#PBF | LT1461AIS8-3.3#TRPBF | 61AI33       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461AIS8-4#PBF   | LT1461AIS8-4#TRPBF   | 461AI4       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461AIS8-5#PBF   | LT1461AIS8-5#TRPBF   | 461AI5       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461BIS8-2.5#PBF | LT1461BIS8-2.5#TRPBF | 61BI25       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461BIS8-3#PBF   | LT1461BIS8-3#TRPBF   | 461BI3       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461BIS8-3.3#PBF | LT1461BIS8-3.3#TRPBF | 61BI33       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461BIS8-4#PBF   | LT1461BIS8-4#TRPBF   | 461BI4       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461BIS8-5#PBF   | LT1461BIS8-5#TRPBF   | 461BI5       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461CIS8-2.5#PBF | LT1461CIS8-2.5#TRPBF | 61CI25       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461CIS8-3#PBF   | LT1461CIS8-3#TRPBF   | 461CI3       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461CIS8-3.3#PBF | LT1461CIS8-3.3#TRPBF | 61CI33       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |

1461fb

## ORDER INFORMATION

| LEAD FREE FINISH   | TAPE AND REEL        | PART MARKING | PACKAGE DESCRIPTION | SPECIFIED TEMPERATURE RANGE |
|--------------------|----------------------|--------------|---------------------|-----------------------------|
| LT1461CIS8-4#PBF   | LT1461CIS8-4#TRPBF   | 461CI4       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461CIS8-5#PBF   | LT1461CIS8-5#TRPBF   | 461CI5       | 8-LEAD PLASTIC SO   | -40°C to 85°C               |
| LT1461DHS8-2.5#PBF | LT1461DHS8-2.5#TRPBF | 61DH25       | 8-LEAD PLASTIC SO   | -40°C to 125°C              |
| LT1461DHS8-3#PBF   | LT1461DHS8-3#TRPBF   | 461DH3       | 8-LEAD PLASTIC SO   | -40°C to 125°C              |
| LT1461DHS8-3.3#PBF | LT1461DHS8-3.3#TRPBF | 61DH33       | 8-LEAD PLASTIC SO   | -40°C to 125°C              |
| LT1461DHS8-4#PBF   | LT1461DHS8-4#TRPBF   | 461DH4       | 8-LEAD PLASTIC SO   | -40°C to 125°C              |
| LT1461DHS8-5#PBF   | LT1461DHS8-5#TRPBF   | 461DH5       | 8-LEAD PLASTIC SO   | -40°C to 125°C              |

Consult LTC Marketing for parts specified with wider operating temperature ranges.

Consult LTC Marketing for information on nonstandard lead based finish parts.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>

## AVAILABLE OPTIONS

| INITIAL ACCURACY | TEMPERATURE COEFFICIENT | TEMPERATURE RANGE | OUTPUT VOLTAGE |              |                |              |              |
|------------------|-------------------------|-------------------|----------------|--------------|----------------|--------------|--------------|
|                  |                         |                   | 2.5V           | 3.0V         | 3.3V           | 4.096V       | 5.0V         |
| 0.04% Max        | 3ppm/°C Max             | 0°C to 70°C       | LT1461ACS8-2.5 | LT1461ACS8-3 | LT1461ACS8-3.3 | LT1461ACS8-4 | LT1461ACS8-5 |
| 0.04% Max        | 3ppm/°C Max             | -40°C to 85°C     | LT1461AIS8-2.5 | LT1461AIS8-3 | LT1461AIS8-3.3 | LT1461AIS8-4 | LT1461AIS8-5 |
| 0.06% Max        | 7ppm/°C Max             | 0°C to 70°C       | LT1461BCS8-2.5 | LT1461BCS8-3 | LT1461BCS8-3.3 | LT1461BCS8-4 | LT1461BCS8-5 |
| 0.06% Max        | 7ppm/°C Max             | -40°C to 85°C     | LT1461BIS8-2.5 | LT1461BIS8-3 | LT1461BIS8-3.3 | LT1461BIS8-4 | LT1461BIS8-5 |
| 0.08% Max        | 12ppm/°C Max            | 0°C to 70°C       | LT1461CCS8-2.5 | LT1461CCS8-3 | LT1461CCS8-3.3 | LT1461CCS8-4 | LT1461CCS8-5 |
| 0.08% Max        | 12ppm/°C Max            | -40°C to 85°C     | LT1461CIS8-2.5 | LT1461CIS8-3 | LT1461CIS8-3.3 | LT1461CIS8-4 | LT1461CIS8-5 |
| 0.15% Max        | 20ppm/°C Max            | -40°C to 125°C    | LT1461DHS8-2.5 | LT1461DHS8-3 | LT1461DHS8-3.3 | LT1461DHS8-4 | LT1461DHS8-5 |

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the specified temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{IN} - V_{OUT} = 0.5\text{V}$ , Pin 3 = 2.4V,  $C_L = 2\mu\text{F}$ , unless otherwise specified.

| PARAMETER                                       | CONDITIONS   | MIN                              | TYP              | MAX                          | UNITS                                |
|---|--|----------------------------------|------------------|------------------------------|--------------------------------------|
| Output Voltage (Note 4)                         | LT1461ACS8/LT1461AIS8<br>LT1461BCS8/LT1461BIS8<br>LT1461CCS8/LT1461CIS8<br>LT1461DHS8                                  | -0.04<br>-0.06<br>-0.08<br>-0.15 |                  | 0.04<br>0.06<br>0.08<br>0.15 | %<br>%<br>%<br>%                     |
| Output Voltage Temperature Coefficient (Note 5) | LT1461ACS8/LT1461AIS8<br>LT1461BCS8/LT1461BIS8<br>LT1461CCS8/LT1461CIS8<br>LT1461DHS8                                  | ●<br>●<br>●<br>●                 | 1<br>3<br>5<br>7 | 3<br>7<br>12<br>20           | ppm/°C<br>ppm/°C<br>ppm/°C<br>ppm/°C |
| Line Regulation                                 | $(V_{OUT} + 0.5\text{V}) \leq V_{IN} \leq 20\text{V}$<br>LT1461DHS8  | ●<br>●                           | 2<br>15          | 8<br>50                      | ppm/V<br>ppm/V<br>ppm/V              |
| Load Regulation Sourcing (Note 6)               | $V_{IN} = V_{OUT} + 2.5\text{V}$<br>$0 \leq I_{OUT} \leq 50\text{mA}$<br>LT1461DHS8, $0 \leq I_{OUT} \leq 10\text{mA}$ | ●<br>●                           | 12               | 30<br>40<br>50               | ppm/mA<br>ppm/mA<br>ppm/mA           |

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the specified temperature range, otherwise specifications are at  $T_A = 25^\circ\text{C}$ .  $V_{IN} - V_{OUT} = 0.5\text{V}$ , Pin 3 = 2.4V,  $C_L = 2\mu\text{F}$ , unless otherwise specified.

| PARAMETER  | CONDITIONS  | MIN | TYP      | MAX | UNITS                                    |
|--|---|-----|----------|-----|--|
| Dropout Voltage  | $V_{IN} - V_{OUT}$ , $V_{OUT}$ Error = 0.1%                                     |     |          |     |  |
|  | $I_{OUT} = 0\text{mA}$  |     | 0.06     |     | V  |
|  | $I_{OUT} = 1\text{mA}$  | ●   | 0.13     | 0.3 | V  |
|  | $I_{OUT} = 10\text{mA}$   | ●   | 0.20     | 0.4 | V  |
|  | $I_{OUT} = 50\text{mA}$ , I and C Grades Only                                   | ●   | 1.50     | 2.0 | V  |
| Output Current   | Short $V_{OUT}$ to GND  |     | 100      |     | mA                                       |
| Shutdown Pin   | Logic High Input Voltage  | ●   | 2.4      |     | V  |
|  | Logic High Input Current, Pin 3 = 2.4V  | ●   | 2        | 15  | $\mu\text{A}$                            |
|  | Logic Low Input Voltage   | ●   | 0.5      | 0.8 | V  |
|  | Logic Low Input Current, Pin 3 = 0.8V   | ●   |          | 4   | $\mu\text{A}$                            |
| Supply Current   | No Load   |     | 35       | 50  | $\mu\text{A}$                            |
|  |   | ●   |          | 70  | $\mu\text{A}$                            |
| Shutdown Current   | $R_L = 1\text{k}$   |     | 25       | 35  | $\mu\text{A}$                            |
|  |   | ●   |          | 55  | $\mu\text{A}$                            |
| Output Voltage Noise (Note 7)                            | $0.1\text{Hz} \leq f \leq 10\text{Hz}$<br>$10\text{Hz} \leq f \leq 1\text{kHz}$ |     | 8<br>9.6 |     | ppm <sub>P-P</sub><br>ppm <sub>RMS</sub> |
| Long-Term Drift of Output Voltage, SO-8 Package (Note 8) | See Applications Information  |     | 60       |     | ppm/ $\sqrt{\text{kHr}}$                 |
| Thermal Hysteresis (Note 9)                              | $\Delta T = 0^\circ\text{C}$ to $70^\circ\text{C}$                              |     | 40       |     | ppm                                      |
|  | $\Delta T = -40^\circ\text{C}$ to $85^\circ\text{C}$                            |     | 75       |     | ppm                                      |
|  | $\Delta T = -40^\circ\text{C}$ to $125^\circ\text{C}$                           |     | 120      |     | ppm                                      |

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime.

**Note 2:** The LT1461 is guaranteed functional over the operating temperature range of  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

**Note 3:** Output may shift due to thermal hysteresis. Thermal hysteresis affects parts during storage as well as operation.

**Note 4:** ESD (Electrostatic Discharge) sensitive device. Extensive use of ESD protection devices are used internal to the LT1461, however, high electrostatic discharge can damage or degrade the device. Use proper ESD handling precautions.

**Note 5:** Temperature coefficient is calculated from the minimum and maximum output voltage measured at  $T_{MIN}$ , Room and  $T_{MAX}$  as follows:

$$TC = (V_{OMAX} - V_{OMIN}) / (T_{MAX} - T_{MIN})$$

Incremental slope is also measured at  $25^\circ\text{C}$ .

**Note 6:** Load regulation is measured on a pulse basis from no load to the specified load current. Output changes due to die temperature change must be taken into account separately.

**Note 7:** Peak-to-peak noise is measured with a single pole highpass filter at 0.1Hz and a 2-pole lowpass filter at 10Hz. The unit is enclosed in a still-

air environment to eliminate thermocouple effects on the leads. The test time is 10 seconds. RMS noise is measured with a single pole highpass filter at 10Hz and a 2-pole lowpass filter at 1kHz. The resulting output is full-wave rectified and then integrated for a fixed period, making the final reading an average as opposed to RMS. A correction factor of 1.1 is used to convert from average to RMS and a second correction of 0.88 is used to correct for the nonideal bandpass of the filters.

**Note 8:** Long-term drift typically has a logarithmic characteristic and therefore, changes after 1000 hours tend to be much smaller than before that time. Total drift in the second thousand hours is normally less than one third that of the first thousand hours with a continuing trend toward reduced drift with time. Long-term drift will also be affected by differential stresses between the IC and the board material created during board assembly. See the Applications Information section.

**Note 9:** Hysteresis in output voltage is created by package stress that depends on whether the IC was previously at a higher or lower temperature. Output voltage is always measured at  $25^\circ\text{C}$ , but the IC is cycled hot or cold before successive measurements. Hysteresis is roughly proportional to the square of the temperature change. Hysteresis is not normally a problem for operational temperature excursions where the instrument might be stored at high or low temperature. See Applications Information section.


**TYPICAL PERFORMANCE CHARACTERISTICS** Characteristic curves are similar for most LT1461s. Curves from the LT1461-2.5 and the LT1461-5 represent the extremes of the voltage options. Characteristic curves for other output voltages fall between these curves and can be estimated based on their output.

**2.5V Reference Voltage vs Temperature**




1461 G01

**2.5V Load Regulation**

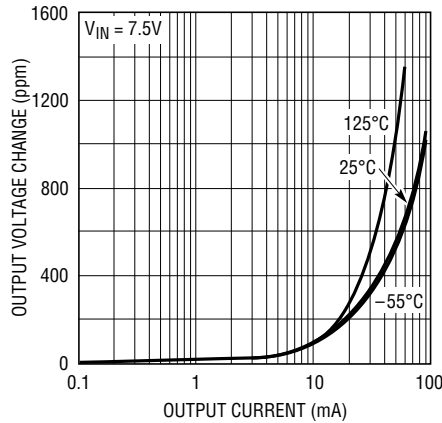


1461 G02

**2.5V Line Regulation vs Temperature**

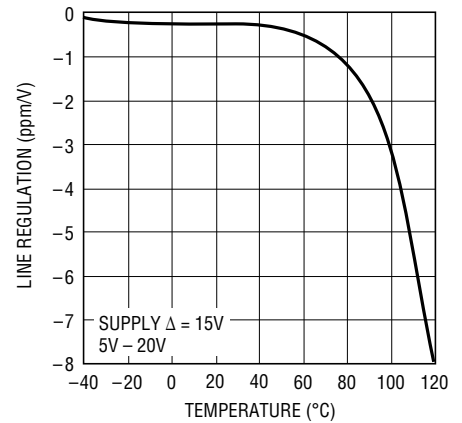


1461 G03

**2.5V Minimum Input/Output Voltage Differential vs Load Current**

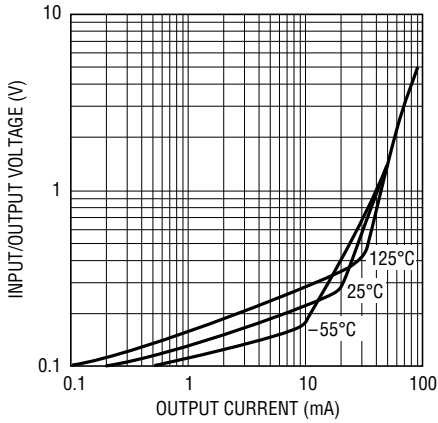


1461 G04

**2.5V Supply Current vs Input Voltage**

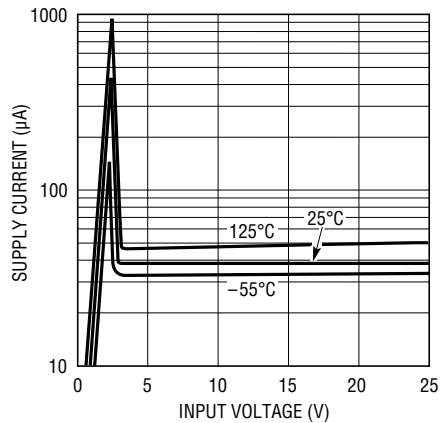

1461 G05

**2.5V Ripple Rejection Ratio vs Frequency**

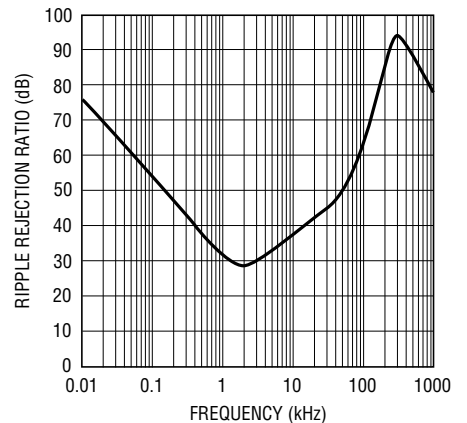


1461 G06

**2.5V Output Impedance vs Frequency**




1461 G07

**2.5V Turn-On Time**

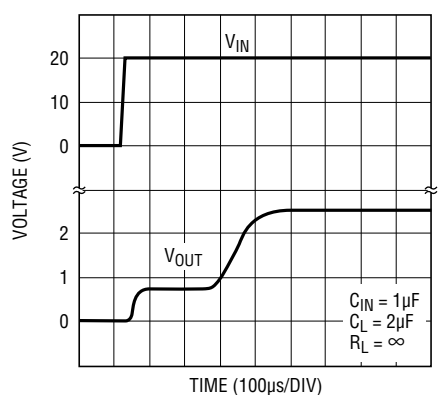

1461 G08

**2.5V Turn-On Time**

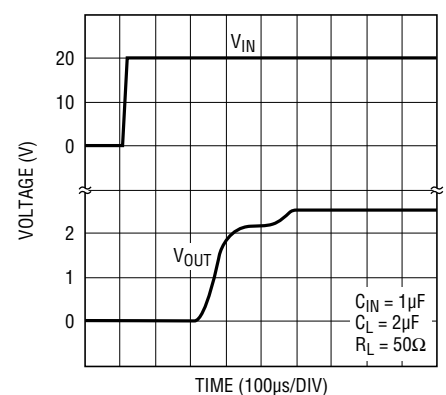

1461 G09

1461fb


## TYPICAL PERFORMANCE CHARACTERISTICS

Characteristic curves are similar for most LT1461s. Curves from the LT1461-2.5 and the LT1461-5 represent the extremes of the voltage options. Characteristic curves for other output voltages fall between these curves and can be estimated based on their output.


**2.5V Transient Response to 10mA Load Step**



**2.5V Line Transient Response**

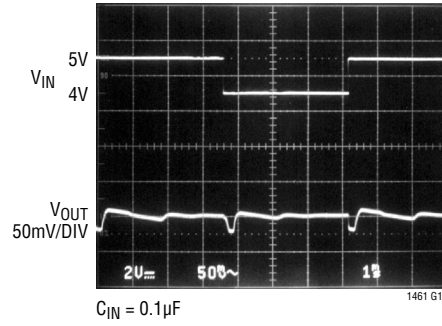


**2.5V Output Noise**  
0.1Hz ≤ f ≤ 10Hz

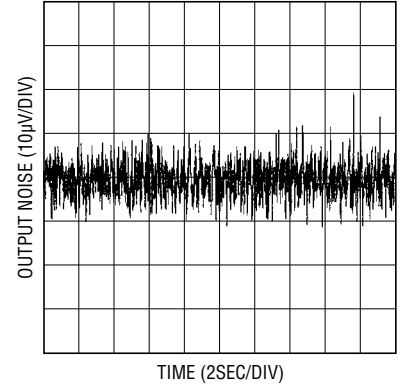

**5V Reference Voltage vs Temperature**



**5V Load Regulation**

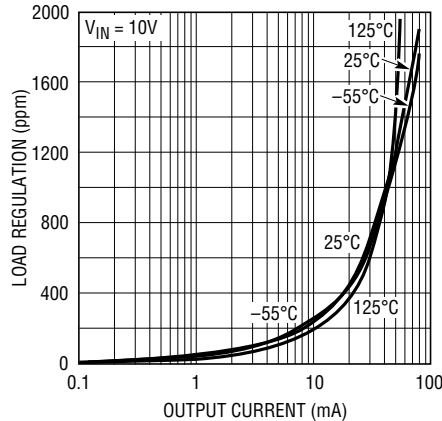


**5V Line Regulation vs Temperature**



**5V Minimum Input/Output Voltage Differential vs Load Current**



**5V Supply Current vs Input Voltage**

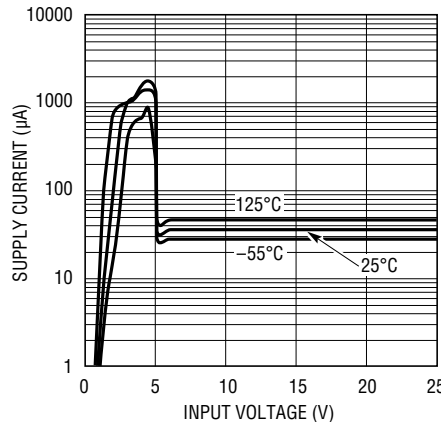

**5V Ripple Rejection Ratio vs Frequency**



**TYPICAL PERFORMANCE CHARACTERISTICS** Characteristic curves are similar for most LT1461s. Curves from the LT1461-2.5 and the LT1461-5 represent the extremes of the voltage options. Characteristic curves for other output voltages fall between these curves and can be estimated based on their output.

**5V Output Impedance vs Frequency**




1461 G19

**5V Turn-On Time**



1461 G20

**5V Turn-On Time**

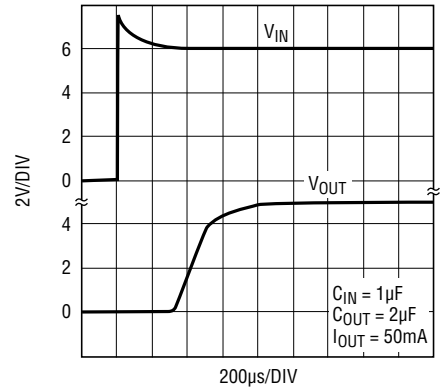

1461 G21

**5V Transient Response to 10mA Load Step**




1461 G22

**5V Line Transient Response**




1461 G23

**5V Output Noise 0.1Hz ≤ f ≤ 10Hz**

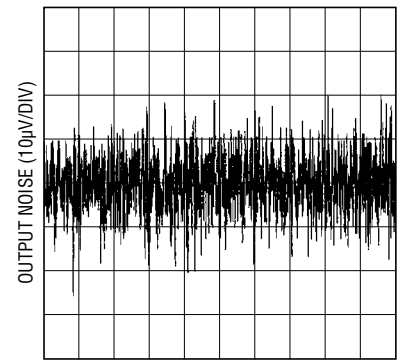


1461 G24

**Supply Current vs Temperature**

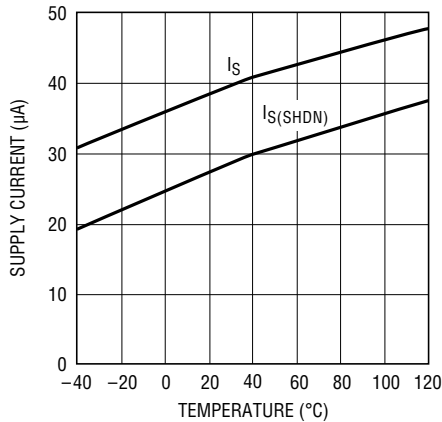


1461 G25

**Current Limit vs Temperature**

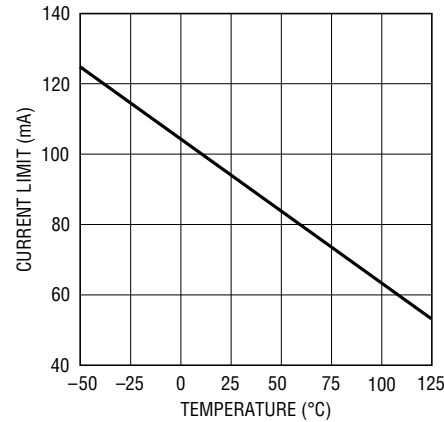

1461 G26


**SHDN Pin Current vs SHDN Input Voltage**

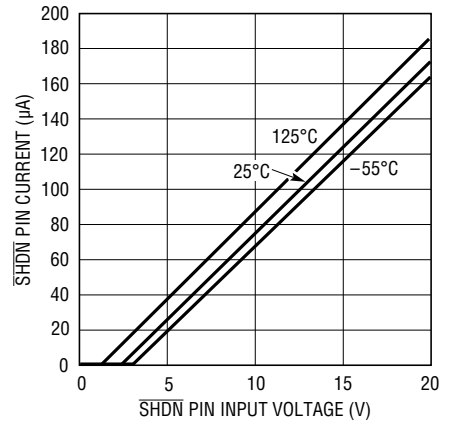

1461fb

## TYPICAL PERFORMANCE CHARACTERISTICS

Characteristic curves are similar for most LT1461s. Curves from the LT1461-2.5 and the LT1461-5 represent the extremes of the voltage options. Characteristic curves for other output voltages fall between these curves and can be estimated based on their output.

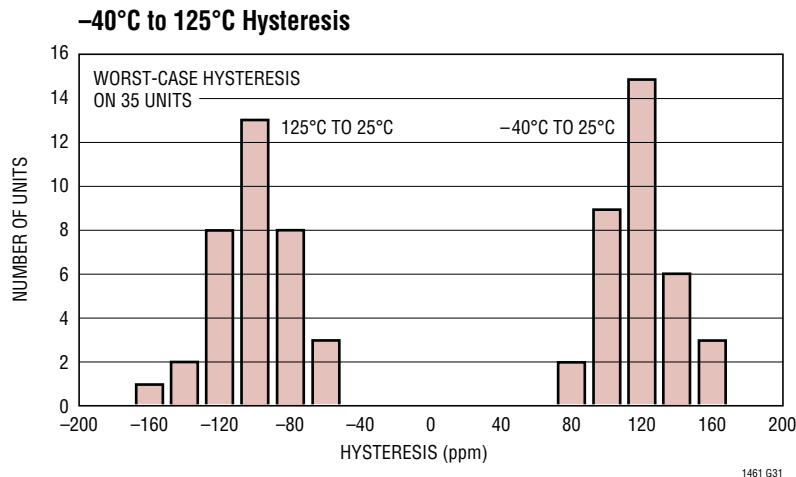



**TYPICAL PERFORMANCE CHARACTERISTICS** Characteristic curves are similar for most LT1461s. Curves from the LT1461-2.5 and the LT1461-5 represent the extremes of the voltage options. Characteristic curves for other output voltages fall between these curves and can be estimated based on their output.

**Long-Term Drift (Number of Data Points Reduced at 650 Hours)\***



1461 G28

\*SEE APPLICATIONS INFORMATION FOR DETAILED EXPLANATION OF LONG-TERM DRIFT

## APPLICATIONS INFORMATION

Examples shown in this Applications section use the LT1461-2.5. The response of other voltage options can be estimated by proper scaling.

### Bypass and Load Capacitors

The LT1461 family requires a capacitor on the input and on the output for stability. The capacitor on the input is a supply bypass capacitor and if the bypass capacitors from other components are close (within 2 inches) they

should be sufficient. The output capacitor acts as frequency compensation for the reference and cannot be omitted. For light loads  $\leq 1\text{mA}$ , a  $1\mu\text{F}$  nonpolar output capacitor is usually adequate, but for higher loads (up to  $75\text{mA}$ ), the output capacitor should be  $2\mu\text{F}$  or greater. Figures 1 and 2 show the transient response to a  $1\text{mA}$  load step with a  $1\mu\text{F}$  output capacitor and a  $50\text{mA}$  load step with a  $2\mu\text{F}$  output capacitor.



Figure 1. 1mA Load Step with  $C_L = 1\mu\text{F}$



Figure 2. 50mA Load Step with  $C_L = 2\mu\text{F}$

## APPLICATIONS INFORMATION

### Precision Regulator

The LT1461 will deliver 50mA with  $V_{IN} = V_{OUT} + 2.5V$  and higher load current with higher  $V_{IN}$ . Load regulation is typically 12ppm/mA, which means for a 50mA load step, the output will change by only 1.5mV. Thermal regulation, caused by die temperature gradients and created from load current or input voltage changes, is not measurable. This often overlooked parameter must be added to normal line and load regulation errors. The load regulation photo, on the first page of this data sheet, shows the output response to 200mW of instantaneous power dissipation and the reference shows no sign of thermal errors. The reference has thermal shutdown and will turn off if the junction temperature exceeds 150°C.

### Shutdown

The shutdown (Pin 3 low) serves to shut off load current when the LT1461 is used as a regulator. The LT1461 operates normally with Pin 3 open or greater than or equal to 2.4V. In shutdown, the reference draws a maximum supply current of 35µA. Figure 3 shows the transient response of shutdown while the part is delivering 25mA. After shutdown, the reference powers up in about 200µs.



Figure 3. Shutdown While Delivering 25mA,  $R_L = 100\Omega$

### PC Board Layout

In 13- to 16-bit systems where initial accuracy and temperature coefficient calibrations have been done, the mechanical and thermal stress on a PC board (in a card cage for instance) can shift the output voltage and mask the true temperature coefficient of a reference. In addition, the mechanical stress of being soldered into a PC board can cause the output voltage to shift from its ideal value. Surface mount voltage references are the most susceptible to PC board stress because of the small amount of plastic used to hold the lead frame.

A simple way to improve the stress-related shifts is to mount the reference near the short edge of the PC board, or in a corner. The board edge acts as a stress boundary, or a region where the flexure of the board is minimum. The package should always be mounted so that the leads absorb the stress and not the package. The package is generally aligned with the leads parallel to the long side of the PC board as shown in Figure 5a.

A qualitative technique to evaluate the effect of stress on voltage references is to solder the part into a PC board and deform the board a fixed amount as shown in Figure 4. The flexure #1 represents no displacement, flexure #2 is concave movement, flexure #3 is relaxation to no displacement and finally, flexure #4 is a convex movement. This motion is repeated for a number of cycles and the relative




Figure 4. Flexure Numbers

## APPLICATIONS INFORMATION


output deviation is noted. The result shown in Figure 5a is for two LT1461S8-2.5s mounted vertically and Figure 5b is for two LT1461S8-2.5s mounted horizontally. The parts oriented in Figure 5a impart less stress into the package because stress is absorbed in the leads. Figures 5a and 5b show the deviation to be between  $125\mu\text{V}$  and  $250\mu\text{V}$  and implies a 50ppm and 100ppm change respectively. This corresponds to a 13- to 14-bit system and is not a problem for most 10- to 12-bit systems unless the system has a calibration. In this case, as with temperature hysteresis, this low level can be important and even more careful techniques are required.

The most effective technique to improve PC board stress is to cut slots in the board around the reference to serve as a strain relief. These slots can be cut on three sides of the reference and the leads can exit on the fourth side. This “tongue” of PC board material can be oriented in the long direction of the board to further reduce stress transferred to the reference.

The results of slotting the PC boards of Figures 5a and 5b are shown in Figures 6a and 6b. In this example the slots can improve the output shift from about 100ppm to nearly zero.




**Figure 5a. Two Typical LT1461S8-2.5s, Vertical Orientation without Slots**

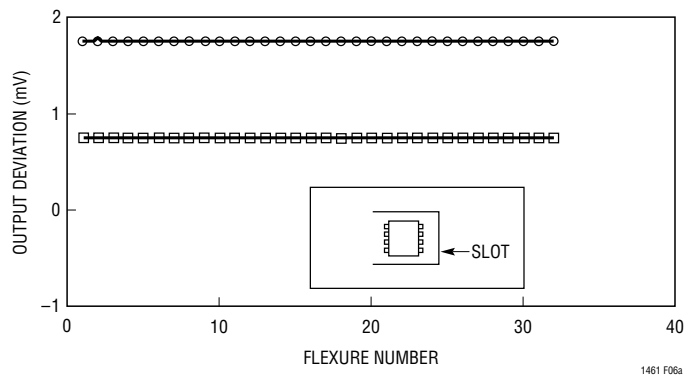

**Figure 6a. Same Two LT1461S8-2.5s in Figure 5a, but with Slots**



**Figure 5b. Two Typical LT1461S8-2.5s, Horizontal Orientation without Slots**

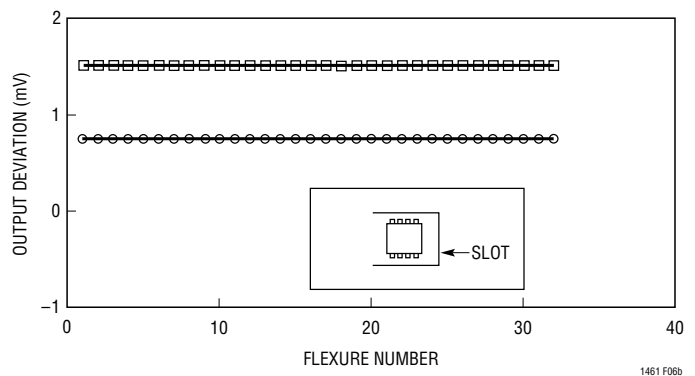

**Figure 6b. Same Two LT1461S8-2.5s in Figure 5b, but with Slots**

## APPLICATIONS INFORMATION

### Long-Term Drift

**Long-term drift cannot be extrapolated from accelerated high temperature testing. This erroneous technique gives drift numbers that are wildly optimistic. The only way long-term drift can be determined is to measure it over the time interval of interest.** The erroneous technique uses the Arrhenius Equation to derive an acceleration factor from elevated temperature readings. The equation is:

$$A_F = e^{\frac{E_A}{K} \left( \frac{1}{T_1} - \frac{1}{T_2} \right)}$$

where:  $E_A$  = Activation Energy (Assume 0.7)  
 $K$  = Boltzmann's Constant  
 $T_2$  = Test Condition in °Kelvin  
 $T_1$  = Use Condition Temperature in °Kelvin

To show how absurd this technique is, compare the LT1461 data. Typical 1000 hour long-term drift at 30°C = 60ppm. The typical 1000 hour long-term drift at 130°C = 120ppm. From the Arrhenius Equation the acceleration factor is:

$$A_F = e^{\frac{0.7}{0.0000863} \left( \frac{1}{303} - \frac{1}{403} \right)} = 767$$

The erroneous projected long-term drift is:

$$120\text{ppm}/767 = 0.156\text{ppm}/1000 \text{ hr}$$

For a 2.5V reference, this corresponds to a 0.39µV shift after 1000 hours. This is pretty hard to determine (read impossible) if the peak-to-peak output noise is larger than this number. As a practical matter, one of the best laboratory references available is the Fluke 732A and its long-term drift is 1.5µV/mo. This performance is only available from the best subsurface zener references utilizing specialized heater techniques.

The LT1461 long-term drift data was taken with parts that were soldered onto PC boards similar to a “real world” application. The boards were then placed into a constant temperature oven with  $T_A = 30^\circ\text{C}$ , their outputs were scanned regularly and measured with an 8.5 digit DVM.

As an additional accuracy check on the DVM, a Fluke 732A laboratory reference was also scanned. Figure 7 shows the long-term drift measurement system. The data taken is shown at the end of the Typical Performance Characteristics section of this data sheet. The long-term drift is the trend line that asymptotes to a value at 2000 hours. Note the slope in output shift between 0 hours and 1000 hours compared to the slope between 1000 hours and 2000 hours. Long-term drift is affected by differential stresses between the IC and the board material created during board assembly.



Figure 7. Long-Term Drift Measurement Setup

### Hysteresis

The hysteresis curves found in the Typical Performance Characteristics represent the worst-case data taken on 35 typical parts after multiple temperature cycles. As expected, the parts that are cycled over the wider -40°C to 125°C temperature range have more hysteresis than those cycled over lower ranges. Note that the hysteresis coming from 125°C to 25°C has an influence on the -40°C to 25°C hysteresis. The -40°C to 25°C hysteresis is different depending on the part's previous temperature. This is because not all of the high temperature stress is relieved during the 25°C measurement.

The typical performance hysteresis curves are for parts mounted in a socket and represent the performance of the

## APPLICATIONS INFORMATION

parts alone. What is more interesting are parts IR soldered onto a PC board. If the PC board is then temperature cycled several times from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$ , the resulting hysteresis curve is shown in Figure 8. This graph shows the influence of the PC board stress on the reference.

When the LT1461 is soldered onto a PC board, the output shifts due to thermal hysteresis. Figure 9 shows the effect of soldering 40 pieces onto a PC board using standard IR reflow techniques. The average output voltage shift is  $-110\text{ppm}$ . Remeasurement of these parts after 12 days shows the outputs typically shift back  $45\text{ppm}$  toward their initial value. This second shift is due to the relaxation of stress incurred during soldering.

The LT1461 is capable of dissipating high power, i.e., for the LT1461-2.5,  $17.5\text{V} \cdot 50\text{mA} = 875\text{mW}$ . The SO-8 package has a thermal resistance of  $190^{\circ}\text{C}/\text{W}$  and this dissipation causes a  $166^{\circ}\text{C}$  internal rise producing a junction temperature of  $T_J = 25^{\circ}\text{C} + 166^{\circ}\text{C} = 191^{\circ}\text{C}$ . What will actually occur is the thermal shutdown will limit the junction temperature to around  $150^{\circ}\text{C}$ . This high temperature excursion will cause the output to shift due to thermal hysteresis. Under these conditions, a typical output shift is  $-135\text{ppm}$ , although this number can be higher. This high dissipation can cause the  $25^{\circ}\text{C}$  output accuracy to exceed its specified limit. **For best accuracy and precision, the LT1461 junction temperature should not exceed  $125^{\circ}\text{C}$ .**



Figure 8.  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  Hysteresis of 35 Parts Soldered Onto a PC Board



Figure 9. Typical Distribution of Output Voltage Shift After Soldering Onto PC Board

**SIMPLIFIED SCHEMATIC**



# PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/designtools/packaging/> for the most recent package drawings.

## S8 Package 8-Lead Plastic Small Outline (Narrow .150 Inch) (Reference LTC DWG # 05-08-1610 Rev G)



- NOTE:  
 1. DIMENSIONS IN  $\frac{\text{INCHES}}{\text{MILLIMETERS}}$   
 2. DRAWING NOT TO SCALE  
 3. THESE DIMENSIONS DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS.  
 MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED  $.006''$  ( $0.15\text{mm}$ )  
 4. PIN 1 CAN BE BEVEL EDGE OR A DIMPLE

S08 REV G 0212



## REVISION HISTORY

| REV | DATE  | DESCRIPTION   | PAGE NUMBER |
|-----|-------|---|-------------|
| A   | 04/15 | Features modified   | 1           |
|     |       | Correction to $V_{IN}$ description, Typical Application schematic | 1           |
|     |       | Order Information updated   | 2           |
|     |       | Note 3 thermal hysteresis description updated                     | 4           |
|     |       | Related Parts list updated  | 18          |
| B   | 09/15 | Removed unneeded Pin Functions section                            | 10          |

**TYPICAL APPLICATION**

Low Power 16-Bit A/D



NOISE PERFORMANCE\*

$V_{IN} = 0V, V_{NOISE} = 1.1ppm_{RMS} = 2.25\mu V_{RMS} = 16\mu V_{P-P}$   
 $V_{IN} = V_{REF}/2, V_{NOISE} = 1.6ppm_{RMS} = 4\mu V_{RMS} = 24\mu V_{P-P}$   
 $V_{IN} = V_{REF}, V_{NOISE} = 2.5ppm_{RMS} = 6.25\mu V_{RMS} = 36\mu V_{P-P}$

\*FOR 24-BIT PERFORMANCE USE LT1236 REFERENCE

**RELATED PARTS**

| PART NUMBER | DESCRIPTION   | COMMENTS   |
|-------------|---|--|
| LT1460      | Micropower Series References                          | 0.075% Accuracy, 10ppm/°C Drift, 20mA Drive  |
| LT1790      | Micropower Series References                          | 0.05% Accuracy, 10ppm/°C Drift, 60µA Supply Current  |
| LTC®1798    | Micropower Series Reference                           | 200mV Dropout at 10mA Drive, Sinks 2mA, 4µA Supply Current   |
| LT6650      | Micropower Reference and Buffer                       | 0.5% Accuracy, 5.6µA Supply Current, SOT23 Package   |
| LTC6652     | Micropower Series Reference                           | 0.05% Accuracy, 5ppm/°C Drift, -40°C to 125°C Operation  |
| LT6654      | All Purpose, Rugged and Precise Micropower References | 0.05% Accuracy, 10ppm/°C Drift, -55°C to 125°C Operation, ±10mA Output Drive, 100mV Dropout, 1.6ppm <sub>P-P</sub> Noise |
| LT6656      | 1µA Precision Voltage Reference                       | 0.05% Accuracy, 10ppm/°C, 800nA Supply Current, SOT-23 Package   |
| LT6660      | Tiny Micropower Series Reference                      | 0.2% Accuracy, 20ppm/°C Drift, 20mA Drive, 2mm × 2mm DFN Package   |

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9