

# Fuse Clips for Printed Circuit Boards


## For ATC, 5mm, 1/4" & 13/32" Diameter Fuses

# 1AXXXX Series

### 1A4534 Series For 1/4" Diameter Fuses

With End Stops & Angled Out Leads

#### Dimensional Data

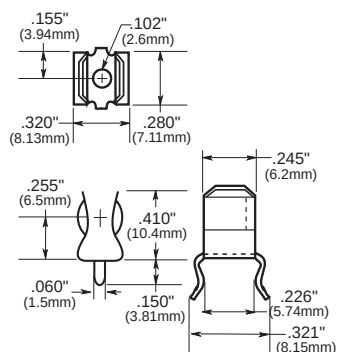


| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A4534-01      | BeCu**      | Bright Tin |
| 1A4534-06      | Cart. Brass | Bright Tin |
| 1A4534-07      | Spg. Br.    | Bright Tin |

### 1A4533 Series For 1/4" Diameter Fuses

Without End Stops & Angled Out Leads

#### Dimensional Data

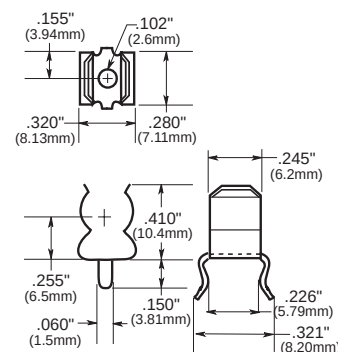


| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A4533-01      | BeCu**      | Bright Tin |
| 1A4533-06      | Cart. Brass | Bright Tin |
| 1A4533-07      | Spg. Br.    | Bright Tin |

### 1A1907 Series For 1/4" Diameter Fuses

With End Stops & Straight Leads

#### Dimensional Data




| Catalog Number | Clip Mat.*  | Finish             |
|----------------|-------------|--------------------|
| 1A1907-02      | Cart. Brass | None Bright Dipped |
| 1A1907-03      | BeCu**      | Bright Tin         |
| 1A1907-05      | BeCu**      | Silver             |
| 1A1907-06      | Cart. Brass | Bright Tin         |
| 1A1907-07      | Spg. Br.    | Bright Tin         |

### 1A3398 Series For 1/4" Diameter Fuses

Without End Stops & Straight Leads

#### Dimensional Data



| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A3398-07      | Cart. Brass | Bright Tin |
| 1A3398-08      | Spg. Br.    | Bright Tin |

\*Spg. Br. - Spring Bronze; BeCu - Beryllium Copper; Cart. Brass - Cartridge Brass

\*\*Beryllium copper recommended for currents higher than 15 amps (1/4" clips).

# Fuse Clips for Printed Circuit Boards

## For ATC, 5mm, 1/4" & 13/32" Diameter Fuses


# 1AXXXX Series

### 1A3399 and 1A5018 Series

#### For 5mm Diameter Fuses

With Straight Leads


#### Dimensional Data



| Catalog Number | Clip Mat.* | Finish     |
|----------------|------------|------------|
| 1A3399-10      | Spg. Br.   | Bright Tin |
| 1A3399-01      | BeCu**     | Silver     |
| 1A3399-04      | BeCu**     | Bright Tin |

#### High Profile

| Catalog Number | Clip Mat.* | Finish     |
|----------------|------------|------------|
| 1A5018-10      | Spg. Br.   | Bright Tin |
| 1A5018-7       | Spg. Br.   | Silver     |




### 1A1119 Series

#### For 1/4" Diameter Fuses

With End Stops and Angled In leads

#### Dimensional Data




| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A1119-04      | BeCu**      | Bright Tin |
| 1A1119-05      | BeCu**      | Silver     |
| 1A1119-10      | Cart. Brass | Bright Tin |
| 1A1119-13      | Spg. Br.    | Bright Tin |

### 1A5601 Series

#### For 5mm Diameter Fuses (0 to 7 amps)

#### Dimensional Data




| Catalog Number | Clip Mat.*  | Finish     |
|----------------|-------------|------------|
| 1A5601         | Cart. Brass | Bright Tin |

### 1A5602 Series

#### For 5mm Diameter Fuses (0 to 7 Amps)

#### Dimensional Data




| Catalog Number | Clip Mat.   | Finish     |
|----------------|-------------|------------|
| 1A5602         | Cart. Brass | Bright Tin |

### 1A1120 Series

#### For 1/4" Diameter Fuses

Without End Stops and Angled In Leads

#### Dimensional Data



| Catalog Number | Clip Mat.*  | Finish             |
|----------------|-------------|--------------------|
| 1A1120-02      | Cart. Brass | Bright Dip         |
| 1A1120-05      | BeCu**      | Silver             |
| 1A1120-06      | BeCu**      | Bright Tin         |
| 1A1120-09      | Cart. Brass | Bright Tin         |
| 1A1120-12      | Spg. Br.    | Bright Tin         |
| 1A1120-11      | Spg. Br.    | None Bright Dipped |


\*Spg. Br. - Spring Bronze; BeCu - Beryllium Copper; Cart. Brass - Cartridge Brass  
 \*\*Beryllium copper recommended for currents higher than 15 amps (1/4" clips).

# Fuse Clips for Printed Circuit Boards


## For ATC, 5mm, 1/4" & 13/32" Diameter Fuses

# 1AXXXX Series


### 1A5778 Series

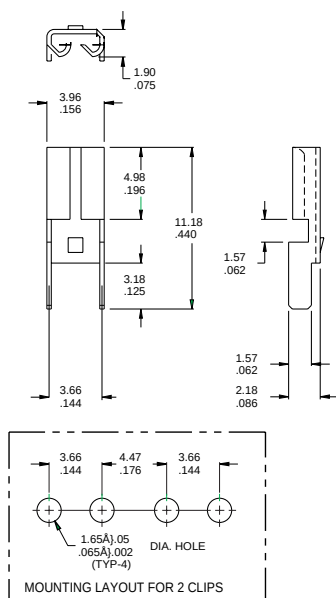

### 1A5779 Series

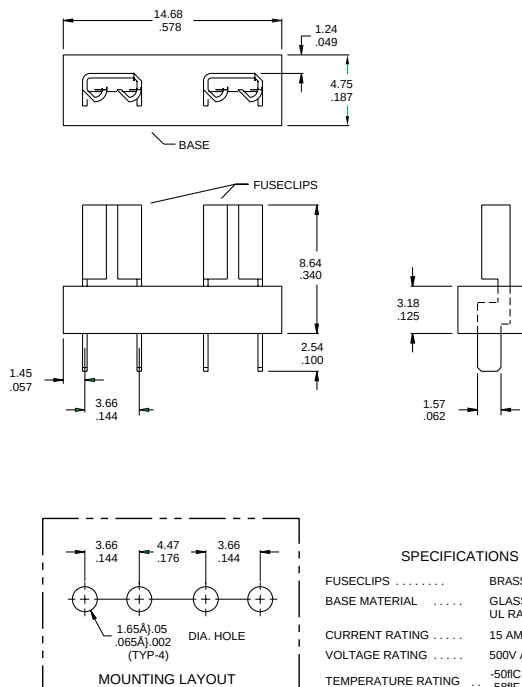

### 1A5780 Series

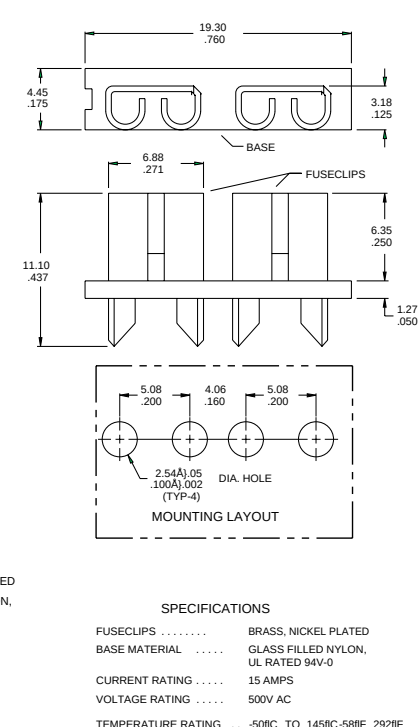


### 1A3400 Series

#### For 13/32" Diameter Fuses (20 Amps Maximum)

With End Stops & Straight Leads

#### Dimensional Data




| Catalog Number | Clip Mat.* | Finish     |
|----------------|------------|------------|
| 1A3400-09      | Spg. Br.   | Bright Tin |

### 1A5600 Series

#### For ATC® Fuses (0 to 20 Amps)

#### Dimensional Data



| Catalog Number | Clip Mat.*  | Finish           |
|----------------|-------------|------------------|
| 1A5600         | Cart. Brass | Satin Finish Tin |

\*Spg. Br. - Spring Bronze; BeCu - Beryllium Copper; Cart. Brass - Cartridge Brass  
\*\*Beryllium copper recommended for currents higher than 15 amps (1/4" clips).

# Fuse Clips for Printed Circuit Boards


## For ATC, 5mm, 1/4" & 13/32" Diameter Fuses

# 1AXXXX

## Series

### Footprint

### Dimensional Data



| Catalog Number | Dimensions    |                |                 |               |                |                             | ATC          | ATM          | B Tabs                      | C (4 holes)                 | Board Thickness               |
|----------------|---------------|----------------|-----------------|---------------|----------------|-----------------------------|--------------|--------------|-----------------------------|-----------------------------|-------------------------------|
|                | 7/8"          | 1"             | 1 1/4"          | 1 3/8"        | 1 1/2"         | 20mm                        |              |              |                             |                             |                               |
|                | (22.2mm)      | (25.4mm)       | (31.8mm)        | (34.93mm)     | (38.10mm)      |                             |              |              |                             |                             |                               |
| 1A5778-        | —             | —              | —               | —             | —              | —                           | —            | 464" (11.79) | .144" (3.66)                | .065" ± .002" (1.65 ± .05)  | .062" (1.57)                  |
| 1A5779-        | —             | —              | —               | —             | —              | —                           | —            | 464" (11.79) | .144" (3.66)                | .065" ± .002" (1.65 ± .05)  | .062" (1.57)                  |
| 1A5780-        | —             | —              | —               | —             | —              | —                           | .560 (14.22) | —            | .200" (5.08)                | .100" ± .002" (2.54 ± .05)  | .062" (1.57)                  |
| 1A3398-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .295" - .305" (7.49 - 7.75) | .067" - .070" (1.70 - 1.78) | .093" (2.36)                  |
| 1A1907-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .295" - .305" (7.49 - 7.75) | .093" ± .002" (2.36 ± .05)  | .062" to .125" (1.57 to 3.18) |
| 1A1119-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .295" - .305" (7.49 - 7.75) | .093" ± .002" (2.36 ± .05)  | .062" to .125" (1.57 to 3.18) |
| 1A1120-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .295" - .305" (7.49 - 7.75) | .093" ± .002" (2.36 ± .05)  | .062" to .125" (1.57 to 3.18) |
| 1A3399-        | —             | —              | —               | —             | —              | .875" (22.23)               | —            | —            | .200" (5.08)                | .067" - .070" (1.70 - 1.78) | .093" (2.36)                  |
| 1A3400-        | —             | —              | —               | 1.50" (38.10) | 1.625" (41.28) | —                           | —            | —            | .405" (10.29)               | .091" - .095" (2.31 - 2.41) | .125" (3.18)                  |
| 1A4533-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .300" (7.62)                | .067" - .070" (1.70 - 1.78) | .062" (1.57)                  |
| 1A4534-        | 1.00" (25.40) | 1.125" (28.58) | 1.375" (34.920) | —             | —              | —                           | —            | —            | .300" (7.62)                | .067" - .070" (1.70 - 1.78) | .062" (1.57)                  |
| 1A5018-        | —             | —              | —               | —             | —              | .820" ± .015" (20.80 ± .38) | —            | —            | .180" (4.6)                 | .053" - .002" (1.35 - 0.05) | .093" (2.36)                  |
| 1A5600-        | —             | —              | —               | —             | —              | —                           | —            | —            | .200" (5.08)                | .052" ± .003" (1.32 ± .077) | .125" max. (3.18)             |
| 1A5601-        | —             | —              | —               | —             | —              | .820" ± .015" (20.80 ± .38) | —            | —            | .266" (6.76)                | .067" ± .003" (1.70 ± .074) | .062" (1.57)                  |
| 1A5602-        | —             | —              | —               | —             | —              | —                           | —            | —            | .220" (5.588)               | —                           | .125" max. (3.175)            |

\*Spg. Br. - Spring Bronze; BeCu - Beryllium Copper; Cart. Brass - Cartridge Brass

\*\*Beryllium copper recommended for currents higher than 15 amps (1/4" clips).

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9