



FEATURES

- Efficiency up to 84%
- MTBF > 1M Hours
- Reinforced Insulation rated for 300VAC Working Voltage
- UL/EN60601-1&EN60950-1 Safety Approval
- Operating Temperature Range -40°C to +85 °C
- High Isolation Voltage 4000VACrms
- Wide 2:1 Input Range
- Complies with EN5022 Class A
- Overload Protection
- Low Leakage Current
- 3 Years Product Warranty

The DM03S/D series are miniature, DIP Package, isolated 3W DC/DC converters with 4,000VACrms isolation. It offers short circuit protection and allows a wide operating temperature range of -40°C to +85°C. These isolated DC/DC converters are the latest offering from a world leader in power systems technology and manufacturing — Delta Electronics, Inc. With creative design technology and optimization of component placement, these converters possess outstanding electrical and thermal performance, as well as extremely high reliability under highly stressful operating conditions..

Model List

Model Number	Input Voltage (Range) VDC	Output Voltage VDC	Output Current		Input Current		Reflected Ripple Current mA (typ.)	Max. capacitive Load uF	Efficiency (typ.) @Max. Load %
			Max. mA	Min. mA	@Max. Load mA(typ.)	@No Load mA(typ.)			
DM03S0505A	5 (4.5 ~ 9)	5	600	90	857	40	60	1000	70
DM03S0512A		12	250	37.5	800			470	75
DM03S0524A		24	125	18.8	800			470	76
DM03D0512A		±12	±125	±18.8	800			220*	75
DM03D0515A		±15	±100	±15	800			220*	75
DM03S1205A	12 (9 ~ 18)	5	600	90	338	30	30	1000	74
DM03S1212A		12	250	37.5	313			470	80
DM03S1224A		24	125	18.8	313			470	81
DM03D1212A		±12	±125	±18.8	313			220*	80
DM03D1215A		±15	±100	±15	313			220*	80
DM03S2405A	24 (18 ~ 36)	5	600	90	160	20	15	1000	78
DM03S2412A		12	250	37.5	151			470	83
DM03S2424A		24	125	18.8	151			470	84
DM03D2412A		±12	±125	±18.8	151			220*	83
DM03D2415A		±15	±100	±15	151			220*	83
DM03S4805A	48 (36 ~ 75)	5	600	90	80	10	10	1000	78
DM03S4812A		12	250	37.5	75			470	83
DM03S4824A		24	125	18.8	75			470	84
DM03D4812A		±12	±125	±18.8	75			220*	83
DM03D4815A		±15	±100	±15	75			2208	83

* For each output

Input Characteristics

Parameter	Model	Min.	Typ.	Max.	Unit
Input Surge Voltage (1 sec. max.)	5V Input Models	-0.7	---	11	VDC
	12V Input Models	-0.7	---	25	
	24V Input Models	-0.7	---	50	
	48V Input Models	-0.7	---	100	
Start-Up Voltage	5V Input Models	3.7	4	4.5	
	12V Input Models	8	8.5	9	
	24V Input Models	15	17	18	
	48V Input Models	30	33	36	
Under Voltage Shutdown	5V Input Models	---	---	4	
	12V Input Models	---	---	8.5	
	24V Input Models	---	---	17	
	48V Input Models	---	---	34	
Reverse Polarity Input Current	All Models	---	---	0.3	A
Short Circuit Input Power		---	---	2000	mW
Internal Power Dissipation		---	---	2500	mW
Conducted EMI		Compliance to EN 55022, class A and FCC part 15, class A			

Output Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy		---	±0.5	±1.0	%
Output Voltage Balance	Dual Output, Balanced Loads	---	±0.5	±2.0	%
Line Regulation	Vin=Min. to Max.	---	±0.3	±0.5	%
Load Regulation	Io=25% to 100%	---	±0.5	±1.0	%
Ripple & Noise (20MHz)	5V Output Models	---	75	100	mV _{P-P}
	Other Output Models	---	100	150	mV _{P-P}
Ripple & Noise (20MHz)	Over Line, Load & Temp.	---	---	180	mV _{P-P}
Ripple & Noise (20MHz)		---	---	15	mV rms
Transient Recovery Time	25% Load Step Change	---	150	500	μs
Transient Response Deviation		---	±3	±6	%
Temperature Coefficient			±0.02	±0.05	%/°C
Over Load Protection	Foldback	120	150	---	%
Short Circuit Protection	Continuous				

Isolation, Safety Approvals

Parameter	Conditions	Min.	Typ.	Max.	Unit
I/O Isolation Voltage (rated)	60 Seconds	4000	---	---	VACrms
I/O Isolation Test Voltage	Flash tested for 1 Second	6000	---	---	V _{PK}
Leakage Current	240VAC, 60Hz	---	---	2	μA
I/O Isolation Resistance	500 VDC	10	---	---	GΩ
I/O Isolation Capacitance	100KHz, 1V	---	7	13	pF
Safety Standards	cUL/UL60950-1, CSA C22.2 No. 60950-1-03				
	UL60601-1, CSA C22.2 No.601-1				
	IEC/EN 60950-1, IEC/EN 60601-1				
Safety Approvals	IEC60950-1 CB report, cUL/UL 60950-1 certificate				
	UL60601-1 UL certificate				

General Characteristics

Parameter	Conditions	Min.	Typ.	Max.	Unit
Switching Frequency		---	150	---	KHz
MTBF(calculated)	MIL-HDBK-217F@25°C, Ground Benign	1,000,000	---	---	Hours


Recommended Input Fuse

5V Input Models	12V Input Models	24V Input Models	48V Input Models
2000mA Slow-Blow Type	1000mA Slow-Blow Type	500mA Slow-Blow Type	250mA Slow-Blow Type

Environmental Specifications

Parameter	Conditions	Min.	Max.	Unit
Operating Temperature Range (with Derating)	Ambient	-40	+85	°C
Case Temperature		---	+95	°C
Storage Temperature Range		-50	+125	°C
Humidity (non condensing)		---	95	% rel. H
Cooling	Free-Air convection			
Lead Temperature (1.5mm from case for 10Sec.)		---	260	°C

Power Derating Curve

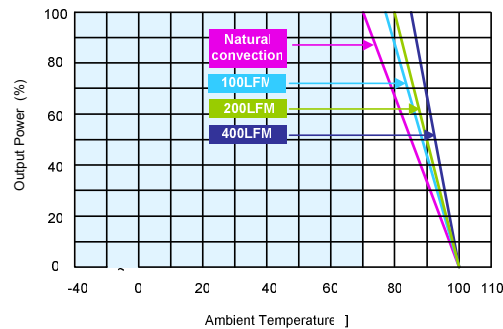

Notes

- 1 Specifications typical at Ta=+25°C, resistive load, nominal input voltage and rated output current unless otherwise noted.
- 2 Transient recovery time is measured to within 1% error band for a step change in output load of 75% to 100%.
- 3 Ripple & Noise measurement bandwidth is 0-20 MHz.
- 4 These power converters require a minimum output loading to maintain specified regulation, operation under no-load conditions will not damage these modules; however, they may not meet all specifications listed.
- 5 All DC/DC converters should be externally fused at the front end for protection.
- 6 Specifications subject to change without notice.

Mechanical Drawing

Mechanical Dimensions

The diagram shows the mechanical dimensions of the converter module. The top view shows a rectangular component with a width of 31.8 mm [1.25] and a height of 20.3 mm [0.80]. The bottom view shows the same component with a width of 31.8 mm [1.25] and a height of 20.3 mm [0.80]. The bottom view also shows the pin locations and dimensions: Pin 1 is at the top left, Pin 11 and 12 are at the top right, Pin 24 and 23 are at the bottom left, Pin 15 and 13 are at the bottom right. The distance between Pin 1 and Pin 11 is 20.32 mm [0.80]. The distance between Pin 11 and Pin 12 is 5.08 mm [0.20]. The distance between Pin 24 and Pin 23 is 2.54 mm [0.10]. The distance between Pin 23 and Pin 15 is 20.32 mm [0.80]. The distance between Pin 15 and Pin 13 is 5.08 mm [0.20]. The distance between Pin 13 and Pin 12 is 2.54 mm [0.10]. The distance between Pin 12 and Pin 11 is 5.08 mm [0.20]. The distance between Pin 11 and Pin 10 is 2.0 mm [0.08]. The distance between Pin 10 and Pin 9 is 2.54 mm [0.10]. The distance between Pin 9 and Pin 8 is 2.0 mm [0.08]. The distance between Pin 8 and Pin 7 is 2.54 mm [0.10]. The distance between Pin 7 and Pin 6 is 2.0 mm [0.08]. The distance between Pin 6 and Pin 5 is 2.54 mm [0.10]. The distance between Pin 5 and Pin 4 is 2.0 mm [0.08]. The distance between Pin 4 and Pin 3 is 2.54 mm [0.10]. The distance between Pin 3 and Pin 2 is 2.0 mm [0.08]. The distance between Pin 2 and Pin 1 is 2.54 mm [0.10]. The distance between Pin 1 and Pin 11 is 20.32 mm [0.80]. The distance between Pin 11 and Pin 12 is 5.08 mm [0.20]. The distance between Pin 24 and Pin 23 is 2.54 mm [0.10]. The distance between Pin 23 and Pin 15 is 20.32 mm [0.80]. The distance between Pin 15 and Pin 13 is 5.08 mm [0.20]. The distance between Pin 13 and Pin 12 is 2.54 mm [0.10]. The distance between Pin 12 and Pin 11 is 5.08 mm [0.20]. The distance between Pin 11 and Pin 10 is 2.0 mm [0.08]. The distance between Pin 10 and Pin 9 is 2.54 mm [0.10]. The distance between Pin 9 and Pin 8 is 2.0 mm [0.08]. The distance between Pin 8 and Pin 7 is 2.54 mm [0.10]. The distance between Pin 7 and Pin 6 is 2.0 mm [0.08]. The distance between Pin 6 and Pin 5 is 2.54 mm [0.10]. The distance between Pin 5 and Pin 4 is 2.0 mm [0.08]. The distance between Pin 4 and Pin 3 is 2.54 mm [0.10]. The distance between Pin 3 and Pin 2 is 2.0 mm [0.08]. The distance between Pin 2 and Pin 1 is 2.54 mm [0.10].

Pin Connections

Pin	Single Output	Dual Output
1	+Vin	+Vin
11	No Pin	Common
12	-Vout	No Pin
13	+Vout	-Vout
15	No Pin	+Vout
23	-Vin	-Vin
24	-Vin	-Vin

- All dimensions in mm (inches)
- Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- Pin diameter ⇔ 0.6 ±0.05 (0.024±0.002)

Physical Outline

Case Size	: 31.8x20.3x10.5mm (1.25x0.8x0.41 Inches)
Case Material	: Non-Conductive Black Plastic (flammability to UL 94V-0 rated)
Weight	: 16.2g

Part Numbering System						
D	M	03	S	05	05	A
Form factor	Family series	Watt	Number of Outputs	Input Voltage	Output Voltage	Option Code
D-DIP	A~Z	01:1W	S - Single	03:3.3V	03:3.3V	A - Std. Functions
P-SIP		02:2W	D- Dual	05: 5V	05: 5V	
S-SMD		03:3W		12:12V	12:12V	
		04:4W		24: 24V	15: 15V	
		06:6W		48:48V	24: 24V	

WARRANTY

Delta offers a three(3) years limited warranty. Complete warranty information is listed on our web site or is available upon request from Delta.

Information furnished by Delta is believed to be accurate and reliable. However, no responsibility is assumed by Delta for its use, nor for any infringements of patents or other rights of third parties, which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Delta. Delta reserves the right to revise these specifications at any time, without notice.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9