

High Frequency Ceramic Solutions

625 - 2815MHz Wideband Balun, 1:2 Impedance Ratio, EIA 0805


P/N 1720BL15A0100

Detail Specification: 2/21/2020

Page 1 of 4

General Specifications

Part Number	1720BL15A0100
Frequency (MHz)	625 - 2815
Unbalanced Impedance	50 Ω
Balanced Impedance	100 Ω
Insertion Loss	1.5 dB max.
Return Loss	9.5 dB min.
Phase Difference	180 \pm 10 deg.
Amplitude Difference	1.0 dB max.
CMRR	20 dB min.
Power Capacity	3W max. (CW)
Reel Quantity	4,000 pcs
Operating Temperature	-40 to +105°C

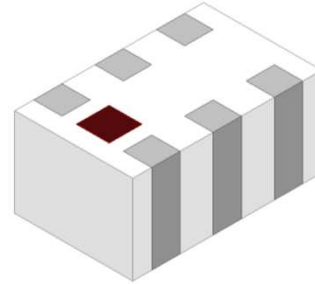

Recommended Storage Conditions of unused product on T&R

+5 to +35°C, 18 mos. max.
Humidity 45~75% RH


You can download measured s-parameters of this component at: <https://www.johansontechnology.com/baluns>

Part Number Explanation

P/N Suffix	Packing Style	Bulk	Suffix = S	Eg. 1720BL15A0100S
		T & R	Suffix = E	Eg. 1720BL15A0100E
	Termination style	100% Tin	Suffix = None	Eg. 1720BL15A0100 (E or S)
	Evaluation Board	1720BL15A0100-EB1SMA (3 female SMA connectors)		


Mechanical Dimensions

	In	mm
L	0.079 \pm 0.004	2.00 \pm 0.10
W	0.049 \pm 0.004	1.25 \pm 0.10
T	0.037 \pm 0.004	0.95 \pm 0.10
a	0.012 \pm 0.004	0.30 \pm 0.10
b	0.008 \pm 0.004	0.20 \pm 0.10
c	0.012 +0.004/0.008	0.30 +0.1/-0.2
g	0.014 \pm 0.004	0.35 \pm 0.10
p	0.026 \pm 0.002	0.65 \pm 0.05

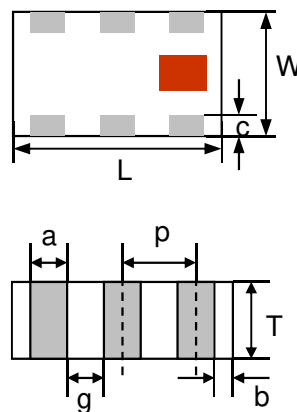

Terminal Configuration

1	Unbalanced Port (IN)
2	GND or DC feed + RF GND
3	Balanced Port (OUT1)
4	Balanced Port (OUT2)
5	GND
6	NC



Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2020 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

625 - 2815MHz Wideband Balun, 1:2 Impedance Ratio, EIA 0805

P/N 1720BL15A0100


Detail Specification: 2/21/2020

Page 2 of 4

Mounting Considerations


Mount these devices with colored mark facing up.

* Line width should be designed to provide 50ohm impedance matching characteristics.

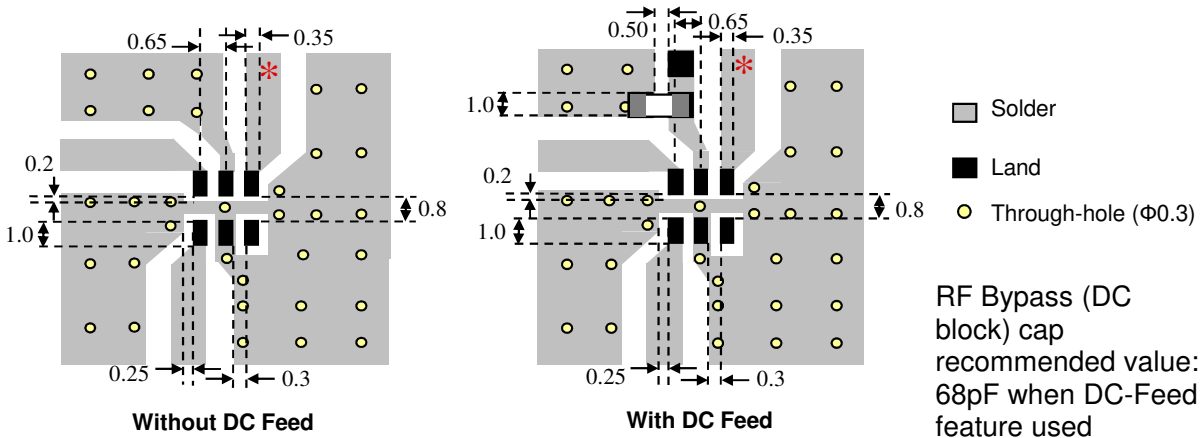

Need our help laying this out for you? Need the layout file? Send us a message at:
<https://www.johansontechnology.com/component/techquestion>

Measuring Diagram

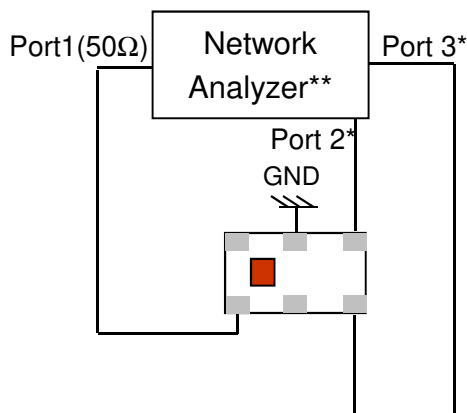

Port 1: Unbalanced Port
 Ports 2 and 3: Balanced Port
 $IL = S_{ds21}$
 $RL = S_{ss11}$
 $Amp_balance = dB(S(2,1)/S(3,1))$
 $Phase_balance = Phase(S(2,1)/S(3,1))$

*Impedance for ports 2 and 3 = Balanced Impedance/2

**E5071B from Agilent

Johanson Technology, Inc. reserves the right to make design changes without notice.
 All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2020 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

625 - 2815MHz Wideband Balun, 1:2 Impedance Ratio, EIA 0805


P/N 1720BL15A0100

Detail Specification: 2/21/2020


Page 3 of 4

Typical Electrical Characteristics (T=25°C)

Insertion and Return Loss

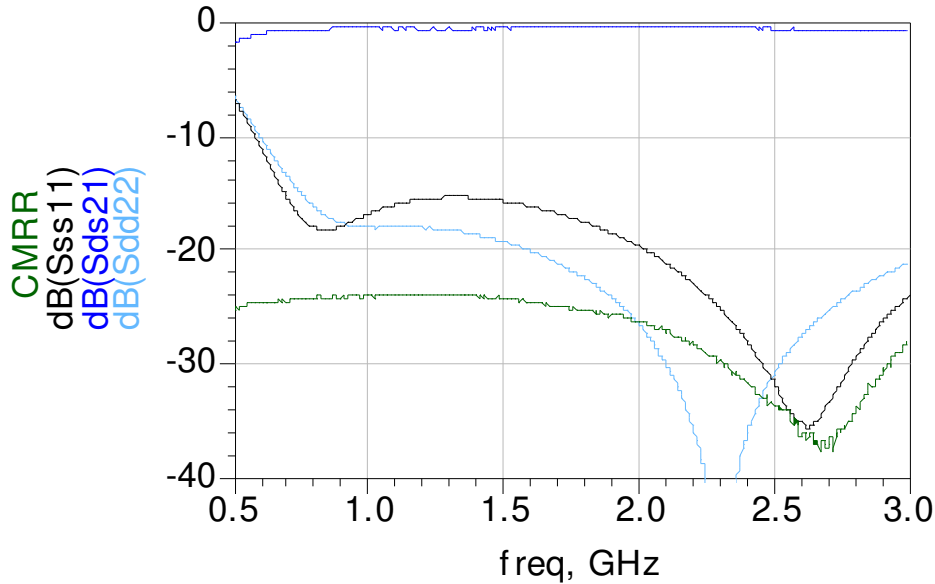

Amplitude and Phase Balance

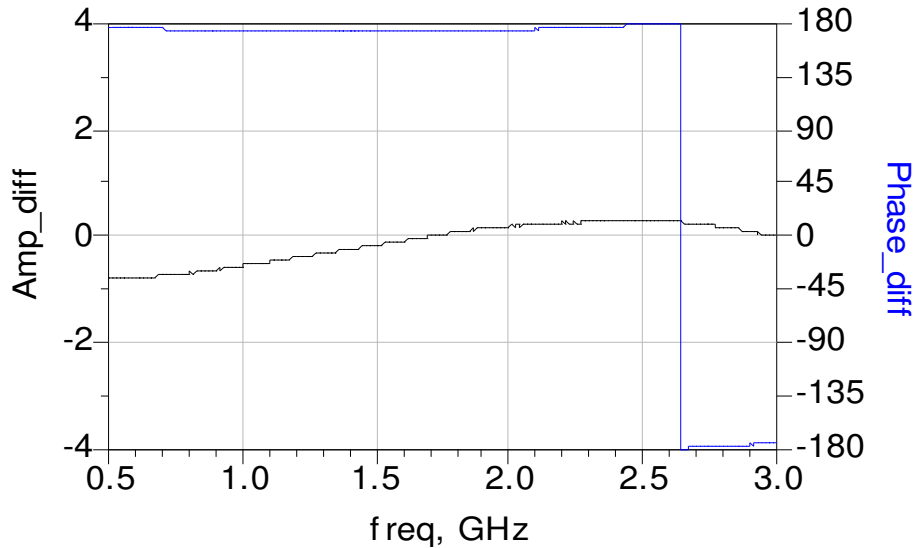

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2020 Johanson Technology, Inc. All Rights Reserved

High Frequency Ceramic Solutions

625 - 2815MHz Wideband Balun, 1:2 Impedance Ratio, EIA 0805

P/N 1720BL15A0100

Detail Specification: 2/21/2020

Page 4 of 4

Application Notes, Layout Files, and more

<https://www.johansontechnology.com/baluns>

Packaging information

<https://www.johansontechnology.com/tape-reel-packaging>

Soldering Information

<https://www.johansontechnology.com/ipcsoldering-profile>

MSL Info

<https://www.johansontechnology.com/msl-rating>

Recommended Storage Condition and Max Shelf Life

<https://www.johansontechnology.com/recommended-storage-conditions>

RoHS Compliance

<https://www.johansontechnology.com/rohs-compliance>

Antenna layout and tuning techniques

<https://www.johansontechnology.com/tuning>

Antenna layout review, tuning, and characterization services

<https://www.johansontechnology.com/ipc-antenna-services>

P/N Explanation and Breakdown

<https://www.johansontechnology.com/ipc-pn-explained>

Johanson Technology, Inc. reserves the right to make design changes without notice.

All sales are subject to Johanson Technology, Inc. terms and conditions.



<https://www.johansontechnology.com>

4001 Calle Tecate • Camarillo, CA 93012, USA • TEL +1.805.389.1166

Ver 2.1

2020 Johanson Technology, Inc. All Rights Reserved

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9