THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| CE | 16 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | D | ECR-14-011707 | 13AUG2014 | HZ | RZ |

1. MAXIMUM CONNECTOR INSERTION LOSS IS 0.2dB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
2. MINIMUM RETURN LOSS: 55dB (1310nm)
3. TEST DATA PROVIDED WITH EACH ASSEMBLY.
4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

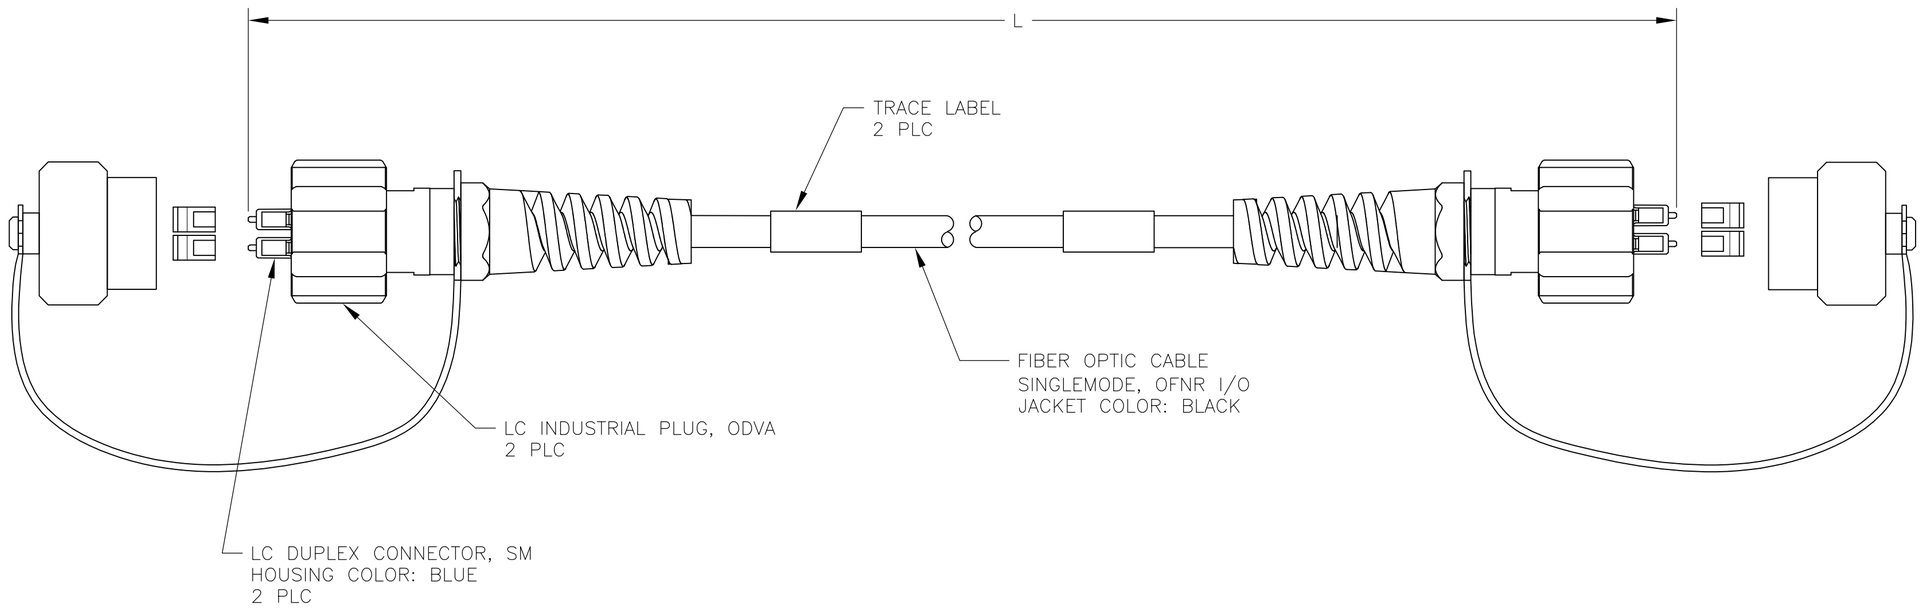





FIBER PATH

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –
FINISH –

| | | |
|---|---|---|
| DWN | J.W.DAVIS | 01NOV05 |
| CHK | J.DUNCAN | 01NOV05 |
| APVD | F.McCORKEL | 01NOV05 |
| PRODUCT SPEC | — | |
| APPLICATION SPEC | — | |
| WEIGHT | — | |

TE Connectivity

NAME: CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE, 2 FIBER BREAKOUT, SEALED LC DUPLEX (ODVA), BOTH ENDS

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-1828936 | — |

CUSTOMER DRAWING | SCALE NTS | SHEET 1 OF 2 | REV D

1828936

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| CE | 16 |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | – | SEE SHEET 1 | – | – | – |

| MAX IL (dB) [1] | L METERS [INCHES] | PART NUMBER |
|---|---|---|
| 0.27 | 100.00±1.00 [3937±39] | 9–1828936–9 |
| 0.48 | 400.00±4.00 [15748±158] | 9–1828936–8 |
| 0.38 | 250.00±2.50 [9843±99] | 9–1828936–7 |
| 0.34 | 200.00±2.00 [7874±79] | 9–1828936–6 |
| 0.24 | 60.00±0.60 [2362±24] | 6–1828936–0 |
| 0.24 | 50.00±0.50 [1968±19] | 5–1828936–0 |
| 0.23 | 40.00±0.40 [1575±16] | 4–1828936–0 |
| 0.23 | 39.00±0.39 [1535±15] | 3–1828936–9 |
| 0.23 | 38.00±0.38 [1496±15] | 3–1828936–8 |
| 0.23 | 37.00±0.37 [1457±15] | 3–1828936–7 |
| 0.23 | 36.00±0.36 [1417±14] | 3–1828936–6 |
| 0.22 | 35.00±0.35 [1378±14] | 3–1828936–5 |
| 0.22 | 34.00±0.34 [1339±13] | 3–1828936–4 |
| 0.22 | 33.00±0.33 [1299±13] | 3–1828936–3 |
| 0.22 | 32.00±0.32 [1260±13] | 3–1828936–2 |
| 0.22 | 31.00±0.30 [1220±12] | 3–1828936–1 |
| 0.22 | 30.00±0.30 [1181±12] | 3–1828936–0 |
| 0.22 | 29.00±0.30 [1141.7±12.0] | 2–1828936–9 |
| 0.22 | 28.00±0.30 [1102.4±12.0] | 2–1828936–8 |
| 0.22 | 27.00±0.30 [1063.0±12.0] | 2–1828936–7 |
| 0.22 | 26.00±0.30 [1023.6±12.0] | 2–1828936–6 |
| 0.22 | 25.00±0.30 [984.2±12.0] | 2–1828936–5 |
| 0.22 | 24.00±0.30 [944.9±12.0] | 2–1828936–4 |
| 0.22 | 23.00±0.30 [905.5±12.0] | 2–1828936–3 |
| 0.22 | 22.00±0.30 [866.1±12.0] | 2–1828936–2 |
| 0.21 | 21.00±0.30 [826.8±12.0] | 2–1828936–1 |
| 0.21 | 20.00±0.30 [787.4±12.0] | 2–1828936–0 |
| 0.21 | 19.00±0.30 [748.0±12.0] | 1–1828936–9 |
| 0.21 | 18.00±0.30 [708.7±12.0] | 1–1828936–8 |
| 0.21 | 17.00±0.30 [669.3±12.0] | 1–1828936–7 |
| 0.21 | 16.00±0.30 [629.9±12.0] | 1–1828936–6 |
| 0.21 | 15.00±0.30 [590.6±12.0] | 1–1828936–5 |
| 0.21 | 14.00±0.15 [551.2±6.0] | 1–1828936–4 |
| 0.21 | 13.00±0.15 [511.8±6.0] | 1–1828936–3 |
| 0.21 | 12.00±0.15 [472.4±6.0] | 1–1828936–2 |
| 0.21 | 11.00±0.15 [433.1±6.0] | 1–1828936–1 |
| 0.21 | 10.00±0.15 [393.7±6.0] | 1–1828936–0 |
| 0.20 | 9.00±0.15 [354.3±6.0] | 1828936–9 |
| 0.20 | 8.00±0.08 [315.0±3.0] | 1828936–8 |
| 0.20 | 7.00±0.08 [275.6±3.0] | 1828936–7 |
| 0.20 | 6.00±0.08 [236.2±3.0] | 1828936–6 |
| 0.20 | 5.00±0.08 [196.8±3.0] | 1828936–5 |
| 0.20 | 4.00±0.05 [118.1±2.0] | 1828936–4 |
| 0.20 | 3.00±0.05 [118.1±2.0] | 1828936–3 |
| 0.20 | 2.00±0.05 [78.7±2.0] | 1828936–2 |
| 0.20 | 1.00±0.05 [39.4±2.0] | 1828936–1 |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: METERS [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL –

FINISH –

DWN J.W.DAVIS 01NOV05
CHK J.DUNCAN 01NOV05
APVD F.McCORKEL 01NOV05
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME
CABLE ASSEMBLY, FIBER OPTIC,
SINGLEMODE, 2 FIBER BREAKOUT,
SEALED LC DUPLEX (ODVA), BOTH ENDS

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A2 | 00779 | C-1828936 | — |

CUSTOMER DRAWING | SCALE NTS | SHEET 2 OF 2 | REV D

1828936

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

**Данный компонент на территории Российской Федерации**

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

**Офис по работе с юридическими лицами:**

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9