



Features

- Shielded construction
- Carbonyl powder core
- High saturation current
- Inductance range: 0.10 to 10 μ H
- AEC-Q200 qualified
- RoHS compliant* and halogen free**

Applications

- Automotive systems:
 - Driver assistant
 - Information
 - Entertainment
 - Lighting
- DC/DC converters
- Power supplies

SRP1238A Series - Shielded Power Inductors

Electrical Specifications @ 25 °C


Bourns Part Number	Inductance @ 100 KHz / 1 V		DCR (m Ω) Max.	I _{rms} (A)	I _{sat} (A)
	L (μ H)	Tol. (%)			
SRP1238A-R10Y	0.10	± 30	0.43	43	84
SRP1238A-R15Y	0.15	± 30	0.48	41	75
SRP1238A-R22M	0.22	± 20	0.81	38.5	65
SRP1238A-R33M	0.33	± 20	1.0	36.5	62
SRP1238A-R47M	0.47	± 20	1.8	32	55
SRP1238A-R60M	0.60	± 20	2.2	29	51
SRP1238A-R68M	0.68	± 20	2.5	28	49
SRP1238A-R82M	0.82	± 20	3.0	25	44
SRP1238A-1R0M	1.0	± 20	3.5	24	40
SRP1238A-1R2M	1.2	± 20	4.0	21	37
SRP1238A-1R5M	1.5	± 20	5.5	19	35
SRP1238A-1R8M	1.8	± 20	7.0	17	30
SRP1238A-2R2M	2.2	± 20	8.0	16	29
SRP1238A-3R3M	3.3	± 20	13.5	12	27
SRP1238A-4R7M	4.7	± 20	18.5	10	24
SRP1238A-5R6M	5.6	± 20	22.0	9.5	19
SRP1238A-6R8M	6.8	± 20	24.0	9	18
SRP1238A-8R2M	8.2	± 20	28.0	8.5	16
SRP1238A-100M	10	± 20	34.0	7	14

How to Order


SRP1238A - 100M

Model _____
Value Code (see table) _____

Electrical Schematic



Soldering Profile

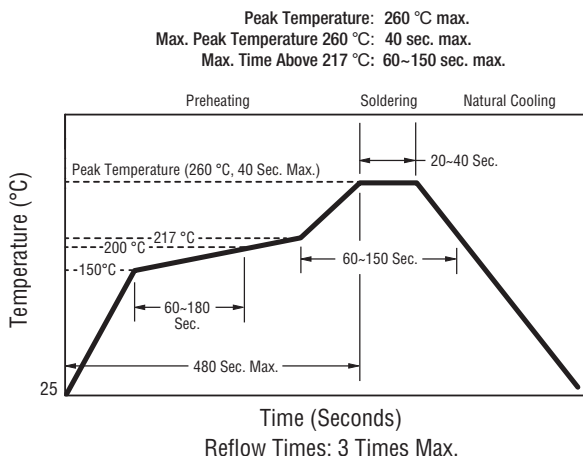


General Specifications

Test Voltage 1.0 V
Test Frequency 100 KHz
Operating Temperature
..... -40 °C to +150 °C
(Temperature rise included)
Storage Temperature
..... -40 °C to +125 °C
Rated Current
..... Inductance drops 20 % at I_{sat}
Temperature Rise 40 °C at rated I_{rms}
Resistance to Soldering Heat
..... +260 °C, 40 sec. max.


Materials

Core Carbonyl powder
Wire Enameled copper
Terminal Finish Sn
Packaging 500 pcs. per 13-inch reel

Product Dimensions

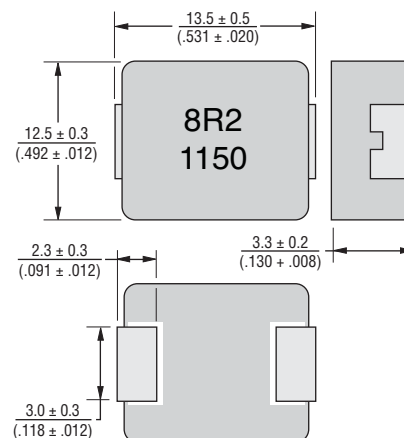

Recommended Layout



* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

** Bourns follows the prevailing definition of "halogen free" in the industry. Bourns considers a product to be "halogen free" if (a) the Bromine (Br) content is 900 ppm or less; (b) the Chlorine (Cl) content is 900 ppm or less; and (c) the total Bromine (Br) and Chlorine (Cl) content is 1500 ppm or less.
















Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

SRP1238A Series - Shielded Power Inductors

BOURNS®

L vs. I Charts

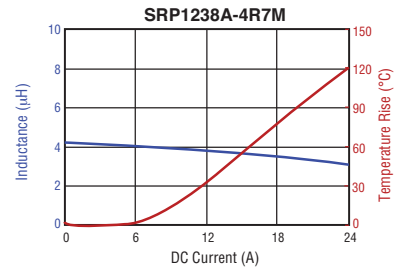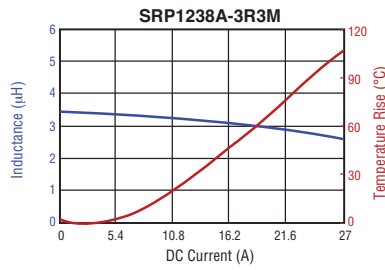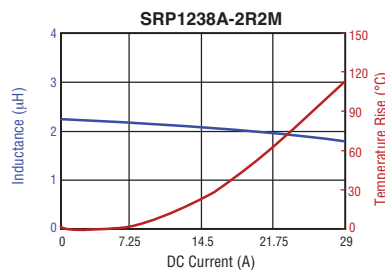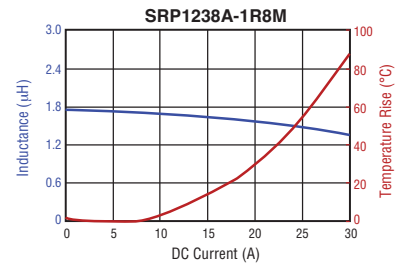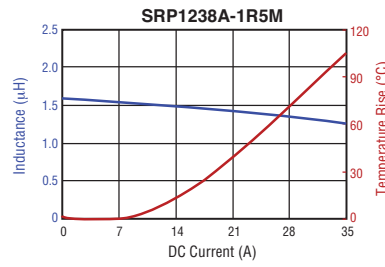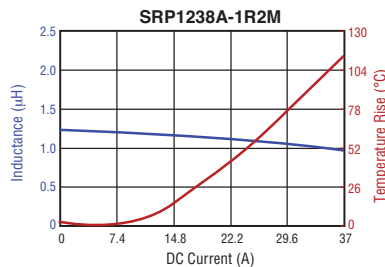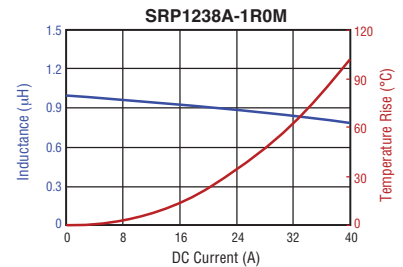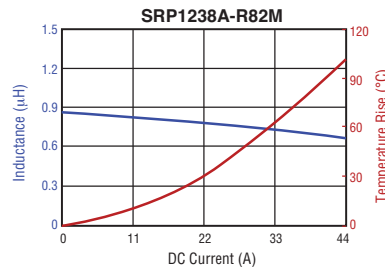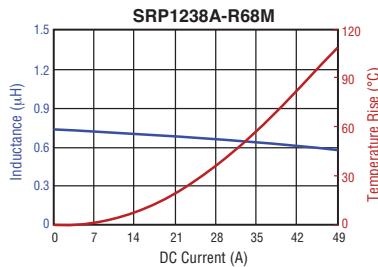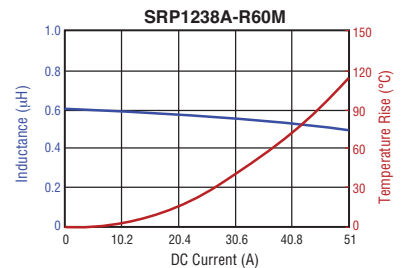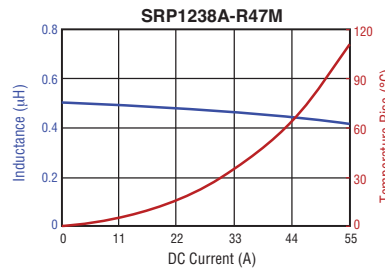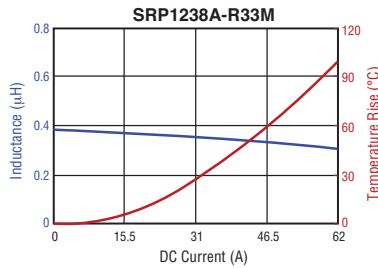
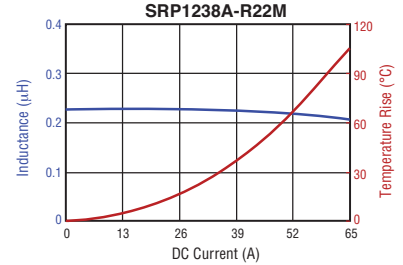
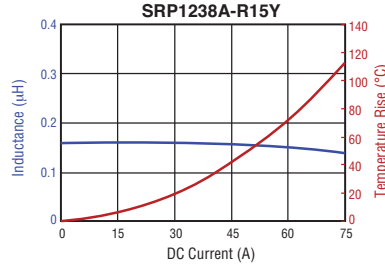
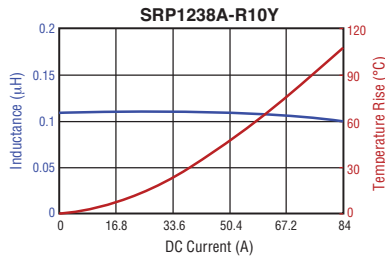


Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.


SRP1238A Series - Shielded Power Inductors

BOURNS®

L vs. I Charts (Continued)

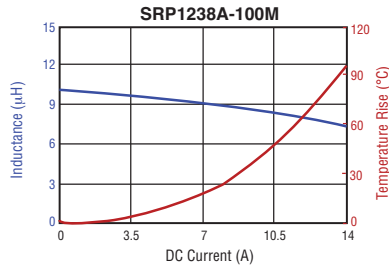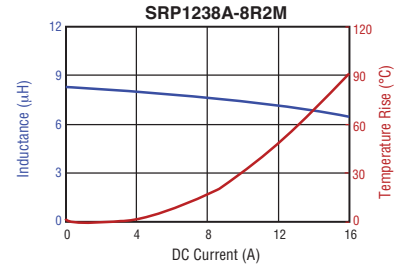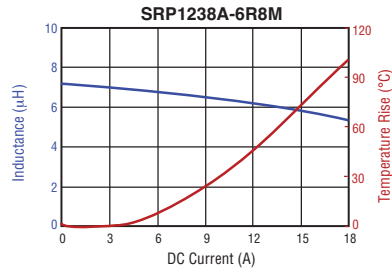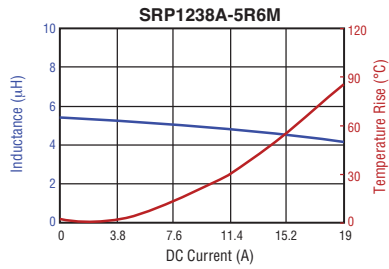

Packaging Specifications

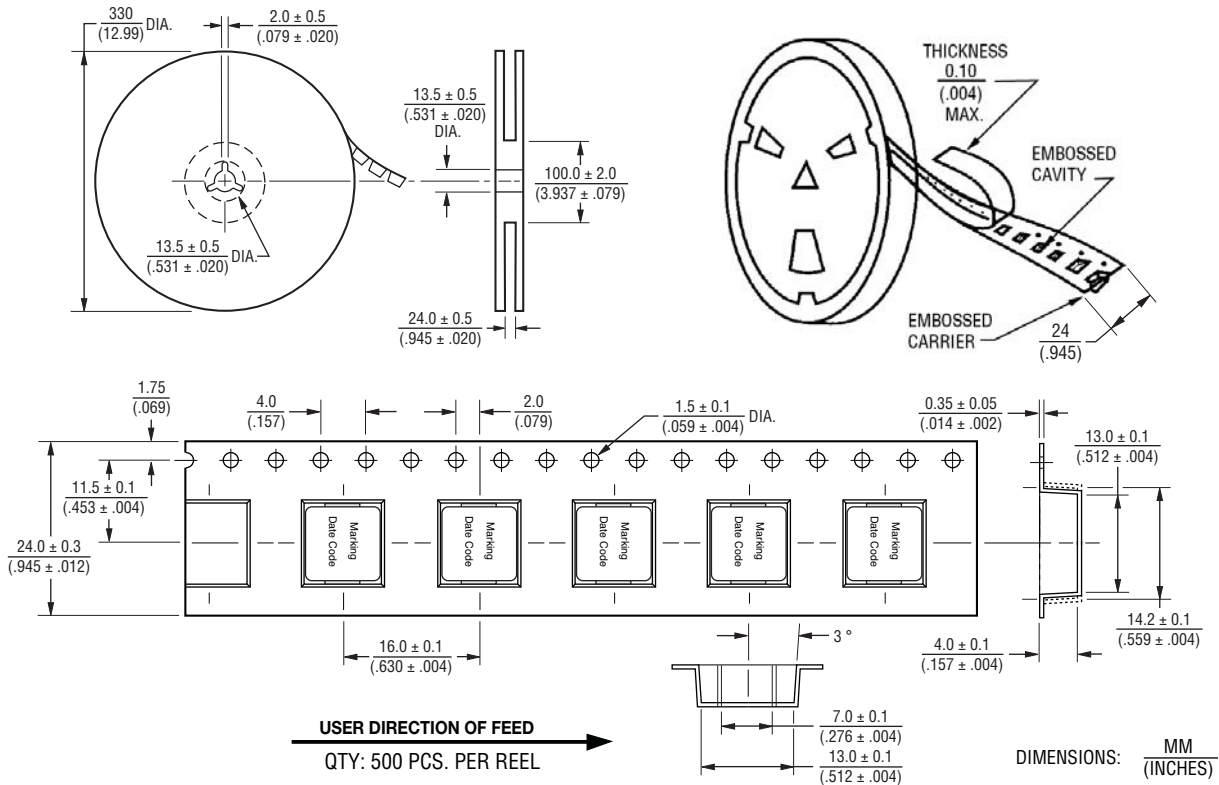

05/14

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9