

6

5



4

3


2

1

PART NUMBER	ENGINEERING NO.	LENGTH ± TOLERANCE
1300480054	E10A00615M010	3' 3" +2.19"/-0" [1M +55.6/-0 mm]
1300480056	E10A00615M050	16' 4" +6.5"/-0" [5M +165.0/-0 mm]

AUX VIEW
SCALE 1:4

MALE- FACE VIEW

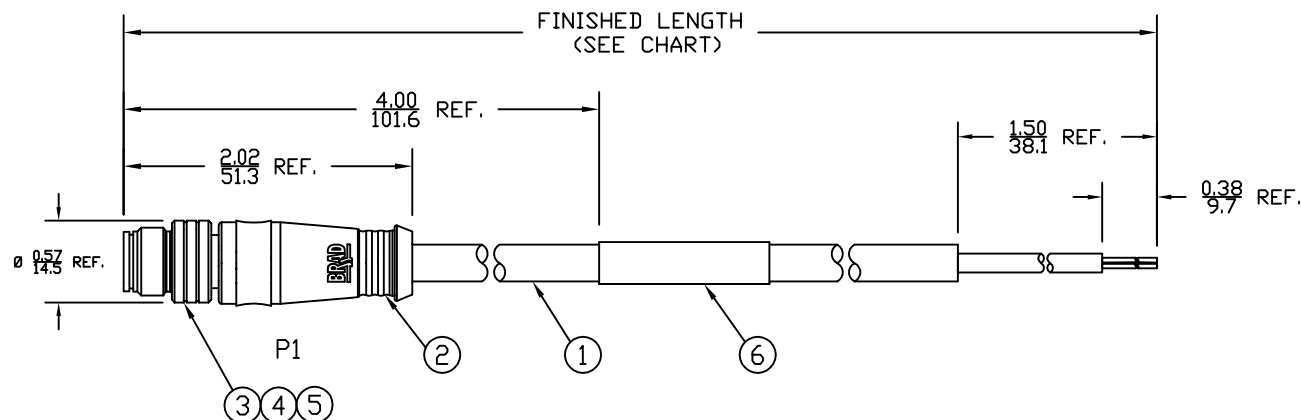

P1	
1	WHITE/DRG
2	WHITE/GRN
3	ORANGE
4	GREEN

WIRING DIAGRAM

NOTES:

- 1) MATERIAL: SEE TABLE
- 2) FINISHES: SEE TABLE
- 3) CABLE: #26/4 SHIELDED PVC
- 4) ELECTRICAL DATA:
ACCORDING TO CAT5e ETHERNET STANDARD
MAX. VOLTAGE: 30V
MAX. CURRENT 1.5A
- 5) ENVIRONMENTAL:
PROTECTION IP67
TEMPERATURE RANGE: -20°C TO 75°C
- 6) WRAP LABEL IS MARKED WITH P/N, DATE CODE,
VOLTAGE & AMPERAGE.
- 7) ASSEMBLY IS RoHS COMPLIANT.


ITEM	QTY.	DESCRIPTION	MATERIAL	FINISH
6	1	LABEL	PLASTIC FILM	BLACK/YELLOW
5	1	INSERT	PUR	BLACK
4	4	PIN CONTACT	COPPER ALLOY	GOLD PLATED
3	1	M12 COUPLING NUT	BRASS	NICKEL
2	1	OVERMOLD	PUR	BLACK
1	1	ETHERNET CABLE-CAT5E	PVC JACKET	TEAL

SD RELEASE EC NO: WEL2010-0005 7/10/09 DRWN: VOU CHKD: BWOODMAN APPR: JFMURPHY 2009/07/20		DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽C=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE IN/MM		SCALE 3:4	DESIGN UNITS INCH	THIRD ANGLE PROJECTION				
						mm	INCH	DRAWN BY DATE VOU 2009/07/06		TITLE MICRO-CHANGE CABLE ASSY 4P M/MP ST D-CODE #26/4 SHIELDED PVC					
								CHECKED BY DATE BWOODMAN 2009/07/31							
				4 PLACES		±----	±----	APPROVED BY DATE ---		molex		MOLEX INCORPORATED			
				3 PLACES		±----	±.005								
				2 PLACES		±----	±.010								
				1 PLACE		±----	±.020								
						ANGULAR ± 1/2°									
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-120108-015				SHEET NO. 1 OF 1	
1		REV				SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

TITLE
MICRO-CHANGE CABLE ASSY
4P M/MP ST D-CODE
#26/4 SHIELDED PVC

MOLEX INCORPORATED


SHEET NO.
1 OF 1



006



007

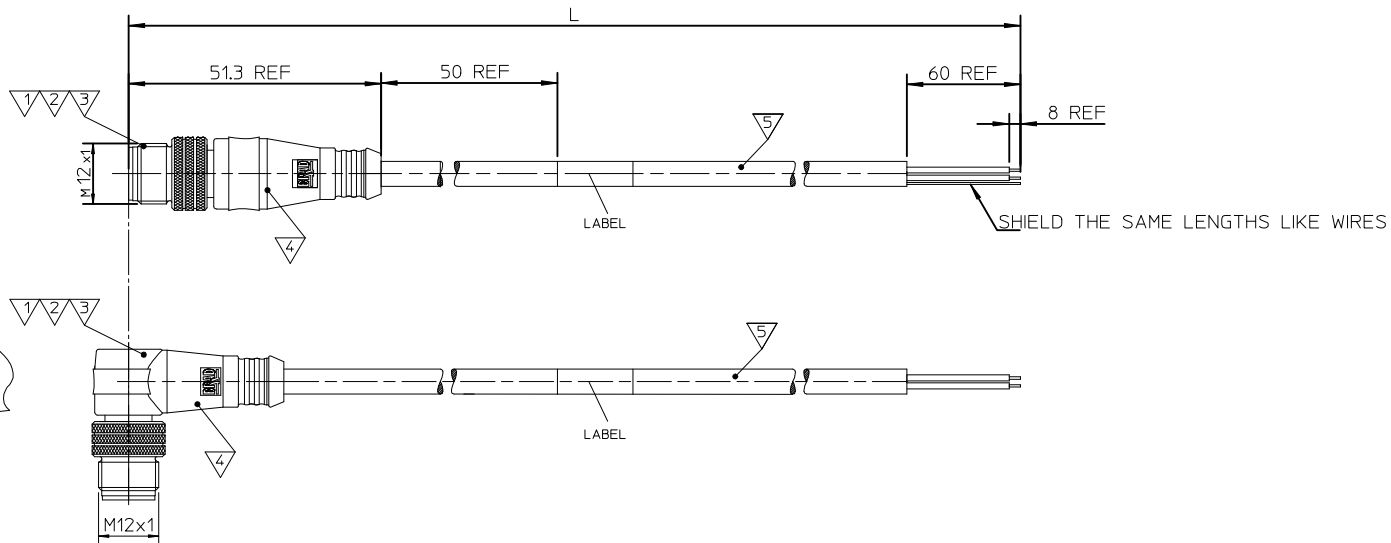

E 1 0 A X X X 1 5 X X X X X

Network Protocol E=Ethernet	second Connector 0=No connector	Wiring Scheme A=4 Pole	HEAD TYPE 006 Plugs male and single ended 007 Plugs male 90° and single ended	Cable type 26AWG 7/34 STRANDED TINNED COPPER PVC, TEAL	LENGTH UNIT C-cm M-m K-km F-feet	LENGTH Example: 020 - 2M 060 - 6M 100 - 10M	OPTIONS D- Decoupled (for Shielded version only)
--------------------------------	------------------------------------	---------------------------	---	---	--	---	---

Table of length tolerances		
Over	Up to and including	Tolerance (+)
0	305	+19
305	915	+45
915	1830	+56
1830	3660	+89
3660	7320	+165
7320	14640	+317
14640	30500	+610
30500	>	2 % of length

CONNECTOR SPECIFICATION:

VOLTAGE RATING	max 30V
AMPERAGE RATING	1.5 A
PROTECTION	IP67
OPERATING TEMPERATURE	-20°C TO 75°C

5	CABLE	1302100082	---
4	OVERMOULDING	TPU UF NATURAL C98A10	---
4	OVERMOULDING	MASTERBATCH COLORANT	---
3	COUPLING NUT	SEE SPECIAL TYPES	---
2	PIN CONTACT	COPPER ALLOY	GOLD OR NICKEL PLATED
1	INSERT	PUR	BLACK
ITEM	PART	MATERIAL	FINISH

DRAWING UPDATED EC NO: IPG2013-1486 DRWN:MDYSZEWSKA 2013/03/26 CHKD: APPR:MIWASIECZKO 2013/05/09	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION
		4 PLACES	± ---	± ---	DRAWN BY MDYSZEWSKA	DATE 2012/11/24	TITLE CSE ETH 4P DC MA PVC SE SHLD NI	
		3 PLACES	± ---	± ---	CHECKED BY HWALCZAK	DATE 2012/11/24		
		2 PLACES	± ---	± ---	APPROVED BY MIWASIECZKO	DATE 2013/01/21		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.		SHEET NO. 1 OF 2
SIZE A3		SEE PAGE 2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION				

F

E

D

C

B

A

F

E

D

C

B

A

SEE CHART 1

1201080140	E10A00615M030
1300480053	E10A00615M006
1300480054	E10A00615M010
1300480055	E10A00615M020
1300480056	E10A00615M050
1300480057	E10A00615M100
1300480058	E10A00615M150
1300480059	E10A00615M300
1300480289	E10A00615M500
1300488006	E10A00615M200
1300480077	E10A00715M006
1300480078	E10A00715M010
1300480079	E10A00715M020
1300480080	E10A00715M050
1300480081	E10A00715M100
1300480290	E10A00715M200

ORIGINAL RELEASE EC NO: IPG2013-0932 DRWN:MDYSZEWSKA 2012/11/24 CHKD:HWALCZAK 2012/11/24 APPR:MIWASIECZKO 2013/01/21	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◻=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	FIRST ANGLE PROJECTION								
				mm	INCH	DRAWN BY	DATE	TITLE CSE ETH 4P DC MA PVC SE SHLD NI									
			4 PLACES	±---	±---	MDYSZEWSKA	2012/11/24										
			3 PLACES	±---	±---	CHECKED BY	DATE	molex									
			2 PLACES	±---	±---	HWALCZAK	2012/11/24										
			1 PLACE	±---	±---	APPROVED BY	DATE						SD-130048-007				
			0 PLACE	±---	±---	MIWASIECZKO	2013/01/21										
			ANGULAR ±---°			MATERIAL NO.		DOCUMENT NO.		SHEET NO.							
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART 1		SD-130048-007		2 OF 2							
						SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION										

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9