

IEC Appliance Inlet C6 with Line Switch 1- or 2-pole



Snap-in version



Description

- Panel Mount :
Snap-in version , from front side
- Appliance Inlet , Pin temperature 70 °C , Protection class I ,
- Line Switch 1- or 2-pole
- Solder terminals or quick connect terminals

Approvals

- VDE Certificate Number: 40002273
- CSA File Number: 1020538

Characteristics

- Line switch non-illuminated or illuminated

References

We recommend for new applications the type [CMF3](#), [CMF6](#)
Last order date: 31.12.2016

Weblinks


[pdf datasheet](#), [html-datasheet](#), [General Product Information](#), [RoHS](#), [CHINA-RoHS](#), [REACH](#), [Distributor-Stock-Check](#), [Accessories](#), [Detailed request for product](#)

Technical Data

Ratings IEC	2.5 A / 250 VAC; 50 Hz	appliance inlet/-outlet	C6 acc. to IEC 60320-1
Ratings UL/CSA	2.5 A / 250 VAC; 60 Hz		UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 2.5 A, Protection Class I
Dielectric Strength	> 2.5 kVAC between L-N > 3 kVAC between L/N-PE (1 min/50 Hz)	Line Switch	Rocker switch 1 or 2 pole, non-illuminated or illuminated, acc. to IEC 61058-1 Technical Details
Allowable Operation Temperature	-25 °C to 70 °C		
IP-Protection	from front side IP 20 acc. to IEC 60529		
Insulation cover	Suitable for appliances with protection class I acc. to IEC 61140		
Terminal	Solder terminals or quick connect terminals		
Panel Thickness s	Snap-in: 1/1.5/2/2.5/3 mm		
Material: Housing	PA6, black, UL 94V-0		

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [General Product Information](#)

Dimensions

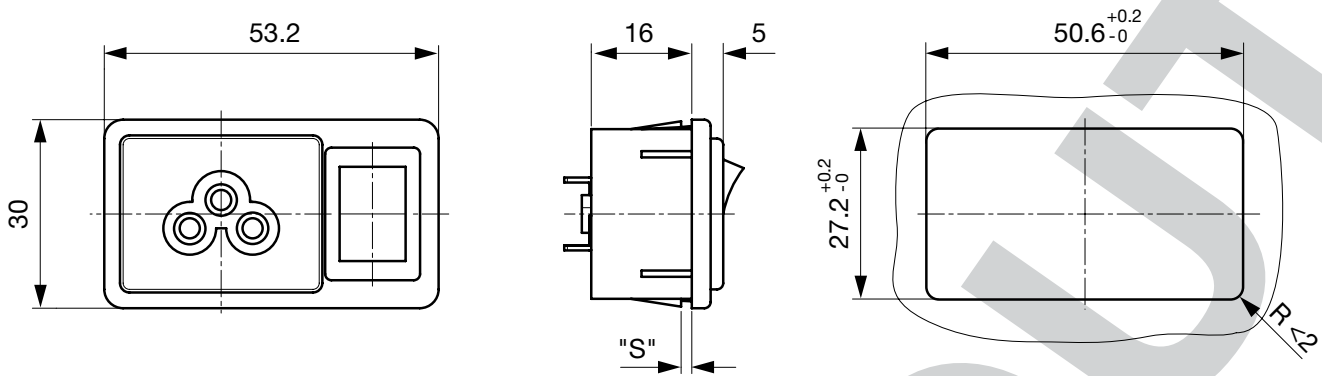

Length of the terminal please find at the order code configuration table

Dimension "S" please ref. to table order code

Config. Code

2565 - H - A B C N - D - E G P

The characters are placeholders for the correspondingly keys of selections from the key tables.

2565 - H - A B C N - D - E G P = Type

Type	Configuration key	Terminal Ground	Configuration key
combination frame	K	short solder terminal (L = 4.8 mm)	2
		long solder terminal (L = 8.5 mm)	3
		Blade terminal (2.8 x 0.8 mm)	7
		Blade terminal (4.8 x 0.8 mm)	8

2565 - H - A B C N - D - E G P = Terminals

Terminal L	Configuration key	Terminal Fuseholder	Configuration key
short solder terminal (L = 4.8 mm)	2	no fuseholder	0
long solder terminal (L = 8.5 mm)	3		
Blade terminal (2.8 x 0.8 mm)	7		
Blade terminal (4.8 x 0.8 mm)	8		

2565 - H - A B C N - D - E G P = Terminals

Terminal N	Configuration key	Style	Configuration key
short solder terminal (L = 4.8 mm)	2	snap-in (s=panel thickness)	4
long solder terminal (L = 8.5 mm)	3		
Blade terminal (2.8 x 0.8 mm)	7		
Blade terminal (4.8 x 0.8 mm)	8		

Symbols similar as in table A

2565 - H - A B C N - D - E G P = Terminals

2565 - H - A B C N - D - E G P = Terminal Fuseholder

Terminal Fuseholder	Configuration key
no fuseholder	0

2565 - H - A B C N - D - E G P = Color

Color	Configuration key
Black	A

2565 - H - A B C N - D - E G P = Style

Style	Configuration key
snap-in (s=panel thickness)	4

2565 - H - A B C N - D - E G P = Mass S

Mass "s"	Configuration key
10	

The dimension "S" is displayed in (1/10 mm). This information is also valid for the order code

Mass "s"	Configuration key	Switches	Configuration key
15		unipolar switch, 4,8mm blade terminal, black rocker	2
20		unipolar switch, solder terminal, black rocker	3
25		bipolar switch, 4,8mm blade terminal, black rocker	4
30		bipolar switch, solder terminals, black rocker	5
The dimension "S" is displayed in ($\frac{1}{10}$ mm). This information is also valid for the order code		bipolar switch, 4,8mm blade terminal, rocker red illuminated	6
		bipolar switch, solder terminal, rocker red illuminated	7
		bipolar switch, 4,8mm blade terminals, rocker green illuminated	8
		bipolar switch, solder terminals, rocker green illuminated	9

2565 - H - A B C N - D - E G P = Switches

All Variants

Config. Code	Description	Order Number
2565-K-2220-A-4155	2565, IEC Power Entry Module C6, 70°C, , version: I, L: short solder terminal (L = 4.8 mm), N: short solder terminal (L = 4.8 mm), ground: short solder terminal (L = 4.8 mm), color: Black, design: snap-in (s=panel thickness), dimension S: 15, bipolar switch, solder terminals, black rocker	4304.6044
2565-K-2220-A-4158	2565, IEC Power Entry Module C6, 70°C, , version: I, L: short solder terminal (L = 4.8 mm), N: short solder terminal (L = 4.8 mm), ground: short solder terminal (L = 4.8 mm), color: Black, design: snap-in (s=panel thickness), dimension S: 15, bipolar switch, 4,8mm blade terminals, rocker green illuminated	4304.6327

The listet variants should be available from stock Other versions on request www.schurter.com/contact

Availability for all products can be searched real-time:<http://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

Packaging unit 100 Pcs

Mating Outlets/Connectors

Category / Description



[Power Supply Cord Overview complete](#)

Cord Sets 2.5 A, Europlug, 2.0 m, Connector IEC C5, H05VV-F3G0.75, black

6052.0042

[Power Supply Cord further types to 2565-K](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9