

Part Number: WP1533AA/YD14V-W152      Yellow

### Features

- Outstanding material efficiency.
- Reliable and rugged.
- Low current capability.
- Housing UL rating: 94V-0.
- Housing material: type 66 nylon.
- 14V internal resistor.
- RoHS compliant.

### Description

The Yellow source color devices are made with Gallium Arsenide Phosphide on Gallium Phosphide Yellow Light Emitting Diode.

### Package Dimensions

Fig.1 :


ANODE LEAD :RED INSULATION LEAD ,24 AWG ,UL#1007,Ø1.45mm,  
TINNED OVERCOATED WIRE , STRIP 12.7mm.

Fig. 2 :

CATHODE LEAD :BLACK INSULATION LEAD ,24 AWG,UL#1007 ,Ø1.45mm,  
TINNED OVERCOATED WIRE , STRIP 12.7mm.

Fig.3 :

STAKING TO FIX THE HOLDER AND LED .

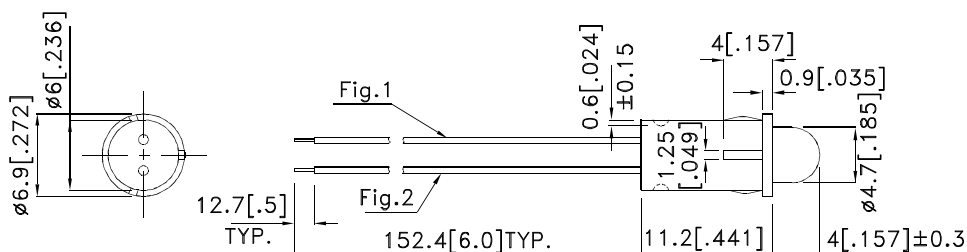

Remark:

Recommended panel mount hole diameter  $\phi=6.30-6.35\text{mm}$ ;  
panel thickness 1.0mm.

Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is  $\pm 0.25(0.01")$  unless otherwise noted.
3. Lead spacing is measured where the leads emerge from the package.
4. The specifications, characteristics and technical data described in the datasheet are subject to change without prior notice.



## Selection Guide

| Part No.            | Dice               | Lens Type       | Iv (mcd) [2]<br>V= 14V |      | Viewing Angle [1] |
|---------------------|--------------------|-----------------|------------------------|------|-------------------|
|                     |                    |                 | Min.                   | Typ. | 2θ1/2             |
| WP1533AA/YD14V-W152 | Yellow (GaAsP/GaP) | Yellow Diffused | 6                      | 15   | 60°               |

Notes:

1. θ1/2 is the angle from optical centerline where the luminous intensity is 1/2 of the optical peak value.
2. Luminous intensity/ luminous Flux: +/-15%.

## Electrical / Optical Characteristics at TA=25°C

| Symbol             | Parameter                | Device | Typ. | Max. | Units | Test Conditions     |
|--------------------|--------------------------|--------|------|------|-------|---------------------|
| λ <sub>peak</sub>  | Peak Wavelength          | Yellow | 590  |      | nm    | V <sub>F</sub> =14V |
| λ <sub>D</sub> [1] | Dominant Wavelength      | Yellow | 588  |      | nm    | V <sub>F</sub> =14V |
| Δλ <sub>1/2</sub>  | Spectral Line Half-width | Yellow | 35   |      | nm    | V <sub>F</sub> =14V |
| I <sub>F</sub>     | Forward Current          | Yellow | 10.5 | 13.5 | mA    | V <sub>F</sub> =14V |
| I <sub>R</sub>     | Reverse Current          | Yellow |      | 10   | uA    | V <sub>R</sub> = 5V |

Note:

- 1.Wavelength: +/-1nm.

## Absolute Maximum Ratings at TA=25°C

| Parameter                   | Yellow              | Units |
|-----------------------------|---------------------|-------|
| Power dissipation           | 160                 | mW    |
| Forward Voltage             | 16                  | V     |
| Reverse Voltage             | 5                   | V     |
| Operating Temperature       | -40°C To +70°C      |       |
| Storage Temperature         | -40°C To +85°C      |       |
| Lead Solder Temperature [1] | 260°C For 3 Seconds |       |
| Lead Solder Temperature [2] | 260°C For 5 Seconds |       |





Notes:

1. 2mm below package base.
2. 5mm below package base.




## Yellow

### WP1533AA/YD14V-W152

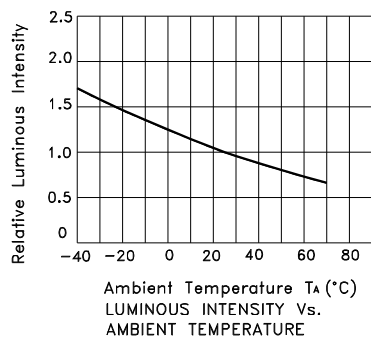

PACKING & LABEL SPECIFICATIONS


WP1533AA/YD14V-W152

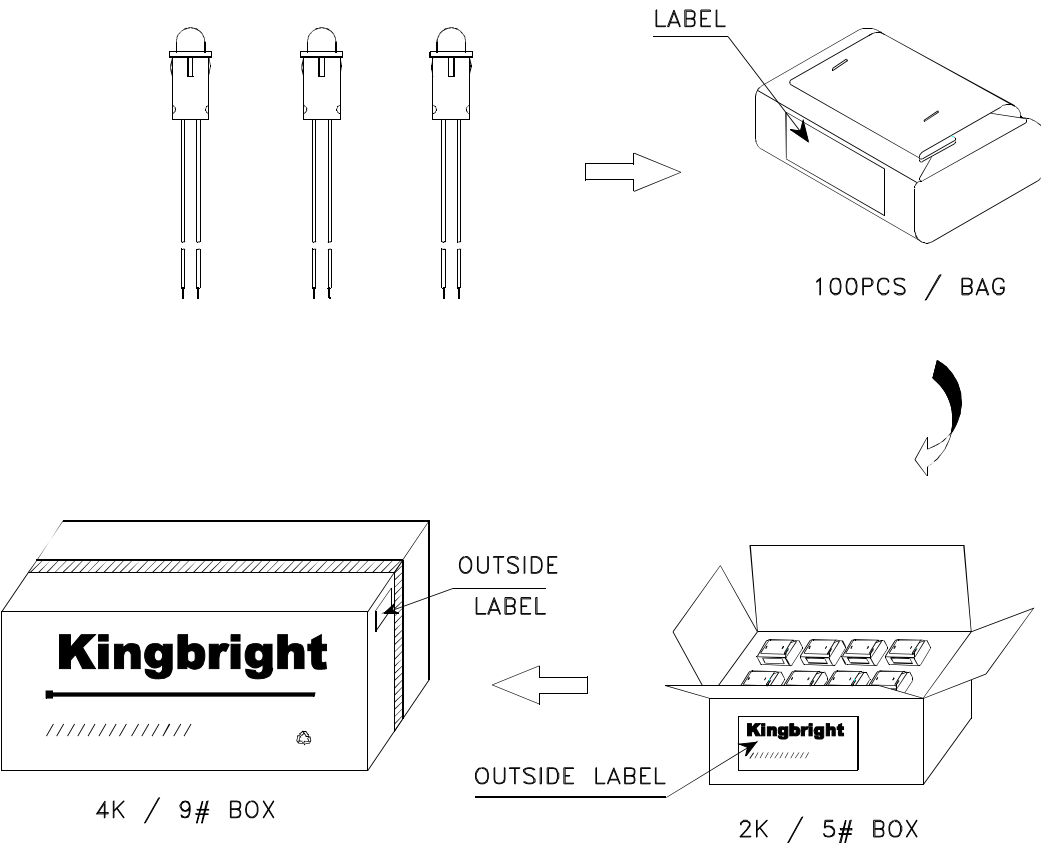

|                                                                                                    |                                                                                                                    |
|----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
| <b>Kingbright</b>                                                                                  |                                                                                                                    |
| P/NO: WP1533AAxxx                                                                                  |                                                                                                                    |
| QTY: 100 pcs                                                                                       | Q.C. <span style="border: 1px solid black; border-radius: 50%; padding: 2px;">Q C<br/>XX XX XXXX<br/>PASSED</span> |
| S/N: XXXX                                                                                          |                                                                                                                    |
| CODE: XXX                                                                                          |                                                                                                                    |
| LOT NO:                                                                                            |                                                                                                                    |
| <br>XXXXXXXXXX |                                                                                                                    |
| RoHS Compliant                                                                                     |                                                                                                                    |


## PRECAUTIONS

1. The lead pitch of the LED must match the pitch of the mounting holes on the PCB during component placement. Lead-forming may be required to insure the lead pitch matches the hole pitch. Refer to the figure below for proper lead forming procedures.

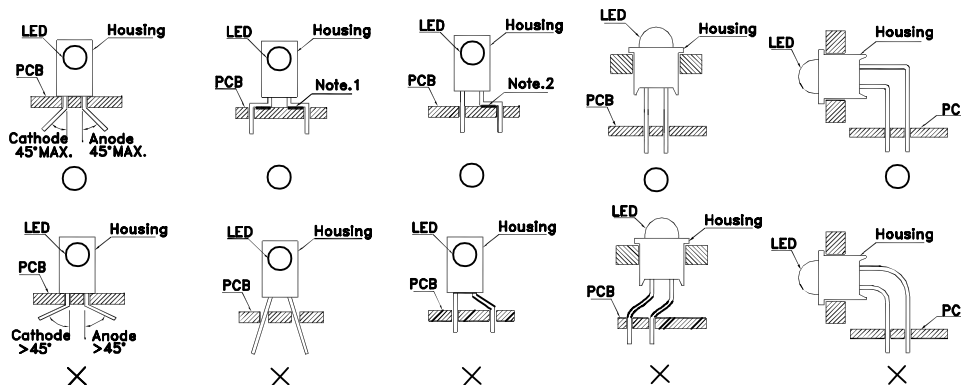


”○” Correct mounting method ”×” Incorrect mounting method

2. During soldering, component covers and holders should leave clearance to avoid placing damaging stress on the LED during soldering.

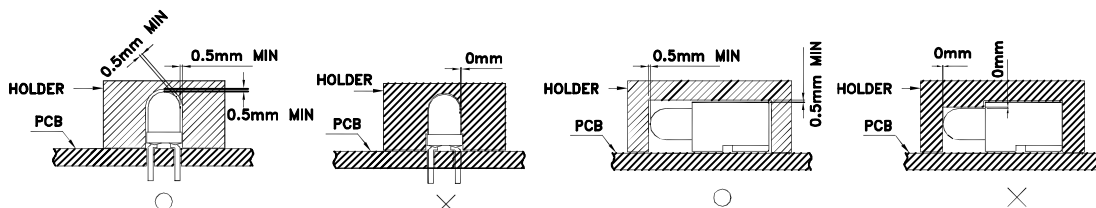

3. The tip of the soldering iron should never touch the lens epoxy.
4. Through-hole LEDs are incompatible with reflow soldering.
5. If the LED will undergo multiple soldering passes or face other processes where the part may be subjected to intense heat, please check with Kingbright for compatibility.
6. Recommended Wave Soldering Profile for Kingbright Thru-Hole Products

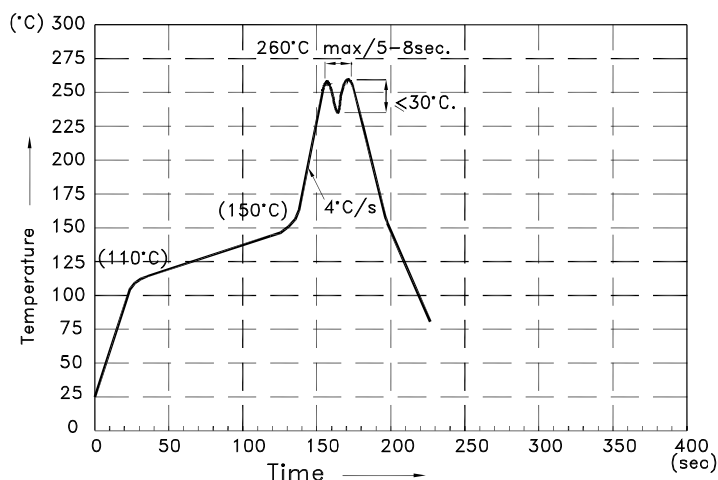

### NOTES:

1. Recommend the wave temperature 245°C~260°C. The maximum soldering temperature should be less than 260°C.
2. Do not apply stress on epoxy resins when temperature is over 85°C.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. During wave soldering, the PCB top-surface temperature should be kept below 105°C.
5. No more than once.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9