


Alchip® MVL Series

- Endurance : 105°C 3000 to 5000 hours
- Suitable for applications requiring long life such as continuously operating equipment, industrial applications, etc
- Solvent-proof type (see PRECAUTIONS AND GUIDELINES)
- Pb-free design




SPECIFICATIONS

Items	Characteristics							
Category	-40 to +105°C							
Temperature Range								
Rated Voltage Range	6.3 to 50V _{dc}							
Capacitance Tolerance	±20%(M) (at 20°C,120Hz)							
Leakage Current	I=0.03CV or 4μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, after 2 minutes)							
Dissipation Factor (tanδ)	Rated voltage (V _{dc})	6.3V	10V	16V	25V	35V	50V	(at 20°C,120Hz)
	Max. tanδ	0.28	0.24	0.20	0.16	0.13	0.12	
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V _{dc})	6.3V	10V	16V	25V	35V	50V	(120Hz)
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	10	7	5	3	3	3	
Endurance	After the capacitors are subjected to the rated DC voltage for 3000 hours (HA0 & JA0 sizes 5000 hours) at 105°C, the following specifications shall be satisfied when the capacitors are restored to 20°C.							
	Capacitance change	≤±30% of the initial measured value						
	D.F. (tanδ)	≤300% of the initial specified value						
	Leakage current	≤The initial specified value						
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 105°C without voltage applied.							
	Capacitance change	≤±30% of the initial measured value						
	D.F. (tanδ)	≤300% of the initial specified value						
	Leakage current	≤The initial specified value						

DIMENSIONS [mm]


- Terminal Code : A

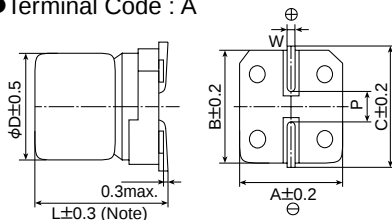

Note : L±0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
D60	4	5.7	4.3	4.3	5.1	0.5 to 0.8	1.0
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

PART NUMBERING SYSTEM

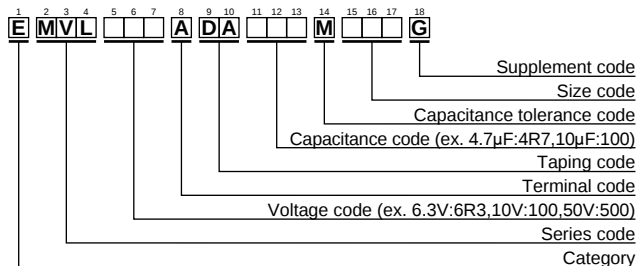

Please refer to "A guide to global code (surface mount type)"

MARKING



STANDARD RATINGS

WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.
6.3	22	D60	0.28	22	EMVL6R3ADA220MD60G
	47	E60	0.28	36	EMVL6R3ADA470ME60G
	100	F60	0.28	60	EMVL6R3ADA101MF60G
	220	F80	0.28	101	EMVL6R3ADA221MF80G
	330	HA0	0.28	160	EMVL6R3ADA331MHA0G
10	1000	JA0	0.28	313	EMVL6R3ADA102MJA0G
	33	E60	0.24	35	EMVL100ADA330ME60G
	220	HA0	0.24	141	EMVL100ADA221MHA0G
	10	D60	0.20	18	EMVL160ADA100MD60G
	22	E60	0.20	30	EMVL160ADA220ME60G
16	47	F60	0.20	50	EMVL160ADA470MF60G
	100	F80	0.20	81	EMVL160ADA101MF80G
	470	JA0	0.20	254	EMVL160ADA471MJA0G
	33	F60	0.16	48	EMVL250ADA330MF60G
	47	F80	0.16	63	EMVL250ADA470MF80G
25	100	HA0	0.16	116	EMVL250ADA101MHA0G
	330	JA0	0.16	238	EMVL250ADA331MJA0G
WV (V _{dc})	Cap (μF)	Size code	tanδ	Rated ripple current (mA _{rms} /105°C,120Hz)	Part No.
35	4.7	D60	0.13	15	EMVL350ADA4R7MD60G
	10	E60	0.13	25	EMVL350ADA100ME60G
	22	F60	0.13	42	EMVL350ADA220MF60G
	33	F80	0.13	57	EMVL350ADA330MF80G
	220	JA0	0.13	216	EMVL350ADA221MJA0G
50	0.10	D60	0.12	1.0	EMVL500ADAR10MD60G
	0.22	D60	0.12	2.6	EMVL500ADAR22MD60G
	0.33	D60	0.12	3.2	EMVL500ADAR33MD60G
	0.47	D60	0.12	3.8	EMVL500ADAR47MD60G
	1.0	D60	0.12	6.2	EMVL500ADA1R0MD60G
	2.2	D60	0.12	11	EMVL500ADA2R2MD60G
	3.3	D60	0.12	14	EMVL500ADA3R3MD60G
	4.7	E60	0.12	19	EMVL500ADA4R7ME60G
	10	F60	0.12	30	EMVL500ADA100MF60G
	22	F80	0.12	49	EMVL500ADA220MF80G
	33	HA0	0.12	77	EMVL500ADA330MHA0G
	47	HA0	0.12	92	EMVL500ADA470MHA0G
	100	JA0	0.12	151	EMVL500ADA101MJA0G

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9