


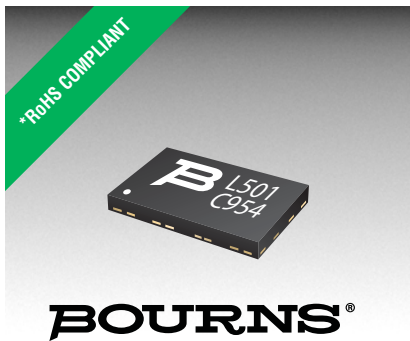

## Features

- Superior circuit protection
- Overcurrent & overvoltage protection
- Blocks surges up to rated limits
- High-speed performance
- Small SMT package
- RoHS compliant\*
- Agency recognition: 

## Applications

- SLIC protection
- Cable & DSL
- MDU/MTU modems
- ONT
- Voice/DSL line cards


# TBU-PL Series - TBU® High-Speed Protectors

## General Information

The TBU-PL Series of Bourns® TBU® products are low capacitance dual bidirectional high-speed protection components, constructed using MOSFET semiconductor technology, and designed to protect against faults caused by short circuits, AC power cross, induction and lightning surges.

In addition to overcurrent protection, an added feature is the voltage monitoring on the two lines. If the voltage on the line drops below  $V_{SS}$  then the voltage will trigger the device to switch to the blocking state.

The TBU® high-speed protector placed in the system circuit will monitor the current with the MOSFET detection circuit triggering to provide an effective barrier behind which sensitive electronics will not be exposed to large voltages or currents during surge events. The TBU® device is provided in a surface mount DFN package and meets industry standard requirements such as RoHS and Pb Free solder reflow profiles.



## Agency Approval

| Description |                      |
|-------------|----------------------|
| UL          | File Number: E315805 |

## Industry Standards (in Conjunction with OVP Device)

Solutions available for GR-1089-CORE, ITU-T and a combination of both.

## Absolute Maximum Ratings (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Symbol     | Parameter                                                    | Part Number      | Value       | Unit             |
|------------|--------------------------------------------------------------|------------------|-------------|------------------|
| $V_{imp}$  | Peak impulse voltage withstand with duration less than 10 ms | TBU-PL050-xxx-WH | 500         | V                |
|            |                                                              | TBU-PL060-xxx-WH | 600         |                  |
|            |                                                              | TBU-PL075-xxx-WH | 750         |                  |
|            |                                                              | TBU-PL085-xxx-WH | 850         |                  |
| $V_{rms}$  | Continuous A.C. RMS voltage                                  | TBU-PL050-xxx-WH | 300         | V                |
|            |                                                              | TBU-PL060-xxx-WH | 350         |                  |
|            |                                                              | TBU-PL075-xxx-WH | 400         |                  |
|            |                                                              | TBU-PL085-xxx-WH | 425         |                  |
| $T_{op}$   | Operating temperature range                                  |                  | -55 to +125 | $^\circ\text{C}$ |
| $T_{stg}$  | Storage temperature range                                    |                  | -65 to +150 | $^\circ\text{C}$ |
| $T_{jmax}$ | Maximum Junction Temperature                                 |                  | +125        | $^\circ\text{C}$ |
| ESD        | HBM ESD Protection per IEC 61000-4-2 on line pads            |                  | $\pm 2$     | kV               |

## Electrical Characteristics (@ $T_A = 25^\circ\text{C}$ Unless Otherwise Noted)

| Symbol               | Parameter                                                                                                                  | Part Number                          |              | Min.       | Typ.       | Max.       | Unit |
|----------------------|----------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------|------------|------------|------------|------|
| I <sub>trigger</sub> | Current required for the device to go from operating state to protected state                                              | TBU-PLxxx-100-WH<br>TBU-PLxxx-200-WH |              | 100<br>200 | 150<br>300 | 200<br>400 | mA   |
| R <sub>device</sub>  | Series resistance of the TBU® device                                                                                       |                                      |              | 40         | 50         | 55         | Ω    |
| R <sub>match</sub>   | Package resistance matching of the TBU® device #1 - TBU® device #2                                                         |                                      |              |            | ±0.5       | ±1.0       | Ω    |
| t <sub>block</sub>   | Time taken for the device to go into current limiting                                                                      |                                      |              |            |            | 1          | μs   |
| I <sub>Q</sub>       | Current through the triggered TBU® device with 50 Vdc circuit voltage                                                      |                                      |              | 0.25       | 0.70       | 1.50       | mA   |
| I <sub>ss</sub>      | Operating current with V <sub>ss</sub> = -50 V                                                                             |                                      |              |            | 100        |            | μA   |
| V <sub>reset</sub>   | Voltage below which the triggered TBU® device will transition to normal operating state                                    | TBU-PLxxx-100-WH                     | Forward Mode | 12         | 15         | 22         | V    |
|                      |                                                                                                                            |                                      | Reverse Mode | 10         | 13         | 20         |      |
|                      |                                                                                                                            | TBU-PLxxx-200-WH                     | Forward Mode | 15         | 20         | 25         |      |
|                      |                                                                                                                            |                                      | Reverse Mode | 12         | 17         | 22         |      |
| V <sub>to</sub>      | Voltage threshold offset with 60 Hz applied voltage, with V <sub>ss</sub> -50 V (V <sub>ss</sub> - V <sub>lineSLIC</sub> ) |                                      |              | -1.0       |            | 0.2        | V    |
| V <sub>ss</sub>      | Operating voltage range relative to V <sub>dd</sub>                                                                        |                                      |              | -180       |            | -20        | V    |
| R <sub>th(j-l)</sub> | One side junction to package pads - FR4 using minimum recommended pad layout                                               |                                      |              |            | 110        |            | °C/W |
| R <sub>th(j-l)</sub> | Both sides junction to package pads - FR4 using minimum recommended pad layout                                             |                                      |              |            | 65         |            | °C/W |
| R <sub>th(j-l)</sub> | One side junction to package pads - FR4 using heat sink on board (6 cm <sup>2</sup> ) (0.5 in. <sup>2</sup> )              |                                      |              |            | 70         |            | °C/W |
| R <sub>th(i-l)</sub> | Both sides junction to package pads - FR4 using heat sink on board (6 cm <sup>2</sup> ) (0.5 in. <sup>2</sup> )            |                                      |              |            | 40         |            | °C/W |

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.


Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

## TBU-PL Series - TBU® High-Speed Protectors


**BOURNS®**

### Functional Block Diagram

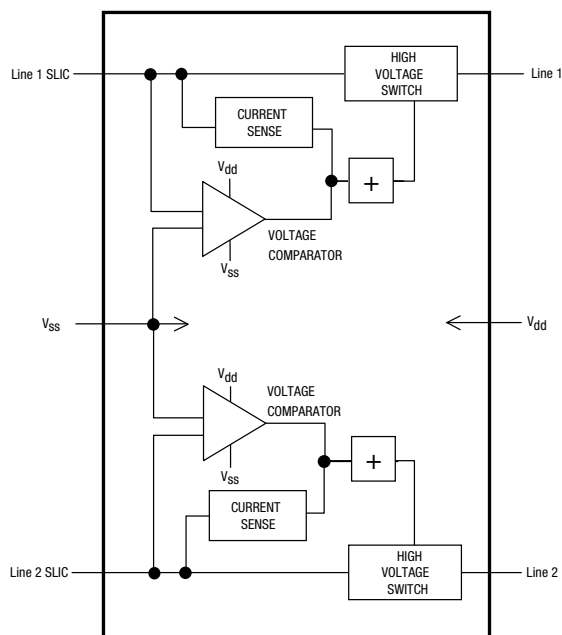

### Reference Application

The TBU-PL Series are high-speed protectors used in voice/VoIP SLIC applications. The maximum voltage rating of the TBU® device should never be exceeded. Where necessary, an OVP device should be employed to limit the maximum voltage. A cost-effective protection solution combines Bourns® TBU® protection devices with a pair of Bourns® MOVs. For bandwidth sensitive applications, a Bourns® GDT may be substituted for the MOV. If EN55024 EMC compliance is required, the TBU® device may require capacitors to be fitted between the Tip and Ring connections and ground.

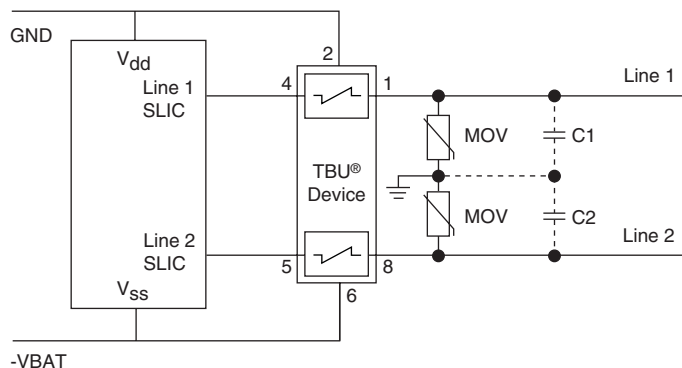

### Basic TBU Operation

The TBU® device, constructed using MOSFET semiconductor technology, placed in the system circuit will monitor the current with the MOSFET detection circuit triggering to provide an effective barrier behind which sensitive electronics are not exposed to large voltages or currents during surge events. The TBU® device operates in approximately 1  $\mu$ s - once line current exceeds the TBU® device's trigger current  $I_{trigger}$ . When operated, the TBU® device restricts line current to less than 1 mA typically. When operated, the TBU® device will block all voltages including the surge up to rated limits.

When the voltage on the SLIC output is driven below ( $V_{bat} - V_{to}$ ) the TBU-PL series device switches to the blocking state, regardless of output current in the device.

After the surge, the TBU® device resets when the voltage across the TBU® device falls to the  $V_{reset}$  level. The TBU® device will automatically reset on lines which have no DC bias or have DC bias below  $V_{reset}$  (such as unpowered signal lines).

If the line has a normal DC bias above  $V_{reset}$ , the voltage across the TBU® device may not fall below  $V_{reset}$  after the surge. In such cases, special care needs to be taken to ensure that the TBU® device will reset, with software monitoring as one method used to accomplish this. Bourns application engineers can provide further assistance.

# TBU-PL Series - TBU® High-Speed Protectors

**BOURNS®**

## Bourns® TBU® Device Solutions

| Industry Standard                                        | Surge & AC Withstand                                                                                                                                                                                                                   | TBU® Device P/N  | Qty. | OVP Device P/N               | Qty. |
|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|------|------------------------------|------|
| Telcordia GR-1089-CORE<br>Intra-building<br>Port Type 4  | 1500 V, 100 A 2/10 $\mu$ s<br>120 V <sub>rms</sub> , 25 A, 900 s                                                                                                                                                                       | TBU-PL050-100-WH | 1    | <a href="#">MOV-07D201K</a>  | 2    |
| Telcordia GR-1089-CORE<br>Intra-building<br>Port Type 4a | 1000 V, 100 A 10/1000 $\mu$ s<br>120 V <sub>rms</sub> , 25 A, 900 s                                                                                                                                                                    | TBU-PL060-100-WH | 1    | <a href="#">MOV-10D201K</a>  | 2    |
| Non-GR-1089-CORE Intra-building<br>Specifications        | 5000 V, 500 A 2/10 $\mu$ s<br>230 V <sub>rms</sub> , 25 A, 900 s                                                                                                                                                                       | TBU-PL085-100-WH | 1    | <a href="#">MOV-10D361K</a>  | 2    |
|                                                          | 1500 V, 100 A 2/10 $\mu$ s<br>275 V <sub>rms</sub> , 25 A, 900 s                                                                                                                                                                       | TBU-PL085-100-WH | 1    | <a href="#">MOV-10D431K</a>  | 2    |
| ITU-T Basic K.20, K.21, K.45                             | 4000 V, 40 $\Omega$ 10/700 $\mu$ s<br>230 V <sub>rms</sub> 10 $\Omega$ - 1000 $\Omega$ , 900 s<br>600 V <sub>rms</sub> 600 $\Omega$ , 0.2 s                                                                                            | TBU-PL075-100-WH | 1    | <a href="#">MOV-10D361K</a>  | 2    |
|                                                          | 4000 V, 40 $\Omega$ 10/700 $\mu$ s<br>230 V rms 10 $\Omega$ - 1000 $\Omega$ , 900 s<br>600 V rms 600 $\Omega$ , 0.1 s                                                                                                                  | TBU-PL060-100-WH | 1    | <a href="#">TISP4400M3BJ</a> | 2    |
| ITU-T Enhanced K.20, K.21, K.45                          | 6000 V, 40 $\Omega$ 10/700 $\mu$ s<br>240 V <sub>rms</sub> 10 $\Omega$ - 1000 $\Omega$ , 900 s<br>600 V <sub>rms</sub> 600 $\Omega$ , 0.2 s<br>600 V <sub>rms</sub> 600 $\Omega$ , 1 s*<br>1500 V <sub>rms</sub> , 200 $\Omega$ , 2 s* | TBU-PL085-100-WH | 1    | <a href="#">MOV-10D391K</a>  | 2    |
|                                                          | 6000 V, 40 $\Omega$ 10/700 $\mu$ s<br>240 V <sub>rms</sub> 10 $\Omega$ - 1000 $\Omega$ , 900 s<br>600 V <sub>rms</sub> 600 $\Omega$ , 1 s<br>1500 V <sub>rms</sub> , 200 $\Omega$ , 2 s                                                | TBU-PL060-100-WH | 1    | <a href="#">TISP4500H3BJ</a> | 2    |

\* GDT Special Test Protector with DC breakdown (DCBD) of less than 330 V.

### Notes:

- 1) The Le9500, Le9520 and Le9530 (VE950 series) require a 200 mA I<sub>trigger</sub> TBU® device for normal operation. Other SLIC types should use the 100 mA device.
- 2) The MOV maximum continuous rms voltage rating should not be exceeded. The exception is where the data sheet highlights withstand capability such as the 600 V<sub>rms</sub>, 1 A for 0.2 s, for example.
- 3) If EN55024 EMC compliance is required, the TBU® device may require capacitors to be fitted between the Tip and Ring connections and ground (i.e. in parallel with the MOV device). The capacitance value can be chosen to meet levels as follows:
  - 10 nF for EN55024 Level 1
  - 20 nF for EN55024 Level 2
  - 47 nF for EN55024 Level 3

Selection of capacitor voltage rating depends upon TBU® part number selection. Recommendations include:

- TBU-PL050 & TBU-PL060 Series: 120 VAC, 500 V Peak Surge Rated
- TBU-PL075 & TBU-PL085 Series: 240 VAC, 750 V Peak Surge Rated


Depending upon the SLIC type, it is usually possible to remove any EMI capacitors present between the output of the SLIC and ground when using capacitors C1 and C2 in parallel with the MOVs.

# TBU-PL Series - TBU® High-Speed Protectors


**BOURNS®**

## Performance Graphs


### Typical V-I Characteristics (TBU-PL085-200-WH)

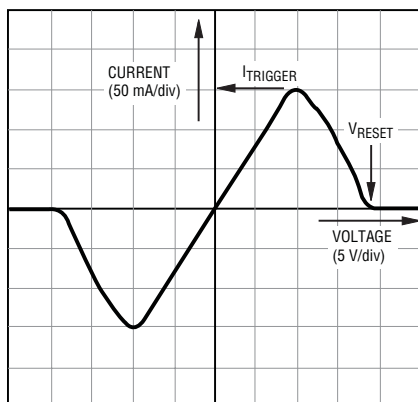


### Typical Trigger Current vs. Temperature

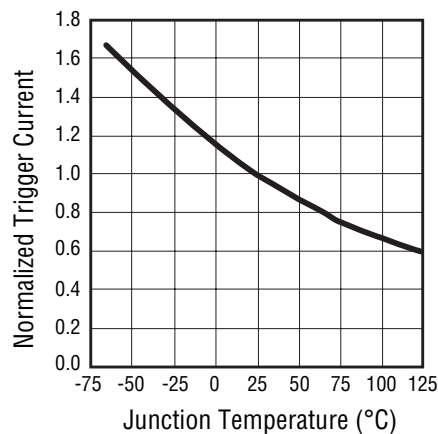


### Tracking Voltage Characteristics

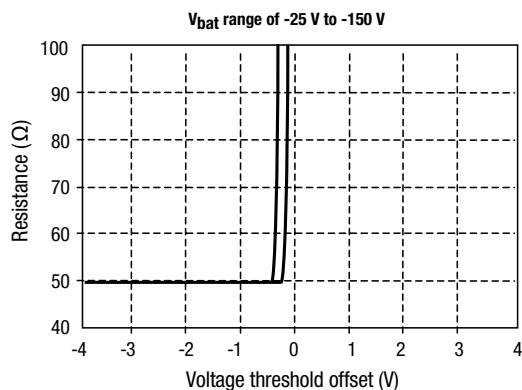


### Typical Resistance vs. Temperature

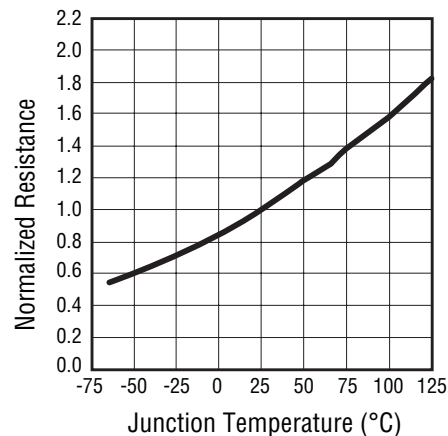

### Power Derating Curve

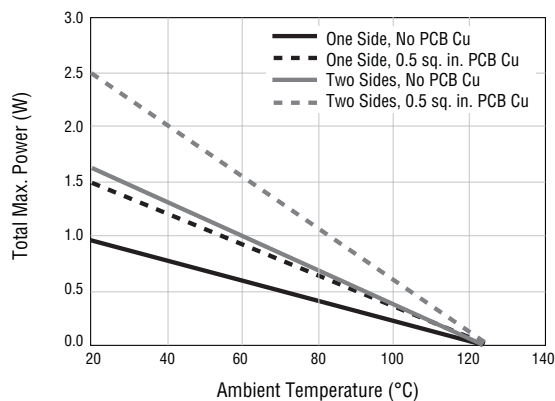

### Typical Surge Response

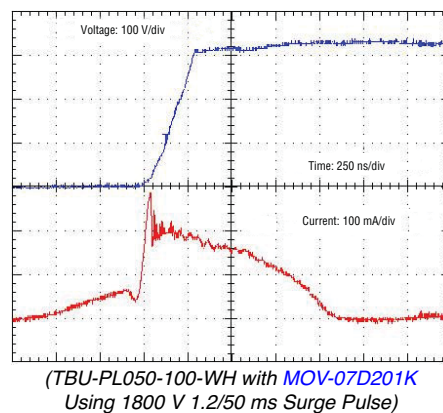


Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

# TBU-PL Series - TBU® High-Speed Protectors

**BOURNS®**


## Product Dimensions

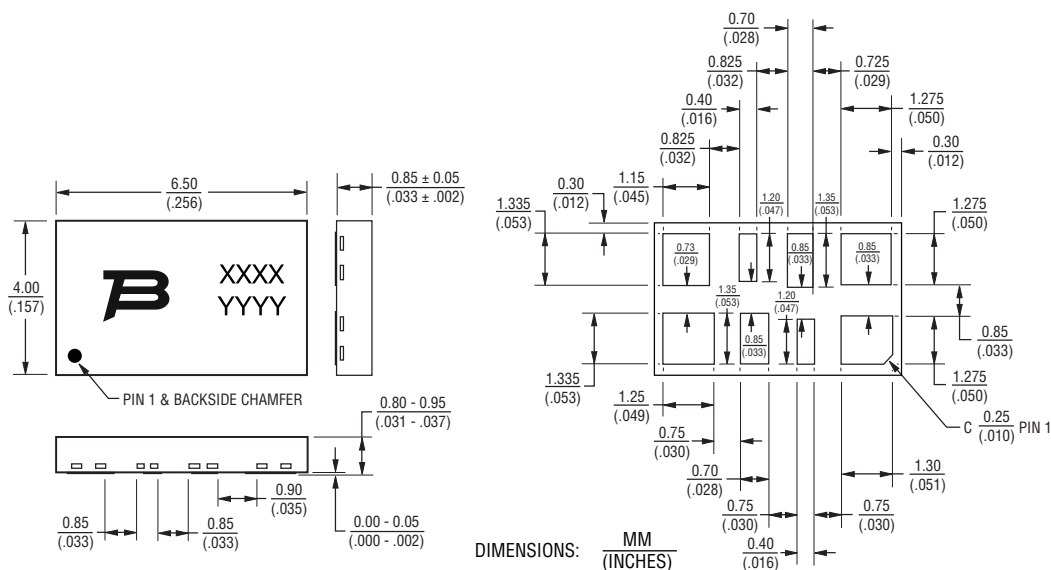

## Recommended Pad Layout


TBU® High-Speed Protectors have a 100 % matte-tin termination finish. For improved thermal dissipation, the recommended layout uses PCB copper areas which extend beyond the exposed solder pad. The exposed solder pads should be defined by a solder mask which matches the pad layout of the TBU® device in size and spacing. It is recommended that they should be the same dimension as the TBU® pads but if smaller solder pads are used, they should be centered on the TBU® package terminal pads and not more than 0.10-0.12 mm (0.004-0.005 in.) smaller in overall width or length. Solder pad areas should not be larger than the TBU® pad sizes to ensure adequate clearance is maintained. The recommended

stencil thickness is 0.10-0.12 mm (0.004-0.005 in.) with a stencil opening size 0.025 mm (0.0010 in.) less than the solder pad size. Extended copper areas beyond the solder pad significantly improve the junction to ambient thermal resistance, resulting in operation at lower junction temperatures with a corresponding benefit of reliability. All pads should be soldered to the PCB, including pads marked as NC or NU but no electrical connection should be made to these pads. For minimum parasitic capacitance, it is recommended that signal, ground or power signals are not routed beneath any pad.

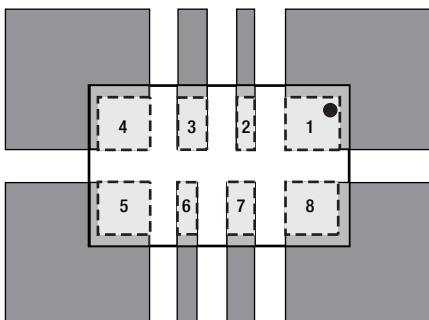

Dark grey areas show added PCB copper area for better thermal resistance.

## Thermal Resistance vs Additional PCB Cu Area

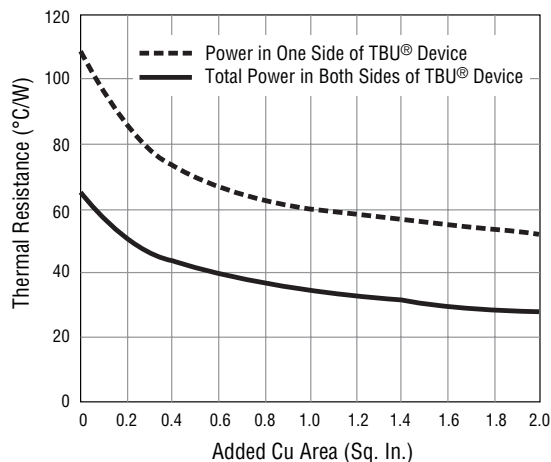


Specifications are subject to change without notice.  
Customers should verify actual device performance in their specific applications.

# TBU-PL Series - TBU® High-Speed Protectors

**BOURNS®**

## Reflow Profile

| Profile Feature                                                                                                                                                                                       | Pb-Free Assembly                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|
| Average Ramp-Up Rate (T <sub>smax</sub> to T <sub>p</sub> )                                                                                                                                           | 3 °C/sec. max.                  |
| Preheat <ul style="list-style-type: none"> <li>- Temperature Min. (T<sub>smin</sub>)</li> <li>- Temperature Max. (T<sub>smax</sub>)</li> <li>- Time (t<sub>smin</sub> to t<sub>smax</sub>)</li> </ul> | 150 °C<br>200 °C<br>60-180 sec. |
| Time maintained above: <ul style="list-style-type: none"> <li>- Temperature (T<sub>L</sub>)</li> <li>- Time (t<sub>L</sub>)</li> </ul>                                                                | 217 °C<br>60-150 sec.           |
| Peak/Classification Temperature (T <sub>p</sub> )                                                                                                                                                     | 260 °C                          |
| Time within 5 °C of Actual Peak Temp. (t <sub>p</sub> )                                                                                                                                               | 20-40 sec.                      |
| Ramp-Down Rate                                                                                                                                                                                        | 6 °C/sec. max.                  |
| Time 25 °C to Peak Temperature                                                                                                                                                                        | 8 min. max.                     |

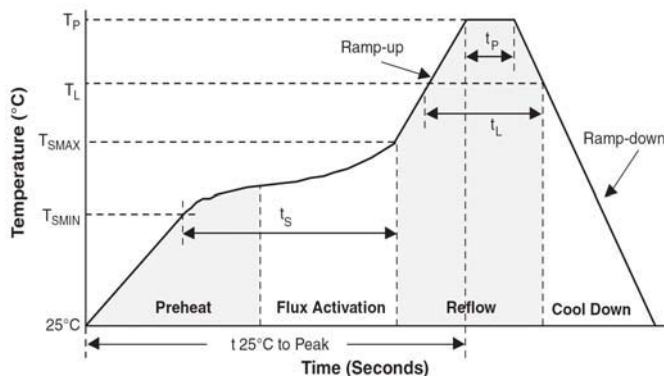

## How to Order

**TBU - PL 085 - 100 - WH**

TBU® Product \_\_\_\_\_

Series \_\_\_\_\_  
 PL = Dual Bidirectional Series


Impulse Voltage Rating \_\_\_\_\_  
 050 = 500 V  
 060 = 600 V  
 075 = 750 V  
 085 = 850 V

Trigger Current \_\_\_\_\_  
 100 = 100 mA  
 200 = 200 mA


Hold to Trip Ratio Suffix \_\_\_\_\_  
 W = Hold to Trip Ratio

Package Suffix \_\_\_\_\_  
 H = DFN Package

## Typical Part Marking

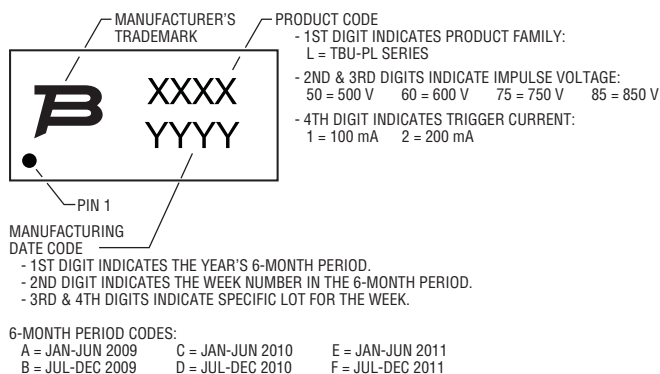

## Device Pin Out



## Pad Designation


| Pad # | Pin Out                              |
|-------|--------------------------------------|
| 1     | Line 1                               |
| 2     | V <sub>dd</sub> (SLIC Ground or 0 V) |
| 3     | Not Used                             |
| 4     | Line 1 SLIC                          |

| Pad # | Pin Out                                                      |
|-------|--------------------------------------------------------------|
| 5     | Line 2 SLIC                                                  |
| 6     | V <sub>SS</sub> (SLIC Negative Supply or -V <sub>bat</sub> ) |
| 7     | Not Used                                                     |
| 8     | Line 2                                                       |

# TBU-PL Series - TBU® High-Speed Protectors

**BOURNS®**

## Packaging Specifications

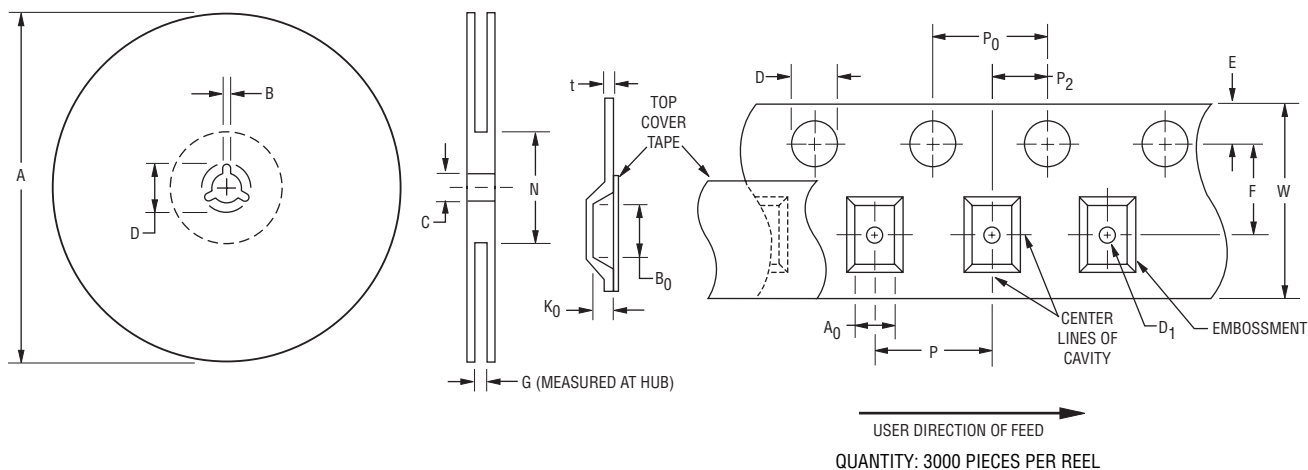

| A        |          | B      |        | C      |        | D      |      | G      | N       |
|----------|----------|--------|--------|--------|--------|--------|------|--------|---------|
| Min.     | Max.     | Min.   | Max.   | Min.   | Max.   | Min.   | Max. | Ref.   | Ref.    |
| 326      | 330      | 1.5    | 2.5    | 12.8   | 13.5   | 20.2   | -    | 16.5   | 102     |
| (12.835) | (13.002) | (.059) | (.098) | (.504) | (.531) | (.795) |      | (.650) | (4.016) |

| A <sub>0</sub> |        | B <sub>0</sub> |        | D              |        | D <sub>1</sub> |        | E      |        | F      |        |
|----------------|--------|----------------|--------|----------------|--------|----------------|--------|--------|--------|--------|--------|
| Min.           | Max.   | Min.           | Max.   | Min.           | Max.   | Min.           | Max.   | Min.   | Max.   | Min.   | Max.   |
| 4.30           | 4.50   | 6.70           | 6.90   | 1.5            | 1.6    | 1.5            | -      | 1.65   | 1.85   | 7.4    | 7.6    |
| (.169)         | (.177) | (.264)         | (.272) | (.059)         | (.063) | (.059)         |        | (.065) | (.073) | (.291) | (.299) |
| K <sub>0</sub> |        | P              |        | P <sub>0</sub> |        | P <sub>2</sub> |        | t      |        | W      |        |
| Min.           | Max.   | Min.           | Max.   | Min.           | Max.   | Min.           | Max.   | Min.   | Max.   | Min.   | Max.   |
| 1.0            | 1.2    | 7.9            | 8.1    | 3.9            | 4.1    | 1.9            | 2.1    | 0.25   | 0.35   | 15.7   | 16.3   |
| (.039)         | (.047) | (.311)         | (.319) | (.159)         | (.161) | (.075)         | (.083) | (.010) | (.014) | (.618) | (.642) |

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

**BOURNS®**

Asia-Pacific: Tel: +886-2 2562-4117 • Fax: +886-2 2562-4116

Europe: Tel: +41-41 768 5555 • Fax: +41-41 768 5510

The Americas: Tel: +1-951 781-5500 • Fax: +1-951 781-5700

[www.bourns.com](http://www.bourns.com)

REV. 01/25/12

"TBU" is a registered trademark of Bourns, Inc. in the United States and other countries.

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9