# **Complementary Silicon Power Transistors**

Specifically designed for general purpose amplifier and switching applications.

#### **Features**

- Isolated Overmold Package (1500 Volts RMS Min)
- Electrically Similar to the Popular MJE3055T and MJE2955T
- Collector–Emitter Sustaining Voltage V<sub>CEO(sus)</sub> 90 Volts
- 10 Amperes Rated Collector Current
- No Isolating Washers Required
- Reduced System Cost
- UL Recognized, File #E69369, to 3500 V<sub>RMS</sub> Isolation
- Epoxy Meets UL 94 V-0 at 0.125 in
- ESD Ratings: Machine Model, C; >400 V Human Body Model, 3B; >8000 V
- Pb-Free Packages are Available\*

#### **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Collector-Emitter Sustaining Voltage	V <sub>CEO(sus)</sub>	90	Vdc
Collector-Emitter Breakdown Voltage	V <sub>CES</sub>	90	Vdc
Base-Emitter Voltage	$V_{EBO}$	5.0	Vdc
Collector Current - Continuous	I <sub>C</sub>	10	Adc
Base Current - Continuous	Ι <sub>Β</sub>	6.0	Adc
RMS Isolation Voltage (Note 3) (t = 0.3 sec, R.H. $\leq$ 30%, T <sub>A</sub> = 25°C) Per Figure 5	V <sub>ISOL</sub>	4500	V <sub>RMS</sub>
Total Power Dissipation @ T <sub>C</sub> = 25°C (Note 2) Derate above 25°C	P <sub>D</sub>	30 0.25	W W/°C
Total Power Dissipation @ T <sub>A</sub> = 25°C Derate above 25°C	P <sub>D</sub>	2.0 0.016	W W/°C
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C

#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction-to-Case (Note 2)	$R_{\theta JC}$	4.0	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62.5	°C/W
Lead Temperature for Soldering Purposes	$T_L$	260	°C

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

- 1. Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.
- Measurement made with thermocouple contacting the bottom insulated surface (in a location beneath the die), the devices mounted on a heatsink with thermal grease and a mounting torque of ≥ 6 in. lbs.
- 3. Proper strike and creepage distance must be provided.



#### ON Semiconductor®


http://onsemi.com

# COMPLEMENTARY SILICON POWER TRANSISTORS 10 AMPERES 90 VOLTS, 30 WATTS



TO-220 FULLPACK CASE 221D STYLE 2

#### **MARKING DIAGRAM**



Fxx55 = Specific Device Code

xx= 29 or 30

G = Pb-Free Package A = Assembly Location

Y = Year

WW = Work Week

#### **ORDERING INFORMATION**

Device	Package	Shipping
MJF2955	TO-220 FULLPACK	50 Units/Rail
MJF2955G	TO-220 FULLPACK (Pb-Free)	50 Units/Rail
MJF3055	TO-220 FULLPACK	50 Units/Rail
MJF3055G	TO-220 FULLPACK (Pb-Free)	50 Units/Rail

<sup>\*</sup>For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# **ELECTRICAL CHARACTERISTICS** ( $T_C = 25^{\circ}C$ unless otherwise noted)

Characteristic	Symbol	Min	Max	Unit	
OFF CHARACTERISTICS (Note 4)					
Collector-Emitter Sustaining Voltage (I <sub>C</sub> = 200 mAdc, I <sub>B</sub> = 0)	V <sub>CEO(sus)</sub>	90	-	Vdc	
Collector Cutoff Current (V <sub>CE</sub> = 90 Vdc, V <sub>BE</sub> = 0)	I <sub>CES</sub>	-	1.0	μAdc	
Collector Cutoff Current (V <sub>CE</sub> = 90 Vdc, I <sub>E</sub> = 0)	I <sub>CBO</sub>	-	1.0	μAdc	
Emitter-Base Leakage (V <sub>EB</sub> = 5.0 Vdc, I <sub>C</sub> = 0)	I <sub>EBO</sub>	-	1.0	μAdc	
ON CHARACTERISTICS (Note 4)					
DC Current Gain $(I_{CE} = 4.0 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc})$ $(I_{CE} = 10 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc})$	h <sub>FE</sub>	20 5.0	100 -	-	
Collector–Emitter Saturation Voltage (I <sub>C</sub> = 4.0 Adc, I <sub>B</sub> = 0.4 Adc) (I <sub>C</sub> = 10 Adc, I <sub>B</sub> = 3.3 Adc)	V <sub>CE(sat)</sub>	- -	1.0 2.5	Vdc	
Base-Emitter On Voltage (I <sub>C</sub> = 4.0 Adc, V <sub>BE</sub> = 4.0 Vdc)	V <sub>BE(on)</sub>	_	1.5	Vdc	
DYNAMIC CHARACTERISTICS	•	-			
Current-Gain-Bandwidth Product (V <sub>CE</sub> = 10 Vdc, I <sub>C</sub> = 0.5 Adc, f <sub>test</sub> = 500 kHz)	f <sub>T</sub>	2.0	-	MHz	

<sup>4.</sup> Pulse Test: Pulse Width = 5.0 ms, Duty Cycle ≤ 10%.

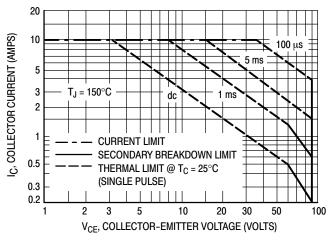


Figure 1. Maximum Forward Bias Safe
Operating Area

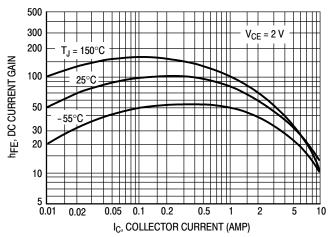
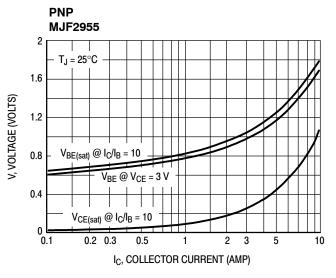


Figure 2. DC Current Gain



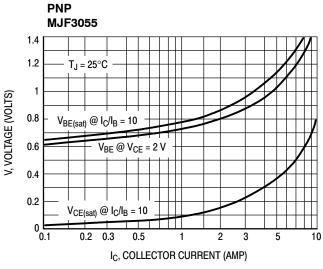


Figure 3. "On" Voltages

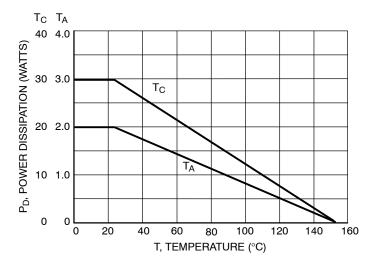


Figure 4. Power Derating

#### **TEST CONDITIONS FOR ISOLATION TESTS\***

FULLY ISOLATED PACKAGE




Figure 5. Mounting Position

\*Measurement made between leads and heatsink with all leads shorted together.

#### MOUNTING INFORMATION

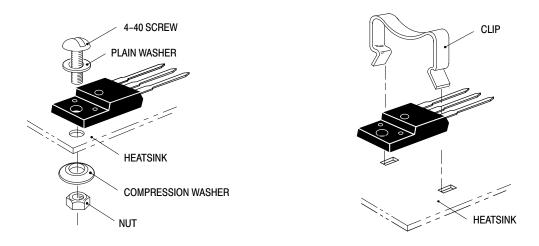


Figure 6. Typical Mounting Techniques\*

Laboratory tests on a limited number of samples indicate, when using the screw and compression washer mounting technique, a screw torque of 6 to 8 in · lbs is sufficient to provide maximum power dissipation capability. The compression washer helps to maintain a constant pressure on the package over time and during large temperature excursions.


Destructive laboratory tests show that using a hex head 4–40 screw, without washers, and applying a torque in excess of 20 in · lbs will cause the plastic to crack around the mounting hole, resulting in a loss of isolation capability.

Additional tests on slotted 4–40 screws indicate that the screw slot fails between 15 to 20 in · lbs without adversely affecting the package. However, in order to positively ensure the package integrity of the fully isolated device, ON Semiconductor does not recommend exceeding 10 in · lbs of mounting torque under any mounting conditions.

<sup>\*\*</sup> For more information about mounting power semiconductors see Application Note AN1040.

#### PACKAGE DIMENSIONS

#### TO-220 FULLPAK CASE 221D-03 ISSUE J

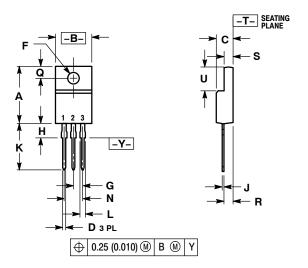

#### NOTES:

- DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
  - . CONTROLLING DIMENSION: INCH
- 221D-01 THRU 221D-02 OBSOLETE, NEW STANDARD 221D-03.

	INCHES		MILLIMETERS	
DIM	MIN	MAX	MIN	MAX
Α	0.617	0.635	15.67	16.12
В	0.392	0.419	9.96	10.63
С	0.177	0.193	4.50	4.90
D	0.024	0.039	0.60	1.00
F	0.116	0.129	2.95	3.28
G	0.100 BSC		2.54 BSC	
Н	0.118	0.135	3.00	3.43
7	0.018	0.025	0.45	0.63
K	0.503	0.541	12.78	13.73
L	0.048	0.058	1.23	1.47
N	0.200 BSC		5.08 BSC	
Q	0.122	0.138	3.10	3.50
R	0.099	0.117	2.51	2.96
S	0.092	0.113	2.34	2.87
U	0.239	0.271	6.06	6.88

STYLE 2: PIN 1. BASE

2. COLLECTOR

3. EMITTER

ON Semiconductor and the registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

#### **PUBLICATION ORDERING INFORMATION**

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
P.O. Box 61312, Phoenix, Arizona 85082–1312 USA
Phone: 480–829–7710 or 800–344–3860 Toll Free USA/Canada
Fax: 480–829–7709 or 800–344–3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800–282–9855 Toll Free USA/Canada

Japan: ON Semiconductor, Japan Customer Focus Center 2–9–1 Kamimeguro, Meguro–ku, Tokyo, Japan 153–0051 Phone: 81–3–5773–3850

ON Semiconductor Website: http://onsemi.com

Order Literature: http://www.onsemi.com/litorder

For additional information, please contact your local Sales Representative.

# **ПОСТАВКА** ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

многоканальный

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

# Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

# http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

## Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru\_6 moschip.ru 4 moschip.ru 9