

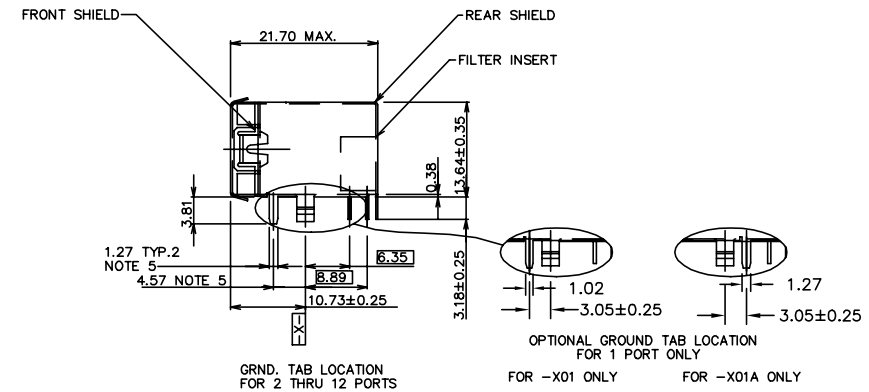
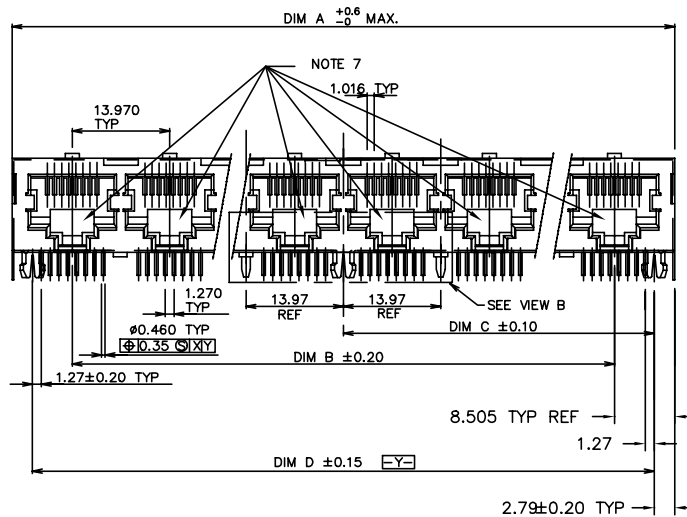




NOTE 1:
A DESIGN IS SHOW WITH AN INNER CONDUCT FRONT PANEL
(FOR GROUNDING), AND A COSMETIC OUTER PANEL,
THE INNER PANEL IS RECOMMENDED TO BE SN PLATED ON THE CUTOUT EDGES.

mat'l. code				surface		tolerance		projection		product family							
				ISO 1302 ✓		ISO406 ISO1101				MOD JACK							
ltr		ecn		nodr		date		tolerances unless otherwise specified		title							
H	M04-0189		MHT		10/11/04		angle	0.X±0.3			R/A GANG JACK FILTER ASSY 8 POS SHIELDED SNAP PER						
J	M05-0074		MHT		4/23/05			0.XX±0.13									
K	N08-0273		SH		12/25/08			0.XXX±0.051									
						0'±2'		scale 1.0									
L	N09-0302		SH		9/3/09		dr	L. POTTIEGER		3/15/95		dwg no		sheet 1 of 8		size A4	
M	EX-N-007903		SH		2011-11-17		eng	Y. BELOPOLSKY		3/15/95		FCI		95672			
N	EX-N-011006		SH		03/27/12		chr	Y. BELOPOLSKY		3/15/95							
								app	Y. BELOPOLSKY		3/15/95		type		Product Customer Drawing		
sheet		revision		N		N		N		N		N		N		N	
index		sheet		1		2		3		4		5		6		7	

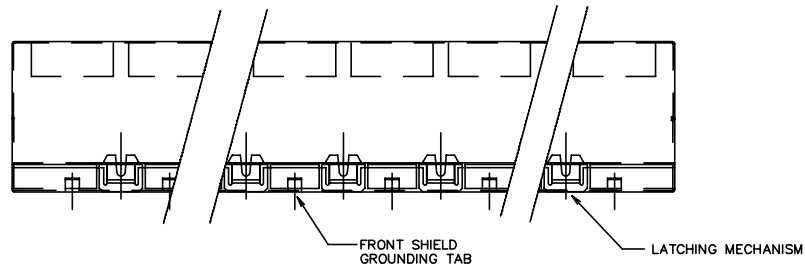

1		2					
PRODUCT No.	NOTE 8	PORTS No	DIM A ± 0.60 -0.00	DIM B	DIM C ± 0.10	DIM D ± 0.15	GROUND LEG NUMBER ON THE BACK (VIEW B) SEE DIAGRAM ON SHT. 3
95672-X01		1	15.74	-	5.715	11.43	
95672-X01A		1	15.74	-	5.715	11.43	
95672-X02-YZ		2	30.98	13.97	12.700	25.40	
95672-X03-YZ		3	44.95	27.94	19.685	39.37	
95672-X04-YZ		4	58.92	41.91	26.670	53.34	
95672-X05-YZ		5	72.89	55.88	33.655	67.31	NO TOOL
95672-X06-YZ		6	86.86	69.85	40.640	81.28	NO TOOL
95672-X07-YZ		7	100.83	83.82	47.625	95.25	NO TOOL
95672-X08-YZ		8	114.80	97.79	54.610	109.22	
95672-X09-YZ		9	128.77	111.76	61.595	123.19	NO TOOL
95672-X10-YZ		10	142.74	125.73	68.580	137.16	NO TOOL
95672-X11-YZ		11	156.71	139.70	75.565	151.13	NO TOOL
95672-X12-YZ		12	170.68	153.67	82.550	165.10	NO TOOL

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: HIGH TEMP RESIN
3. CONTACTS:PHOS BRONZE ALLOY UNS-C51000, ϕ 0.460 ROUND WIRE,PLATING SEE TABLE.
4. SHIELDING MATERIAL: BRASS ALLOY 0.25 MM THICK
SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
FINISH OF BRIGHT TIN LEAD 100u" MIN
LEAD FREE OPTION
SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
FINISH OF BRIGHT PURE TIN 100u" MIN
- (5) SEE SNGL. PORT GROUND LEG OPTIONS,
SIDE VIEW PG.1 FOR DETAILS.
6. ALL DIMENSIONS IN MILLIMETERS.
- (7) COMPANY LOGO LOCATED IN THIS AREA.
- (8) ADD LF SUFFIX AT THE END OF PART NUMBER
FOR LEAD FREE OPTION.
9. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C
PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE
SOLDER APPLICATION WITH A 1.5mmMINIMUM THICK
CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES
IF THEY ARE AVAILABLE.
10. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATION AS DESCRIBED
IN GS-22-008.
- (11) PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT
MANUFACTURER'S OPTION.
12. PRODUCT SPECIFICATION GS-12-083
PRODUCT PACKAGING SPECIFICATION GS-14-361

FRONT SHIELD CODE Y

0 = STANDARD GRND. TABS
1 = NO GRND. TABS

REAR SHIELD CODE Z

0 = STANDARD GRND. LEGS
1 = 1 STANDARD GRND. LEG
2 = ALL GRND. LEGS
3 = NO GRND. LEGS


PLATING CODE X	PLATING (11)
0	30u" G.X.T.
1	15u" GOLD.
3	5u" Au + high performance lubricant
5	50u" GXT.

mat'l. code		surface ☒ tolerance		projection		product family	
ISO 1302		ISO 406 ISO 1101				MOD JACK	
tolerances unless otherwise specified						title	
N		angle		MM		R/A GANG JACK FILTER ASSY	
		0.X $\pm$ 0.3				8 POS SHIELDED SNAP PER	
		0.XX $\pm$ 0.13		scale 1.0			
		0.XXX $\pm$ 0.051					
		dr L. POTTIEGER 3/15/95				dwg no sheet 2 of 8 size	
		engr. BELOPOLSKY 3/15/95				95672 A4	
		chr. Y. BELOPOLSKY 3/15/95					
		app. BELOPOLSKY 3/15/95				type Product Customer Drawing	
sheet index	revision sheet						




REAR SHIELD (VIEWED FROM PLUG ENTRY SIDE)
GROUND SOLDER TAIL CONFIGURATION

CODE "Z" = 0

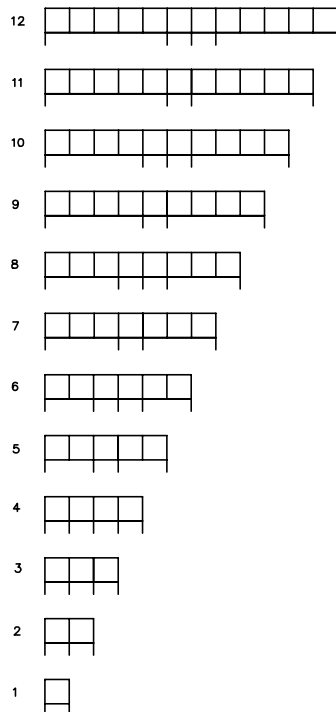


PCB LAYOUT SHEET 4

CODE "Z" = 1

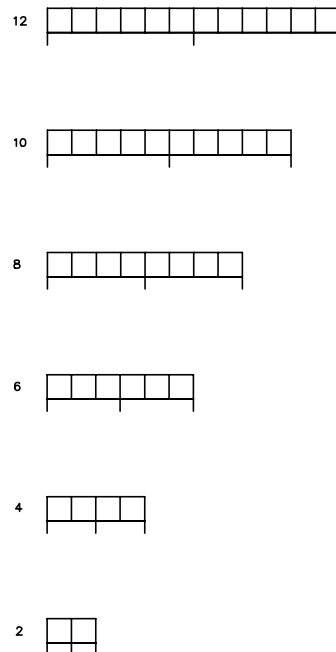


PCB LAYOUT SHEET 5

CODE "Z" = 2

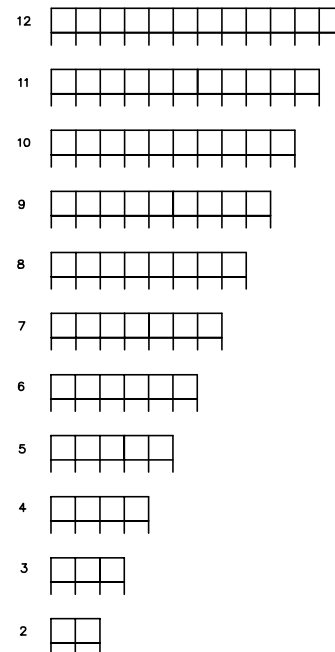







PCB LAYOUT SHEET 6

CODE "Z" = 3

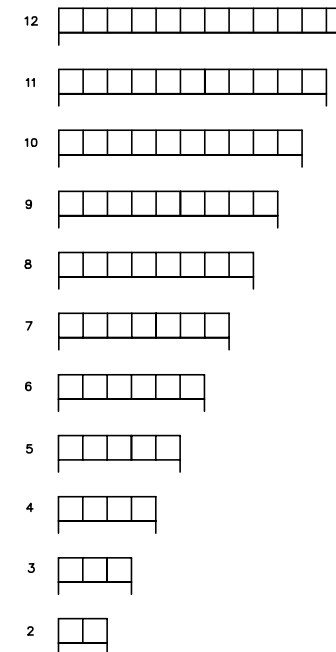


PCB LAYOUT SHEET 7

mat'l. code		surface		tolerance		projection		product family	
ISO 1302		ISO 406		ISO 1101		MM		MOD JACK	
tolerances unless otherwise specified		angle		0°±2'		scale 1.0		R/A GANG JACK FILTER ASSY	
N		date		0.X±0.3		8 POS SHIELDED SNAP PER		title	
				0.XX±0.13					
				0.XXX±0.051					
		dr		L. POTTIEGER		3/15/95		dwg no	
		eng		Y. BELOPOLSKY		3/15/95		sheet 3 of 8	
		chr		Y. BELOPOLSKY		3/15/95		size	
		app		Y. BELOPOLSKY		3/15/95		A4	
sheet index		revision sheet						type Product Customer Drawing	

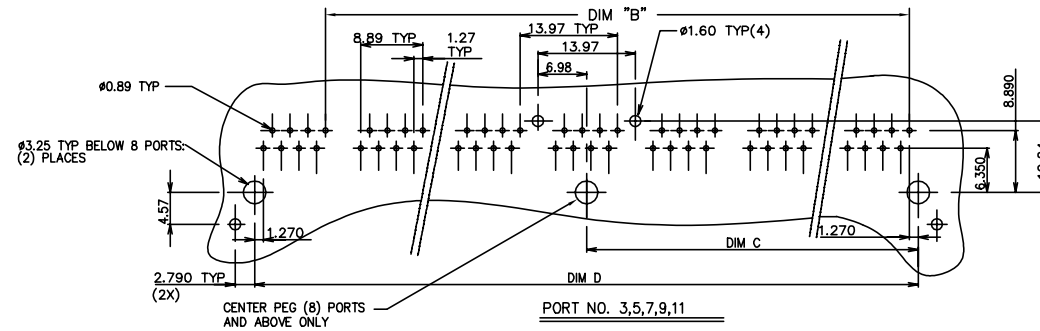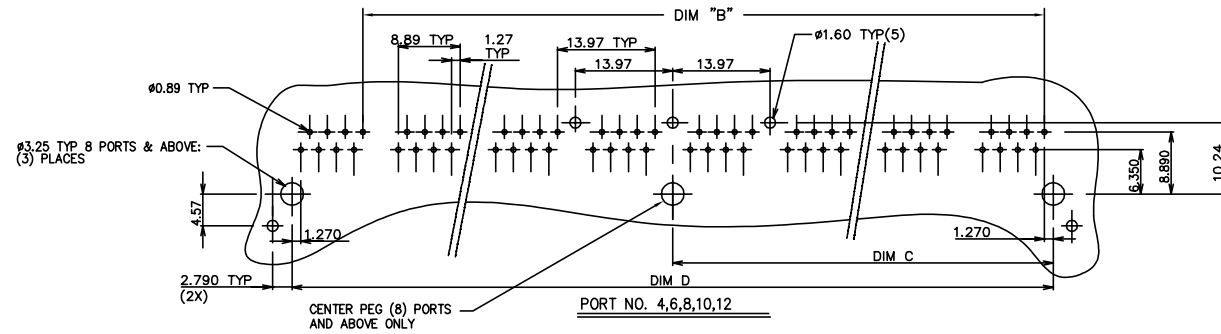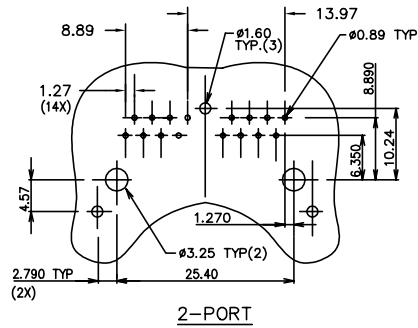



mat'l. code	surface	tolerance	projection	product family
	ISO 1302	ISO 406 ISO 1101		MOD JACK
l t r e c n n o d r	date	tolerances unless otherwise specified		
N		angle	MM	R/A GANG JACK FILTER ASSY
		0°±2'	scale 1.0	8 POS SHIELDED SNAP PER
	dr L. POTTIEGER	3/15/95		dwg no
	eng M. BELOPOLSKY	3/15/95		sheet 4 of 8
	chr Y. BELOPOLSKY	3/15/95		size
	app M. BELOPOLSKY	3/15/95		A4
sheet	revision			type Product Customer Drawing
index	sheet			

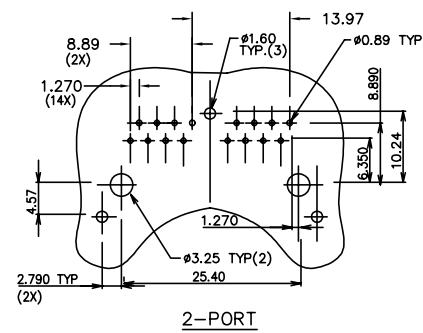


CODE "Z" = 1 (1 GROUND LEG)


mat'l. code				surface / tolerance ISO 1302 ✓ ISO406 ISO1101		projection product family  MOD JACK				
ltr ecn nodr date				tolerances unless otherwise specified		title				
N				angle	0.x±0.3		R/A GANG JACK FILTER ASSY 8 POS SHIELDED SNAP PER			
					0.xx±0.13					
				0'±2'	0.xxx±0.051			scale 1.0		
				dr	L. POTTIEGER	3/15/95		dwg no	sheet 5 of 8	size
				eng	R. BELOPOLSKY	3/15/95		95672	A4	
				chr	Y. BELOPOLSKY	3/15/95				
				app	D. BELOPOLSKY	3/15/95				
sheet index	revision sheet							type	Product Customer Drawing	

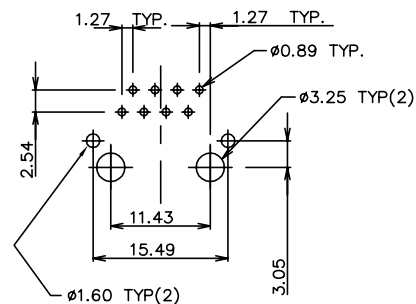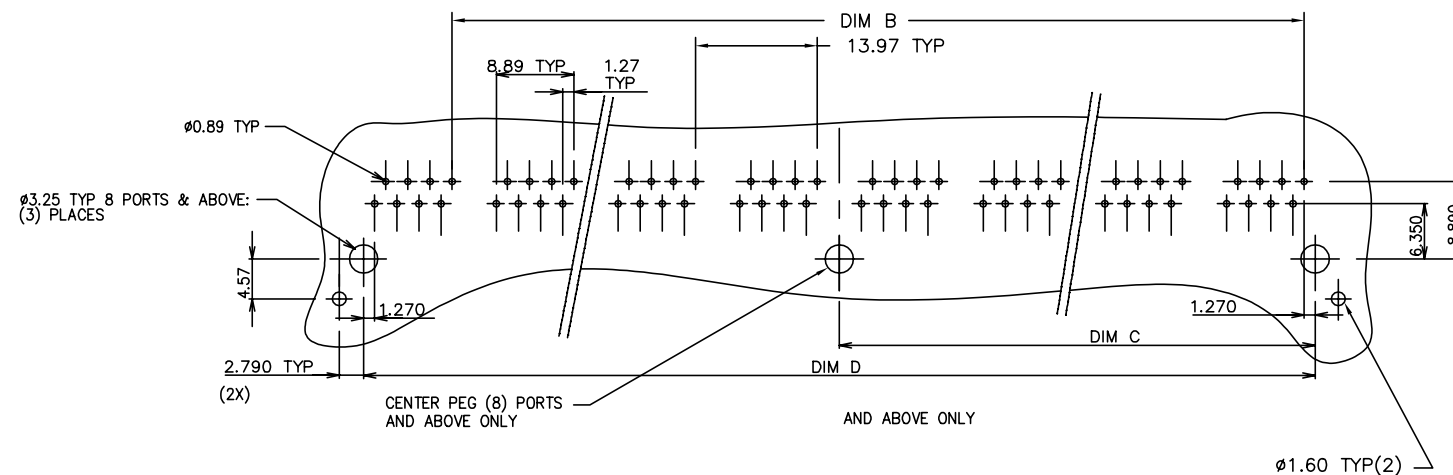

FOR 1-PORT, -X01A, -X01ALF
SAME AS STD CODE "Z"=0

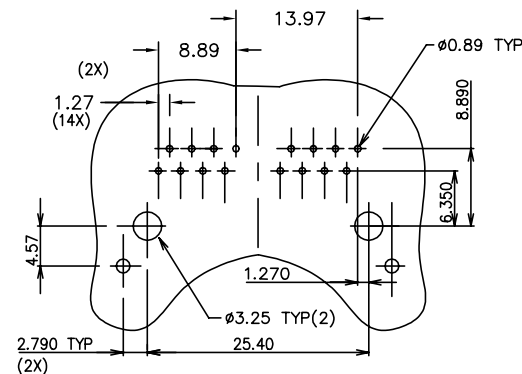

2-PORT

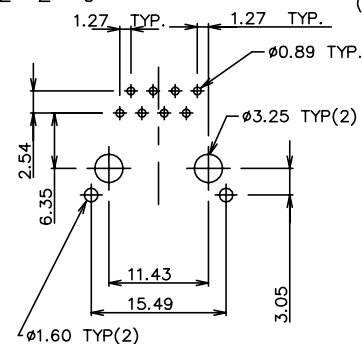

FOR 1-PORT, -X01, -X01LF
SAME AS STD CODE "Z"=0

RECOMMENDED P.C.B LAYOUT

CODE "Z" = 3 (NO GROUND LEGS)

mat'l. code		surface	tolerance	projection	product family
ISO 1302		ISO 406	ISO 1101		MOD JACK
ltr ecn nodr	date	tolerances unless otherwise specified			title
N		angle	0.x $\pm$ 0.3	MM	R/A GANG JACK FILTER ASSY
		0' $\pm$ 2'	0.xx $\pm$ 0.13	scale 1.0	8 POS SHIELDED SNAP PER
			0.xxx $\pm$ 0.051		
dr	L. POTTIEGER	3/15/95			dwg no
eng	Y. BELOPOLSKY	3/15/95			sheet 7 of 8
chr	Y. BELOPOLSKY	3/15/95			size
app	Y. BELOPOLSKY	3/15/95			A4
sheet	revision				type
index	sheet				Product Customer Drawing

PRODUCT No. NOTE 8	PORTS No	DIM A ± 0.60 -0.00	DIM B	DIM C ± 0.10	DIM D ± 0.15	GROUND LEG NUMBER ON THE BACK (VIEW B) SEE DIAGRAM ON SHT. 3	COMMENT
95672-X01H	1	15.74	-	5.715	11.43		NOTE 5
95672-X01AH	1	15.74	-	5.715	11.43		NOTE 5
95672-X02H -YZ	2	30.98	13.97	12.700	25.40		NO TOOL
95672-X03H -YZ	3	44.95	27.94	19.685	39.37		NO TOOL
95672-X04H -YZ	4	58.92	41.91	26.670	53.34		
95672-X05H -YZ	5	72.89	55.88	33.655	67.31		NO TOOL
95672-X06H -YZ	6	86.86	69.85	40.640	81.28		NO TOOL
95672-X07H -YZ	7	100.83	83.82	47.625	95.25		NO TOOL
95672-X08H -YZ	8	114.80	97.79	54.610	109.22		
95672-X09H -YZ	9	128.77	111.76	61.595	123.19		NO TOOL
95672-X10H -YZ	10	142.74	125.73	68.580	137.16		NO TOOL
95672-X11H -YZ	11	156.71	139.70	75.565	151.13		NO TOOL
95672-X12H -YZ	12	170.68	153.67	82.550	165.10		NO TOOL

NOTES:

1. RECOMMENDED P.C.B THICKNESS 1.60 MM
2. HOUSING MAT'L: HIGH TEMP RESIN
3. CONTACTS: PHOS BRONZE ALLOY UNS-C51000,
Ø 0.460 ROUND WIRE, PLATING SEE TABLE.

SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
FINISH OF BRIGHT TIN LEAD 100u" MIN

LEAD FREE OPTION

SHIELDING PLATING: NICKEL UNDERPLATE 40u" MIN
FINISH OF BRIGHT PURE TIN 100u" MIN

- SEE SNGL. PORT GROUND LEG OPTIONS,
SIDE VIEW PG.1 FOR DETAILS.
- ALL DIMENSIONS IN MILLIMETERS.
- COMPANY LOGO LOCATED IN THIS AREA.
- ADD LF SUFFIX AT THE END OF PART NUMBER
FOR LEAD FREE OPTION.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C
PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE
SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK
CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES
IF THEY ARE AVAILABLE.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES
AND OTHER COUNTRY REGULATION AS DESCRIBED
IN GS-22-008.
- PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT
MANUFACTURER'S OPTION.
- PRODUCT SPECIFICATION GS-12-083
PRODUCT PACKAGING SPECIFICATION GS-14-361

MEETS PIP PROCESS PRODUCT NO.

FRONT SHIELD CODE Y

0 = STANDARD GRND. TABS
1 = NO GRND. TABS

REAR SHIELD CODE Z

0 = STANDARD GRND. LEGS
1 = 1 STANDARD GRND. LEG
2 = ALL GRND. LEGS
3 = NO GRND. LEGS

PLATING CODE X	PLATING ⑪
0	30u" G.X.T.
1	15u" GOLD.
3	5u" Au + high performance lubricant
5	50u" GXT.

NOTE: PLEASE CHECK FOR AVAILABILITY, NOT ALL OPTIONS AVAILABLE.

mat'l. code	surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection MM	product family MOD JACK
ltr ecn nodr date	tolerances unless otherwise specified	angle 0°±2'	scale 1.0	R/A GANG JACK FILTER ASSY 8 POS SHIELDED SNAP PER
N	0.x±0.3	0°±2'	scale 1.0	dwg no 95672 sheet 8 of 8 size A4
	0.xx±0.13			type Product Customer Drawing
	0.xxx±0.051			
dr L. POTTIEGER 3/15/95	eng Y. BELOPOLSKY 3/15/95	chr Y. BELOPOLSKY 3/15/95	app Y. BELOPOLSKY 3/15/95	
sheet index	revision sheet			

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9