


## MELF Resistors

### WRM Series

- AEC-Q200
- High reliability
- Predictable pulse handling capability
- Tolerances down to 0.1%
- TCR down to 5 ppm/°C

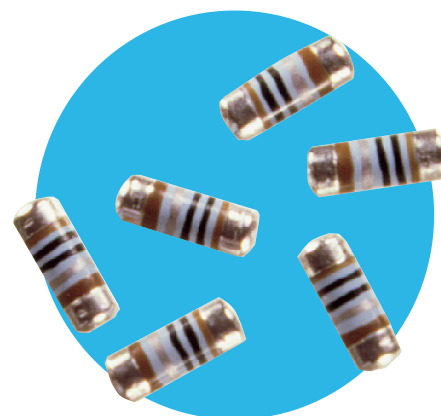


All parts are Pb-free and comply with EU Directive 2011/65/EU amended by (EU) 2015/863 (RoHS3)

## Electrical Data

|                                             |        | WRM 0102        | WRM 0204               | WRM 0207        |
|---------------------------------------------|--------|-----------------|------------------------|-----------------|
| Power rating @70°C                          | watts  | 0.2             | 0.25                   | 0.4             |
| Resistance Range                            | ohms   | 1R0- 1M0        | R22-5M1                | R22- 4M7        |
| Limiting element voltage                    | volts  | 200             | 200                    | 250             |
| TCR                                         | ppm/°C | 15, 25, 50, 100 | 5, 10, 15, 25, 50, 100 | 15, 25, 50, 100 |
| Resistance tolerance                        | %      |                 | 0.1, 0.25, 0.5, 1, 5   |                 |
| Standard values                             |        |                 | E24 & E96              |                 |
| Thermal impedance                           | k/W    | 250             | 200                    | 140             |
| Ambient temperature range                   | °C     | -55 to +155     | -55 to +125            |                 |
| Insulation resistance                       | ohms   |                 | >10 <sup>10</sup>      |                 |
| Zero ohm jumper current rating              | amps   |                 | 2                      | 4               |
| Zero ohm jumper maximum residual resistance | mΩ     |                 | 15                     |                 |

## Physical Data

| Dimensions (mm) & weight (g) |       |       |                    |       |                    |        |  |
|------------------------------|-------|-------|--------------------|-------|--------------------|--------|---------------------------------------------------------------------------------------|
| Type                         | L max | D max | D <sup>1</sup> max | K min | L <sup>1</sup> min | Weight |                                                                                       |
| WRM 0102                     | 2.3   | 1.35  | 1.3                | 0.3   | 1.1                | 0.01   |                                                                                       |
| WRM 0204                     | 3.7   | 1.55  | 1.55               | 0.5   | 1.5                | 0.02   |                                                                                       |
| WRM 0207                     | 6.1   | 2.4   | 2.4                | 0.5   | 2.9                | 0.08   |                                                                                       |

### Construction

A metal film is deposited onto a high dissipation ceramic former to which tin plated terminating caps are fitted.

The resistor is adjusted to value by a helical cut in the film and the body is protected by a lacquer coating.

### Marking

Resistance values are colour coded with four bands, three indicating value and one indicating the multiplier. (Note this describes standard marking, but certain values may still be supplied with the addition of a tolerance band following the multiplier.).

### Terminations

#### Material

Plated steel cap.

#### Solderability

The pure tin finish produces ageing free contacts on which low melting solders can be used. Dipped area shall be covered with a smooth and bright solder coating after 3 seconds immersion at 215°C.

### Solvent Resistance

The body protection and marking are resistant to all normal industrial cleaning solvents suitable for printed circuit boards.

### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

## TCR and Tolerance Range

| Type Reference | TCR     | Tolerance |            |            |            |            |
|----------------|---------|-----------|------------|------------|------------|------------|
|                |         | 5%        | 1.0%       | 0.5%       | 0.25%      | 0.1%       |
| WRM0102        | ±100ppm | 1R0- 1M0  | 1R0- 1M0   | -          | -          | -          |
|                | ±50ppm  | 1R0- 1M0  | 1R0- 1M0   | 8R2- 1M0   | -          | -          |
|                | ±25ppm  | -         | 49R9- 390K | 49R9- 200K | 100R- 82K  | 100R- 82K  |
|                | ±15ppm  | -         | 100R- 56K  | 100R- 56K  | 100R- 56K  | 100R- 56K  |
| WRM0204        | ±100ppm | R22- R91  | -          | -          | -          | -          |
|                | ±50ppm  | -         | 1R- 5M1    | 10R- 1M6   | 22R- 332K  | 43R- 332K  |
|                | ±25ppm  | -         | 4R7- 500K  | 10R- 500K  | 22R- 402K  | 43R- 332K  |
|                | ±15ppm  | -         | -          | 10R- 221K  | 22R- 221K  | 43R- 221K  |
|                | ±10ppm  | -         | -          | -          | 22R- 221K  | 43R- 221K  |
|                | ±05ppm  | -         | -          | -          | 100R- 100K | 100R- 100K |
| WRM0207        | ±100ppm | R22- R91  | -          | -          | -          | -          |
|                | ±50ppm  | -         | 1R- 4M7    | 10R-1M6    | -          | -          |
|                | ±25ppm  | -         | 10R- 1M    | 10R- 680K  | 51R1- 330K | 100R- 100K |
|                | ±15ppm  | -         | -          | 51R1- 10K  | 51R1- 10K  | 100R- 10K  |

\* TC 10ppm & 5ppm is specified over the temperature range -10°C to +85°C.

## Performance Data

| Test                         | Δ R/R                     |                           |                |                |
|------------------------------|---------------------------|---------------------------|----------------|----------------|
|                              | 0204 and 0207             |                           |                | 0102           |
|                              | 75R - 100K                | 10R - <75R & >100K - 332K | <10R & >332K   | All values     |
| Short time overload*         | ≤0.05% + 0.01Ω            | ≤0.1% + 0.01Ω             | ≤0.25% + 0.05Ω | ≤0.25% + 0.05Ω |
| Bending test*                | ≤0.05% + 0.01Ω            | ≤0.1% + 0.01Ω             | ≤0.25% + 0.05Ω | ≤0.25% + 0.05Ω |
| Resistance to soldering heat | ≤0.05% + 0.01Ω            | ≤0.1% + 0.01Ω             | ≤0.25% + 0.05Ω | ≤0.25% + 0.05Ω |
| Temperature rapid change     | ≤0.05% + 0.01Ω            | ≤0.1% + 0.01Ω             | ≤0.25% + 0.05Ω | ≤0.25% + 0.05Ω |
| Endurance*                   |                           |                           |                |                |
| Load life                    |                           |                           |                |                |
| 1000h                        | ≤0.15% + 0.05Ω            | ≤0.15% + 0.05Ω            | ≤0.3% + 0.05Ω  | ≤0.5% + 0.05Ω  |
| 8000h                        | ≤0.3% + 0.05Ω             | ≤0.3% + 0.05Ω             | ≤0.6% + 0.05Ω  | ≤1.0% + 0.05Ω  |
| 225,000h                     | ≤0.9% + 0.05Ω             | ≤0.9% + 0.05Ω             | ≤1.8% + 0.05Ω  | ≤3.0% + 0.05Ω  |
| Climatic sequence*           | ≤0.25% + 0.05Ω            | ≤0.5% + 0.05Ω             | ≤1.0% + 0.05Ω  | ≤1.0% + 0.05Ω  |
| Damp heat steady state*      | ≤0.25% + 0.05Ω            | ≤0.5% + 0.05Ω             | ≤1.0% + 0.05Ω  | ≤1.0% + 0.05Ω  |
| Current noise                | <0.05μV/V                 | <0.25μV/V                 | <3μV/V         | <3μV/V         |
| Solderability                | >95% coverage             |                           |                |                |
| Voltage coefficient          | 0 to -0.5ppm/V            |                           |                |                |
| Voltage proof                | No flashover or breakdown |                           |                |                |

\* Resistors to be mounted on a PC-board according to IEC 115-1, clause 4.27.1.

\* AEC-Q200 approval applies to all values up to and including 3M4 at TCRs above 5ppm/°C and to zero ohm jumpers.


### General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.

All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Single Pulse

Maximum Pulse Load

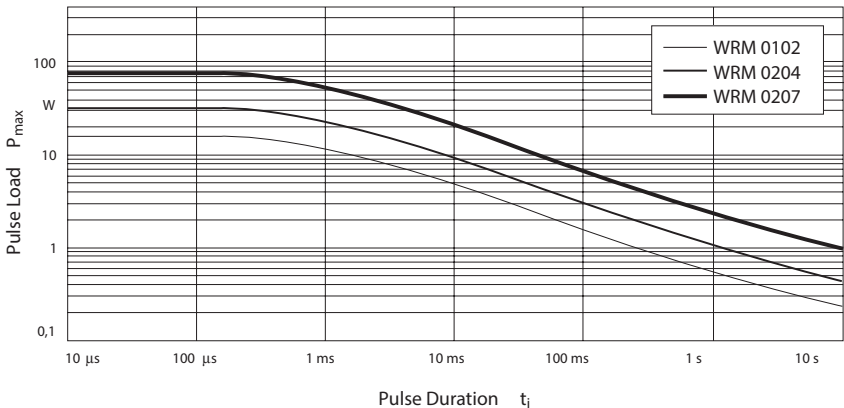

Continuous Pulses

Maximum Pulse Load

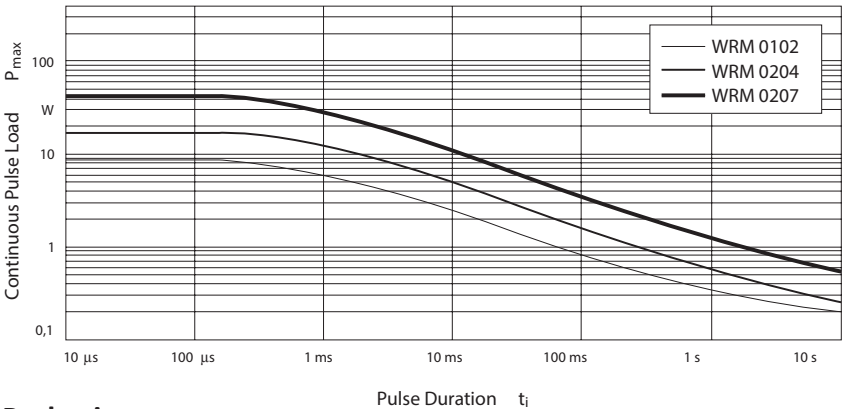

Packaging

The WRM 0102 and 0204 resistors are supplied reeled on 8mm blister tape.  
WRM 0207 resistors are supplied on 12mm blister tape.  
Packaging complies with the requirements of IEC 286-3.

Ordering Procedure

Example: **WRM0204C-1K0FI** (WRM0204, 50ppm/°C, 1 kilohm ±1%, Pb-free)

Example: **WRM0204-R000I** (WRM0204, zero ohm jumper, Pb-free)

|   |   |   |   |   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| W | R | M | 0 | 2 | 0 | 4 | C | - | 1 | K | 0 |   | F | I |
| 1 |   |   |   |   |   |   | 2 | 3 |   |   | 4 | 5 |   |   |

| 1<br>Type | 2<br>TCR        | 3<br>Value                                               | 4<br>Tolerance  | 5<br>Packing                     |
|-----------|-----------------|----------------------------------------------------------|-----------------|----------------------------------|
| WRM0102   | V = ±5ppm/°C    | 3/4 characters<br>R = ohms<br>K = kilohms<br>M = megohms | B = ±0.1%       | I = Standard                     |
| WRM0204   | T = ±10ppm/°C   |                                                          | C = ±0.25%      | 0102 3000 / 7" reel              |
| WRM0207   | Y = ±15ppm/°C   |                                                          | D = ±0.5%       | 0204 3000 / 7" reel <sup>1</sup> |
|           | D = ±25ppm/°C   | R000 = Jumper                                            | F = ±1%         | 0207 1500 / 7" reel              |
|           | C = ±50ppm/°C   |                                                          | J = ±5%         |                                  |
|           | Z = ±100ppm/°C  |                                                          | Omit for Jumper |                                  |
|           | Omit for Jumper |                                                          |                 |                                  |

Note 1: High precision parts may be supplied on 1000 piece reels – please enquire

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.  
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9