

**Premo-Flex™ FFC jumpers, available in a variety of pitches, cable lengths and thicknesses, plus high-temperature ratings up to +105°C, deliver durable, ultra flexible, low-cost solutions for PCB connections in virtually any industry**



The complete line of 0.50, 1.00 and 1.25mm pitch flat flex cable (FFC) jumpers offers standard lengths, pitches and circuit sizes to accommodate a wide range of flexible interconnect requirements between two PC boards. Standard, off-the-shelf FFC cable jumpers reduce lead-times and tooling costs to the customer. In addition, Molex can also accommodate custom requirements for FFC cable jumpers in lengths of over 305mm, with prototype lead-times of around 1 week.

The flat flex jumpers are terminated to Zero Insertion Force (ZIF), non-ZIF or Low Insertion Force (LIF) FFC connectors, available from Molex. Premo-Flex standard flat flex jumpers are now available in ultra-thin, ultra-flexible 0.12mm cable, ideal for complex board-to-board interconnections in confined spaces.

Molex offers an extensive range of FFC connectors and is able to design customized FFC connectors to customer requirements. Type A (same-side) and Type D (opposite-side) contact layouts allow for mirrored contacts in top- and bottom-mount ZIF applications. For additional information visit: [www.molex.com/product/premoflex\\_ffc-fpc.html](http://www.molex.com/product/premoflex_ffc-fpc.html)

**Premo-Flex™ Flat Flex Cable Jumpers**

**Cable Thickness 0.12mm**

- 15166 Tin, 0.50mm Pitch, 105°C
- 15167 Tin, 1.00mm Pitch, 105°C
- 15168 Tin, 1.25mm Pitch, 105°C

**Cable Thickness 0.22mm**


- 98266 Tin, 0.50mm Pitch, 105°C
- 98267 Tin, 1.00mm Pitch, 105°C
- 98268 Tin, 1.25mm Pitch, 105°C

**Cable Thickness 0.27mm**

- 21020 Tin, 0.50mm Pitch, 80°C
- 21039 Tin, 1.00mm Pitch, 80°C
- 21049 Tin, 1.25mm Pitch, 80°C
- 15266 Tin, 0.50mm Pitch, 105°C
- 15267 Tin, 1.00mm Pitch, 105°C
- 15268 Tin, 1.25mm Pitch, 105°C
- 15020 Gold, 0.50mm Pitch, 105°C
- 15039 Gold, 1.00mm Pitch, 105°C
- 15049 Gold, 1.25mm Pitch, 105°C

**FEATURES AND BENEFITS**

- |   |  |
|---|--|
| • Available in numerous circuit sizes (4 to 60) and custom lengths                          | • Provides limitless design-in options   |
| • Contact area can be configured on the same or opposite sides of the flexible cable jumper | • Cable mirrors signal layout between PCBs   |
| • Rated up to +105°C  | • Meets industry-standard requirements   |
| • Simple assembly process   | • Ideal for electrical connections between PCBs, display boards, etc.                            |
| • Various cable termination thicknesses   | • Meets industry-standard ZIF connector requirements   |
|   | • Ease-of-assembly in hard-to-reach applications   |
| • Polyester insulation  | • Meets Registration Evaluation, Authorization and Restriction of Chemicals (REACH) requirements |
| • Ultra-thin, ultra-flexible 0.12mm cable option  | • Extends life of cable: 900,000 cycles vs. standard jumper flex life of 6,000 cycles            |

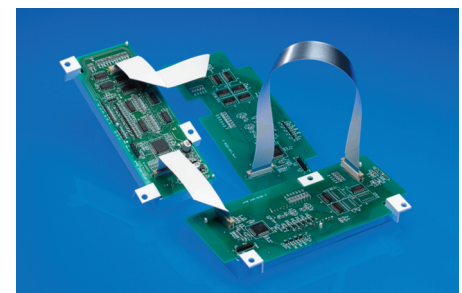

Premo-Flex™ Flat Flex Jumpers

**MARKETS AND APPLICATIONS**

- |   |   |
|---|---|
| <ul style="list-style-type: none"> <li>• Automotive                     <ul style="list-style-type: none"> <li>- Radio, CD, DVD, GPS device</li> <li>- LCD display</li> <li>- Keyboard</li> <li>- Moveable units</li> </ul> </li> <li>• Consumer                     <ul style="list-style-type: none"> <li>- Set top box</li> <li>- Camcorder</li> <li>- Plasma display</li> </ul> </li> <li>• Computer                     <ul style="list-style-type: none"> <li>- Notebook</li> <li>- Printer</li> <li>- Scanner</li> <li>- Keyboard</li> <li>- LCD flat panel</li> </ul> </li> </ul> | <ul style="list-style-type: none"> <li>• Industrial</li> <li>• Medical Equipment</li> <li>• Military</li> <li>• Home Appliance                     <ul style="list-style-type: none"> <li>- Control Panels</li> </ul> </li> </ul> |
|---|---|



Automotive Electronics



Surgery Lamp

## SPECIFICATIONS

### Reference Information

Packaging: Box  
 UL Style No: 20706 (copper wire)  
 Flame Resistance: UL 758 VW-1  
 RoHS: Yes  
 Halogen Free: Yes

### Physical

Temperature Rating: -40 to +105°C  
 Heat Resistance: 168 hours at +136°C  
 Moisture Resistance: 96 hours at +60°C,  
 95% Relative Humidity (RH)  
 Folding: Specimen to be folded manually  
 at +180° over a 4.00mm (.157") radius,  
 min. 20 cycles

### Electrical

Voltage (max.): 60V  
 Current (max.):  
 0.50mm Pitch — 0.5A  
 1.00mm Pitch — 1.2A  
 1.25mm Pitch — 1.4A  
 Conductor Resistance: 730 ohms per km. max.  
 Insulation Resistance: 10 Megohms per km. min.  
 Dielectric Test: 200V AC for 1 minute, no  
 disrupted discharge

## Premo-Flex™ Flat Flex Cable Jumpers

### Cable Thickness 0.12mm

15166 Tin, 0.50mm Pitch, 105°C  
 15167 Tin, 1.00mm Pitch, 105°C  
 15168 Tin, 1.25mm Pitch, 105°C

### Cable Thickness 0.22mm

98266 Tin, 0.50mm Pitch, 105°C  
 98267 Tin, 1.00mm Pitch, 105°C  
 98268 Tin, 1.25mm Pitch, 105°C

### Cable Thickness 0.27mm

21020 Tin, 0.50mm Pitch, 80°C  
 21039 Tin, 1.00mm Pitch, 80°C  
 21049 Tin, 1.25mm Pitch, 80°C  
 15266 Tin, 0.50mm Pitch, 105°C  
 15267 Tin, 1.00mm Pitch, 105°C  
 15268 Tin, 1.25mm Pitch, 105°C  
 15020 Gold, 0.50mm Pitch, 105°C  
 15039 Gold, 1.00mm Pitch, 105°C  
 15049 Gold, 1.25mm Pitch, 105°C



Control Panels

## ORDERING INFORMATION

| Series No. | Plating Material | Cable Thickness mm | Pitch mm | Temp Rating Max. °C | Circuits | Contact Layout Type | Cable Lengths  | Minimum Order Quantity |         |         |
|------------|------------------|--------------------|----------|---------------------|----------|---------------------|--|------------------------|---------|---------|
| 15166-XXXX | Tin              | 0.12               | 0.50     | 105                 | 6 to 60  | A or D              | Standard lengths 30 up to 305mm<br><br>Custom lengths available over 305mm | 1000                   |         |         |
| 15167-XXXX |                  |                    | 1.00     |                     |          |                     |  |                        |         |         |
| 15168-XXXX |                  |                    | 1.25     |                     |          |                     |  |                        |         |         |
| 98266-XXXX |                  | 0.22               | 0.50     |                     | 6 to 50  |                     |  |                        |         |         |
| 98267-XXXX |                  |                    | 1.00     |                     | 4 to 50  |                     |  |                        |         |         |
| 98268-XXXX |                  |                    | 1.25     |                     |          |                     |  |                        |         |         |
| 21020-XXXX |                  | 0.27               | 0.50     | 0.50                | 80       |                     |  |                        | 6 to 50 |         |
| 21039-XXXX |                  |                    |          | 1.00                |          |                     |  |                        |         |         |
| 21049-XXXX |                  |                    |          | 1.25                |          |                     |  |                        |         |         |
| 15266-XXXX |                  |                    | 0.27     | 0.50                | 0.50     |                     |  |                        | 105     | 4 to 50 |
| 15267-XXXX |                  |                    |          |                     | 1.00     |                     |  |                        |         |         |
| 15268-XXXX |                  |                    |          |                     | 1.25     |                     |  |                        |         |         |
| 15020-XXXX |                  |                    | Gold     | 0.27                | 0.50     |                     |  |                        | 105     | 6 to 50 |
| 15039-XXXX |                  |                    |          |                     | 1.00     |                     |  |                        |         | 4 to 50 |
| 15049-XXXX |                  |                    |          |                     | 1.25     |                     |  |                        |         |         |

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9